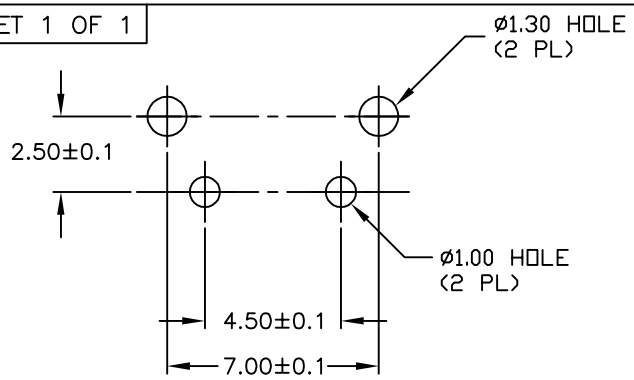

RECOMMENDED P.C.B. LAYOUT



CIRCUIT: SPST

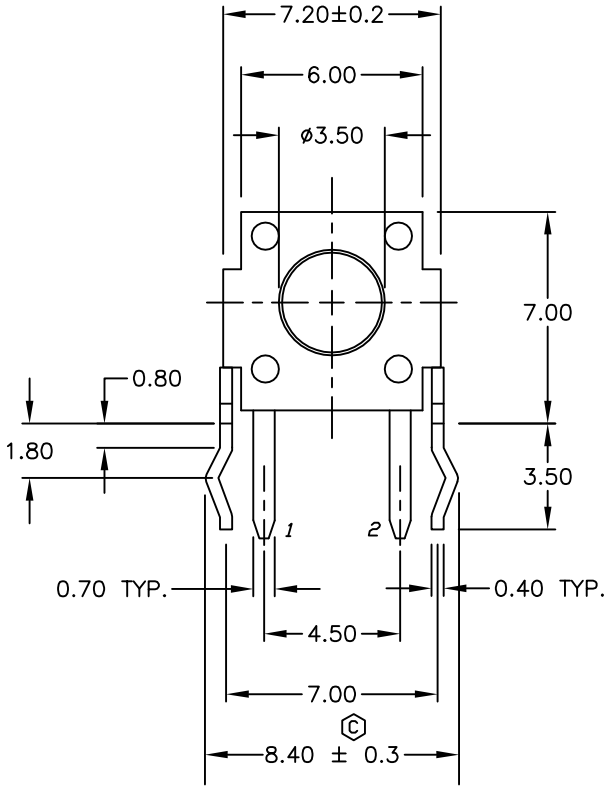

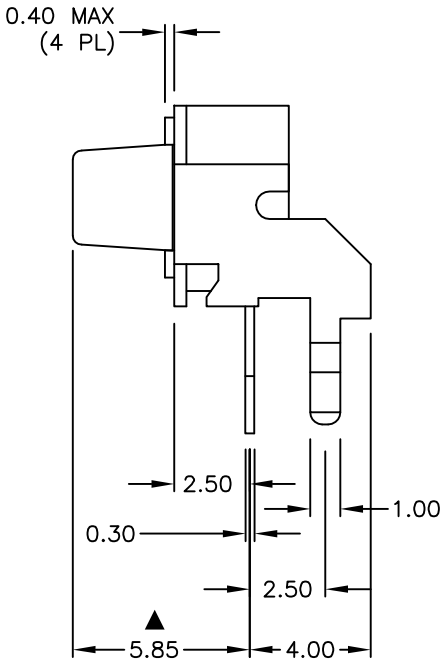

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. ▲ RATING: 50mA, @12V DC
5. TRAVEL: 0.25±0.1mm
6. OPERATING FORCE: 250±50gf
7. CONTACT RESISTANCE: 100 milliohms Max.
8. ELECTRICAL LIFE: 100,000 CYCLES MIN.
9. ACTUATOR COLOR: RED
10. HOUSING COLOR: BLCK
11. ▲ DENOTES CRITICAL PARAMETER.
12. 2002/95/EC (ROHS) COMPLIANT

REV.	ECN No.	DESCRIPTION	DATE	CHKD
C	18742	LEG TOLERANCE WAS +/- 0.1	12/22/09	BLR
B	17780	CHANGED NOTES #9 & #10	10/15/07	BF
A	17769	MAKE ACTIVE	10/11/07	BF

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH | LAMB INDUSTRIES

TITLE				
TL1105XF250Q				
SCALE	DATE	DR	DWG	REV
4:1	12/22/09	BLR	P010391	C