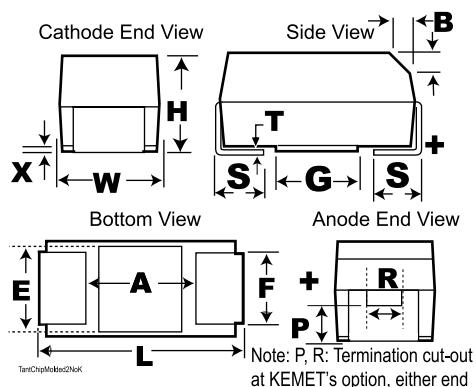


Capacitor, Tantalum, SMD, MnO₂, Molded, 15 uF, 7343, +/-20% Tol, 35V@85C

Dimensions (mm)		
Symbol	Dimension	Tolerance
L	7.3	+/-0.3
W	4.3	+/-0.3
H	2.8	+/-0.3
F	2.4	+/-0.1
S	1.3	+/-0.3
B	0.5	+/-0.15
X	0.1	+/-0.1
P	0.9	REF
R	1	REF
T	0.13	REF
A	3.8	MIN
G	3.5	REF
E	3.5	REF

Notes:

-In polarity stripe, at KEMET's option, type may be indicated: no symbol = Standard (or low leakage) MnO₂ tantalum chip, O = LowESR T494, R = Low ESR T495, F = Fused T496, HT = 150C rated T498 (or B45196P, B45198P), H = 175C rated T499, M = Multiple anode construction T510 (and B45396R), KO = Organic cathode T520 or T521, KT = High temp organic cathode, KM = Multiple anode, organic cathode, FD= Organic cathode face down terminals T528.

General Information	
Supplier:	KEMET
Part Type Description:	SMD, MnO ₂ , Molded
Construction:	Standard Chip-MnO ₂

Specifications	
Capacitance:	15 uF
Voltage DC @ 85C:	35V
Voltage DC @ 105C:	29.23V
Voltage DC @ 125C:	23.45V
Tolerance:	+/-20%
Application:	General Purpose
Temperature Range:	-55/+125C
Body Type:	Molded Chip
ESR:	800 mOhm
Footprint:	7343
Termination:	Tin
RoHS:	Yes
Leakage Current:	5.3 uA
Dissipation Factor:	6%
Ripple @ 25C:	0.433 A
Ripple @ 85C:	0.39 A
Ripple @ 105C:	0.282 A
Ripple @ 125C:	0.173 A

Packaging Specifications	
Package Kind:	T&R
Package Size:	7in
Package Quantity:	500

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.