
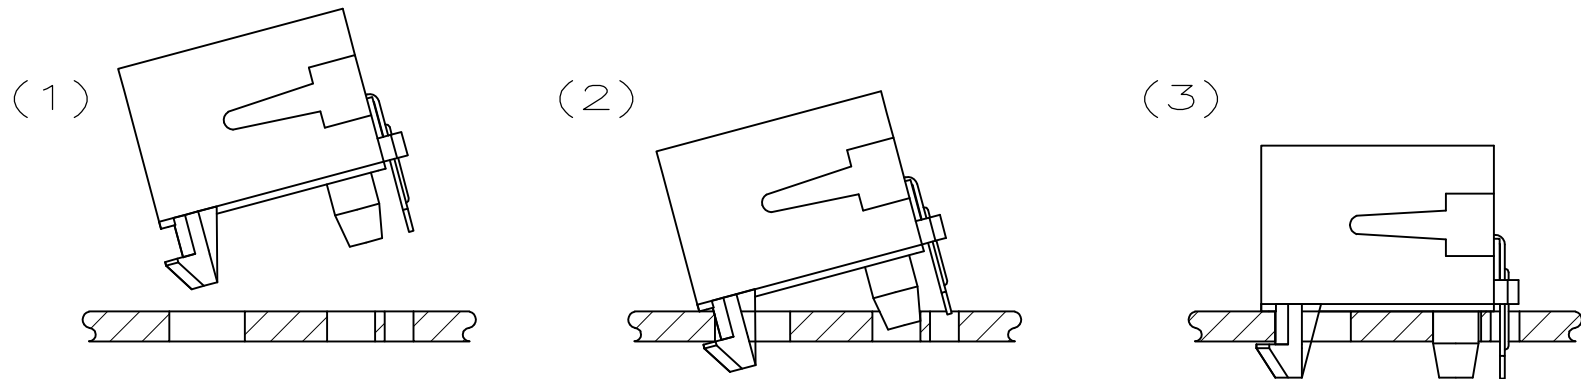
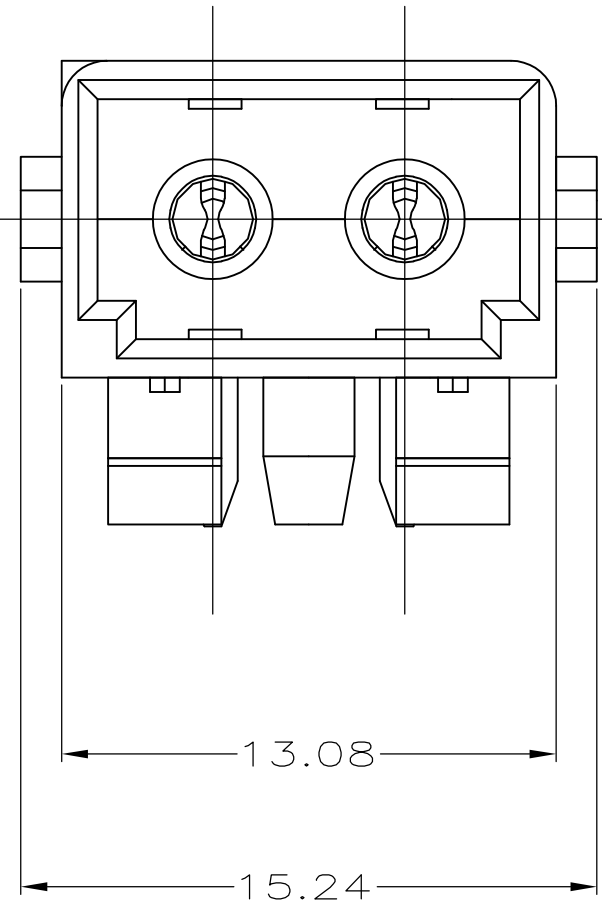


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
CM	53						
			C	REVISED PER ECO-09-006627	18MAR09	HMR	MS

- 1 PARTS COMPLY WITH AMP SOLDERABILITY SPEC. 109-11-3.
- 2 RECOMMENDED EXPOSURE TO SOLDER WAVE (254° C, 490°F)
NOT TO EXCEED 5 SECONDS.

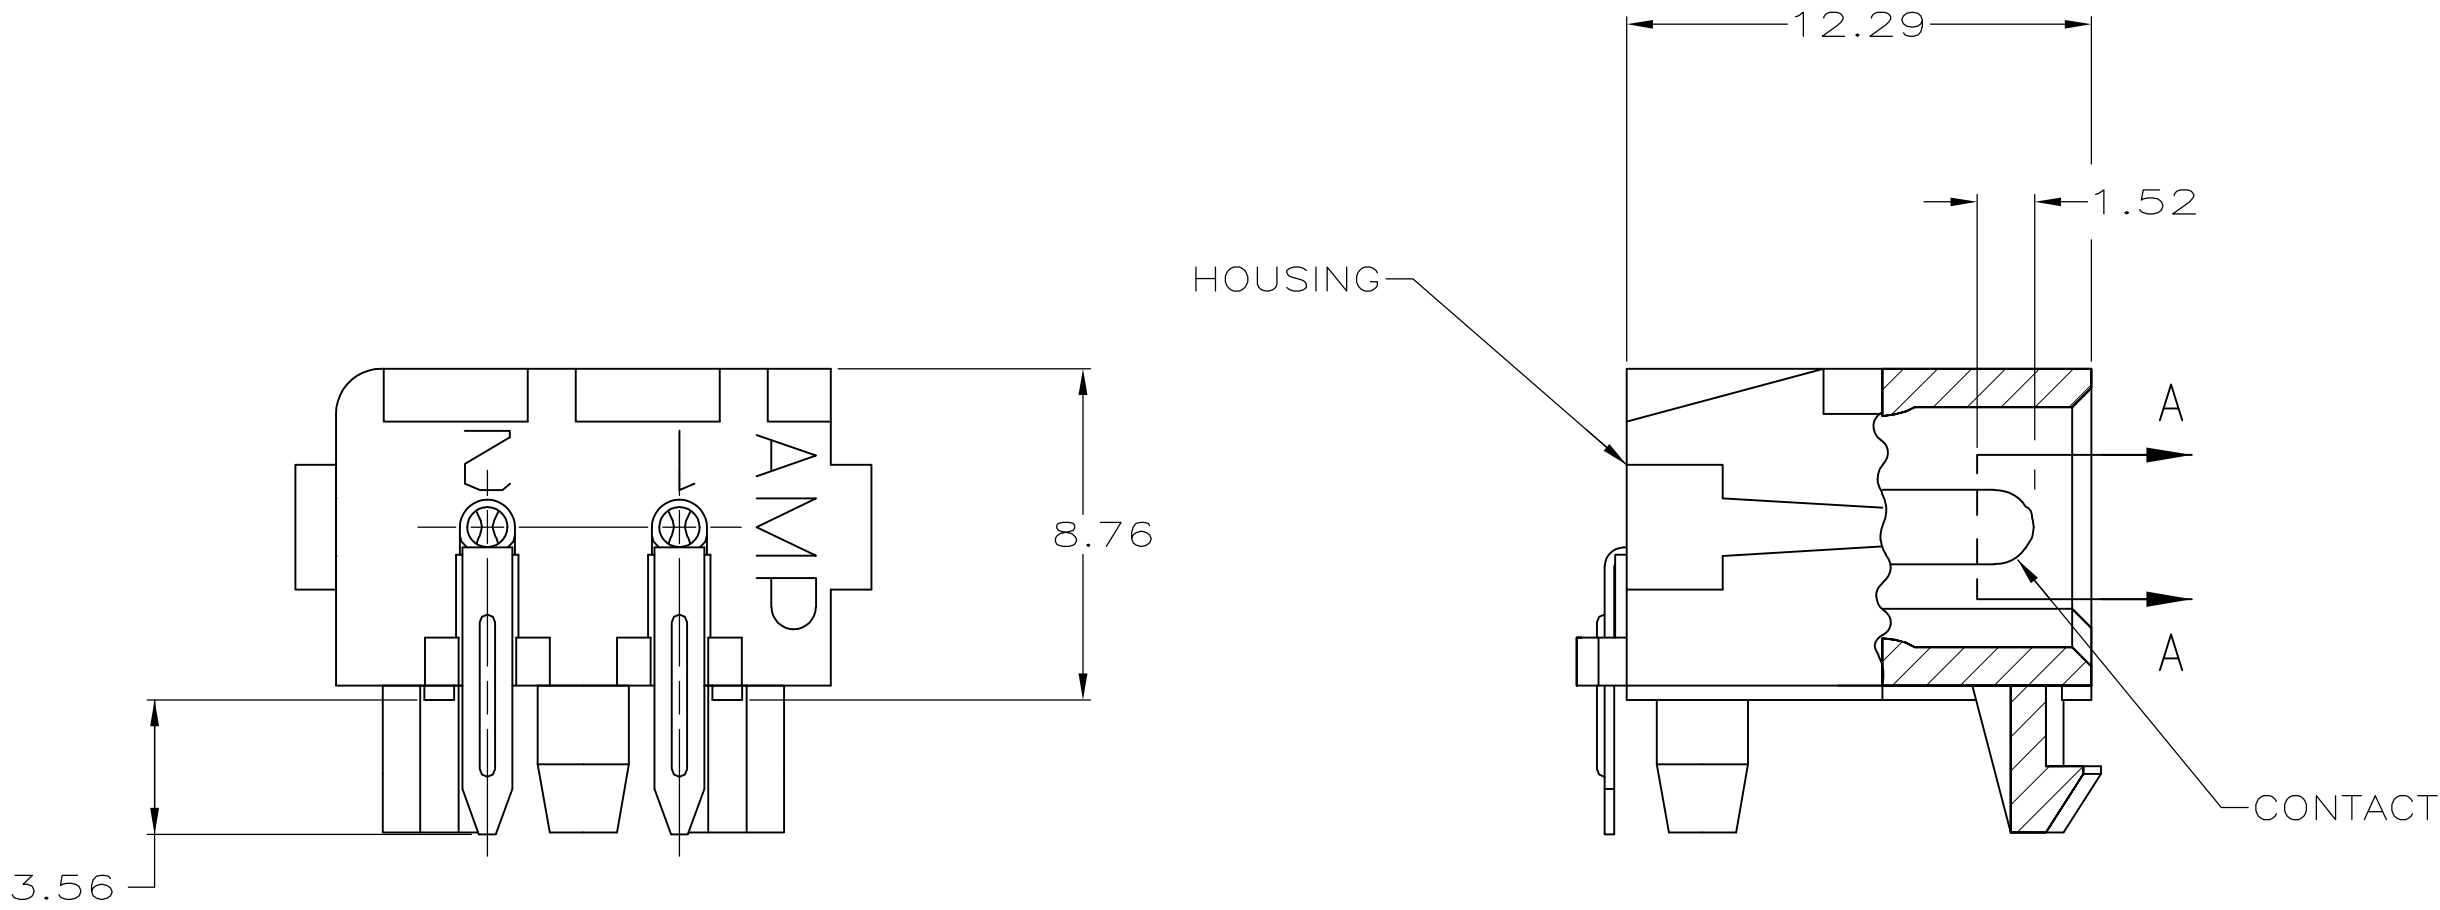

MOUNTING PROCEDURE

COPPER ALLOY	PRE-TIN	NYLON, UL94V-0	NATURAL	794120-2
COPPER ALLOY	PRE-TIN	NYLON, UL94V-2	NATURAL	794120-1
MATERIAL	FINISH	MATERIAL	COLOR	PART NO
CONTACT		HOUSING		
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. LEWIS 4-25-96	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: mm		CHK R. SWING 4-25-96		
		APVD C. MARTIN 4-25-96	NAME CONNECTOR ASSEMBLY,P.C. HEADER, RIGHT ANGLE MOUNT, COMMERCIAL MATE-N-LOK	
		PRODUCT SPEC		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC	SIZE A2	
MATERIAL SEE TABLE		WEIGHT -	CAGE CODE 00779	DRAWING NO C=794120
FINISH SEE TABLE		CUSTOMER DRAWING	SCALE 5:1	SHEET 1 OF 1
			REV C	

2.01	.079	5.08	.200	-	-
1.85	.073	3.99	.157	15.24	.600
1.58	.062	3.81	.150	13.08	.515
1.52	.060	3.56	.140	12.29	.484
0.38	.015	2.54	.100	10.16	.400
0.08	.003	2.26	.089	8.76	.345
0.05	.002	2.08	.082	7.62	.300
MM	IN	MM	IN	MM	IN
CONVERSION TABLE					

