

12 11 10 9 8 7 6 5 4 3 2 19425

J

I

H

G

F

E

D

C

B

A

J

I

H

G

F




E

D


C

B


A

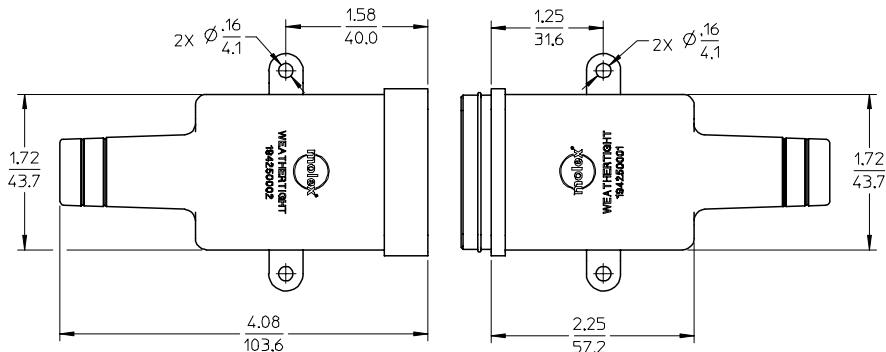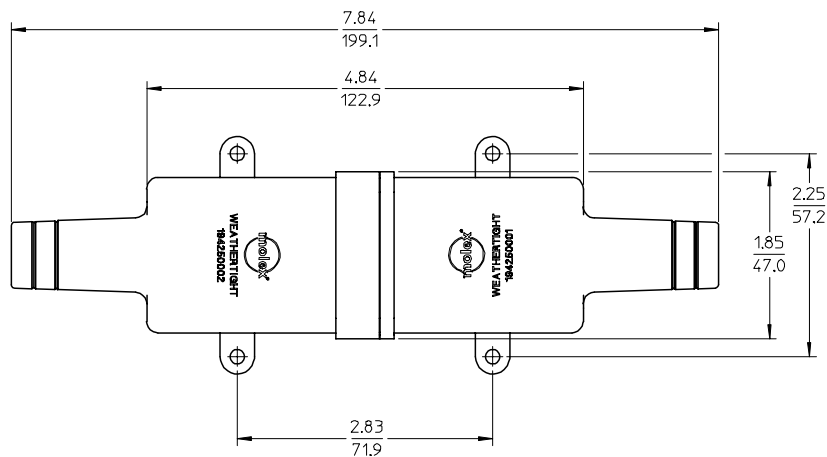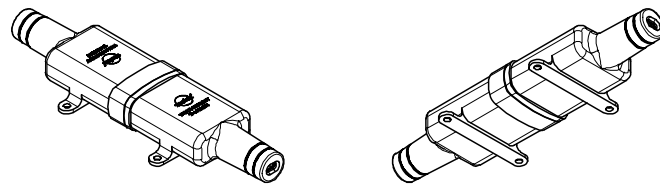

ASSEMBLED VIEWS



4X GROOVE PROVIDED AS CUT OFF GUIDE FOR USER WHEN USING THICK INSULATION TYPE CABLE.



194250002
FEMALE BOOT

194250001
MALE BOOT

NOTES:

1. MATERIAL: THERMOPLASTIC ELASTOMER. COLOR: BLACK.
UV RESISTANCE: UL "F1".
2. PARTS ARE PACKAGED 15 EACH PER CARTON.

EC NO: ETC2004-0130 DRWN: DMYRICK 2004/01/21 CHKD: JPAWLICK 2004/01/21 APPR: RDEROSS 2004/01/21	QUALITY SYMBOLS ▽ - 0 ◇ - 0	GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± --- ± .025 1 PLACE ± 0.64 ± --- ANGULAR ± 2 ° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY	TITLE WEATHERTIGHT MALE/FEMALE BOOT ASSY, 16-12 AWG, ROMEX CABLE, SC		
							MOLEX INCORPORATED		
							MATERIAL NO.	DOCUMENT NO.	SHEET NO.
							SEE DRAWING	SD-19425-001	1 OF 1

11 10 9 8 7 6 5 4 3 2 1