SERIES

9021

Single row type with flange for printed circuit boards

Vertical

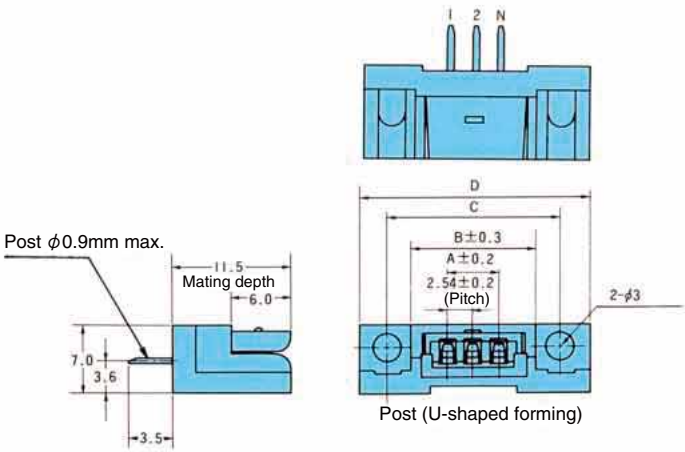

Post (U-shaped forming)

Right Angle

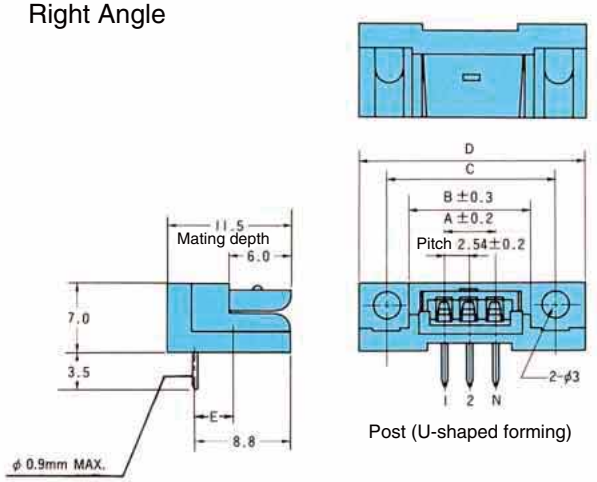

Post (U-shaped forming)

Mating dimensions

Connection of a board and board



Vertical and Right Angle types



Vertical and Vertical types

Connection of a board and crimped wire



Right Angle and Right Angle types





Mounting dimensions on the P.C.board

Vertical



Right Angle



No. of positions	A	B	C	D	E	Remarks
6	12.70	20.70	25.65	31.7	2.4	With the locking structure
12	27.94	35.94	40.89	46.9	2.4	
16	38.10	46.10	51.05	57.1	2.4	
20	48.26	56.26	61.21	67.3	3.3	No locking structure

Ordering code

Part number	00	9021	0613	00	339

No. of positions

6,12,16,20

Variation(Terminating type)

13 : Right Angle
14 : Vertical

Plating code

339 : Au plated

SERIES

9021

Single row type with no flange for printed circuit boards

Vertical



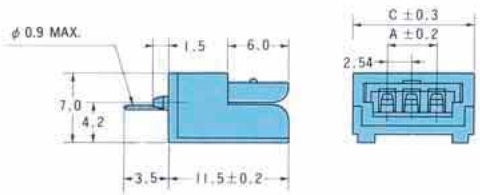

Right Angle

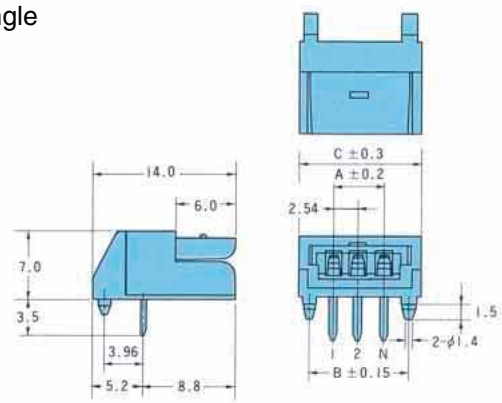

Mating dimensions

Connection of a board and board

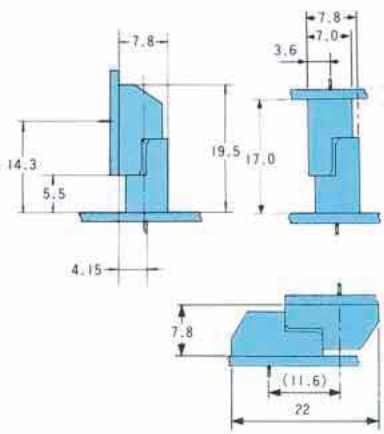

Connection of a board and crimped wire

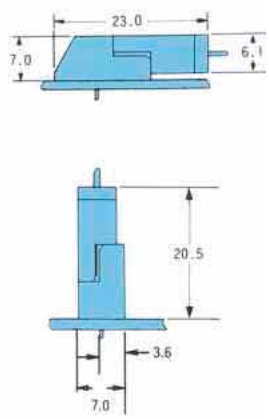

Mounting dimensions on the P.C.board

Vertical



Right Angle



No. of positions	A	B	C	Remarks
2	2.54	7.62	10.54	With the locking structure
3	5.08	11.58	13.08	
4	7.62	12.70	15.62	
6	12.70	17.78	20.70	
8	17.78	22.86	25.78	
10	22.86	27.94	30.86	
12	27.94	33.02	35.94	
14	33.02	38.10	41.02	
16	38.10	43.18	46.10	
18	43.18	48.26	51.18	
20	48.26	53.34	56.26	No locking structure

Ordering code

Part number	00	9021	0211	00	339

No. of positions

2,3,4,6,8,10,12,14,16,18,20

Variation(Terminating type)

11 : Right Angle

12 : Vertical (Note: 20Pos. is Right Angle type only.)

Plating code

339 : Au plated

SERIES

9021

Dual type for
printed circuit boards

Vertical

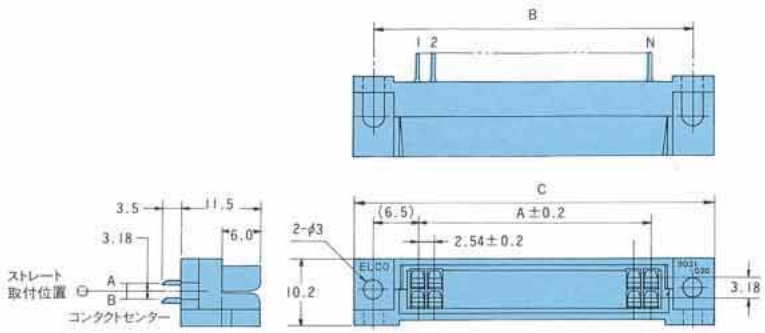

Right Angle

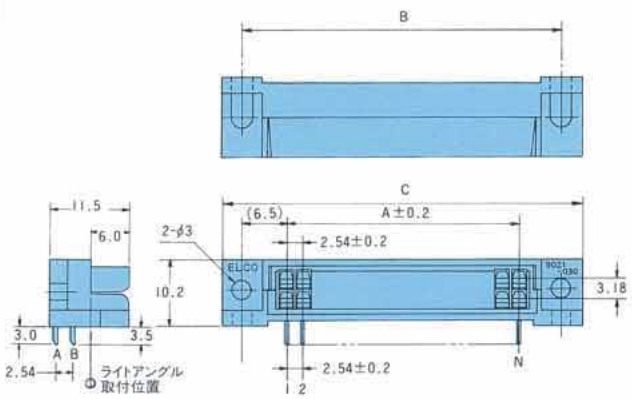

No. of positions	A	B	C
14(7/ 7)	15.24	—	23.24
20(10/10)	22.86	35.81	41.9
26(13/13)	30.48	43.43	49.5
30(15/15)	35.56	48.51	54.6
36(18/18)	43.18	56.13	62.2
40(20/20)	48.26	61.21	67.3

Mating dimensions

Connection of a board and board

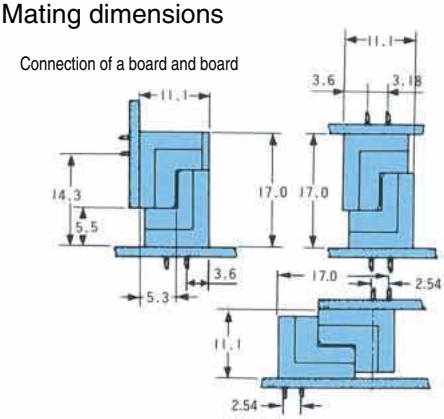

Connection of a board and crimped wire



Mounting dimensions on the P.C.board

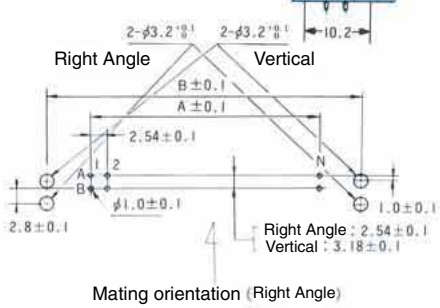

Ordering code

Part number	00	9021	1421	00	339

No. of positions

14,20,26,30,36,40

Variation(Terminating type)

21	Right Angle type with no flange (only for 14-contact)
22	Vertical type with no flange (only for 14-contact)
23	Right Angle type with the flange
24	Vertical type with the flange

Plating code

339 : Au plated

SERIES

9021

Insulator

Crimp type

Single type



Dual type

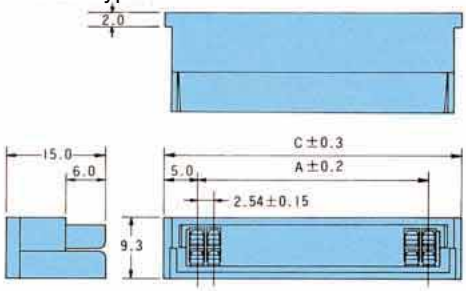

Single type

No. of positions	A	B	C
2	2.54	10.54	12.5
3	5.08	13.08	15.1
4	7.62	15.62	17.6
6	12.70	20.70	22.7
8	17.78	25.78	27.8
10	22.86	30.86	32.9
12	27.94	35.94	37.9
14	33.02	41.02	43.0
16	38.10	46.10	48.1
18	43.18	51.18	53.2
20	48.26	56.26	58.2

Dual type

No. of positions	A	C
14(7/ 7)	15.24	23.30*
20(10/10)	22.86	32.86
26(13/13)	30.48	40.48
30(15/15)	35.56	45.56
36(18/18)	43.18	53.18
40(20/20)	48.26	58.26

*with no flange

(Note) the location of flange for 14-position type is different from others.

Panel mounted type



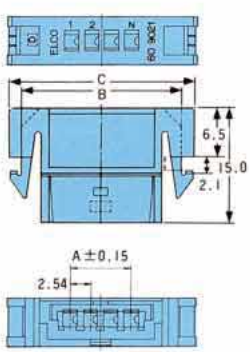

No. of positions	A	B	C
2	2.54	15.74	19.34
3	5.08	18.28	21.88
4	7.62	20.82	24.42
6	12.70	25.90	29.50
8	17.78	30.98	34.58
10	22.86	36.06	39.66
12	27.94	41.14	44.74

Shape of the panel to be mounted

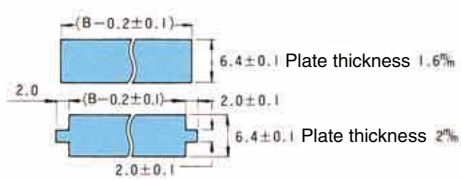

Ordering code

Crimp type

Part number	60	9021	3024	10	000

No. of positions

Single type :2,3,4,6,8,10,12,14,16,18,20

Dual type :14,20,26,30,36,40

Variation

1 : Single type

2 : Dual type

Color code

000: Green



Panel mounted type

Part number	60	9021	3028	16	000

No. of positions

2,3,4,6,8,10,12

Color code

000:Green 001:White 002:Black

Contact

Part number	60	9021	0313	00	339

Variation

0313 00: Contacts loose

0323 99: Reeled Contacts(10,000 contacts per reel)

Plating code

339: Au plated

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

AVX:

009021262300339 009021262300339+