
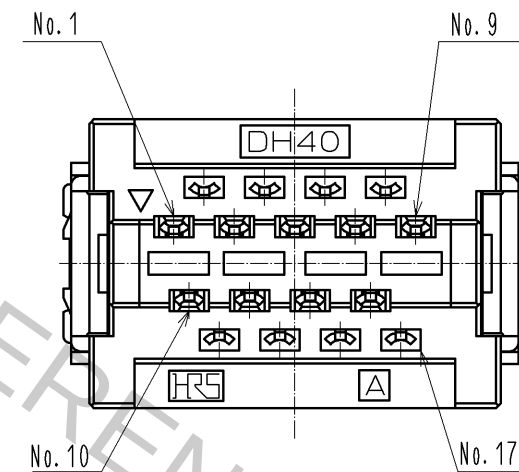
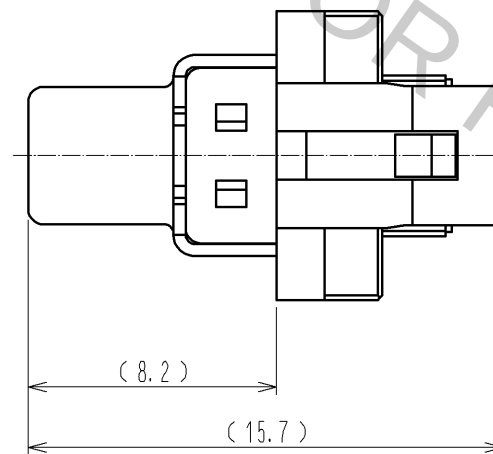




3	COPPER ALLOY	CONTACT AREA INSULATION DISPLACEMENT AREA: UNDER PLATING	:GOLD 0.2μm MIN :GOLD 0.03 μm MIN :NICKEL 1μm MIN	5	STAINLESS STEEL	PLATING:NICKEL 1μm MIN		
2								
1	POLYAMID	BLACK, UL94V-0		4	POLYAMID	BLACK, UL94V-0		
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS		
UNITS mm		SCALE 4 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.	APPROVED : AO. SUZUKI		10.10.06		DRAWING NO.	EDC3-127106-00		
	CHECKED : YH. ENAMI		10.10.06		PART NO.	DH40-17S		
	DESIGNED : YH. MAMADA		10.10.01		CODE NO.	CL244-0054-0-00		
	DRAWN : YH. MAMADA		10.10.01					
								