



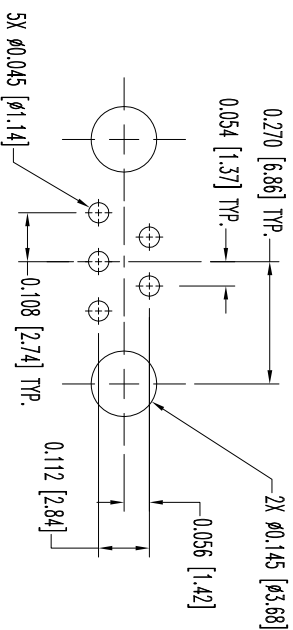

SK10761

DATE PREV	REVISION/RECORD	APP	DR	CK
8-05 09	ECO 31056	RCW	BS	TK
3-24 10	ECO 32270	COLL	BR	COLL

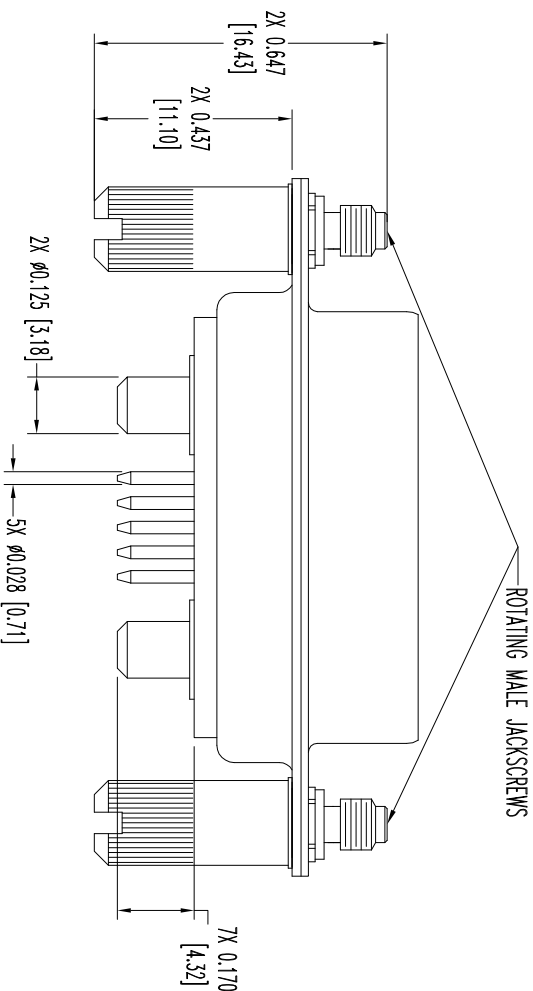

NOTES:

1. MATERIALS AND FINISHES:
INSULATOR: GLASS FILLED POLYESTER PER ASTM D5927, UL 94V-0, BLUE COLOR.
SIGNAL CONTACTS: PRECISION MACHINED COPPER ALLOY WITH BERYLLIUM COPPER CLIP, 0.000050 [1.27μ] GOLD OVER NICKEL.
POWER CONTACTS: MACHINED OF HIGH CONDUCTIVITY COPPER ALLOY, GOLD FLASH OVER NICKEL PLATE.
SHELLS: STEEL, ZINC PLATED WITH DICHROMATE SEAL.
JACKSCREWS: STEEL WITH ZINC PLATE.
2. DETAILED PRODUCT, ELECTRICAL, AND MECHANICAL INFORMATION IS AVAILABLE IN THE LATEST STANDARD DENSITY COMBO-D PRODUCT PUBLICATION.
VISIT CONNECTPOSTRONIC.COM/PRODUCTS/1/STANDARDENSITYCOMBO-D OR CONNECTPOSTRONIC.COM.
3. DIMENSIONS ARE IN INCHES [MILLIMETERS].

		POSITRONIC INDUSTRIES INC. www.connectpositronic.com		FSCM 28198	
		DECIMAL TOL. ± 0.015 [0.38]		TITLE CBM7W2S3700E0	
ANGULAR TOL. $\pm 5^\circ$		CBM SERIES		SCALE N.T.S.	
DATE 8-05-09		DRAWING NUMBER SK10761		DRAWN BY B SHRELEDDY	
				APPROVED BY R WILLIAMS	
				REV. A	