

Nominal frequency (f0)**100 MHz****Frequency stabilities**

Parameter	Frequency stability	Operating temp. range
Over all (df/f0)	-4.6 to 4.6 ppm	0 ... 70 °C
vs. operating temp. range (df/f@25 °C)	-0.8 to 0.8 ppm	
Parameter	Value	Condition
initial tolerance (df/f0)	-0.8 to 0.8 ppm	@25 °C
vs. supply voltage change (df/f)	-0.2 to 0.2 ppm	static; 3.3 V ±5 %
vs. aging / 20 years (df/f)	<± 2.8 ppm	@ 40 °C

RF output

Parameter	Value	Condition
Signal	LVC MOS	@ 20 to 80 %Vout @ 80 to 20 %Vout @ 1.65 V
Load	15 pF ±10 %	
Rise Time	< 5 ns	
Fall Time	< 5 ns	
Duty cycle	40 / 60 %	
V Low	x < 0.33 V	
V High	x > 2.97 V	

Supply voltage

Parameter	Value	Condition
Supply voltage (Vs)	3.3 V ± 5 %	@ Vsnom & 25 °C
Current consumption steady state	< 40 mA	

Additional Parameters

Additional Parameters			
Parameter	Value	Condition	
Phase Noise	< -75 dBc/Hz	10 Hz	typ values
	< -100 dBc/Hz	100 Hz	
	< -130 dBc/Hz	1000 Hz	
	< -150 dBc/Hz	10 kHz	
Processing & Packing	handling&processing note		


Additional environmental conditions

Tensile strength of leads DIN IEC 68 T2-21 (Ua 1)
Flexibility of leads DIN IEC 68 T2-21 (Ub)
Sealing test A nicht dicht (not hermetically sealed)
Solderability DIN IEC 68 T2-20 (Ta)
Solvent resistance EN 60068-2-45, Test xA non-washable device


Absolute Maximum Ratings

Parameter	Min	Typ	Max	Units	Condition
Operable temperature range	-40		85	°C	
Storage temperature range	-55		105	°C	

Enclosure

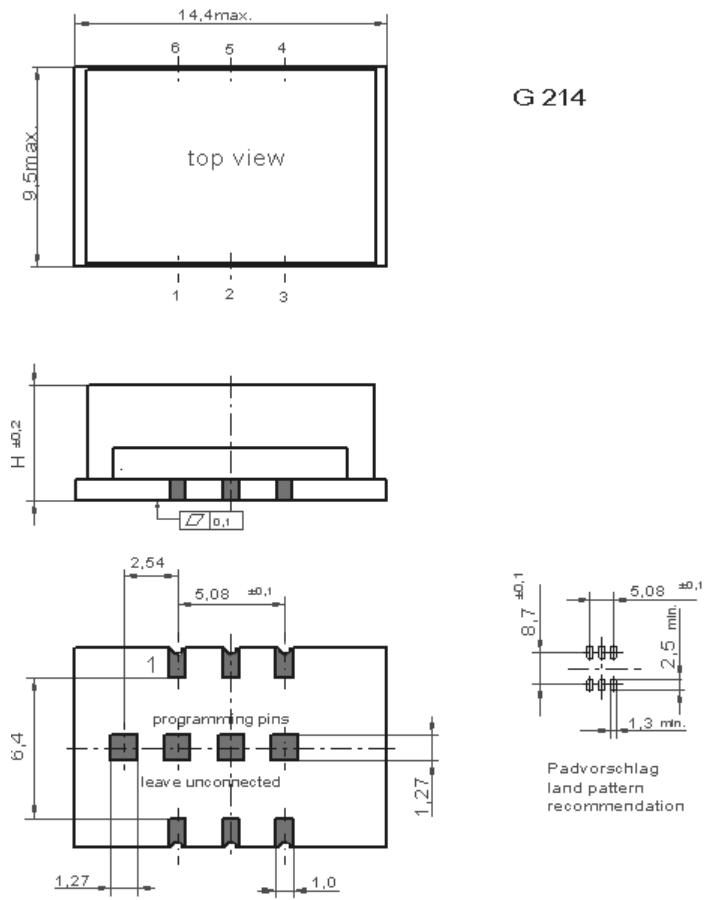
Type G214B	Height 5.9 mm
 G 214 all units in mm	
Pin Connections Pin 1: N.C. Pin 2: N.C. Pin 3: GND(Case) Pin 4: RF-Output Pin 5: N.C. Pin 6: Vs (supply voltage)	
Marking C2310A1-102 100,000 MHz * VI AYYWW * pin-1 marking	

Reflow profile

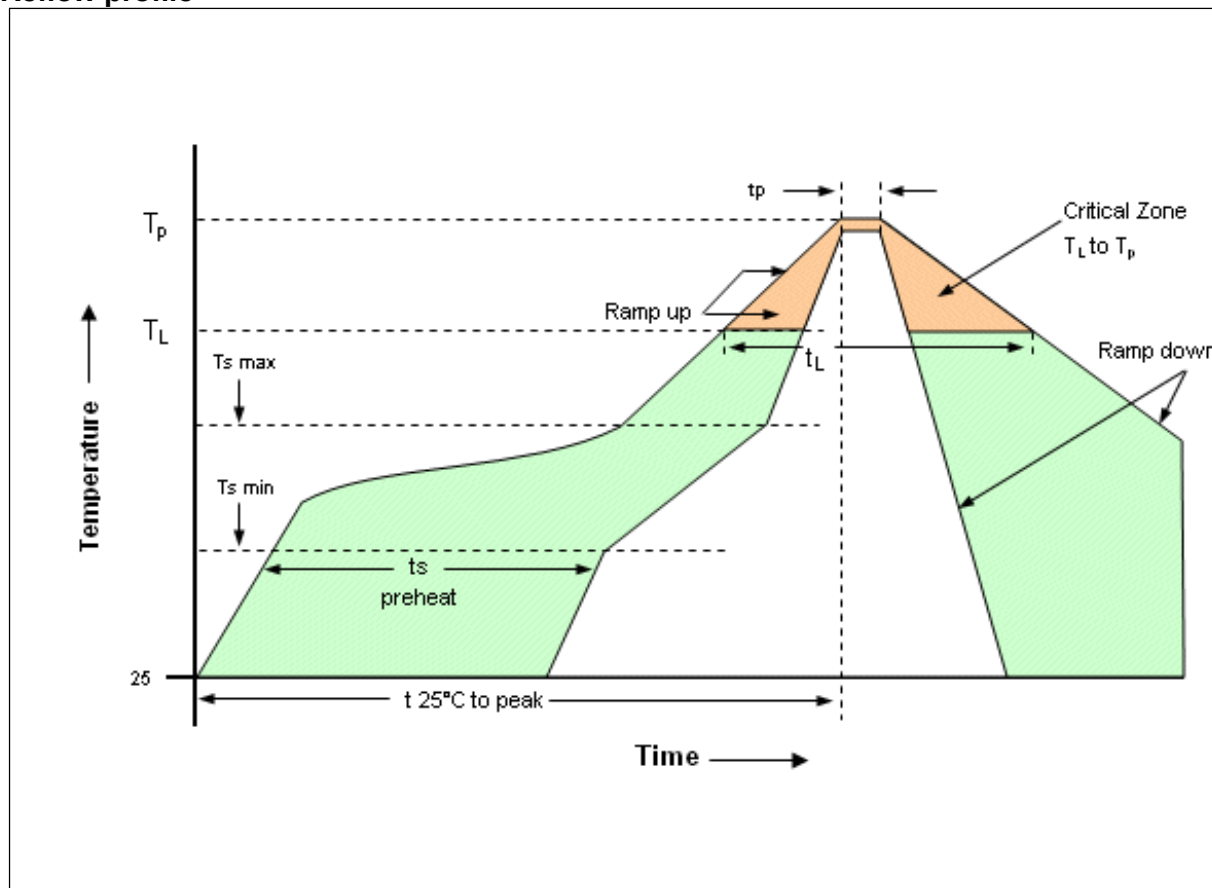

Profile Feature	Pb-Free Assembly/Sn-Pb Assembly
Average ramp-up rate (TL to Tp)	3°C/second max.
Preheat -Temperature Min (Tsmín)	150°C
-Temperature Min (Tsmáx)	200°C
-Time (min to max) (ts)	60-180 seconds
Tsmáx to TL - Ramp-up Rate	3°C/second max.
Time maintainted above - Temperature (TL)	217°C
- Time (tL)	60-150 seconds
Peak Temperature (Tp)	max 260°C
Time within 5°C of actual Peak Temperature (tp)	20-40 seconds
Ramp-down Rate	6°C/second max.
Time 25°C to Peak Temperature	8 minutes max.
Note: All temperatures refer to topside of the package, measured on the package body surface.	
Additional Information	
This SMD oscillator has been designed for pick and place reflow soldering. SMD oscillators must be on the top side of the PCB during the reflow process.	

Standard shipping method

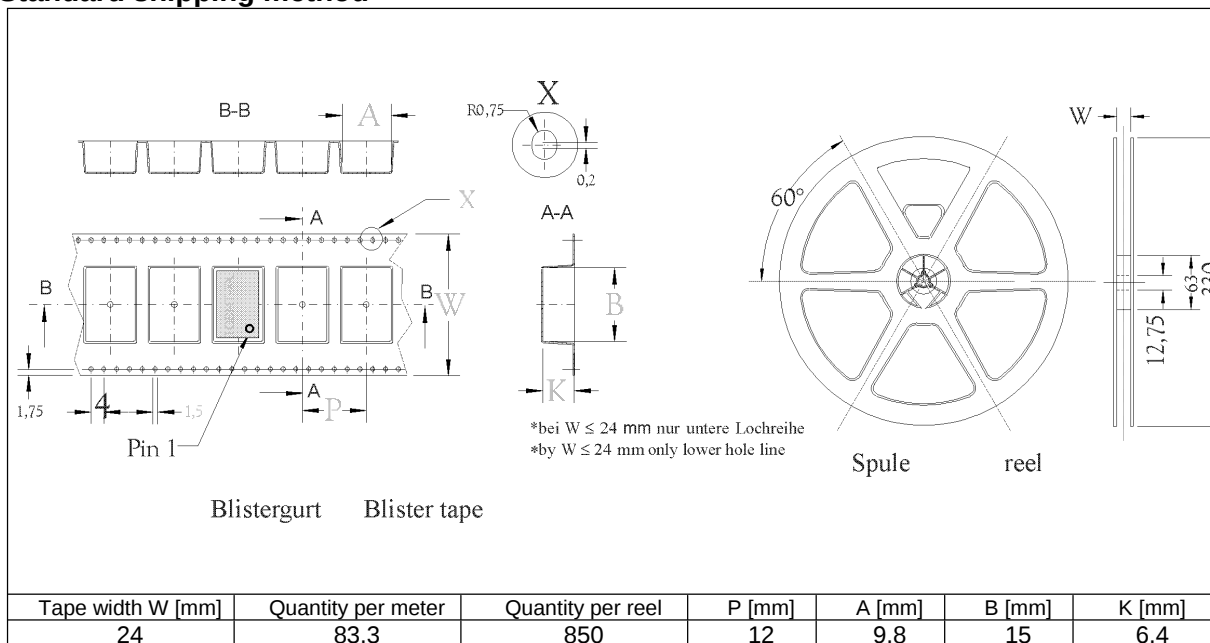

Notes:

Unless otherwise stated all values are valid after warm-up time and refer to typical conditions for supply voltage, frequency control voltage, load, temperature (25°C).
Subject to technical modification.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Vectron:](#)

[C2310A1-0102](#)