

CRIMPING TOOL

CRIMPER (ISO) 0.1-0.25mm² 0.5-1.0mm² CRIMPER (AWG) 24-30 18-22 WITH SIX SECTIONS PRESSURE ADJUSTMENT PUSH TO RELEASE CLOSE TO RELEASE 76mm 203mm PEPPER CORP. CONTACT CRIMPING TOOL	CRIMPER (ISO) 0.5-0.7mm² 1.0-1.5mm² 2.5mm² 4.0mm² 6.0mm² CRIMPER (AWG) 22-20 18-16 16-14 14-12 12-10 WITH SIX SECTIONS PRESSURE ADJUSTMENT PUSH TO RELEASE CLOSE TO RELEASE 76mm 203mm CABLE FERRULES CRIMPING TOOL	CRIMPER (ISO) 6.0mm² 10.0mm² 16.0mm² CRIMPER (AWG) 12-10 8-6 6-4 WITH SIX SECTIONS PRESSURE ADJUSTMENT PUSH TO RELEASE CLOSE TO RELEASE 76mm 203mm CABLE FERRULES CRIMPING TOOL	CRIMPER 6P6C 6P4C 6P2C CRIMPER 4P4C 4P2C STRIPPER CRIMPER 8P8C 8P6C 8P4C 8P2C CUTTER 94mm 208mm STRIPPING BLADES & CRIMPING																														
YAC-4 D-SUB CONTACT CRIMPING TOOL <table><tr><td>CRIMPING</td><td>JIS SNCM21</td></tr><tr><td>BODY</td><td>JIS G4051 S50C</td></tr><tr><td>PLASTIC GRIP</td><td>30% GLASS FIBER REINFORCED NYLON 6</td></tr><tr><td>CRIMPING SIZE</td><td>(ISO) 0.1-0.25mm², 0.5-1.0mm² (AWG) 24-30, 18-22</td></tr></table>	CRIMPING	JIS SNCM21	BODY	JIS G4051 S50C	PLASTIC GRIP	30% GLASS FIBER REINFORCED NYLON 6	CRIMPING SIZE	(ISO) 0.1-0.25mm ² , 0.5-1.0mm ² (AWG) 24-30, 18-22	YAC-5 CABLE FERRULES CRIMPING TOOL <table><tr><td>CRIMPING</td><td>JIS SNCM21</td></tr><tr><td>BODY</td><td>JIS G4051 S50C</td></tr><tr><td>PLASTIC GRIP</td><td>30% GLASS FIBER REINFORCED NYLON 6</td></tr><tr><td>CRIMPING SIZE</td><td>(ISO) 0.5-0.75mm², 1.0-1.5mm², 2.5mm², 4mm², 6mm² (AWG) 22-20, 18-16, 16-14, 14-12, 12-10</td></tr></table>	CRIMPING	JIS SNCM21	BODY	JIS G4051 S50C	PLASTIC GRIP	30% GLASS FIBER REINFORCED NYLON 6	CRIMPING SIZE	(ISO) 0.5-0.75mm ² , 1.0-1.5mm ² , 2.5mm ² , 4mm ² , 6mm ² (AWG) 22-20, 18-16, 16-14, 14-12, 12-10	YAC-6 CABLE FERRULES CRIMPING TOOL <table><tr><td>CRIMPING</td><td>JIS SNCM21</td></tr><tr><td>BODY</td><td>JIS G4051 S50C</td></tr><tr><td>PLASTIC GRIP</td><td>30% GLASS FIBER REINFORCED NYLON 6</td></tr><tr><td>CRIMPING SIZE</td><td>(ISO) 6mm², 10mm², 16mm² (AWG) 12-10, 8-6, 6-4</td></tr></table>	CRIMPING	JIS SNCM21	BODY	JIS G4051 S50C	PLASTIC GRIP	30% GLASS FIBER REINFORCED NYLON 6	CRIMPING SIZE	(ISO) 6mm ² , 10mm ² , 16mm ² (AWG) 12-10, 8-6, 6-4	YTT-02 MODULAR CONNECTOR CRIMPING TOOL <table><tr><td colspan="2">STRIPPING BLADES & CRIMPING</td></tr><tr><td>STEEL BODY</td><td>30% GLASS FIBER REINFORCED NYLON 6</td></tr><tr><td>SPECIFICATION</td><td>4P4C, 4P2C, 6P6C, 6P4C, 6P2C, 8P8C, 8P6C, 8P4C, 8P2C PLUGS</td></tr></table>	STRIPPING BLADES & CRIMPING		STEEL BODY	30% GLASS FIBER REINFORCED NYLON 6	SPECIFICATION	4P4C, 4P2C, 6P6C, 6P4C, 6P2C, 8P8C, 8P6C, 8P4C, 8P2C PLUGS
CRIMPING	JIS SNCM21																																
BODY	JIS G4051 S50C																																
PLASTIC GRIP	30% GLASS FIBER REINFORCED NYLON 6																																
CRIMPING SIZE	(ISO) 0.1-0.25mm ² , 0.5-1.0mm ² (AWG) 24-30, 18-22																																
CRIMPING	JIS SNCM21																																
BODY	JIS G4051 S50C																																
PLASTIC GRIP	30% GLASS FIBER REINFORCED NYLON 6																																
CRIMPING SIZE	(ISO) 0.5-0.75mm ² , 1.0-1.5mm ² , 2.5mm ² , 4mm ² , 6mm ² (AWG) 22-20, 18-16, 16-14, 14-12, 12-10																																
CRIMPING	JIS SNCM21																																
BODY	JIS G4051 S50C																																
PLASTIC GRIP	30% GLASS FIBER REINFORCED NYLON 6																																
CRIMPING SIZE	(ISO) 6mm ² , 10mm ² , 16mm ² (AWG) 12-10, 8-6, 6-4																																
STRIPPING BLADES & CRIMPING																																	
STEEL BODY	30% GLASS FIBER REINFORCED NYLON 6																																
SPECIFICATION	4P4C, 4P2C, 6P6C, 6P4C, 6P2C, 8P8C, 8P6C, 8P4C, 8P2C PLUGS																																



CRIMPER (ISO) 0.75mm² 22-10 1.5mm² 18-16 2.5mm² 16-14 CRIMPER (ISO) 4.0mm² 14-12 6.0mm² 12-10 10.0mm² 10-8 180mm 100mm YYT-21 CRIMPING PLIER FOR CABLE FERRULES <table><tr><td>CRIMPING</td><td>JIS SNCM21</td></tr><tr><td>BODY</td><td>JIS G4051 S50C</td></tr><tr><td>PLASTIC GRIP</td><td>PVC</td></tr><tr><td>CRIMPING SIZE</td><td>(ISO) 0.75mm², 1.5mm², 2.5mm², 4.0mm², 6.0mm², 10.0mm² (AWG) 22-20, 18-16, 16-14, 14-12, 12-10, 10-8</td></tr></table>	CRIMPING	JIS SNCM21	BODY	JIS G4051 S50C	PLASTIC GRIP	PVC	CRIMPING SIZE	(ISO) 0.75mm ² , 1.5mm ² , 2.5mm ² , 4.0mm ² , 6.0mm ² , 10.0mm ² (AWG) 22-20, 18-16, 16-14, 14-12, 12-10, 10-8	CRIMPER (ISO) 0.5mm² 22-24 0.75mm² 22-20 1.0mm² 20-18 1.5mm² 18-16 2.5mm² 16-14 150mm 95mm YYT-22 CRIMPING PLIER FOR CABLE FERRULES <table><tr><td>CRIMPING</td><td>JIS SNCM21</td></tr><tr><td>BODY</td><td>JIS G4051 S50C</td></tr><tr><td>PLASTIC GRIP</td><td>PVC</td></tr><tr><td>CRIMPING SIZE</td><td>(ISO) 0.5mm², 0.75mm², 1.0mm², 1.5mm², 2.5mm² (AWG) 24-22, 22-20, 20-18, 18-16, 16-14</td></tr></table>	CRIMPING	JIS SNCM21	BODY	JIS G4051 S50C	PLASTIC GRIP	PVC	CRIMPING SIZE	(ISO) 0.5mm ² , 0.75mm ² , 1.0mm ² , 1.5mm ² , 2.5mm ² (AWG) 24-22, 22-20, 20-18, 18-16, 16-14	CRIMPER (ISO) 0.08-6.0mm² (AWG) 28-10 PRESSURE ADJUSTMENT (WITH SIX SECTIONS) PUSH TO RELEASE 175mm (7") 80mm (3 1/8") YAC-8 CABLE FERRULES CRIMPING TOOL <table><tr><td>CRIMPING</td><td>JIS SNCM 21</td></tr><tr><td>HANDLE</td><td>JIS G4051 S50C</td></tr><tr><td>PLASTIC GRIP</td><td>30% GLASS FIBER REINFORCED NYLON 6</td></tr><tr><td>CRIMPING SIZE</td><td>(ISO) 0.08-6.0mm² (AWG) 28-10</td></tr><tr><td>LENGTH</td><td>175mm (7")</td></tr><tr><td>WIDTH</td><td>80mm (3 1/8")</td></tr></table>	CRIMPING	JIS SNCM 21	HANDLE	JIS G4051 S50C	PLASTIC GRIP	30% GLASS FIBER REINFORCED NYLON 6	CRIMPING SIZE	(ISO) 0.08-6.0mm ² (AWG) 28-10	LENGTH	175mm (7")	WIDTH	80mm (3 1/8")	CRIMPER (ISO) 0.08-5.0mm² (AWG) 28-10 PRESSURE ADJUSTMENT (WITH SIX SECTIONS) PUSH TO RELEASE 175mm (7") 80mm (3 1/8") YAC-9 CABLE FERRULES CRIMPING TOOL <table><tr><td>CRIMPING</td><td>JIS SNCM 21</td></tr><tr><td>HANDLE</td><td>JIS G4051 S50C</td></tr><tr><td>PLASTIC GRIP</td><td>30% GLASS FIBER REINFORCED NYLON 6</td></tr><tr><td>CRIMPING SIZE</td><td>(ISO) 0.08-5.0mm² (AWG) 28-10</td></tr><tr><td>LENGTH</td><td>175mm (7")</td></tr><tr><td>WIDTH</td><td>80mm (3 1/8")</td></tr></table>	CRIMPING	JIS SNCM 21	HANDLE	JIS G4051 S50C	PLASTIC GRIP	30% GLASS FIBER REINFORCED NYLON 6	CRIMPING SIZE	(ISO) 0.08-5.0mm ² (AWG) 28-10	LENGTH	175mm (7")	WIDTH	80mm (3 1/8")
CRIMPING	JIS SNCM21																																										
BODY	JIS G4051 S50C																																										
PLASTIC GRIP	PVC																																										
CRIMPING SIZE	(ISO) 0.75mm ² , 1.5mm ² , 2.5mm ² , 4.0mm ² , 6.0mm ² , 10.0mm ² (AWG) 22-20, 18-16, 16-14, 14-12, 12-10, 10-8																																										
CRIMPING	JIS SNCM21																																										
BODY	JIS G4051 S50C																																										
PLASTIC GRIP	PVC																																										
CRIMPING SIZE	(ISO) 0.5mm ² , 0.75mm ² , 1.0mm ² , 1.5mm ² , 2.5mm ² (AWG) 24-22, 22-20, 20-18, 18-16, 16-14																																										
CRIMPING	JIS SNCM 21																																										
HANDLE	JIS G4051 S50C																																										
PLASTIC GRIP	30% GLASS FIBER REINFORCED NYLON 6																																										
CRIMPING SIZE	(ISO) 0.08-6.0mm ² (AWG) 28-10																																										
LENGTH	175mm (7")																																										
WIDTH	80mm (3 1/8")																																										
CRIMPING	JIS SNCM 21																																										
HANDLE	JIS G4051 S50C																																										
PLASTIC GRIP	30% GLASS FIBER REINFORCED NYLON 6																																										
CRIMPING SIZE	(ISO) 0.08-5.0mm ² (AWG) 28-10																																										
LENGTH	175mm (7")																																										
WIDTH	80mm (3 1/8")																																										

PROFESSIONAL CRIMPING TOOL RATCHET TYPE



HT-533FM
(Frame Only)
9.4" (239mm)

HT-336FM
(Frame Only) 8.7" (220mm)







Die sets are interchangeable, except
HT-311M, HT-301X and HT-301









ITEM NO.	HT-301	HT-236H	HT-5332H	HT-236W	HT-5332W
DESCRIPTION	 ※with HT-336FM				
DIE ITEM NO.	HT-301 DIE is unchangeable	HT-236H DIE	HT-5332H DIE	HT-236W DIE	HT-5332W DIE
Specifications	AWG 22-18/16-14/12-10 DIN 0.5-1.0/1.5-2.5/4-6 mm ²	AWG 22-18/16-14/12-10 DIN 0.5-1.0/1.5-2.5/4-6 mm ²		AWG 22-18/16-14/12-10 DIN 0.5-1.0/1.5-2.5/4-6 mm ²	
Crimping cable size	Insulated Terminal 	Insulated Terminal 		Insulated Terminal 	

ITEM NO.	HT-236R	HT-5332R	HT-236F	HT-5332F	HT-236F1	HT-5332F1
DESCRIPTION						
DIE ITEM NO.	HT-236R DIE	HT-5332R DIE	HT-236F DIE	HT-5332F DIE	HT-236F1 DIE	HT-5332F1 DIE
Specifications	AWG 22-18/16-14/12-10 JIS 1.25/2.0/5.5 mm ²		AWG 22-18/16-14 DIN 0.5-1.0/1.5-2.5 mm ²		AWG 22-18/16-14 DIN 0.5-1.0/1.5-2.5 mm ²	
Crimping cable size	Vinyl Insulated w/o Copper Sleeve 		Insulated Flag Terminal 		Non-Insulated Flag Terminal 	

PROFESSIONAL CRIMPING TOOL RATCHET TYPE

ITEM NO.	HT-236E	HT-5332E	HT-236E1	HT-5332E1	HT-236E2	HT-5332E2	HT-236E3	HT-5332E3
DESCRIPTION								
DIE ITEM NO.	HT-236E DIE	HT-5332E DIE	HT-236E1 DIE	HT-5332E1 DIE	HT-236E2 DIE	HT-5332E2 DIE	HT-236E3 DIE	HT-5332E3 DIE
Specifications	AWG 22/20/18/16/14/12 JIS 0.5/0.75/1.0/1.5/2.5/4 mm ²		AWG 10/8/6 DIN 6/10/16 mm ²		AWG 22/20/18/16/14/12/10/8/6 DIN 0.5/0.75/1.0/1.5/2.5/4/6/10/16 mm ²		AWG 22/20/18/16/14/12/10 DIN 0.5/0.75/1.0/1.5/2.5/4/6 mm ²	
Crimping cable size	Pin Terminal Insulated or Non-Insulated Ferrules 		Pin Terminal Insulated or Non-Insulated Ferrules 		Terminal Insulated or Non-Insulated Ferrules 		Terminal Insulated or Non-Insulated Ferrules 	


ITEM NO.	HT-5335D	HT-5335D1	HT-5335D2
DESCRIPTION			
DIE ITEM NO.	HT-5335D DIE	HT-5335D1 DIE	HT-5335D2 DIE
Specifications	AWG 4/2/6 DIN 25/35/16 mm ²	AWG 4/1 DIN 25/50 mm ²	AWG 6/4/2 DIN 16/25/35 mm ²
Crimping cable size	Pin Terminal Insulated or Non-Insulated Ferrules 	Pin Terminal Insulated or Non-Insulated Ferrules 	Pin Terminal Insulated or Non-Insulated Ferrules 

ITEM NO.	HT-236U	HT-5332U	HT-236C	HT-5332C	HT-236N	HT-5332N
DESCRIPTION						
DIE ITEM NO.	HT-236U DIE	HT-5332U DIE	HT-236C DIE	HT-5332C DIE	HT-236N DIE	HT-5332N DIE
Specifications	AWG 14-22 DIN 2.5-0.5 mm ²		AWG 20-18/16-14/12-10 DIN 0.5-1/1.5-2.5/4-6 mm ²		AWG 20-18/16-14/12-10/8 DIN 1.5/2.5/6/10 mm ² JIS 1.25/2.0/5.5/8mm ²	
Crimping cable size	Non-Insulated, Open Barrel & D-sub, V.35 Terminal 		Non-Insulated Terminal or Open Barrel Terminal 		Non-Insulated Terminal 	

TERMINAL CRIMPING TOOL



Crimper made of carbon steel and hardened.

ITEM NO.	Crimping insulated terminal size			
HT-303 Economic Type	AWG mm²	Red	Blue	Yellow
		22-18	16-14	12-10
		0.5-1	1.5-2.5	4-6

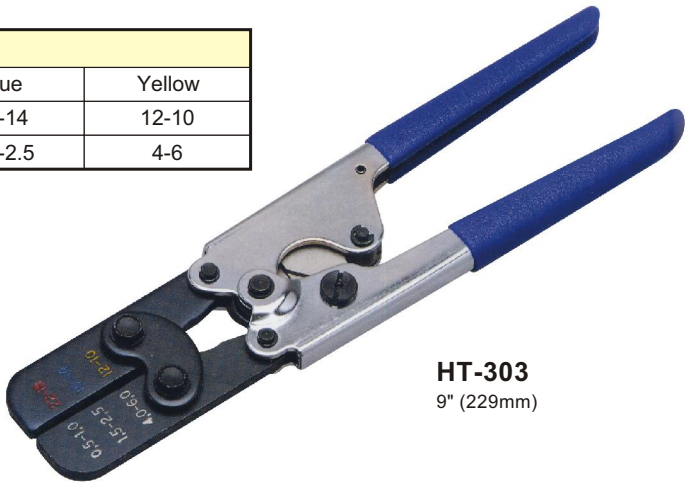


HT-303
9" (229mm)

ITEM NO.	Description
HT-202A	For computer pins & sockets, D-Sub 26-28 AWG wire. For butt-insulated connectors, 22-26 AWG wire. For telephone piercing spade lugs, 22-26 AWG wire. For open barrel connectors, 20-22 AWG wire. For open barrel connectors, 14-18 AWG wire.
HT-202B	For computer pins & sockets, D-Sub 26-28 AWG wire. For butt-insulated connectors, 22-26 AWG wire. For telephone piercing spade lugs, 22-26 AWG wire. For open barrel connectors, 20-22 AWG wire. For open barrel connectors, 14-18 AWG wire. For non-insulated terminals, 10-14, 16-18 and 20-22 AWG wire.

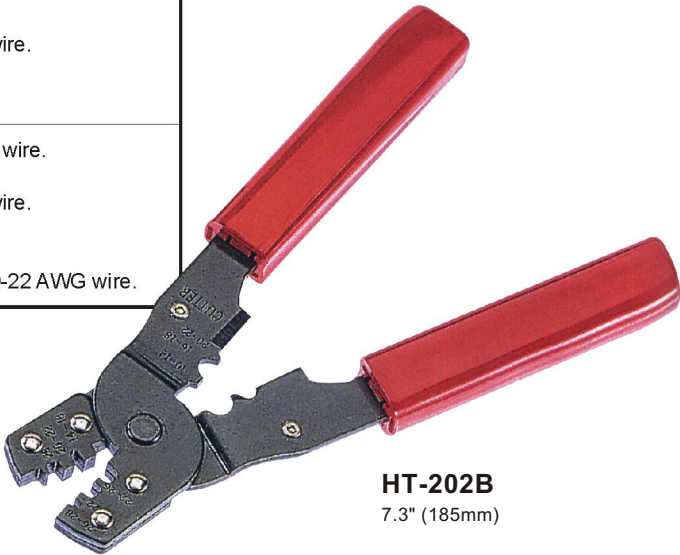

HT-202B
7.3" (185mm)

ITEM NO.	Description
HT-213	For crimping D-Sub AWG : 20-24-28

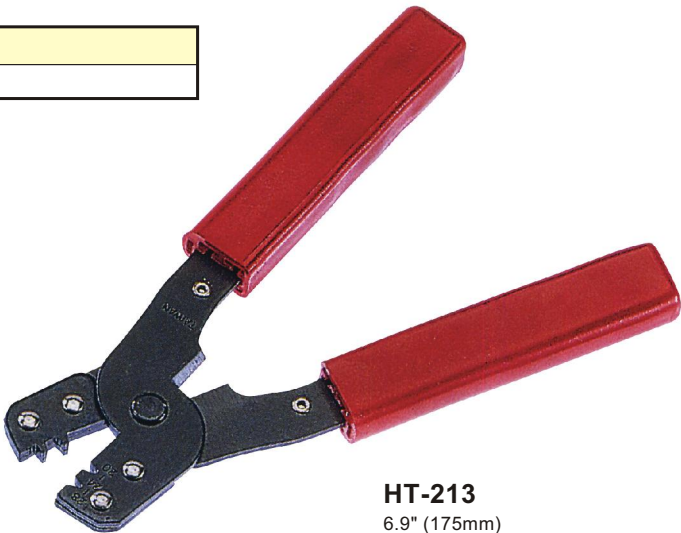

HT-213
6.9" (175mm)

PRECISE CUTTER & STRIPPER

- 6.6" 5 in 1, precise cutter & stripper with comfortable thickness handle.
- Made by CNC grinding.
- Wire stripper, wire cutter, steel wire cutter, pliers, wire loop with grinding blades for sharp cutter & stripper.
- Laser marked gauges including AWG mm.

ITEM NO.	Applicable for stripping wire size								
HT-5021 HT-5021R	AWG	Stranded	12	14	16	18	20	22	24
		Single	10	12	14	16	18	20	22
	mm		2.6	2.0	1.6	1.3	1.0	0.8	0.6
HT-5022 HT-5022R	AWG	Stranded		16	18	20	22	24	26
		Single		14	16	18	20	22	24
	mm			1.6	1.3	1.0	0.8	0.6	0.5
HT-5023 HT-5023R	AWG	Stranded		22	24	26	28	30	--
		Single		20	22	24	26	28	30
	mm			0.8	0.6	0.5	0.4	0.32	0.25

Special stripping sizes are welcomed.



HT-5021R
7" (177mm)
With ergonomically
designed handles



HT-5021
6.6" (168mm)



HT-1041
6.8" (173mm)

- 6.8" 7 in 1 crimping tools.
- Wire stripper, wire cutter, steel wire cutter, pliers, wire loop, scale mm & inch, crimping tool.

ITEM NO.	Stripping wire size					
HT-1041	AWG	10	12	14	16	18
	mm ²	5.5	3.5	2.0	1.25	0.9
HT-1042	AWG	16	18	20	22	24,26
	mm ²	1.25	0.9	0.5	0.35	0.2
HT-1043	AWG	22	24	26	28	30
	mm	0.65	0.5	0.4	0.32	0.25



HT-206
6.5" (167mm)



HT-502C
6.6" (168mm)

ITEM NO.	For cutting
HT-502C	For cutting ribbon cable, max. 30mm width use.
HT-206	6.5" Length, cuts wire O.D up to 0.41" (10.5mm ϕ)