



22MM PLASTIC ROUND ACTUATOR: PUSHBUTTON
LATCHING,
UNLOCKING BY PRESSING AGAIN WITH FLAT BUTTON
WITH HOLDER YELLOW

Actuator / signaling device:

Design of the operating mechanism	push button
Type of unlocking device	push-to-unlatch mechanism
Material / of the activation element	plastic
Shape / of the activation element	Flat pushbutton
Number of switching positions	2
Product component / front ring	Yes
Material / of the front ring	plastic
Color / of the front ring	black
Design of front ring	Standard
Product function / EMERGENCY STOP function	No

Holder:

Material / of holder	Plastic
----------------------	---------

General technical details:

Resistance against shock		
• for devices without incandescent lamp / according to IEC 60068-2-27		<= 50g
Resistance against vibration / according to IEC 60068-2-6		20 ... 200 Hz: 5g
Operating cycles / maximum	1/h	1,000

Mechanical operating cycles as operating time / typical		300,000
Item designation		
• according to DIN EN 61346-2		S
• according to DIN 40719 extendable after IEC 204-2 / according to IEC 750		S
Tightening torque / of the screws in the bracket / maximum	N·m	1
Ambient temperature		
• during operating	°C	-25 ... +70
• during storage	°C	-40 ... +80
Protection class IP		IP66
climatic class / during the operating phase / according to EN 60721		3K6
Type of mounting		front mounting
Shape / of the installation hole		round
Installation width	mm	28.5
Mounting diameter	mm	22
Mounting height	mm	8
Mounting depth	mm	29

Certificates/approvals:

General Product Approval	Test Certificates
 CSA	 GOST
 UL	Special Test Certificate
Shipping Approval	
 ABS	 BUREAU VERITAS
 DNV	 LRS
	 PRS
	 RINA
other	
Confirmation	other
	 UL

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)


<http://www.siemens.com/industrial-controls/mall>

Cax online generator:

<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3SB3000-0DA31/all>

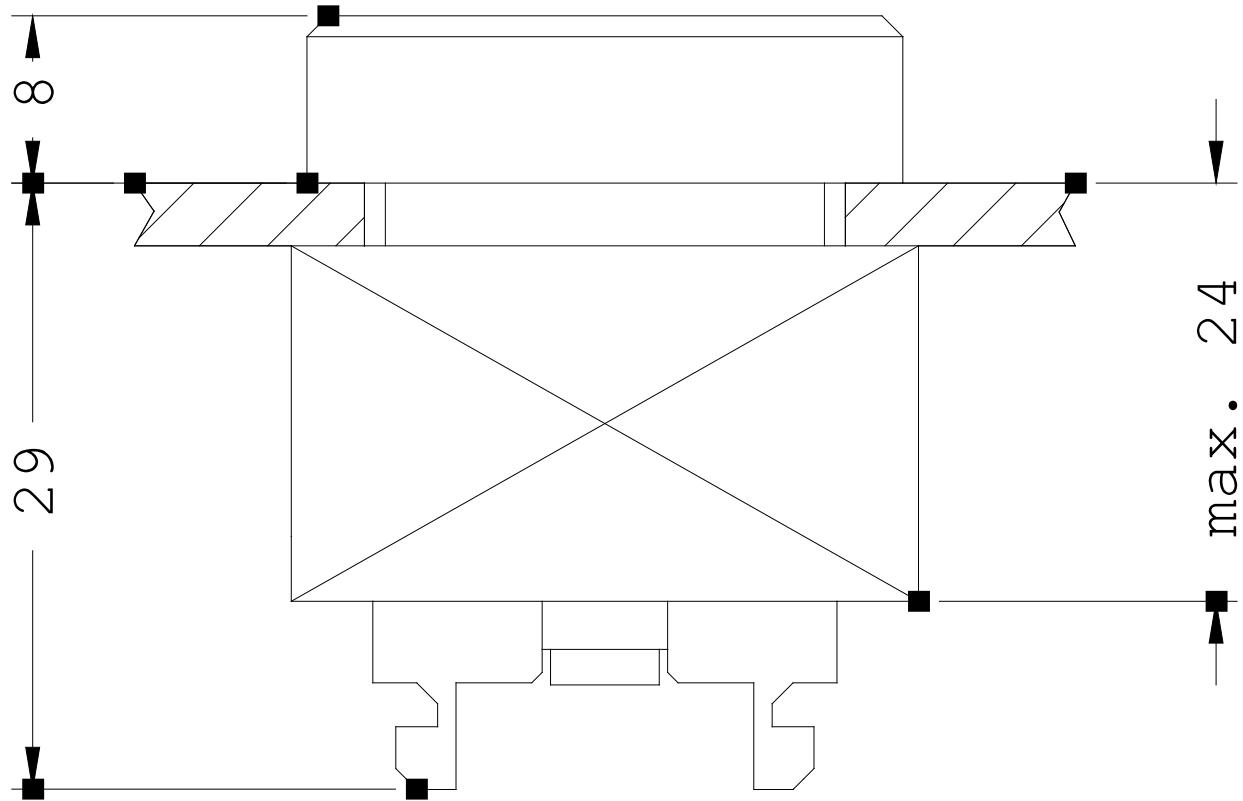

last change:

Jul 17, 2012