AMPOHM
WOUND PRODUCTS LTD

PF-XTI-AL (PIO)630VDC Audio Capacitors
Paper in Oil, Tin Foil

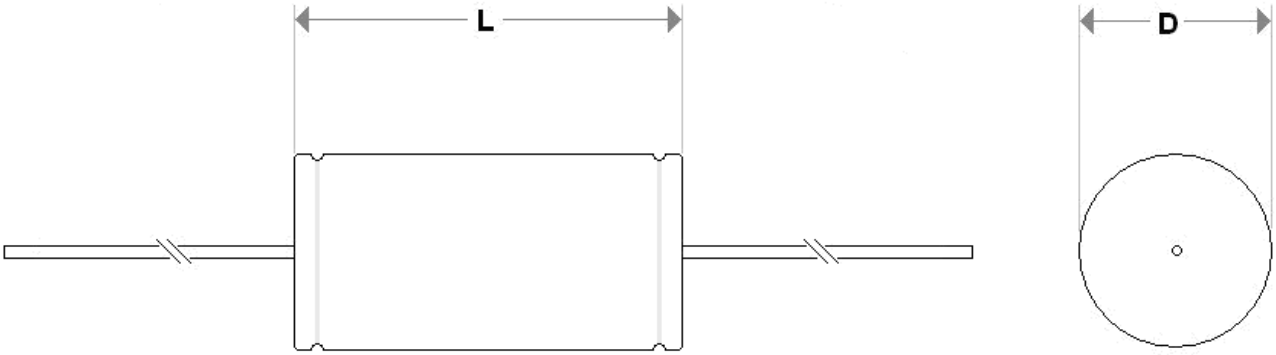

CAPACITANCE µF	D	L
0.001 – 0.05	15mm	34mm
0.05+ – 0.47	25mm	54mm
0.47+ - 1.2	35mm	54mm
1.2+ -2.0	45mm	95mm

AMPOHM Audio Capacitors are specially designed for high performance audio systems, used in various applications. These paper in oil (PIO) capacitors are hand wound using high purity tin foil and have their 1.0mm diameter (0.8mm diameter 0.0033uF and below) tinned copper leads hand solder sealed to the eyelets in the end discs. They are oil impregnated before being assembled oil filled and hermetically sealed in an aluminium housing with phenolic resin and rubber end discs, all being individually hand tested.
Custom Designs available

Type: **PF-XTI-AL**
Capacitance: **0.001µF – 2.0µF**
Dissipation Factor: **< 0.01@ 1KHz**
Tolerance: **+/- 20% up to 0.1µF**
+/- 10% up to 2.0µF
+/- 5% above 5.0µF
Rated Voltage: **630V DC**
Temperature Range: **-40 to +85C**
Outer Foil: **Line on label denotes outer foil**

Marking:

AMPOHM
AUDIO CAPACITOR
TYPE
SPEC
VALUE - VOLTAGE
DATE CODE

Line on label denotes outer foil

Witness Innovation... Experience Technology

Registered Office: Ampohm Wound Products Ltd, Knaresborough Technology Park, Manse Lane, Knaresborough, North Yorkshire, HG5 8LF
Tel: 01423 865641 ▪ Fax: 01423 798246 ▪ E-mail: sales@ampohm.co.uk ▪ Website: www.ampohm.co.uk

Registered in England & Wales No: 5654904 VAT Registration: 874 7628 73 (a subsidiary of GSPK Circuits Ltd)