




.050" [1.27 mm] Contact Centers, IDC Sockets, .100" [2.54 mm] Row Spacing Insulation Displacement With or Without Strain Relief - SFH Series Mates with SBH41 series (See opposite page)

SPECIFICATIONS

- Centered Polarizing Key
- Operating Temperature: -40°C to +105°C
- UL Flammability Rating: 94V-0
- Contact Resistance: 30 Megohms Max.
- Current Rating: 1 Amp
- Dielectric Withstanding: 500 VAC
- Insulation Resistance: 1000 Megohms

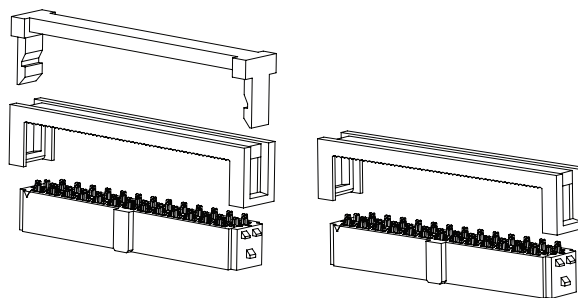


PART NUMBER OPTIONS

SERIES	INSULATOR MATERIAL	CONTACT MATERIAL	CONTACT FINISH - RoHS Compliant	COLOR	TERMINATION TYPE	NUMBER OF CONTACT POSITIONS	NUMBER OF ROWS	CONTACT CENTERS
SFH41 = IDC Socket Without Strain Relief, .050" [1.27 mm] Contact Centers by .100" [2.54 mm] Row Spacing	P = PBT	P = Phosphor Bronze	P = Gold Flash Overall E = .000100" Pure Tin, Matte, Overall V = Gold Flash on Contact Surface, Nickel on Termination	BK = Black	ID = Insulation Displacement	05, 08, 10, 13, 15, 17, 20, 25, 30, 34, 40, 50	D = Dual Row	B = .050" [1.27 mm]



SFH41 - P P P B - D 10 - ID - BK

DIMENSIONS For complete drawings, go to www.sullinscorp.com or e-mail techsupport@sullinscorp.com

Dimensions in [] are in millimeters, all others are in inches.



**INSULATION DISPLACEMENT (ID)
without Strain Relief
Requires SFH41
Example P/N: SFH41-PPPB-D20-ID-BK**

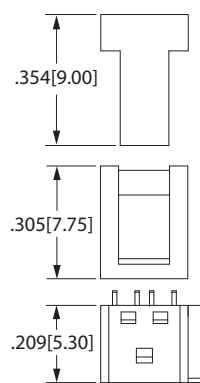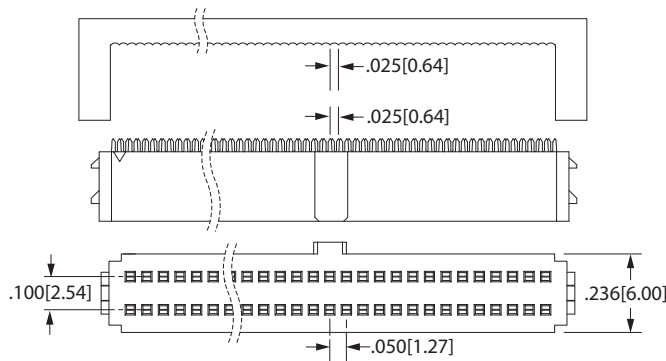

**INSULATION DISPLACEMENT (ID)
with Strain Relief
Requires SFH413
Example P/N: SFH413-PPPB-D20-ID-BK**

