

Metallized Polypropylene (PP) - Capacitors for DC-Link Applications. Capacitances from 1.0 μF to 400 μF . Rated Voltages from 400 VDC to 1700 VDC.

Special Features

- Capacitances up to 400 μF
- High volume/capacitance ratio
- Excellent self-healing properties
- Very low dissipation factor
- High reliability
- 2-pin, 4-pin or plate contact configuration
- AEC-Q200 qualified
- According to RoHS 2015/863/EU

Typical Applications

As intermediate circuit capacitor e.g. in high power converter technology, power supplies, solar inverters, e-mobility (battery chargers, motor drives & power train) etc.


Construction

Dielectric: Polypropylene (PP) film

Capacitor electrodes:

Vacuum-deposited

Internal construction:

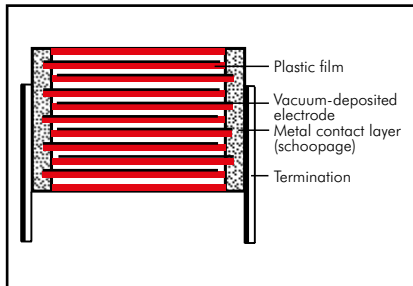

Encapsulation:

Solvent-resistant, flame-retardant plastic case with epoxy resin seal, UL 94 V-0

Dissipation factors at +20° C: $\tan \delta \times 10^{-4}$

PCM	400 VDC		500 VDC		600 VDC		800 VDC		900 VDC		1000 VDC		1100 VDC		1200 VDC		1300 VDC		1500 VDC		1700 VDC	
	1 kHz	10 kHz	1 kHz	10 kHz	1 kHz	10 kHz	1 kHz	10 kHz	1 kHz	10 kHz	1 kHz	10 kHz	1 kHz	10 kHz	1 kHz	10 kHz	1 kHz	10 kHz	1 kHz	10 kHz	1 kHz	10 kHz
27.5	15	160	15	130	12	120	10	90	10	80	10	70	10	60	8	55	7	50	7	40	7	40
37.5	60	350	30	240	21	150	18	170	16	150	15	120	14	100	13	90	12	90	12	90	12	90
52.5	80	550	80	460	40	300	35	250	31	200	30	190	30	170	28	160	23	150	23	150	23	150

Terminations: Tinned wire or plates.

Marking: Colour: Red. Marking: Black.

Packing

Packing units at the end of the catalogue

For further details and graphs please refer to Technical Information.

Electrical Data

Capacitance range: 1 μF to 400 μF (intermediate values on request)

Rated voltages: 400VDC, 500VDC, 600VDC, 800VDC, 900VDC, 1000VDC, 1100VDC, 1200VDC, 1300VDC, 1500VDC, 1700VDC

Capacitance tolerances: $\pm 20\%$, $\pm 10\%$, $\pm 5\%$

Operating temperature range:

-55° C to +105° C (hot spot including self-heating)

Climatic test category: 55/085/56

in accordance with IEC

Insulation resistance at +20° C:

$\geq 30\,000$ sec ($M\Omega \times \mu\text{F}$)

Measuring voltage: 100 V/1 min.

Voltage and current derating:

A derating factor of 1.35% per K must be applied from +85° C for DC voltages and from +70° C for AC currents (I_{rms}). Additionally a derating factor of 4.5% per K must be applied from +85° C for AC currents (I_{rms})

Reliability: Operational life > 100 000 hours (U_r and 70° C)

Failure rate λ_0 ($0.5 \times U_r$ and 40° C)

$\Pi = C_N [\mu\text{F}] \times U_r [\text{V}] $	λ_0
$\Pi \leq 10\,000$	< 2 fit
$10\,000 < \Pi \leq 25\,000$	< 5 fit
$25\,000 < \Pi \leq 50\,000$	< 10 fit
$50\,000 < \Pi \leq 100\,000$	< 20 fit
$\Pi > 100\,000$	< 30 fit

Dielectric absorption: 0.05 %

Test voltage:

≤ 500 VDC: 1.5 U_r , 2sec


> 500 VDC: 1.2 U_r , 2sec

Specific dissipation:

Box size W x H x L in mm	Specific dissipation in Watts per K above the ambient temperature
9x19x31.5	0.021
11x21x31.5	0.025
13x24x31.5	0.030
15x26x31.5	0.034
17x29x31.5	0.039
17x34.5x31.5	0.044
20x39.5x31.5	0.053
13x24x41.5	0.037
15x26x41.5	0.042
17x29x41.5	0.048
19x32x41.5	0.054
20x39.5x41.5	0.065
24x45.5x41.5	0.080
28x38x41.5	0.076
31x46x41.5	0.092
35x50x41.5	0.106
40x55x41.5	0.123
25x45x57	0.102
30x45x57	0.113
35x50x57	0.132
45x55x57	0.164
45x65x57	0.184

Maximum pulse rise time:

PCM	max. pulse rise time V/ μsec at $T_A < 40^\circ\text{C}$											
	400VDC	500VDC	600VDC	800VDC	900VDC	1000VDC	1100VDC	1200VDC	1300VDC	1500VDC	1700VDC	
27.5	11	15	27	29	35	39	43	46	50	59	64	
37.5	8	10	19	21	22	25	29	32	35	41	45	
52.5	5	7	13	15	18	19	21	23	25	29	32	

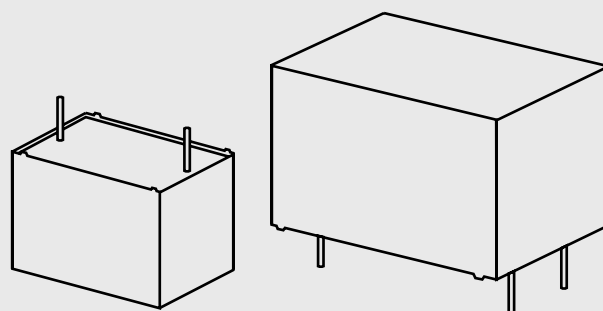

Continuation

General Data

Capacitance	400 VDC (70° C) / 300 VDC (85° C) / 220 VDC (105° C)								
	W	H	L	PCM**	Pin	I _S A	I _{rms} * (10 kHz)* A	ESR (10 kHz)* mΩ	Part number
1 µF	9	19	31.5	27.5	2	11	1	238.7	DCP4G041006A
2 "	9	19	31.5	27.5	2	22	1.5	119.4	DCP4G042006A
3 "	9	19	31.5	27.5	2	33	1.5	79.6	DCP4G043006A
4 "	9	19	31.5	27.5	2	44	2	59.7	DCP4G044006A
5 "	9	19	31.5	27.5	2	55	2	47.7	DCP4G045006A
7 "	9	19	31.5	27.5	2	77	2.5	34.1	DCP4G047006A
10 µF	11	21	31.5	27.5	2/4	110	3.5	23.9	DCP4G051006B
15 "	13	24	31.5	27.5	2/4	165	4.5	15.9	DCP4G051506D
20 "	15	26	31.5	27.5	2/4	220	5.5	11.9	DCP4G052006F
22 "	17	29	31.5	27.5	2/4	242	6	9.8	DCP4G052206G
25 "	17	29	31.5	27.5	2/4	275	7	8.6	DCP4G052506G
	15	26	41.5	37.5	2/4	200	6.5	10	DCP4G052507D
30 "	17	34.5	31.5	27.5	2/4	330	8	7.2	DCP4G053006I
	17	29	41.5	37.5	2/4	240	7.5	8.5	DCP4G053007E
40 "	20	39.5	31.5	27.5	2/4	440	10	5.4	DCP4G054006J
	19	32	41.5	37.5	2/4	320	9.5	6	DCP4G054007F
50 "	20	39.5	41.5	37.5	2/4	400	11	5.4	DCP4G055007G
60 "	20	39.5	41.5	37.5	2/4	480	11.5	4.8	DCP4G056007G
70 "	24	45.5	41.5	37.5	2/4	560	13	4.7	DCP4G057007H
80 "	24	45.5	41.5	37.5	2/4	640	14	4.1	DCP4G058007H
90 "	24	45.5	41.5	37.5	2/4	720	15	3.6	DCP4G059007H
	28	38	41.5	37.5	2/4	720	15	3.6	DCP4G059007L
100 µF	31	46	41.5	37.5	2/4	800	18	2.8	DCP4G061007I
120 "	31	46	41.5	37.5	2/4	960	20	2.3	DCP4G061207I
140 "	35	50	41.5	37.5	2/4	1120	22.5	2.1	DCP4G061407J
150 "	35	50	41.5	37.5	2/4	1200	23	2	DCP4G061507J
	25	45	57	52.5	4	750	20	2.6	DCP4G061509D
160 "	40	55	41.5	37.5	2/4	1280	24.5	2	DCP4G061607K
	25	45	57	52.5	4	800	21	2.3	DCP4G061609D
180 "	40	55	41.5	37.5	2/4	1440	26	1.8	DCP4G061807K
	30	45	57	52.5	4	900	23.5	2	DCP4G061809E
200 "	40	55	41.5	37.5	2/4	1600	27.5	1.6	DCP4G062007K
	30	45	57	52.5	4	1000	25	1.8	DCP4G062009E
220 "	35	50	57	52.5	4	1100	27	1.8	DCP4G062209F
250 "	45	55	57	52.5	4	1250	32	1.6	DCP4G062509H
270 "	45	55	57	52.5	4	1350	33.5	1.5	DCP4G062709H
300 "	45	55	57	52.5	4	1500	35	1.3	DCP4G063009H
330 "	45	65	57	52.5	4	1650	37	1.2	DCP4G063309J
350 "	45	65	57	52.5	4	1750	40	1.1	DCP4G063509J
370 "	45	65	57	52.5	4	1850	41.5	1.1	DCP4G063709J
400 "	45	65	57	52.5	4	2000	43	1	DCP4G064009J

* General guide

* Permissible I_{rms} at 10° C internal temperature rise (general guide)

** PCM = Printed circuit module = pin spacing

Dims. in mm.

Part number completion:

Version code:	2-pin	= D2
	4-pin	= D4
Tolerance:	20 %	= M
	10 %	= K
	5 %	= J
Packing:	bulk	= S
Pin length:	6-2	= SD
Taped version see page 151.		

Rights reserved to amend design data without prior notification.

Continuation page 125

Continuation

General Data

Capacitance	500 VDC (70° C) / 400 VDC (85° C) / 290 VDC (105° C)								Part number
	W	H	L	PCM**	Pin	I _s A	I _{rms} * (10 kHz)* A	ESR (10 kHz)* mΩ	
1 µF	9	19	31.5	27.5	2	15	1	238.7	DCP4H141006A
2 "	9	19	31.5	27.5	2	30	1.5	119.4	DCP4H142006A
3 "	9	19	31.5	27.5	2	45	1.5	79.6	DCP4H143006A
4 "	9	19	31.5	27.5	2	60	1.8	63.7	DCP4H144006A
5 "	9	19	31.5	27.5	2	75	2.5	47.7	DCP4H145006A
7 "	11	21	31.5	27.5	2/4	105	3	34.1	DCP4H147006B
8 "	13	24	31.5	27.5	2/4	120	3	29.8	DCP4H148006D
10 µF	13	24	31.5	27.5	2/4	150	4	23.9	DCP4H151006D
12 "	15	26	31.5	27.5	2/4	180	4	19.9	DCP4H151206F
15 "	17	29	31.5	27.5	2/4	225	5	15.9	DCP4H151506G
	15	26	41.5	37.5	2/4	150	4.3	22.3	DCP4H151507D
18 "	17	29	31.5	27.5	2/4	270	6	9.5	DCP4H151806G
20 "	17	34.5	31.5	27.5	2/4	300	6	11.9	DCP4H152006I
	17	29	41.5	37.5	2/4	200	5.4	16.8	DCP4H152007E
22 "	20	39.5	31.5	27.5	2/4	330	7	10.9	DCP4H152206J
25 "	20	39.5	31.5	27.5	2/4	375	7.5	9.5	DCP4H152506J
	19	32	41.5	37.5	2/4	250	6.3	13.4	DCP4H152507F
30 "	20	39.5	41.5	37.5	2/4	300	9	7.9	DCP4H153007G
35 "	20	39.5	41.5	37.5	2/4	350	8.5	9.1	DCP4H153507G
40 "	20	39.5	41.5	37.5	2/4	400	10	5.7	DCP4H154007G
50 "	24	45.5	41.5	37.5	2/4	500	13	4.8	DCP4H155007H
	28	38	41.5	37.5	2/4	500	13	4.8	DCP4H155007L
55 "	24	45.5	41.5	37.5	2/4	550	14	4	DCP4H155507H
	28	38	41.5	37.5	2/4	550	14	4	DCP4H155507L
60 "	31	46	41.5	37.5	2/4	600	14	4.7	DCP4H156007I
70 "	31	46	41.5	37.5	2/4	700	16.5	3.9	DCP4H157007I
80 "	31	46	41.5	37.5	2/4	800	17.5	3.4	DCP4H158007I
90 "	35	50	41.5	37.5	2/4	900	19	3	DCP4H159007J
100 µF	35	50	41.5	37.5	2/4	1000	20	2.7	DCP4H161007J
	25	45	57	52.5	4	700	14.3	5	DCP4H161009D
120 "	40	55	41.5	37.5	2/4	1200	22.5	2.7	DCP4H161207K
	30	45	57	52.5	4	840	16.5	4.2	DCP4H161209E
130 "	40	55	41.5	37.5	2/4	1300	23	2.4	DCP4H161307K
140 "	35	50	57	52.5	4	980	21.5	2.8	DCP4H161409F
150 "	35	50	57	52.5	4	1050	22.5	2.7	DCP4H161509F
160 "	45	55	57	52.5	4	1120	25.5	2.5	DCP4H161609H
180 "	45	55	57	52.5	4	1260	27	2.2	DCP4H161809H
200 "	45	55	57	52.5	4	1400	28.5	2	DCP4H162009H
210 "	45	55	57	52.5	4	1470	29.5	1.9	DCP4H162109H
220 "	45	65	57	52.5	4	1540	32	1.8	DCP4H162209J
240 "	45	65	57	52.5	4	1680	33.5	1.7	DCP4H162409J

* General guide

* Permissible I_{rms} at 10° C internal temperature rise (general guide)

** PCM = Printed circuit module = pin spacing

Dims. in mm.

Rights reserved to amend design data without prior notification.

Part number completion:	
Version code:	2-pin = D2
	4-pin = D4
Tolerance:	20 % = M
	10 % = K
	5 % = J
Packing:	bulk = S
Pin length:	6-2 = SD
Taped version see page 151.	

Continuation page 126

Continuation

General Data

Capacitance	600 VDC (70° C) / 450 VDC (85° C) / 320 VDC (105° C)								
	W	H	L	PCM**	Pin	I _S A	I _{rms} * (10 kHz)* A	ESR (10 kHz)* mΩ	Part number
1 µF	9	19	31.5	27.5	2	27	1.5	106.9	DCP4I041006A
2 "	9	19	31.5	27.5	2	54	2	56	DCP4I042006A
3 "	9	19	31.5	27.5	2	81	2.5	35.6	DCP4I043006A
4 "	11	21	31.5	27.5	2/4	108	3	26.7	DCP4I044006B
5 "	13	24	31.5	27.5	2/4	135	3.5	22	DCP4I045006D
7 "	15	26	31.5	27.5	2/4	189	4.5	16	DCP4I047006F
8 "	15	26	31.5	27.5	2/4	216	5	13.4	DCP4I048006F
10 µF	17	29	31.5	27.5	2/4	270	6	11	DCP4I051006G
	13	24	41.5	37.5	2/4	190	5	17.6	DCP4I051007C
12 "	17	29	31.5	27.5	2/4	324	6.5	8.9	DCP4I051206G
15 "	17	34.5	31.5	27.5	2/4	405	8	7	DCP4I051506I
	17	29	41.5	37.5	2/4	285	6.5	11.8	DCP4I051507E
18 "	20	39.5	31.5	27.5	2/2	486	9.5	5.9	DCP4I051806J
20 "	20	39.5	31.5	27.5	2/4	540	10	5.3	DCP4I052006J
	19	32	41.5	37.5	2/4	380	10.5	4.9	DCP4I052007F
22 "	20	39.5	41.5	37.5	2/4	418	11	5.4	DCP4I052207G
25 "	20	39.5	41.5	37.5	2/4	475	11.5	5	DCP4I052507G
30 "	24	45.5	41.5	37.5	2/4	570	14	4.1	DCP4I053007H
35 "	24	45.5	41.5	37.5	2/4	665	14.5	3.8	DCP4I053507H
	28	38	41.5	37.5	2/4	665	14.5	3.8	DCP4I053507L
40 "	31	46	41.5	37.5	2/4	760	16.5	3.3	DCP4I054007I
45 "	31	46	41.5	37.5	2/4	855	17	3.2	DCP4I054507I
50 "	35	50	41.5	37.5	2/4	950	19	2.9	DCP4I055007J
60 "	35	50	41.5	37.5	2/4	1140	17.5	3.4	DCP4I056007J
	25	45	57	52.5	2/4	780	14.5	4.9	DCP4I056009D
70 "	40	55	41.5	37.5	2/4	1330	20	3.1	DCP4I057007K
	30	45	57	52.5	4	910	16.5	4.2	DCP4I057009E
80 "	40	55	41.5	37.5	2/4	1520	22	2.6	DCP4I058007K
	30	45	57	52.5	4	1040	17.8	3.6	DCP4I058009E
90 "	35	50	57	52.5	4	1170	23.5	1.9	DCP4I059009F
100 µF	45	55	57	52.5	4	1300	25	2.6	DCP4I061009H
120 "	45	65	57	52.5	4	1560	28	2.3	DCP4I061209J
140 "	45	65	57	52.5	4	1820	31	1.9	DCP4I061409J
150 "	45	65	57	52.5	4	1950	33	1.7	DCP4I061509J

* General guide


* Permissible I_{rms} at 10° C internal temperature rise (general guide)

** PCM = Printed circuit module = pin spacing

Dims. in mm.


Part number completion:	
Version code:	2-pin = D2
	4-pin = D4
Tolerance:	20 % = M
	10 % = K
	5 % = J
Packing:	bulk = S
Pin length:	6-2 = SD
Taped version see page 151.	

2-pin version

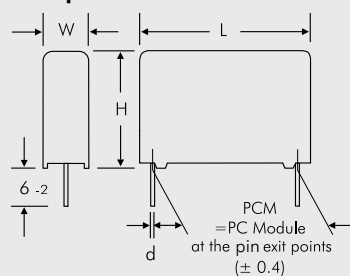

PCM	Ø d
27.5	0.8
37.5	1

4-pin version

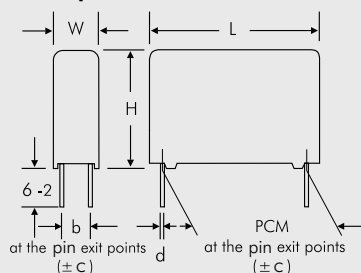

W	PCM	b	Ø d	c
11	27.5	5	0.8	0.4
13	27.5	7.5	0.8	0.4
15	27.5	7.5	0.8	0.4
17	27.5	10	0.8	0.4
20	27.5	12.5	0.8	0.4
19	37.5	10	1	0.4
20	37.5	12.5	1	0.4
24	37.5	12.5	1	0.4
28	37.5	10	1	0.4
31	37.5	20	1	0.4
35	37.5	20	1	0.4
40	37.5	20	1	0.4
25	52.5	12.5	1.2	0.8
30	52.5	20	1.2	0.8
35	52.5	20	1.2	0.8
45	52.5	20	1.2	0.8

Plate versions page 136

Rights reserved to amend design data without prior notification.

Continuation

General Data

Capacitance	W	H	L	PCM**	Pin	I _S A	I _{rms} * (10 kHz)* A	ESR (10 kHz)* mΩ	Part number
1 µF	9	19	31.5	27.5	2	29	1.7	73.2	DCP4L041006A
2 "	9	19	31.5	27.5	2	58	2.5	36.6	DCP4L042006A
3 "	11	21	31.5	27.5	2/4	87	3	24.4	DCP4L043006B
4 "	13	24	31.5	27.5	2/4	116	4	18.3	DCP4L044006D
5 "	13	24	31.5	27.5	2/4	145	4.5	14.6	DCP4L045006D
7 "	17	29	31.5	27.5	2/4	203	6	10.5	DCP4L047006G
8 "	17	29	31.5	27.5	2/4	232	6.5	9.2	DCP4L048006G
10 µF	17	34.5	31.5	27.5	2/4	290	8	7.3	DCP4L051006I
	17	29	41.5	37.5	2/4	210	7.5	8.5	DCP4L051007E
12 "	20	39.5	31.5	27.5	2/4	348	9.5	6.1	DCP4L051206J
15 "	20	39.5	31.5	27.5	2/4	435	10.5	4.9	DCP4L051506J
	19	32	41.5	37.5	2/4	315	8.5	7.5	DCP4L051507F
18 "	20	39.5	41.5	37.5	2/4	378	9.5	7.2	DCP4L051807G
20 "	20	39.5	41.5	37.5	2/4	420	10	6.2	DCP4L052007G
22 "	20	39.5	41.5	37.5	2/4	462	10.5	5.9	DCP4L052207G
25 "	24	45.5	41.5	37.5	2/4	525	12.5	5	DCP4L052507H
30 "	24	45.5	41.5	37.5	2/4	630	14	4.1	DCP4L053007H
	28	38	41.5	37.5	2/4	630	14	4.1	DCP4L053007L
35 "	31	46	41.5	37.5	2/4	735	15.5	3.8	DCP4L053507I
40 "	31	46	41.5	37.5	2/4	840	16.5	3.3	DCP4L054007I
45 "	35	50	41.5	37.5	2/4	945	17.5	3.4	DCP4L054507J
50 "	35	50	41.5	37.5	2/4	1050	19	3	DCP4L055007J
	25	45	57	52.5	4	750	18.5	3	DCP4L055009D
60 "	40	55	41.5	37.5	2/4	1260	21.5	2.7	DCP4L056007K
	30	45	57	52.5	4	900	20.5	2.7	DCP4L056009E
65 "	35	50	57	52.5	4	975	22.5	2.2	DCP4L056509F
70 "	45	55	57	52.5	4	1050	23.5	3	DCP4L057009H
75 "	45	55	57	52.5	4	1125	24	2.9	DCP4L057509H
80 "	45	55	57	52.5	4	1200	24.5	3	DCP4L058009H
90 "	45	65	57	52.5	4	1350	25.5	2.5	DCP4L059009J
100 µF	45	65	57	52.5	4	1500	26.5	2.3	DCP4L061009J
115 "	45	65	57	52.5	4	1725	28	2.1	DCP4L061159J

* General guide


* Permissible I_{rms} at 10° C internal temperature rise (general guide)

** PCM = Printed circuit module = pin spacing

Dims. in mm.


Part number completion:	
Version code:	2-pin = D2
	4-pin = D4
Tolerance:	20 % = M
	10 % = K
	5 % = J
Packing:	bulk = S
Pin length:	6-2 = SD
Taped version see page 151.	

2-pin version

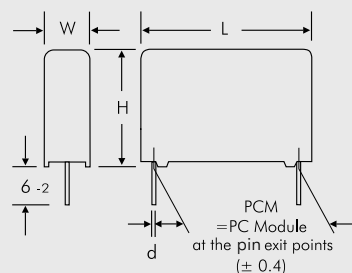

PCM	Ø d
27.5	0.8
37.5	1

4-pin version

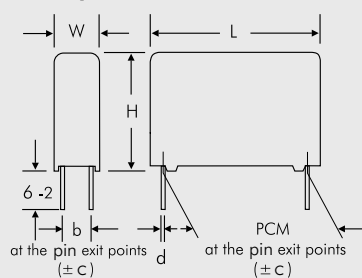

W	PCM	b	Ø d	c
11	27.5	5	0.8	0.4
13	27.5	7.5	0.8	0.4
15	27.5	7.5	0.8	0.4
17	27.5	10	0.8	0.4
20	27.5	12.5	0.8	0.4
19	37.5	10	1	0.4
20	37.5	12.5	1	0.4
24	37.5	12.5	1	0.4
28	37.5	10	1	0.4
31	37.5	20	1	0.4
35	37.5	20	1	0.4
40	37.5	20	1	0.4
25	52.5	12.5	1.2	0.8
30	52.5	20	1.2	0.8
35	52.5	20	1.2	0.8
45	52.5	20	1.2	0.8

Plate versions page 136

Rights reserved to amend design data without prior notification.

Continuation

General Data

Capacitance	900 VDC (70° C) / 760 VDC (85° C) / 550 VDC (105° C)								Part number
	W	H	L	PCM**	Pin	I _S A	I _{rms} * (10 kHz)* A	ESR (10 kHz)* mΩ	
1 µF	9	19	31.5	27.5	2	35	2	66.1	DCP4N041006A_____
2 "	11	21	31.5	27.5	2/4	70	2.5	44	DCP4N042006B_____
3 "	13	24	31.5	27.5	2/4	105	4	22	DCP4N043006D_____
4 "	13	24	31.5	27.5	2/4	140	4.5	16.5	DCP4N044006D_____
5 "	17	29	31.5	27.5	2/4	175	4.5	18	DCP4N045006G_____
7 "	17	29	31.5	27.5	2/4	245	6.5	9.4	DCP4N047006G_____
8 "	17	34.5	31.5	27.5	2/4	280	7.5	8.3	DCP4N048006I_____
10 µF	20	39.5	31.5	27.5	2/4	350	10	5.3	DCP4N051006J_____
	19	32	41.5	37.5	2/4	220	9	6.7	DCP4N051007F_____
15 "	20	39.5	41.5	37.5	2/4	330	10.5	5.8	DCP4N051507G_____
20 "	24	45.5	41.5	37.5	2/4	440	13	4.8	DCP4N052007H_____
	28	38	41.5	37.5	2/4	440	13	4.8	DCP4N052007L_____
22 "	24	45.5	41.5	37.5	2/4	484	14	4.1	DCP4N052207H_____
	28	38	41.5	37.5	2/4	484	14	4.1	DCP4N052207L_____
25 "	31	46	41.5	37.5	2/4	550	15.5	3.8	DCP4N052507I_____
30 "	31	46	41.5	37.5	2/4	660	16.5	3.4	DCP4N053007I_____
	25	45	57	52.5	4	540	15	4.5	DCP4N053009D_____
35 "	35	50	41.5	37.5	2/4	770	18	3.2	DCP4N053507J_____
	25	45	57	52.5	4	630	16	4	DCP4N053509D_____
40 "	40	55	41.5	37.5	2/4	880	19.5	3.2	DCP4N054007K_____
	30	45	57	52.5	4	720	18	3.5	DCP4N054009E_____
50 "	35	50	57	52.5	4	900	22	3.3	DCP4N055009F_____
60 "	45	55	57	52.5	4	1080	23	3	DCP4N056009H_____
70 "	45	65	57	52.5	4	1260	24.5	3.3	DCP4N057009J_____
80 "	45	65	57	52.5	4	1440	25.5	2.8	DCP4N058009J_____

* General guide

* Permissible I_{rms} at 10° C internal temperature rise (general guide)

** PCM = Printed circuit module = pin spacing

Dims. in mm.

Part number completion:		
Version code:	2-pin	= D2
	4-pin	= D4
Tolerance:	20 %	= M
	10 %	= K
	5 %	= J
Packing:	bulk	= S
Pin length:	6-2	= SD
Taped version see page 151.		

Rights reserved to amend design data without prior notification.

Continuation page 129

Continuation

General Data

Capacitance	1000 VDC (70° C) / 840 VDC (85° C) / 600 VDC (105° C)								Part number
	W	H	L	PCM**	Pin	I _S A	I _{rms} * (10 kHz)* A	ESR (10 kHz)* mΩ	
1 µF	9	19	31.5	27.5	2	39	2	76	DCP4O141006A_____
2 "	11	21	31.5	27.5	2/4	78	2.5	33	DCP4O142006B_____
3 "	13	24	31.5	27.5	2/4	117	4	18	DCP4O143006D_____
4 "	15	26	31.5	27.5	2/4	156	5	14	DCP4O144006F_____
5 "	17	29	31.5	27.5	2/4	195	5.5	13	DCP4O145006G_____
	15	26	41.5	37.5	2/4	125	6	11	DCP4O145007D_____
7 "	17	34.5	31.5	27.5	2/4	273	6.5	11	DCP4O147006I_____
	17	29	41.5	37.5	2/4	175	7	9	DCP4O147007E_____
8 "	20	39.5	31.5	27.5	2/4	312	7.5	9	DCP4O148006J_____
	17	29	41.5	37.5	2/4	200	8	8	DCP4O148007E_____
10 µF	20	39.5	31.5	27.5	2/4	390	8	8	DCP4O151006J_____
	20	39.5	41.5	37.5	2/4	250	9	7	DCP4O151007G_____
15 "	28	38	41.5	37.5	2/4	375	11.5	5.7	DCP4O151507L_____
	24	45.5	41.5	37.5	2/4	375	11.5	5.7	DCP4O151507H_____
20 "	31	46	41.5	37.5	2/4	500	14	4.8	DCP4O152007I_____
22 "	31	46	41.5	37.5	2/4	550	14.5	4.3	DCP4O152207I_____
25 "	31	46	41.5	37.5	2/4	625	15	4	DCP4O152507I_____
	25	45	57	52.5	4	475	14.5	4.8	DCP4O152509D_____
30 "	35	50	41.5	37.5	2/4	750	16.5	3.9	DCP4O153007J_____
	25	45	57	52.5	4	570	15	4.5	DCP4O153009D_____
35 "	40	55	41.5	37.5	2/4	875	18	3.8	DCP4O153507K_____
	30	45	57	52.5	4	665	16.5	4	DCP4O153509E_____
40 "	40	55	41.5	37.5	2/4	1000	18.5	3.7	DCP4O154007K_____
	35	50	57	52.5	4	760	18	4	DCP4O154009F_____
45 "	35	50	57	52.5	4	855	18.5	3.9	DCP4O154509F_____
50 "	45	55	57	52.5	4	950	21	3.8	DCP4O155009H_____
55 "	45	55	57	52.5	4	1045	21.5	3.6	DCP4O155509H_____
60 "	45	55	57	52.5	4	1140	22.5	3.3	DCP4O156009H_____
65 "	45	55	57	52.5	4	1235	22.5	3.3	DCP4O156509H_____
70 "	45	65	57	52.5	4	1330	24	3.2	DCP4O157009J_____
75 "	45	65	57	52.5	4	1425	24.5	3.1	DCP4O157509J_____

* General guide

New range

* Permissible I_{rms} at 10° C internal temperature rise (general guide)

** PCM = Printed circuit module = pin spacing

Dims. in mm.

Rights reserved to amend design data without prior notification.

Part number completion:

Version code:	2-pin	= D2
	4-pin	= D4
Tolerance:	20 %	= M
	10 %	= K
	5 %	= J
Packing:	bulk	= S
Pin length:	6-2	= SD
Taped version see page 151		

Continuation page 130

Continuation

General Data

Capacitance	W	H	L	PCM**	Pin	I_s A	I_{rms} * (10 kHz)* A	ESR (10 kHz)* mΩ	Part number
1 µF	9	19	31.5	27.5	2	43	2	86	DCP4P041006A_____
2 "	13	24	31.5	27.5	2/4	86	4	19	DCP4P042006D_____
3 "	15	26	31.5	27.5	2/4	129	5	13.6	DCP4P043006F_____
4 "	17	29	31.5	27.5	2/4	172	6	10.8	DCP4P044006G_____
5 "	17	34.5	31.5	27.5	2/4	215	7.5	7.8	DCP4P045006I_____
7 "	20	39.5	31.5	27.5	2/4	301	9	6.5	DCP4P047006J_____
	19	32	41.5	37.5	2/4	203	7.5	10	DCP4P047007F_____
8 "	20	39.5	41.5	37.5	2/4	232	8	10	DCP4P048007G_____
10 µF	20	39.5	41.5	37.5	2/4	290	9.5	7.2	DCP4P051007G_____
12 "	24	45.5	41.5	37.5	2/4	348	11	6.6	DCP4P051207H_____
15 "	24	45.5	41.5	37.5	2/4	435	12	5.6	DCP4P051507H_____
	28	38	41.5	37.5	2/4	435	12	5.6	DCP4P051507L_____
18 "	31	46	41.5	37.5	2/4	522	13.5	5	DCP4P051807I_____
20 "	35	50	41.5	37.5	2/4	580	15	4.7	DCP4P052007J_____
	25	45	57	52.5	4	420	14.5	4.9	DCP4P052009D_____
22 "	35	50	41.5	37.5	2/4	638	15.5	4.4	DCP4P052207J_____
	25	45	57	52.5	4	462	15	4.5	DCP4P052209D_____
25 "	40	55	41.5	37.5	2/4	725	16.5	4.6	DCP4P052507K_____
	30	45	57	52.5	4	525	16	4.4	DCP4P052509E_____
30 "	35	50	57	52.5	4	630	17.5	4.4	DCP4P053009F_____
35 "	35	50	57	52.5	4	735	18	4	DCP4P053509F_____
40 "	35	50	57	52.5	4	840	18	4.3	DCP4P054009F_____
45 "	45	55	57	52.5	4	945	20	4.1	DCP4P054509H_____
50 "	45	65	57	52.5	4	1050	21	4.1	DCP4P055009J_____
60 "	45	65	57	52.5	4	1260	23	3.5	DCP4P056009J_____


* General guide

* Permissible I_{rms} at 10° C internal temperature rise (general guide)

** PCM = Printed circuit module = pin spacing

Dims. in mm.

Part number completion:	
Version code:	2-pin = D2 4-pin = D4
Tolerance:	20 % = M 10 % = K 5 % = J
Packing:	bulk = S
Pin length:	6-2 = SD
Taped version see page 151	

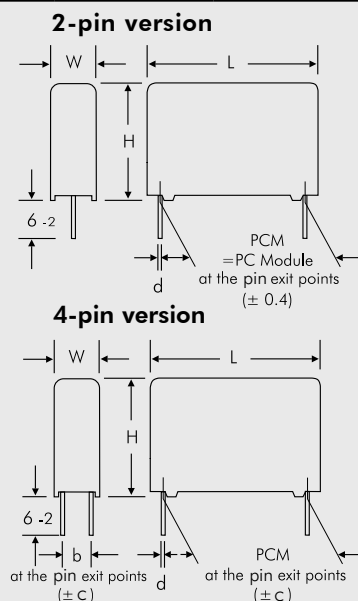

PCM	Ø d
27.5	0.8
37.5	1

W	PCM	b	Ø d	c
11	27.5	5	0.8	0.4
13	27.5	7.5	0.8	0.4
15	27.5	7.5	0.8	0.4
17	27.5	10	0.8	0.4
20	27.5	12.5	0.8	0.4
19	37.5	10	1	0.4
20	37.5	12.5	1	0.4
24	37.5	12.5	1	0.4
28	37.5	10	1	0.4
31	37.5	20	1	0.4
35	37.5	20	1	0.4
40	37.5	20	1	0.4
25	52.5	12.5	1.2	0.8
30	52.5	20	1.2	0.8
35	52.5	20	1.2	0.8
45	52.5	20	1.2	0.8

Plate versions page 136

Rights reserved to amend design data without prior notification.

Continuation

General Data

Capacitance	1200 VDC (70° C) / 1010 VDC (85° C) / 730 VDC (105° C)								Part number
	W	H	L	PCM**	Pin	I _S A	I _{rms} * (10 kHz)* A	ESR (10 kHz)* mΩ	
1 µF	9	19	31.5	27.5	2	46	2	60	DCP4Q041006A
2 "	13	24	31.5	27.5	2/4	92	4	18	DCP4Q042006D
3 "	15	26	31.5	27.5	2/4	138	5.5	12.5	DCP4Q043006F
4 "	17	29	31.5	27.5	2/4	185	6.2	10.6	DCP4Q044006G
5 "	17	34.5	31.5	27.5	2/4	230	7	8.8	DCP4Q045006I
	17	29	41.5	37.5	2/4	160	6.5	12.2	DCP4Q045007E
7 "	19	32	41.5	37.5	2/4	224	7.5	10	DCP4Q047007F
8 "	20	39.5	41.5	37.5	2/4	256	8	9.9	DCP4Q048007G
10 µF	24	45.5	41.5	37.5	2/4	320	10	7.2	DCP4Q051007H
	28	38	41.5	37.5	2/4	320	10	7.2	DCP4Q051007L
12 "	24	45.5	41.5	37.5	2/4	384	11	6.2	DCP4Q051207H
	28	38	41.5	37.5	2/4	384	11	6.2	DCP4Q051207L
15 "	31	46	41.5	37.5	2/4	480	13	5.3	DCP4Q051507I
18 "	31	46	41.5	37.5	2/4	576	14	4.8	DCP4Q051807I
	25	45	57	52.5	4	414	14.5	4.9	DCP4Q051809D
20 "	35	50	41.5	37.5	2/4	640	15.5	4.5	DCP4Q052007J
	25	45	57	52.5	4	460	15	4.7	DCP4Q052009D
22 "	35	50	41.5	37.5	2/4	704	16	4.2	DCP4Q052207J
	30	45	57	52.5	4	506	15.5	4.5	DCP4Q052209E
25 "	40	55	41.5	37.5	2/4	800	17.5	4.1	DCP4Q052507K
	35	50	57	52.5	4	575	17.5	4.3	DCP4Q052509F
30 "	40	55	41.5	37.5	2/4	960	17.5	4	DCP4Q053007K
	35	50	57	52.5	4	690	17.5	4.2	DCP4Q053009F
35 "	45	55	57	52.5	4	805	20	4.1	DCP4Q053509H
40 "	45	55	57	52.5	4	920	20	4	DCP4Q054009H
45 "	45	55	57	52.5	4	1035	20.5	3.9	DCP4Q054509H
50 "	45	65	57	52.5	4	1150	22	3.8	DCP4Q055009J

Capacitance	1300 VDC (70° C) / 1100 VDC (85° C) / 800 VDC (105° C)								Part number
	W	H	L	PCM**	Pin	I _S A	I _{rms} (10 kHz)* A	ESR (10 kHz)* mΩ	
1 µF	11	21	31.5	27.5	2/4	50	2.5	40	DCP4R241006B
2 "	15	26	31.5	27.5	2/4	100	4.5	16.8	DCP4R242006F
3 "	17	29	31.5	27.5	2/4	150	6	10.8	DCP4R243006G
4 "	17	34.5	31.5	27.5	2/4	200	6.5	10.4	DCP4R244006I
5 "	20	39.5	31.5	27.5	2/4	250	7.5	9.4	DCP4R245006J
	19	32	41.5	37.5	2/4	175	7	11	DCP4R245007F
7 "	20	39.5	41.5	37.5	2/4	245	8	10	DCP4R247007G
8 "	24	45.5	41.5	37.5	2/4	280	9	9.9	DCP4R248007H
10 µF	24	45.5	41.5	37.5	2/4	350	10.5	7.2	DCP4R251007H
	28	38	41.5	37.5	2/4	350	10.5	7.2	DCP4R251007L
15 "	31	46	41.5	37.5	2/4	525	14	4.8	DCP4R251507I
	25	45	57	52.5	4	375	13	6	DCP4R251509D
18 "	35	50	41.5	37.5	2/4	630	15.5	4.4	DCP4R251807J
	25	45	57	52.5	4	450	14.5	4.9	DCP4R251809D
20 "	40	55	41.5	37.5	2/4	700	17.5	4	DCP4R252007K
	30	45	57	52.5	4	500	16	4.4	DCP4R252009E
22 "	40	55	41.5	37.5	2/4	770	18	3.8	DCP4R252207K
	35	50	57	52.5	4	550	17.5	4.3	DCP4R252209F
25 "	35	50	57	52.5	4	625	19	3.6	DCP4R252509F
30 "	45	55	57	52.5	4	750	20	4	DCP4R253009H
35 "	45	65	57	52.5	4	875	21	4.1	DCP4R253509J
40 "	45	65	57	52.5	4	1000	22	3.7	DCP4R254009J

* General guide

Dims. in mm.

■ New range

** PCM = Printed circuit module = pin spacing

* Permissible I_{rms} at 10° C internal temperature rise (general guide)

Rights reserved to amend design data without prior notification.

Continuation

General Data

Capacitance	1500 VDC (70° C) / 1200 VDC (85° C) / 870 VDC (105° C)								Part number
	W	H	L	PCM**	Pin	I _S A	I _{rms} * (10 kHz)* A	ESR (10 kHz)* mΩ	
1 µF	13	24	31.5	27.5	2/4	59	3	33.3	DCP4S041006D
2 "	17	29	31.5	27.5	2/4	118	5	15.6	DCP4S042006G
3 "	19	32	41.5	37.5	2/4	123	6	15	DCP4S043007F
4 "	20	39.5	41.5	37.5	2/4	164	7	13.3	DCP4S044007G
5 "	20	39.5	41.5	37.5	2/4	205	8	10.2	DCP4S045007G
7 "	24	45.5	41.5	37.5	2/4	287	9.5	8.9	DCP4S047007H
	28	38	41.5	37.5	2/4	287	9.5	8.4	DCP4S047007L
8 "	31	46	41.5	37.5	2/4	328	11	7.6	DCP4S048007L
10 µF	31	46	41.5	37.5	2/4	410	12.5	5.9	DCP4S051007I
12 "	35	50	41.5	37.5	2/4	492	14.5	5	DCP4S051207J
	25	45	57	52.5	4	348	14	5.2	DCP4S051209D
15 "	40	55	41.5	37.5	2/4	615	17	4.3	DCP4S051507K
	30	45	57	52.5	4	435	16	4.4	DCP4S051509E
18 "	35	50	57	52.5	4	522	17.5	4.3	DCP4S051809F
20 "	35	50	57	52.5	4	580	18	4.1	DCP4S052009F
22 "	45	55	57	52.5	4	638	20	4.1	DCP4S052209H
25 "	45	55	57	52.5	4	725	20.5	3.9	DCP4S052509H
30 "	45	65	57	52.5	4	870	21.5	4	DCP4S053009J

Capacitance	1700 VDC (70° C) / 1350 VDC (85° C) / 950 VDC (105° C)								Part number
	W	H	L	PCM**	Pin	I _S A	I _{rms} * (10 kHz)* A	ESR (10 kHz)* mΩ	
1 µF	13	24	31.5	27.5	2/4	65	3	28	DCP4TA41006D
2 "	17	34.5	31.5	27.5	2/4	125	5	15	DCP4TA42006I
	17	29	41.5	37.5	2/4	100	5	17	DCP4TA42007E
3 "	20	39.5	31.5	27.5	2/4	160	6	13	DCP4TA43006J
	19	32	41.5	37.5	2/4	140	6	15	DCP4TA43007F
4 "	20	39.5	41.5	37.5	2/4	185	7	12	DCP4TA44007G
5 "	24	45.5	41.5	37.5	2/4	230	9	9	DCP4TA45007H
	28	38	41.5	37.5	2/4	230	9	9	DCP4TA45007L
7 "	31	46	41.5	37.5	2/4	320	10	8.9	DCP4TA47007I
8 "	31	46	41.5	37.5	2/4	350	12	5.8	DCP4TA48007I
	25	45	57	52.5	4	250	13	5.8	DCP4TA48009D
10 µF	35	50	41.5	37.5	2/4	450	15	4.6	DCP4TA51007J
	30	45	57	52.5	4	320	15	4.6	DCP4TA51009E
12 "	40	55	41.5	37.5	2/4	530	16	4.5	DCP4TA51207K
	30	45	57	52.5	4	380	15	4.5	DCP4TA51209E
15 "	35	50	57	52.5	4	470	17	4.4	DCP4TA51509F
18 "	45	55	57	52.5	4	550	19	4.3	DCP4TA51809H
20 "	45	55	57	52.5	4	610	19	4.2	DCP4TA52009H
22 "	45	55	57	52.5	4	670	20	4.1	DCP4TA52209H
25 "	45	65	57	52.5	4	760	21	4	DCP4TA52509J

* General guide

New range

** PCM = Printed circuit module = pin spacing

* Permissible I_{rms} at 10° C internal temperature rise (general guide)

Part number completion:	
Version code:	2-pin = D2 4-pin = D4
Tolerance:	20 % = M 10 % = K 5 % = J
Packing:	bulk = S
Pin length:	6-2 = SD
Taped version see page 151.	



Rights reserved to amend design data without prior notification.

Continuation page 133




Continuation

500 VDC

Impedance change with frequency
(general guide)

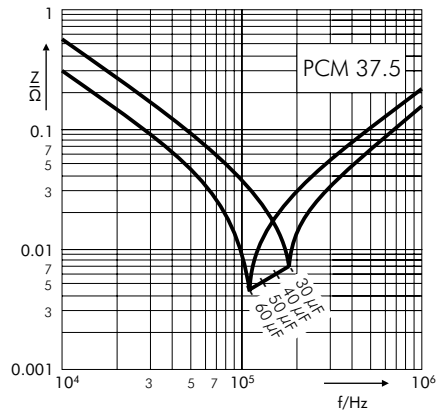
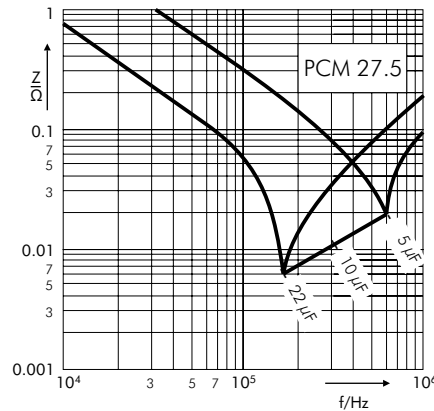


Permissible AC current in relation to
frequency at $\leq 20^\circ\text{C}$ internal temperature
rise (general guide)

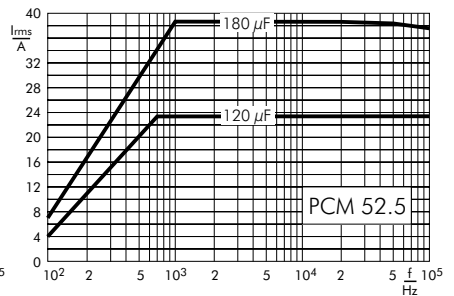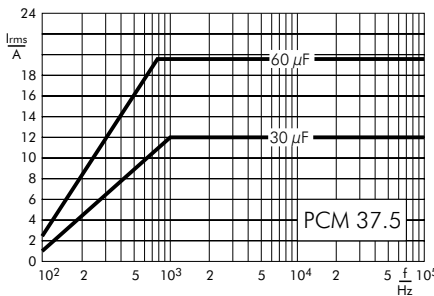
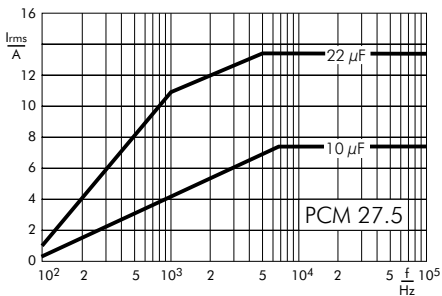


600 VDC

Impedance change with frequency
(general guide)

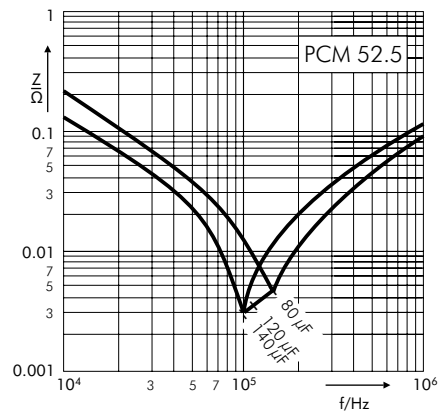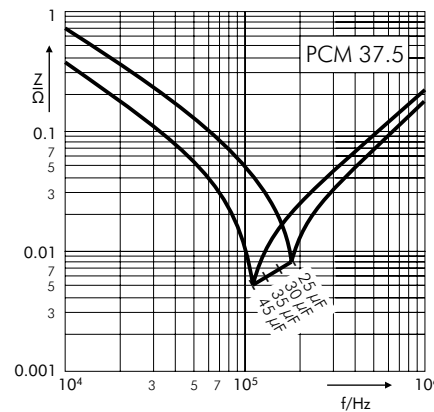


Permissible AC current in relation to
frequency at $\leq 20^\circ\text{C}$ internal temperature
rise (general guide)

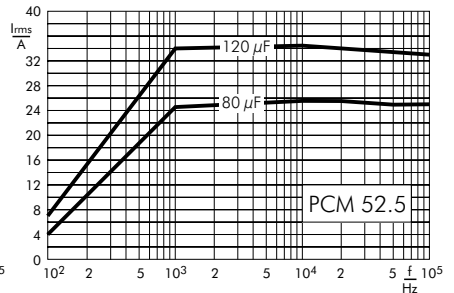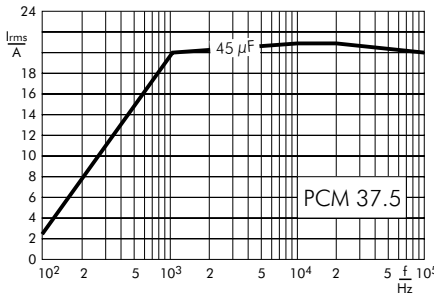


Continuation

800 VDC

Impedance change with frequency (general guide)

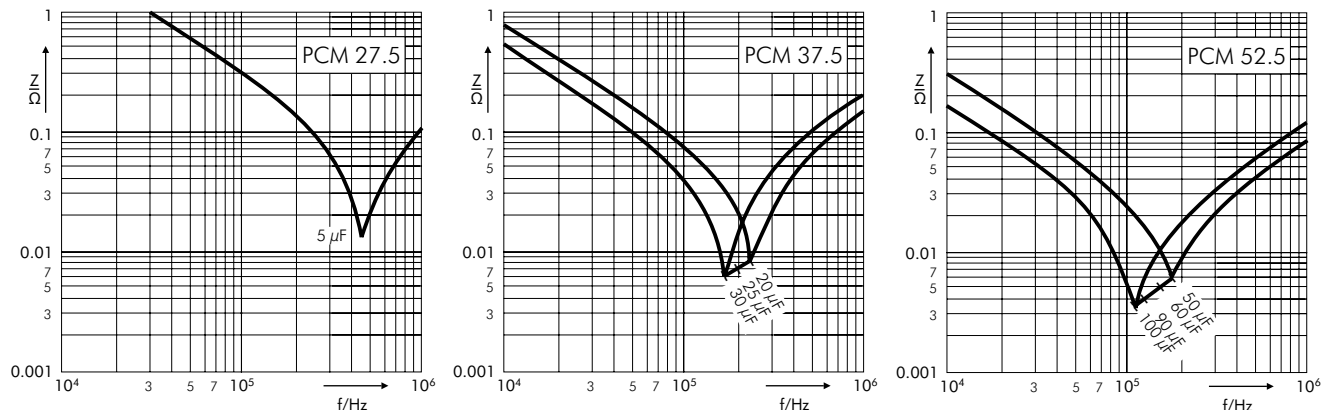


Permissible AC current in relation to frequency at $\leq 20^\circ \text{C}$ internal temperature rise (general guide)

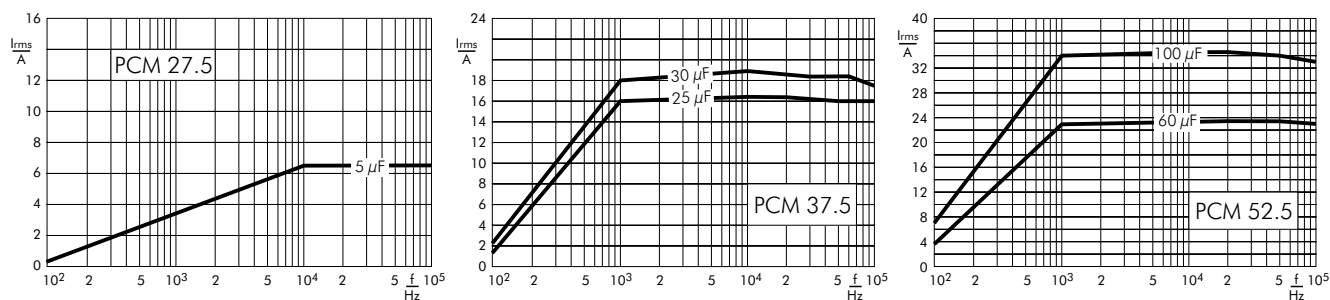


900 VDC

Impedance change with frequency (general guide)

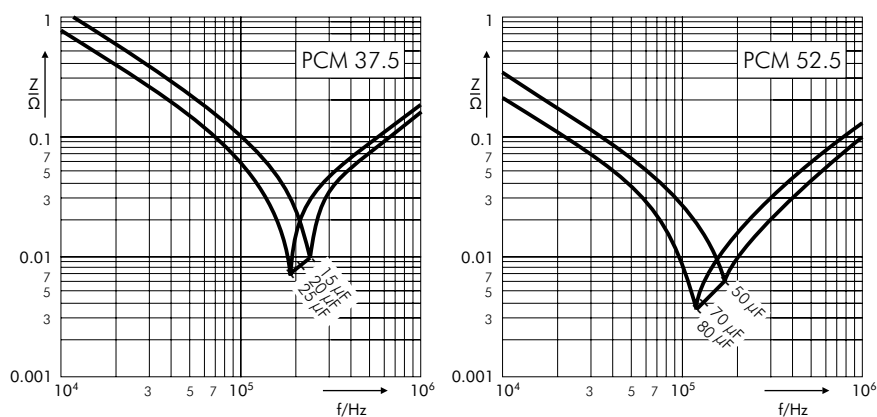


Permissible AC current in relation to frequency at $\leq 20^\circ \text{C}$ internal temperature rise (general guide)

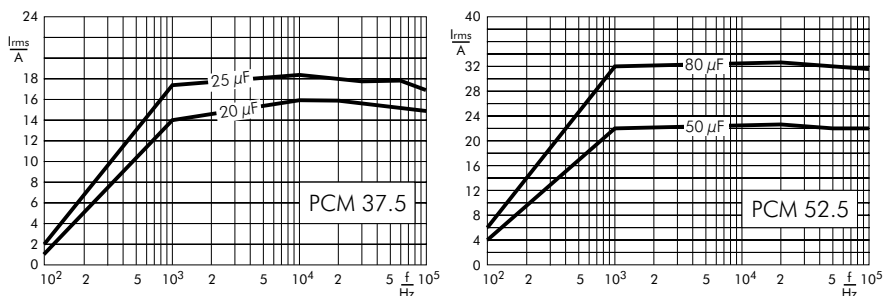


Continuation

1100 VDC

Impedance change with frequency (general guide)

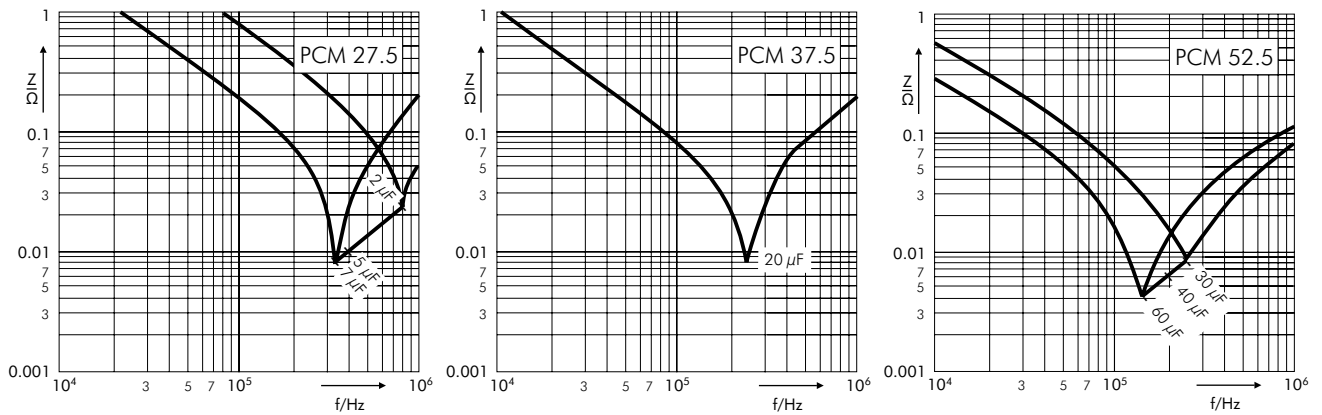


Permissible AC current in relation to frequency at $\leq 20^\circ \text{C}$ internal temperature rise (general guide)

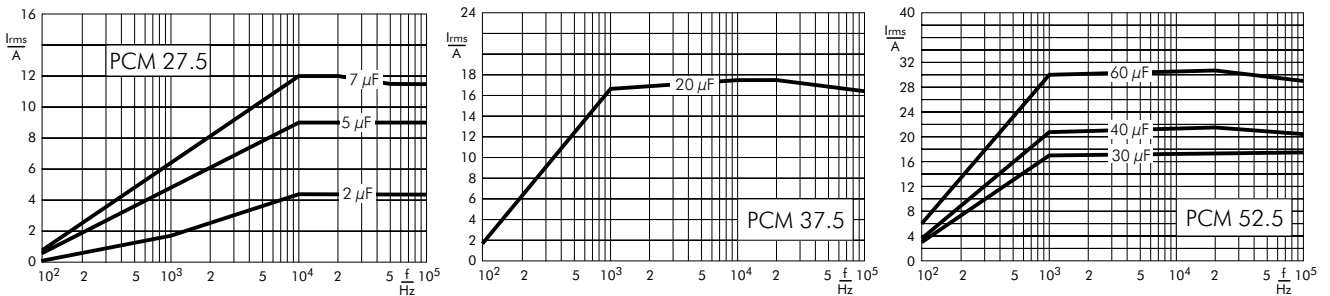


1300 VDC

Impedance change with frequency (general guide)

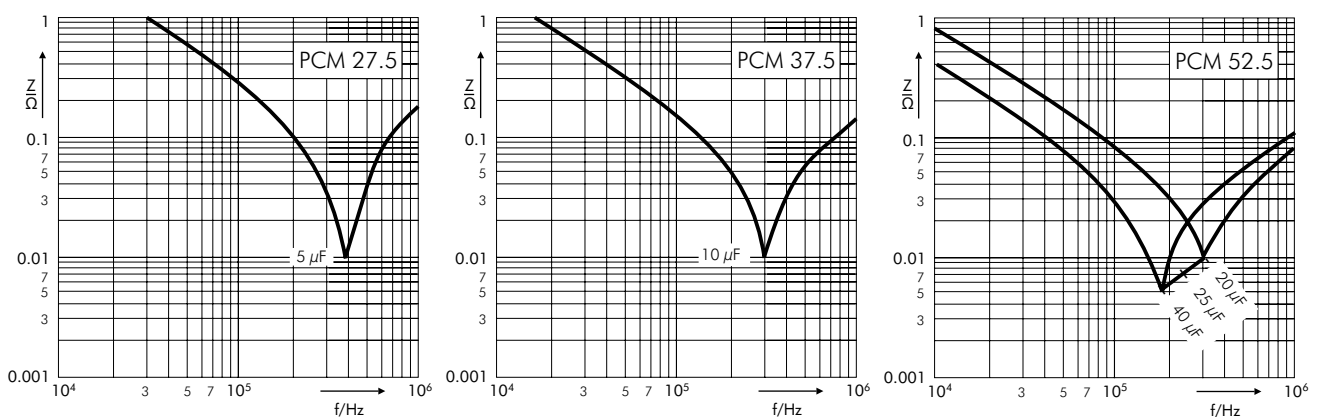


Permissible AC current in relation to frequency at $\leq 20^\circ \text{C}$ internal temperature rise (general guide)

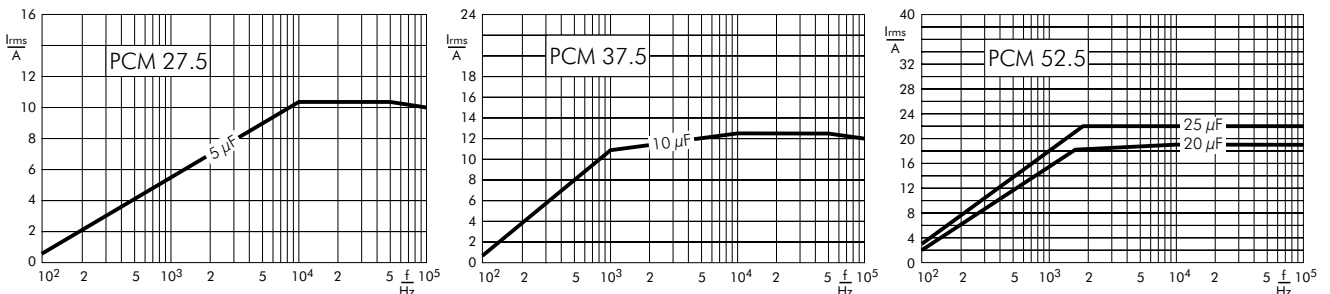


Continuation


Plate versions

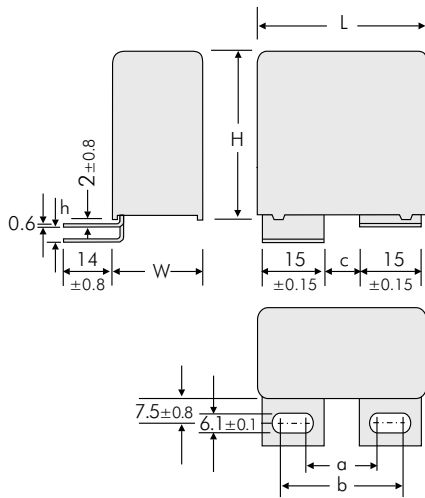


Version	L	a ±0.5	b ±0.5	c ±0.5	h ±0.8
A1	41.5	17.5	28	7.5	0
A1.5	41.5	17.5	28	7.5	3.5

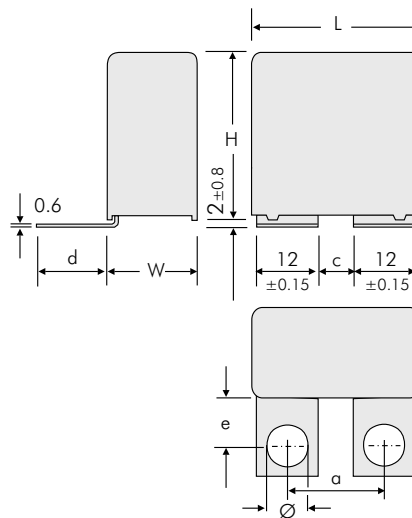


Version	L	a ±0.5	c ±0.5	d ±0.8	e ±0.8	Ø ±0.1
A1.6	41.5	18	6	21.5	16	7
A1.6.1	41.5	22	10	18.5	13	7
A1.6.2	41.5	23	10	18.5	13	8

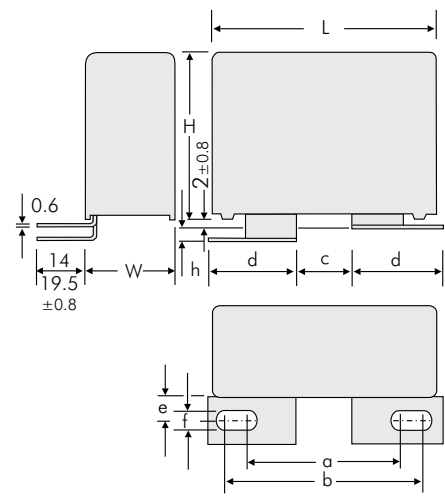


Version	L	a ±0.5	b ±0.5	c ±0.5	d ±0.15	e ±0.8	f ±0.1	h ±0.8
A2	41.5	36	46.5	14.5	22	7.5	8.4	0
A2.4.1	41.5	33.5	39.5	7.5	22	13	8.4	0
A2.6.1	41.5	31.5	41.5	14	22	13	6.1	3.5
A2.6.2	41.5	31.5	41.5	14	22	13	6.1	0
A2.8	41.5	36	46.5	14.5	22	7.5	8.4	3.5

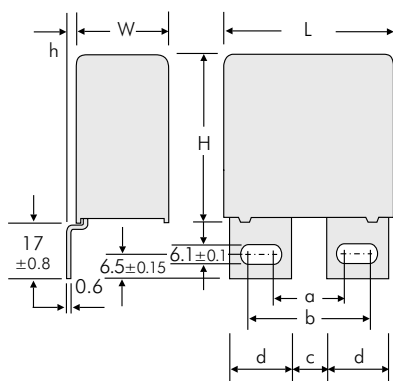

Version	L	a ±0.5	b ±0.5	c ±0.5	d ±0.15	h ±0.8
A3	41.5	17.5	27.5	7.5	15	0
A3.5	41.5	17.5	27.5	7.5	15	3
A3.12	41.5	17.5	30	7.5	16.5	0

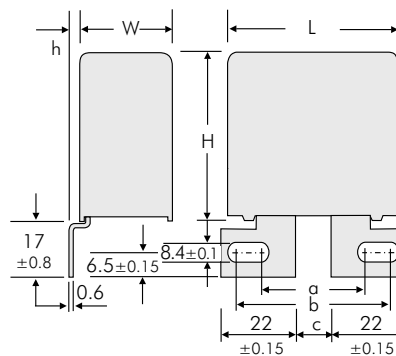


Version	L	a ±0.5	b ±0.5	c ±0.5	h ±0.8
A3.9	41.5	40.5	46.5	14.5	0
A3.11	41.5	40.5	46.5	14.5	3

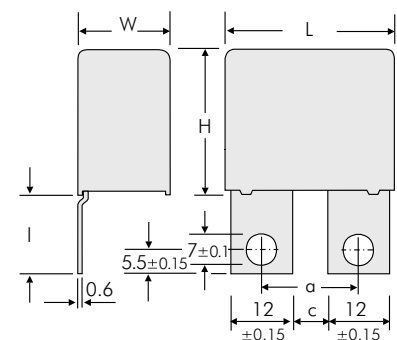

Version	L	a ±0.5	c ±0.5	l ±0.8
A3.8	41.5	18	6	23
A3.8.1	41.5	22	10	17.5
A3.8.2	41.5	22	10	23


Continuation

Plate versions

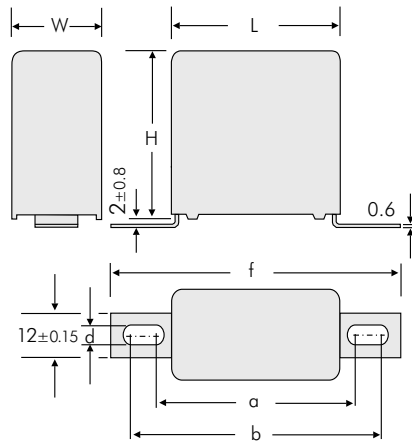

Version	L	a ±0.8	b ±0.8	f ±0.8	d ±0.1
A4.9	31.5 W ≥ 15	44	47	57	4.5
A4.10	31.5 W ≥ 15	43	59	69	6.1
A4.2	41.5 W ≥ 15	54	57	67	4.5
A4	41.5 W ≥ 15	53	69	79	6.1

Version B Dims. in mm

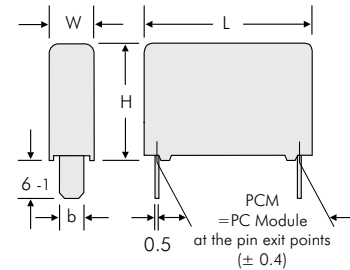

L	PCM	b ±0.15
31.5	28.5	8
41.5	38.5	8

Additional special versions can be realized. Please contact us with your specific needs.

Possible connecting respective plate versions - depending on box size

Version code		D2	D4	B8	1A	1H	1I	1J	1S	2A	2F	2J	2K	2M	3A	3G	3K	3L	3M	3N	3P	3Q	4A	4C	4L	4M
W x H x L	Size Code	2-pin	4-pin	B8	A1	A1.5	A1.6	A1.6.1	A1.6.2	A2	A2.4.1	A2.6.1	A2.6.2	A2.8	A3	A3.5	A3.8	A3.8.1	A3.8.2	A3.9	A3.11	A3.12	A4	A4.2	A4.9	A4.10
9 x 19 x 31.5	6A																									
11 x 21 x 31.5	6B																									
13 x 24 x 31.5	6D																									
15 x 26 x 31.5	6F																									
17 x 29 x 31.5	6G																									
17 x 34.5 x 31.5	6I																									
20 x 39.5 x 31.5	6J																									
13 x 24 x 41.5	7C																									
15 x 26 x 41.5	7D																									
17 x 29 x 41.5	7E																									
19 x 32 x 41.5	7F																									
20 x 39.5 x 41.5	7G																									
24 x 45.5 x 41.5	7H																									
28 x 38 x 41.5	7L																									
31 x 46 x 41.5	7I																									
35 x 50 x 41.5	7J																									
40 x 55 x 41.5	7K																									

Recommendation for Processing and Application of Through-Hole Capacitors

Soldering Process

Internal temperature of the capacitor must be kept as follows:

Polyester: preheating: $T_{\max.} \leq 125^{\circ}\text{C}$
soldering: $T_{\max.} \leq 135^{\circ}\text{C}$

Polypropylene: preheating: $T_{\max.} \leq 100^{\circ}\text{C}$
soldering: $T_{\max.} \leq 110^{\circ}\text{C}$

Single wave soldering

Soldering bath temperature: $T < 260^{\circ}\text{C}$

Dwell time: $t < 5\text{ sec}$


Double wave soldering

Soldering bath temperature: $T < 260^{\circ}\text{C}$

Dwell time: $\sum t < 5\text{ sec}$

Due to different soldering processes and heat requirements the graphs are to be regarded as a recommendation only.

Wave soldering

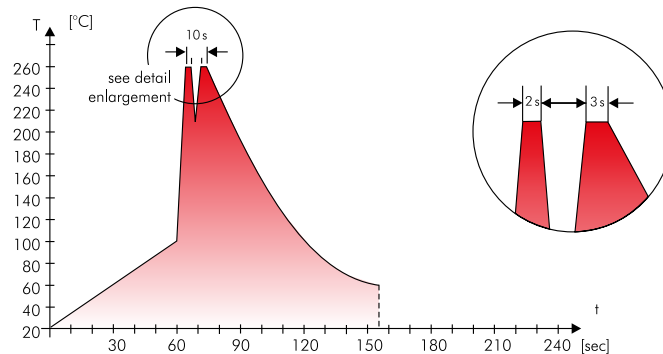

Typical temperature/time graph for double wave soldering

WIMA Quality and Environmental Philosophy

ISO 9001:2015 Certification

ISO 9001:2015 is an international basic standard of quality assurance systems for all branches of industry. The approval according to ISO 9001:2015 of our factories certifies that organisation, equipment and monitoring of quality assurance in our factories correspond to internationally recognized standards.

WIMA WPCS

The WIMA Process Control System (WPCS) is a quality surveillance and optimization system developed by WIMA. WPCS is a major part of the quality-oriented WIMA production. Points of application during production process:

- incoming material inspection
- metallization
- film inspection
- schoopage
- pre-healing
- pin attachment
- cast resin preparation/encapsulation
- 100% final inspection
- Testing as per customer requirements

WIMA Environmental Policy

All WIMA capacitors, irrespective of whether through-hole devices or SMD, are made of environmentally friendly materials. Neither during manufacture nor in the product itself any toxic substances are used, e.g.

- Lead
- PCB
- CFC
- Hydrocarbon chloride
- Chromium 6+
- PBB/PBDE
- Arsenic
- Cadmium
- Mercury
- etc.

We merely use pure, recyclable materials for packing our components, such as:

- carton
- cardboard
- adhesive tape made of paper
- polystyrene

We almost completely refrain from using packing materials such as:

- adhesive tapes made of plastic
- metal clips

RoHS Compliance

According to the RoHS Directive 2015/863/EU as amended from time to time certain hazardous substances like e.g. lead, cadmium, mercury must not be used any longer in electronic equipment as of July 1st, 2006. For the sake of the environment WIMA has re-frained from using such substances since years already.



WIMA Kondensatoren sind bleifrei konform RoHS 2015/863/EU

WIMA capacitors are lead free in accordance with RoHS 2015/863/EU

Tape for lead-free WIMA capacitors

DIN EN ISO 14001:2004

WIMA's environmental management has been established in accordance with the guidelines of DIN EN ISO 14001:2004 to optimize the production processes with regard to energy and resources.

Typical Dimensions for Taping Configuration

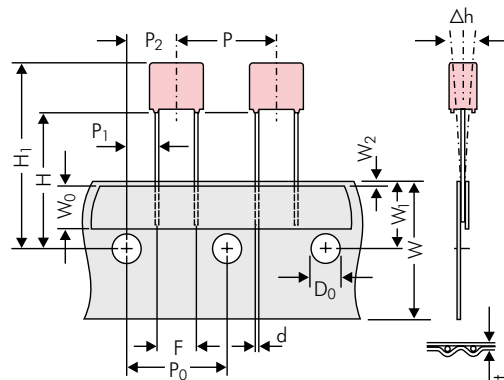


Diagram 1:
PCM 2.5/5/7.5mm

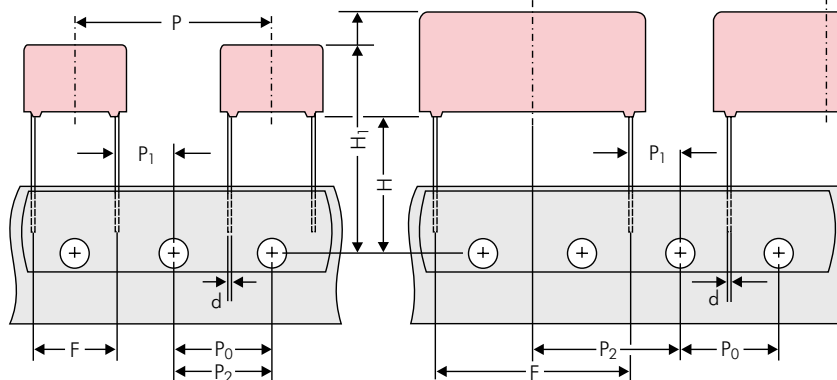


Diagram 2: PCM 10/15 mm

Diagram 3: PCM 22.5 and 27.5*mm

*PCM 27.5 taping possible with two feed holes between components

Designation	Symbol	Dimensions for Radial Taping						
		PCM 2.5 taping	PCM 5 taping	PCM 7.5 taping	PCM 10 taping*	PCM 15 taping*	PCM 22.5 taping	PCM 27.5 taping
Carrier tape width	W	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5
Hold-down tape width	W ₀	6.0 for hot-sealing adhesive tape	6.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape
Hole position	W ₁	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5
Hold-down tape position	W ₂	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.
Feed hole diameter	D ₀	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2
Pitch of component	P	12.7 ±1.0	12.7 ±1.0	12.7 ±1.0	25.4 ±1.0	25.4 ±1.0	38.1 ±1.5	*38.1 ±1.5 or 50.8 ±1.5
Feed hole pitch	P ₀	12.7 ±0.3 error max. 1.0 mm/20 pitch	12.7 ±0.3 error max. 1.0 mm/20 pitch	12.7 ±0.3 error max. 1.0 mm/20 pitch	12.7 ±0.3 error max. 1.0 mm/20 pitch	12.7 ±0.3 error max. 1.0 mm/20 pitch	12.7 ±0.3 error max. 1.0 mm/20 pitch	12.7 ±0.3 error max. 1.0 mm/20 pitch
Feed hole centre to pin	P ₁	5.1 ±0.5	3.85 ±0.7	2.6 ±0.7	7.7 ±0.7	5.2 ±0.7	7.8 ±0.7	5.3 ±0.7
Hole centre to component centre	P ₂	6.35 ±1.3	6.35 ±1.3	6.35 ±1.3	12.7 ±1.3	12.7 ±1.3	19.05 ±1.3	19.05 ±1.3
Feed hole centre to bottom edge of the component	H ▲	16.5 ±0.3 18.5 ±0.5	16.5 ±0.3 18.5 ±0.5	16.5 ±0.3 18.5 ±0.5	16.5 ±0.3 18.5 ±0.5	16.5 ±0.3 18.5 ±0.5	16.5 ±0.3 18.5 ±0.5	16.5 ±0.3 18.5 ±0.5
Feed hole centre to top edge of the component	H ₁	H+H _{component} < H ₁ 32.25 max.	H+H _{component} < H ₁ 32.25 max.	H+H _{component} < H ₁ 24.5 to 31.5	H+H _{component} < H ₁ 25.0 to 31.5	H+H _{component} < H ₁ 26.0 to 37.0	H+H _{component} < H ₁ 30.0 to 43.0	H+H _{component} < H ₁ 35.0 to 45.0
Pin spacing at upper edge of carrier tape	F	2.5 ±0.5	5.0 ^{+0.8} _{-0.2}	7.5 ±0.8	10.0 ±0.8	15 ±0.8	22.5 ±0.8	27.5 ±0.8
Pin diameter	d	0.4 ±0.05	0.5 ±0.05	*0.5 ±0.05 or 0.6 ^{+0.06} _{-0.05}	*0.5 ±0.05 or 0.6 ^{+0.06} _{-0.05}	0.8 ^{+0.08} _{-0.05}	0.8 ^{+0.08} _{-0.05}	0.8 ^{+0.08} _{-0.05}
Component alignment	Δh	± 2.0 max.	± 2.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.
Total tape thickness	t	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2
Package (see also page 152)	▲	ROLL/AMMO			AMMO			
		REEL Ø 360 max. Ø 30 ±1	B 52 ±2 58 ±2 depending on comp. dimensions		REEL Ø 360 max. Ø 30 ±1	B 52 ±2 58 ±2 or 66 ±2	REEL Ø 500 max. Ø 25 ±1	B 54 ±2 60 ±2 or 68 ±2 depending on PCM and component dimensions
Unit		see details page 153.						

▲ When ordering please specify dimension H and required packaging type.

Dims in mm.

• Diameter of pins see General Data.


Please clarify customer-specific deviations with the manufacturer.

* PCM 10 and PCM 15 can be crimped to PCM 7.5.


Position of components according to PCM 7.5 (sketch 1). P₀ = 12.7 or 15.0 is possible

Types of Tape Packaging of Capacitors for Automatic Radial Insertion


■ ROLL Packaging

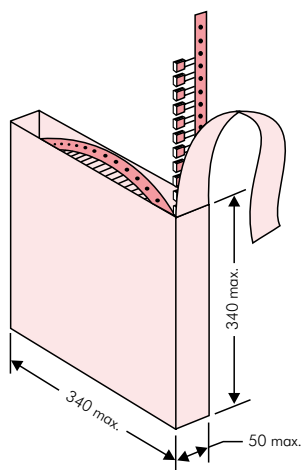

■ AMMO Packaging

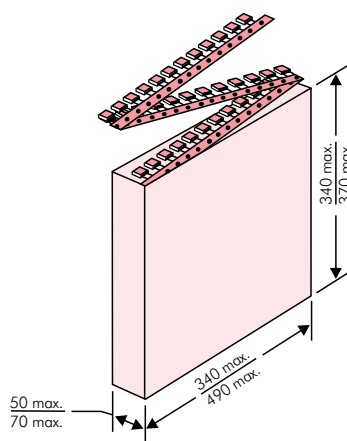

■ REEL Packaging

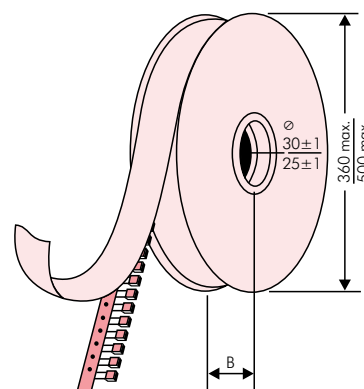


BAR CODE (Labelling)

Labelling of package units in plain text and with alphanumeric Bar Code

- WIMA supplier number
- Date code
- Customer's P/O number
- P/O line
- Customer's part number
- WIMA part number
- Quantity
- WIMA confirmation number
- Country of origin
- Customer name
- Handling unit number
- Week of delivery.

In addition part description of

- article
- capacitance value
- rated voltage
- dimensions
- technical note
- capacitance tolerance
- packing
- connecting information

WIMA Best Capacitors Made in Germany	
Werk Aurich	
Supplier-ID: LIEF.NR.	Date Code: 20210419
	
Purchase Order No. (P/O): Bestellung xyz	P/O line: 100
	
Customer Part No.: KUNDENTEILENUMMER	
	
WIMA Part No.: MKP1F041006B00KSSD	Quantity: 459
	
WIMA Confirmation No.: 0001105072000100	
	
Customer No.: 0000100002	RoHS 2011/65/EU
Gross Weight [g]: 4557	COO: DE
	
WIMA - MKP 10 WIMA Part No.: MKP1F041006B00KSSD	
MKP 10 1.0 µF 250 VDC 11x21x31.5 RM27.5	
Standard 10% Lose - Standard Drähte 6-2	
Vorlage Debitor Inland	
	0001105072000100
1002021443	QTY: 459 Week 19/2021

BARCODE PDF417
BARCODE 2D Datamatrix

Packing Quantities for Capacitors with Radial Pins in PCM 2.5 mm to 27.5 mm



PCM	Size				bulk	ROLL		pcs. per packing unit				AMMO			
								REEL							
	W	H	L	Codes		H16.5	H18.5	Ø 360	Ø 500	H16.5	H18.5	340 x 340	490 x 370	H16.5	H18.5
					S	N	O	F	I	H	J	A	C	B	D
2.5 mm	2.5	7	4.6	0B	5000	2200		2500		–		2800		–	
	3	7.5	4.6	0C	5000	2000		2300		–		2300		–	
	3.8	8.5	4.6	0D	5000	1500		1800		–		1800		–	
	4.6	9	4.6	0E	5000	1200		1500		–		1500		–	
	5.5	10	4.6	0F	5000	900		1200		–		1200		–	
5 mm	2.5	6.5	7.2	1A	5000	2200		2500		–		2800		–	
	3	7.5	7.2	1B	5000	2000		2300		–		2300		–	
	3.5	8.5	7.2	1C	5000	1600		2000		–		2000		–	
	4.5	6	7.2	1D	6000	1300		1500		–		1500		–	
	4.5	9.5	7.2	1E	4000	1300		1500		–		1500		–	
	5	10	7.2	1F	3500	1100		1400		–		1400		–	
	5.5	7	7.2	1G	4000	1000		1200		–		1200		–	
	5.5	11.5	7.2	1H	2500	1000		1200		–		1200		–	
	6.5	8	7.2	1I	2500	800		1000		–		1000		–	
	7.2	8.5	7.2	1J	2500	700		1000		–		1000		–	
	7.2	13	7.2	1K	2000	700		950		–		1000		–	
	8.5	10	7.2	1L	2000	600		800		–		800		–	
	8.5	14	7.2	1M	1500	600		800		–		800		–	
	11	16	7.2	1N	1000	500		600		–		640		–	
7.5 mm	2.5	7	10	2A	5000	–		2500		4400		2500		–	
	3	8.5	10	2B	5000	–		2200		4300		2300		4150	
	4	9	10	2C	4000	–		1700		3200		1700		3000	
	4.5	9.5	10.3	2D	3500	–		1500		2900		1400		2700	
	5	10.5	10.3	2E	3000	–		1300		2500		1300		–	
	5.7	12.5	10.3	2F	2000	–		1000		2200		1100		–	
	7.2	12.5	10.3	2G	1500	–		900		1800		1000		–	
10 mm	3	9	13	3A	3000	–		1100		2200		–		1900	
	4	9	13	3C	3000	–		900		1600		–		1450	
	4	9.5	13	3D	3000	–		900		1600		–		1400	
	5	11	13	3F	3000	–		700		1300		–		1100	
	6	12	13	3G	2400	–		550		1100		–		1000	
	6	12.5	13	3H	2400	–		550		1100		–		1000	
	8	12	13	3I	2000	–		400		800		–		740	
15 mm	5	11	18	4B	2400	–		600		1200		–		1150	
	6	12.5	18	4C	2000	–		500		1000		–		1000	
	7	14	18	4D	1600	–		450		900		–		850	
	8	15	18	4F	1200	–		400		800		–		740	
	9	14	18	4H	1200	–		350		700		–		650	
	9	16	18	4J	900	–		350		700		–		650	
	11	14	18	4M	1000	–		300		600		–		540	
22.5 mm	5	14	26.5	5A	1200	–		–		800		–		770	
	6	15	26.5	5B	1000	–		–		700		–		640	
	7	16.5	26.5	5D	760	–		–		600		–		550	
	8.5	18.5	26.5	5F	500	–		–		480		–		450	
	10.5	19	26.5	5G	594*	–		–		400		–		360	
	10.5	20.5	26.5	5H	594*	–		–		400		–		360	
	11	21	26.5	5I	561*	–		–		380		–		350	
27.5 mm	9	19	31.5	6A	567*	–		–		460/340*		–		–	
	11	21	31.5	6B	459*	–		–		380/280*		–		–	
	13	24	31.5	6D	378*	–		–		300		–		–	
	15	26	31.5	6F	324*	–		–		270		–		–	
	17	29	31.5	6G	198*	–		–		–		–		–	
	17	34.5	31.5	6I	198*	–		–		–		–		–	
	20	39.5	31.5	6J	162*	–		–		–		–		–	

* for 2-inch transport pitches.

* TPS (Tray-Packing-System). Plate versions may have different packing units. Samples and pre-production needs on request.

Rights reserved to amend design data without prior notification.

Packing Quantities for Capacitors with Radial Pins in PCM 37.5 mm to 52.5 mm

PCM	Size				bulk	pcs. per packing unit									
						ROLL		REEL				AMMO			
	H16.5	H18.5	Ø 360	Ø 500		340 × 340		490 × 370							
	W	H	L	Codes	S	N	O	F	I	H	J	A	C	B	D
37.5 mm**	9	19	41.5	7A	441*	—	—	—	—	—	—	—	—	—	—
	11	22	41.5	7B	357*	—	—	—	—	—	—	—	—	—	—
	13	24	41.5	7C	294*	—	—	—	—	—	—	—	—	—	—
	15	26	41.5	7D	252*	—	—	—	—	—	—	—	—	—	—
	17	29	41.5	7E	154*	—	—	—	—	—	—	—	—	—	—
	19	32	41.5	7F	140*	—	—	—	—	—	—	—	—	—	—
	20	39.5	41.5	7G	126*	—	—	—	—	—	—	—	—	—	—
	24	45.5	41.5	7H	112*	—	—	—	—	—	—	—	—	—	—
	28	38	41.5	7L	84*	—	—	—	—	—	—	—	—	—	—
	31	46	41.5	7I	84*	—	—	—	—	—	—	—	—	—	—
	35	50	41.5	7J	35*	—	—	—	—	—	—	—	—	—	—
	40	55	41.5	7K	28*	—	—	—	—	—	—	—	—	—	—
48.5 mm**	19	31	56	8D	120*	—	—	—	—	—	—	—	—	—	—
	23	34	56	8E	80*	—	—	—	—	—	—	—	—	—	—
	27	37.5	56	8H	84*	—	—	—	—	—	—	—	—	—	—
	33	48	56	8J	25*	—	—	—	—	—	—	—	—	—	—
	37	54	56	8L	25*	—	—	—	—	—	—	—	—	—	—
52.5 mm	25	45	57	9D	70*	—	—	—	—	—	—	—	—	—	—
	30	45	57	9E	60*	—	—	—	—	—	—	—	—	—	—
	35	50	57	9F	25*	—	—	—	—	—	—	—	—	—	—
	45	55	57	9H	20*	—	—	—	—	—	—	—	—	—	—
	45	65	57	9J	20*	—	—	—	—	—	—	—	—	—	—

* TPS (Tray-Packing-System). Plate versions may have different packing units.

**For Snubber capacitors in 2-pin version the PCM is changing to 38.5 respective 49.5 mm.

Samples and pre-production needs on request.

Rights reserved to amend design data without prior notification.

Updated data on www.wima.com

A WIMA part number consists of 18 digits and is composed as follows:

- Field 1 - 4: Type description
- Field 5 - 6: Rated voltage
- Field 7 - 10: Capacitance
- Field 11 - 12: Size and PCM
- Field 13 - 14: Version code (e.g. Snubber versions)
- Field 15: Capacitance tolerance
- Field 16: Packing
- Field 17 - 18: Pin length (untaped)

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
M	K	S	2	C	0	2	1	0	0	1	A	0	0	M	S	S	D
MKS 2				63 VDC		0.01 µF				2.5x6.5x7.2		-		20%	bulk	6 -2	
Type description:				Rated voltage:		Capacitance:				Size:				Tolerance:			
SMD-PET = SMDT				50 VDC = B0		22 pF = 0022				4.8x3.3x3 Size 1812 = KA				±20% = M			
SMD-PPS = SMDI				63 VDC = C0		47 pF = 0047				4.8x3.3x4 Size 1812 = KB				±10% = K			
FKP 02 = FKP0				100 VDC = D0		100 pF = 0100				5.7x5.1x3.5 Size 2220 = QA				±5% = J			
MKS 02 = MKS0				250 VDC = F0		150 pF = 0150				5.7x5.1x4.5 Size 2220 = QB				±2.5% = H			
FKS 2 = FKS2				400 VDC = G0		220 pF = 0220				7.2x6.1x3 Size 2824 = TA				±1% = E			
FKP 2 = FKP2				450 VDC = H0		330 pF = 0330				7.2x6.1x5 Size 2824 = TB				...			
FKS 3 = FKS3				520 VDC = H2		470 pF = 0470				10.2x7.6x5 Size 4030 = VA							
FKP 3 = FKP 3				600 VDC = I0		680 pF = 0680				12.7x10.2x6 Size 5040 = XA							
MKS 2 = MKS2				630 VDC = J0		1000 pF = 1100				15.3x13.7x7 Size 6054 = YA							
MKP 2 = MKP2				700 VDC = K0		1500 pF = 1150				2.5x7x4.6 PCM2.5 = 0B				Packing:			
MKS 4 = MKS4				800 VDC = L0		2200 pF = 1220				3x7.5x4.6 PCM2.5 = 0C				AMMO H16.5 340x340 = A			
MKP 4 = MKP4				850 VDC = M0		3300 pF = 1330				2.5x6.5x7.2 PCM5 = 1A				AMMO H16.5 490x370 = B			
MKP 10 = MKP1				900 VDC = N0		4700 pF = 1470				3x7.5x7.2 PCM5 = 1B				AMMO H18.5 340x340 = C			
FKP 4 = FKP4				1000 VDC = O1		6800 pF = 1680				2.5x7x10 PCM7.5 = 2A				AMMO H18.5 490x370 = D			
FKP 1 = FKP1				1100 VDC = P0		0.01 µF = 2100				3x8.5x10 PCM7.5 = 2B				REEL H16.5 360 = F			
MKP-X2 = MKX2				1200 VDC = Q0		0.022 µF = 2220				3x9x13 PCM10 = 3A				REEL H16.5 500 = H			
MKP-X1 R = MKX1				1250 VDC = R0		0.047 µF = 2470				4x9x13 PCM10 = 3C				REEL H18.5 360 = I			
MKP-Y2 = MKY2				1500 VDC = S0		0.1 µF = 3100				5x11x18 PCM15 = 4B				REEL H18.5 500 = J			
MKP 4F = MKPF				1600 VDC = T0		0.22 µF = 3220				6x12.5x18 PCM15 = 4C				ROLL H16.5 = N			
Snubber MKP = SNMP				1700 VDC = TA		0.47 µF = 3470				6x14x26.5 PCM22.5 = 5A				ROLL H18.5 = O			
Snubber FKP = SNFP				2000 VDC = U0		1 µF = 4100				6x15x26.5 PCM22.5 = 5B				BLISTER W12 180 = P			
GTO MKP = GTOM				2500 VDC = V0		2.2 µF = 4220				9x19x31.5 PCM27.5 = 6A				BLISTER W12 330 = Q			
DC-LINK MKP 4 = DCP4				3000 VDC = W0		4.7 µF = 4470				11x21x31.5 PCM27.5 = 6B				BLISTER W16 330 = R			
DC-LINK MKP 6 = DCP6				4000 VDC = X0		10 µF = 5100				9x19x41.5 PCM37.5 = 7A				BLISTER W24 330 = T			
DC-LINK HC = DCHC				6000 VDC = Y0		22 µF = 5220				11x22x41.5 PCM37.5 = 7B				Bulk/TPS Standard = S			
				230 VAC = 3Y		47 µF = 5470				19x31x56 PCM 48.5 = 8D				...			
				275 VAC = 1W		100 µF = 6100				25x45x57 PCM 52.5 = 9D							
				300 VAC = 2W		220 µF = 6220				...							
				305 VAC = AW		1000 µF = 7100											
				350 VAC = BW		1500 µF = 7150											
				440 VAC = 4W		...											
				...													
														</			

The data on this page is not complete and serves only to explain the part number system. Part number information is listed on the pages of the respective WIMA range.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[WIMA:](#)

[DCP4L052007GD2KYSD](#) [DCP4L053507ID2KYSD](#) [DCP4L055007JD2KYSD](#) [DCP4N054007KD2KYSD](#)
[DCP4R251007HD2KYSD](#) [DCP4I056509FD2KYSD](#) [DCP4I056509FD4KYSD](#) [DCP4I057009FD2KYSD](#)
[DCP4I057009FD4KYSD](#) [DCP4I057509FD4KYSD](#) [DCP4I058009FD2KYSD](#) [DCP4I058009FD4KYSD](#)
[DCP4I058509FD2KYSD](#) [DCP4I058509FD4KYSD](#) [DCP4I059009FD2KYSD](#) [DCP4I059509HD2KYSD](#)
[DCP4I059509HD4KYSD](#) [DCP4I061009HD2KYSD](#) [DCP4I061109HD2KYSD](#) [DCP4I061109HD4KYSD](#)
[DCP4I061209JD2KYSD](#) [DCP4I061309JD2KYSD](#) [DCP4I061309JD4KYSD](#) [DCP4I061409JD2KYSD](#)
[DCP4I061409JD4KYSD](#) [DCP4I061509JD2KYSD](#) [DCP4L056009FD2KYSD](#) [DCP4L056009FD4KYSD](#)
[DCP4L056509FD2KYSD](#) [DCP4L057009HD2KYSD](#) [DCP4L057009HD4KYSD](#) [DCP4L057509HD2KYSD](#)
[DCP4L057509HD4KYSD](#) [DCP4L058009HD2KYSD](#) [DCP4L058509JD2KYSD](#) [DCP4L058509JD4KYSD](#)
[DCP4L059009JD2KYSD](#) [DCP4L059009JD4KYSD](#) [DCP4L061009JD2KYSD](#) [DCP4L061109JD2KYSD](#)
[DCP4L061109JD4KYSD](#) [DCP4L061159JD2KYSD](#) [DCP4L061159JD4KYSD](#) [DCP4N054009FD2KYSD](#)
[DCP4N054009FD4KYSD](#) [DCP4N054509FD2KYSD](#) [DCP4N054509FD4KYSD](#) [DCP4N055009FD2KYSD](#)
[DCP4N055009FD4KYSD](#) [DCP4N055509HD2KYSD](#) [DCP4N056009HD2KYSD](#) [DCP4N056009HD4KYSD](#)
[DCP4N056509HD2KYSD](#) [DCP4N056509HD4KYSD](#) [DCP4N057009JD2KYSD](#) [DCP4N057509JD2KYSD](#)
[DCP4N057509JD4KYSD](#) [DCP4N058009JD2KYSD](#) [DCP4N058009JD4KYSD](#) [DCP4P053009FD2KYSD](#)
[DCP4P053509FD2KYSD](#) [DCP4P053509FD4KYSD](#) [DCP4P054009HD2KYSD](#) [DCP4P054009HD4KYSD](#)
[DCP4P054509HD2KYSD](#) [DCP4P055009JD2KYSD](#) [DCP4P055009JD4KYSD](#) [DCP4P055509JD2KYSD](#)
[DCP4P055509JD4KYSD](#) [DCP4P056009JD2KYSD](#) [DCP4P056009JD4KYSD](#) [DCP4R252009FD4KYSD](#)
[DCP4R252509FD2KYSD](#) [DCP4R253009HD2KYSD](#) [DCP4R253009HD4KYSD](#) [DCP4R253509JD2KYSD](#)
[DCP4R253509JD4KYSD](#) [DCP4R254009JD2KYSD](#) [DCP4R252009FD2KYSD](#) [DCP4I045006DD2KYSD](#)
[DCP4I053007HD4KYSD](#) [DCP4I054507ID4KYSD](#) [DCP4I056007JD4KYSD](#) [DCP4I057507KD4KYSD](#)
[DCP4I059008AD4KSSD](#) [DCP4I061208CD4KSSD](#) [DCP4I061508CD4KSSD](#) [DCP4L047006GD2KYSD](#)
[DCP4L052007GD4KYSD](#) [DCP4L053507ID4KYSD](#) [DCP4L055007JD4KYSD](#) [DCP4L056508AD4KSSD](#)
[DCP4L058008BD4KSSD](#) [DCP4L061008CD4KSSD](#) [DCP4N042006BD2KYSD](#) [DCP4N051006JD2KYSD](#)
[DCP4N052507ID4KYSD](#) [DCP4N054007KD4KYSD](#) [DCP4N055508BD4KSSD](#) [DCP4N057008CD4KSSD](#)