

LOC		DIST		REVISIONS				
CM		P	LYR	DESCRIPTION	DATE	DWN	APVD	
			L1	REVISED PER ECR-12-011660	04FEB2013	KH	TM	

1. PARTS COMPLY TO AMP SOLDERABILITY SPECIFICATION 109-11-3.





2. CIRCUIT IDENTIFICATION CHARACTERS ARE ADJACENT TO THE INDICATED CAVITIES, BUT LOCATION AND ORIENTATION MAY DIFFER FROM PRINT.

3. DIMENSIONS IN BRACKETS ARE IN INCHES.



4. CONTACT IS STAMPED FROM PRE-PLATED STOCK WHICH IS PLATED OVERALL WITH 0.00127 [.000050] NICKEL: THEN STRIPED WITH 0.0076 [.000030] GOLD IN CONTACT AREA INDICATED AND MATTE TIN LEAD ON SOLDER TAIL END.

5. CONTACT IS STAMPED FROM PRE-PLATED STOCK WHICH IS PLATED OVERALL WITH 0.00127 [.000050] NICKEL: THEN STRIPED WITH 0.0076 [.000030] GOLD IN CONTACT AREA INDICATED AND MATTE TIN ON SOLDER TAIL END.


6. SUPERSEDED BY 643426-3

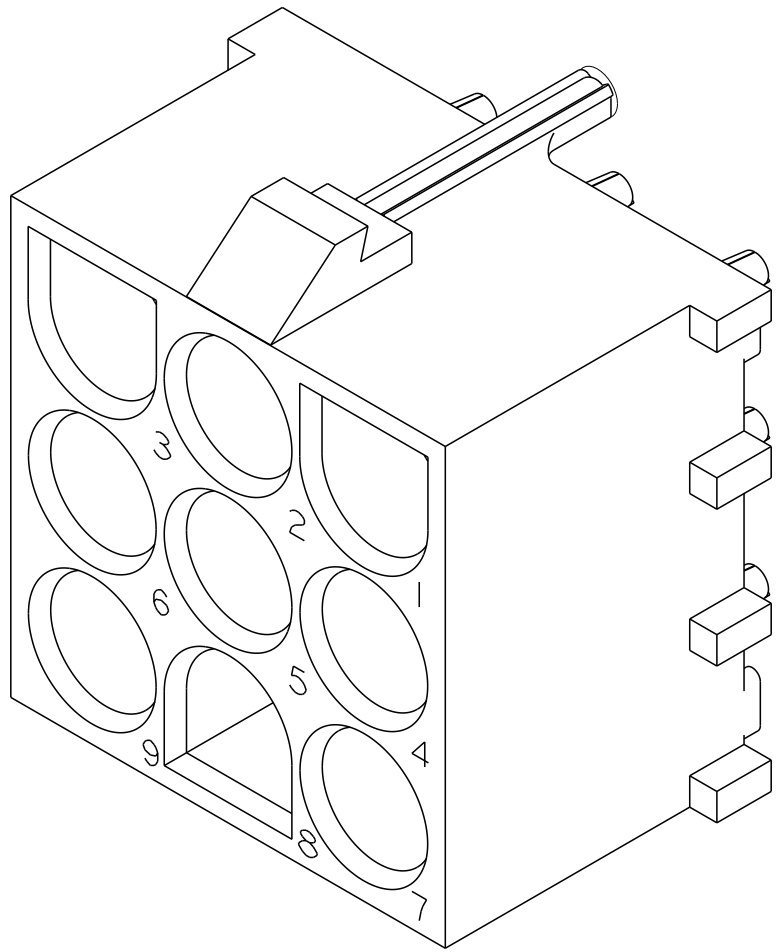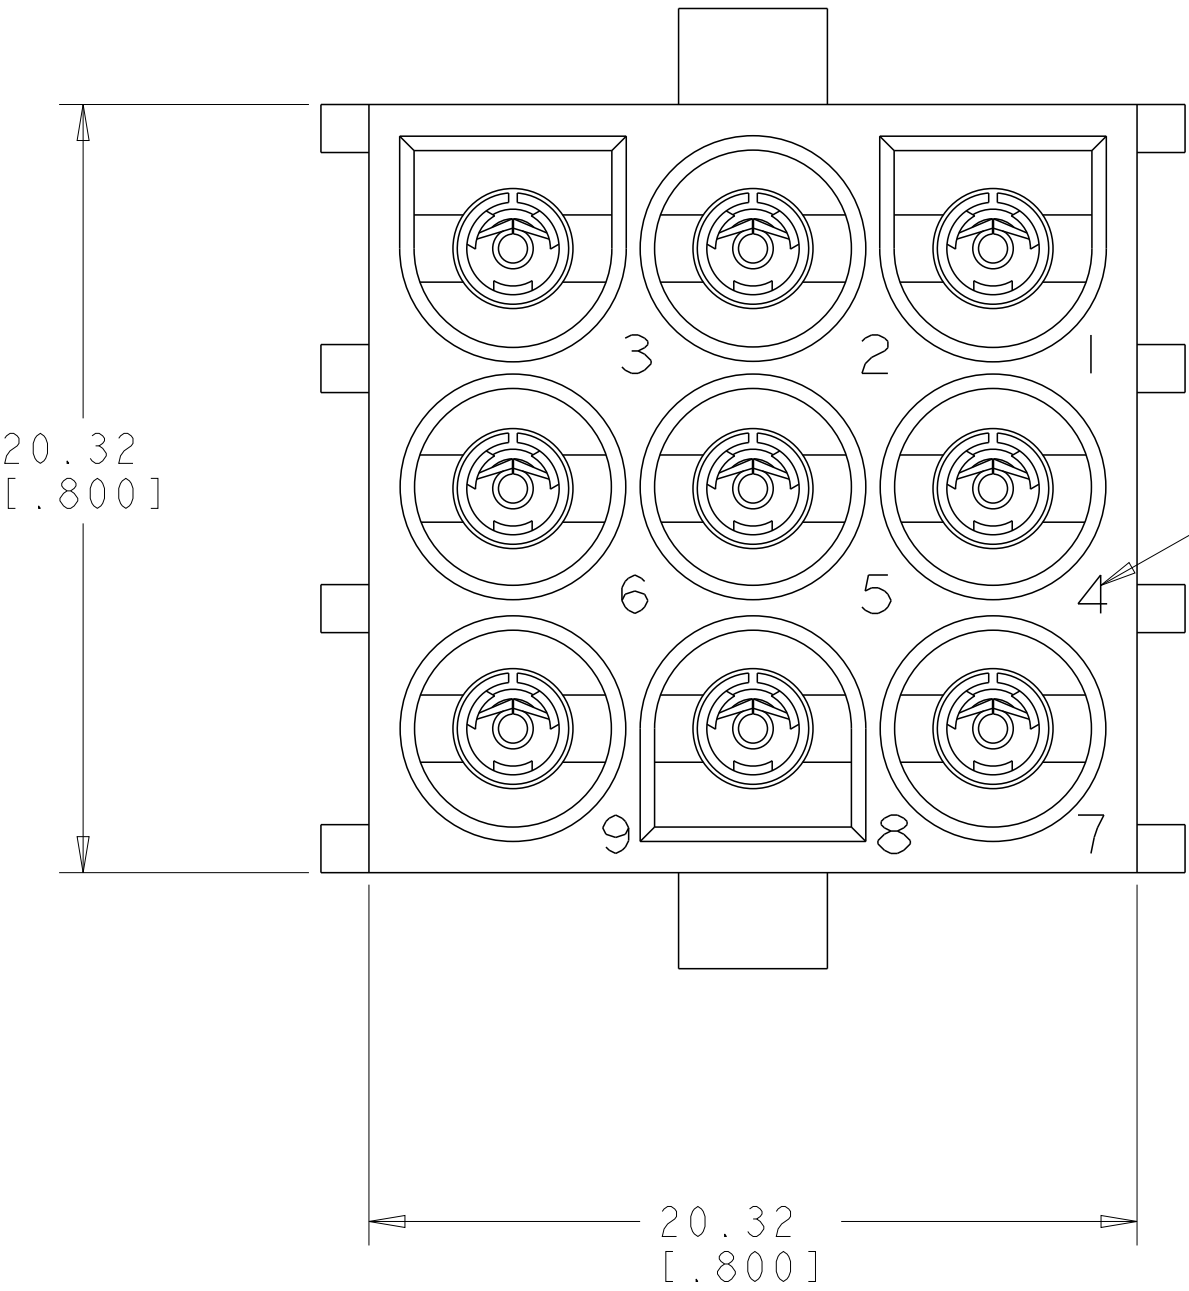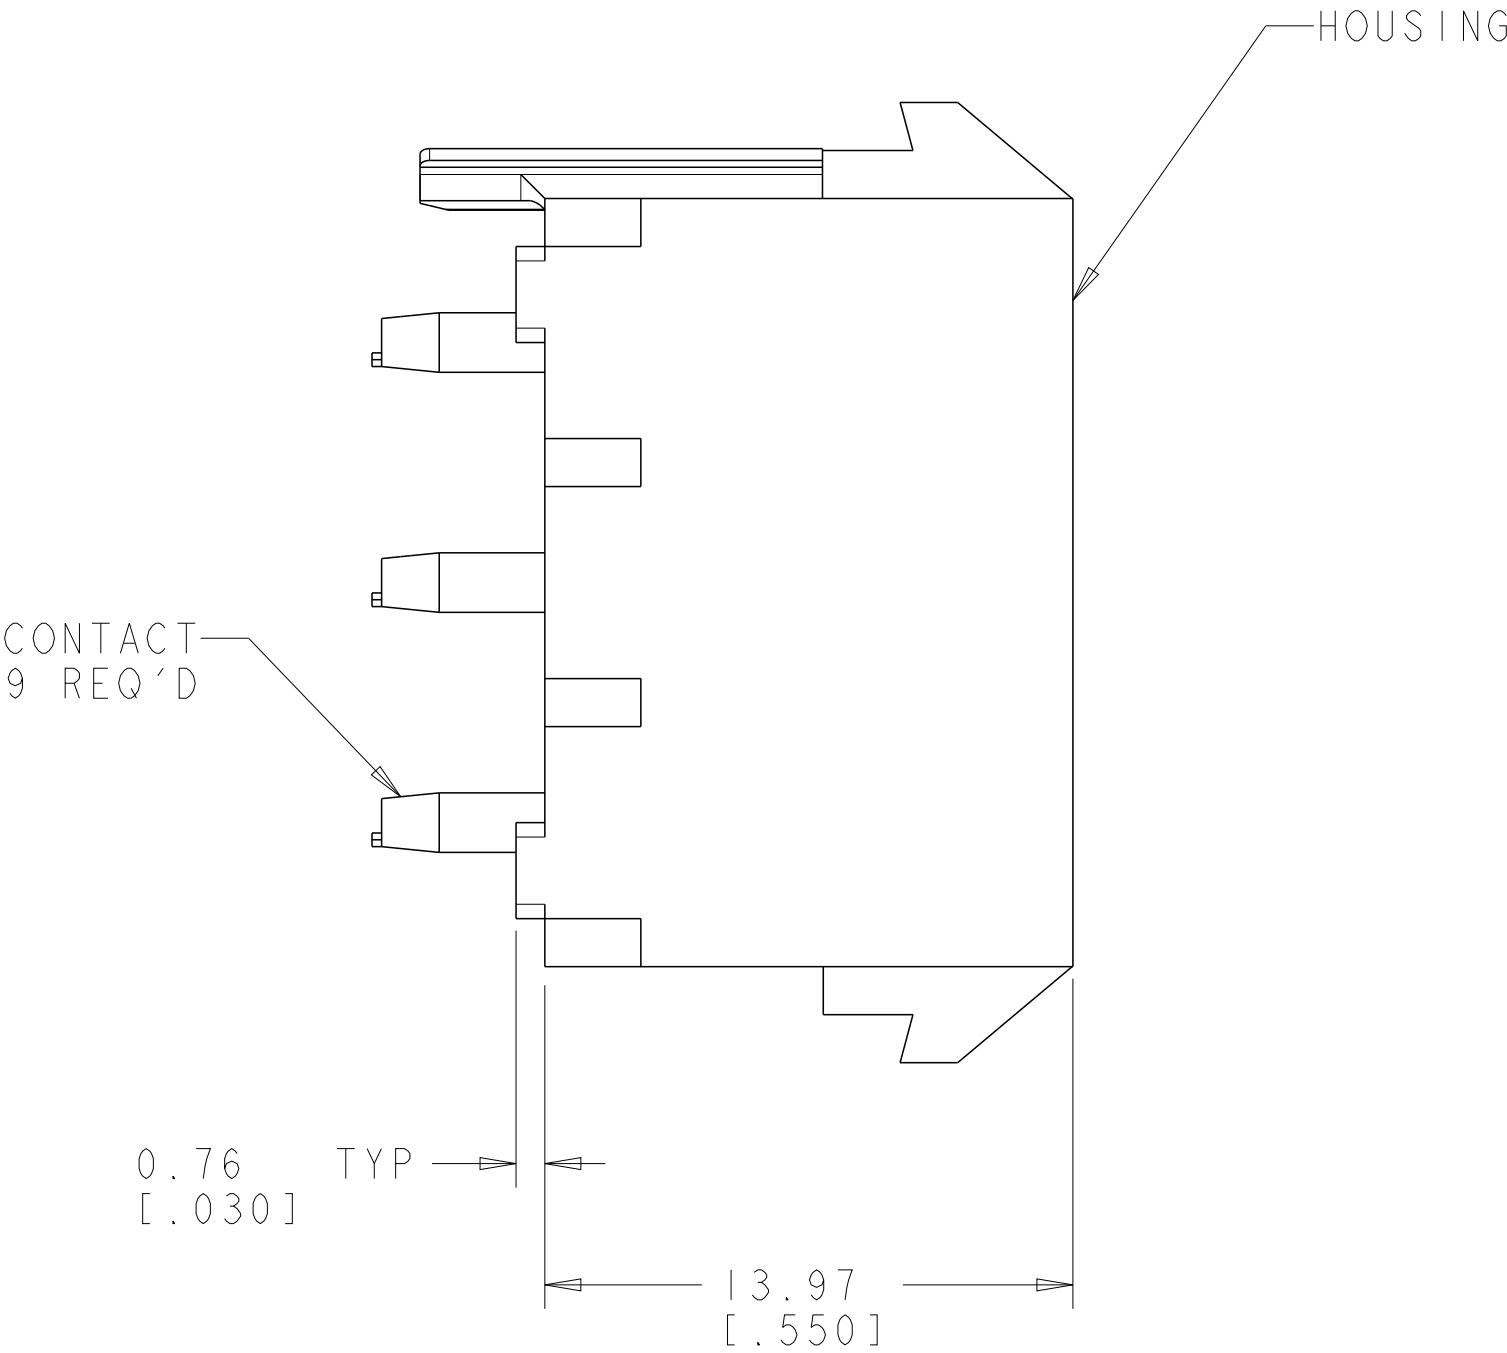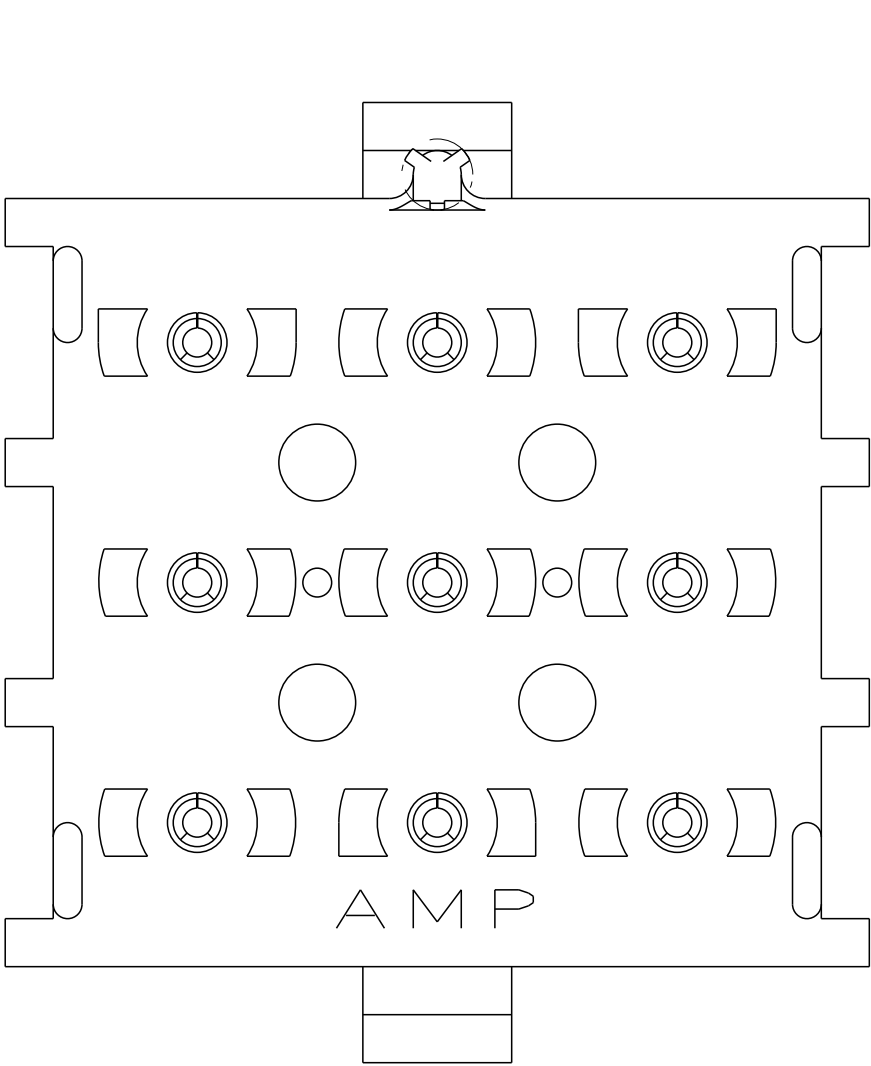

3 DIMENSIONAL MODEL
SCALE 4:1

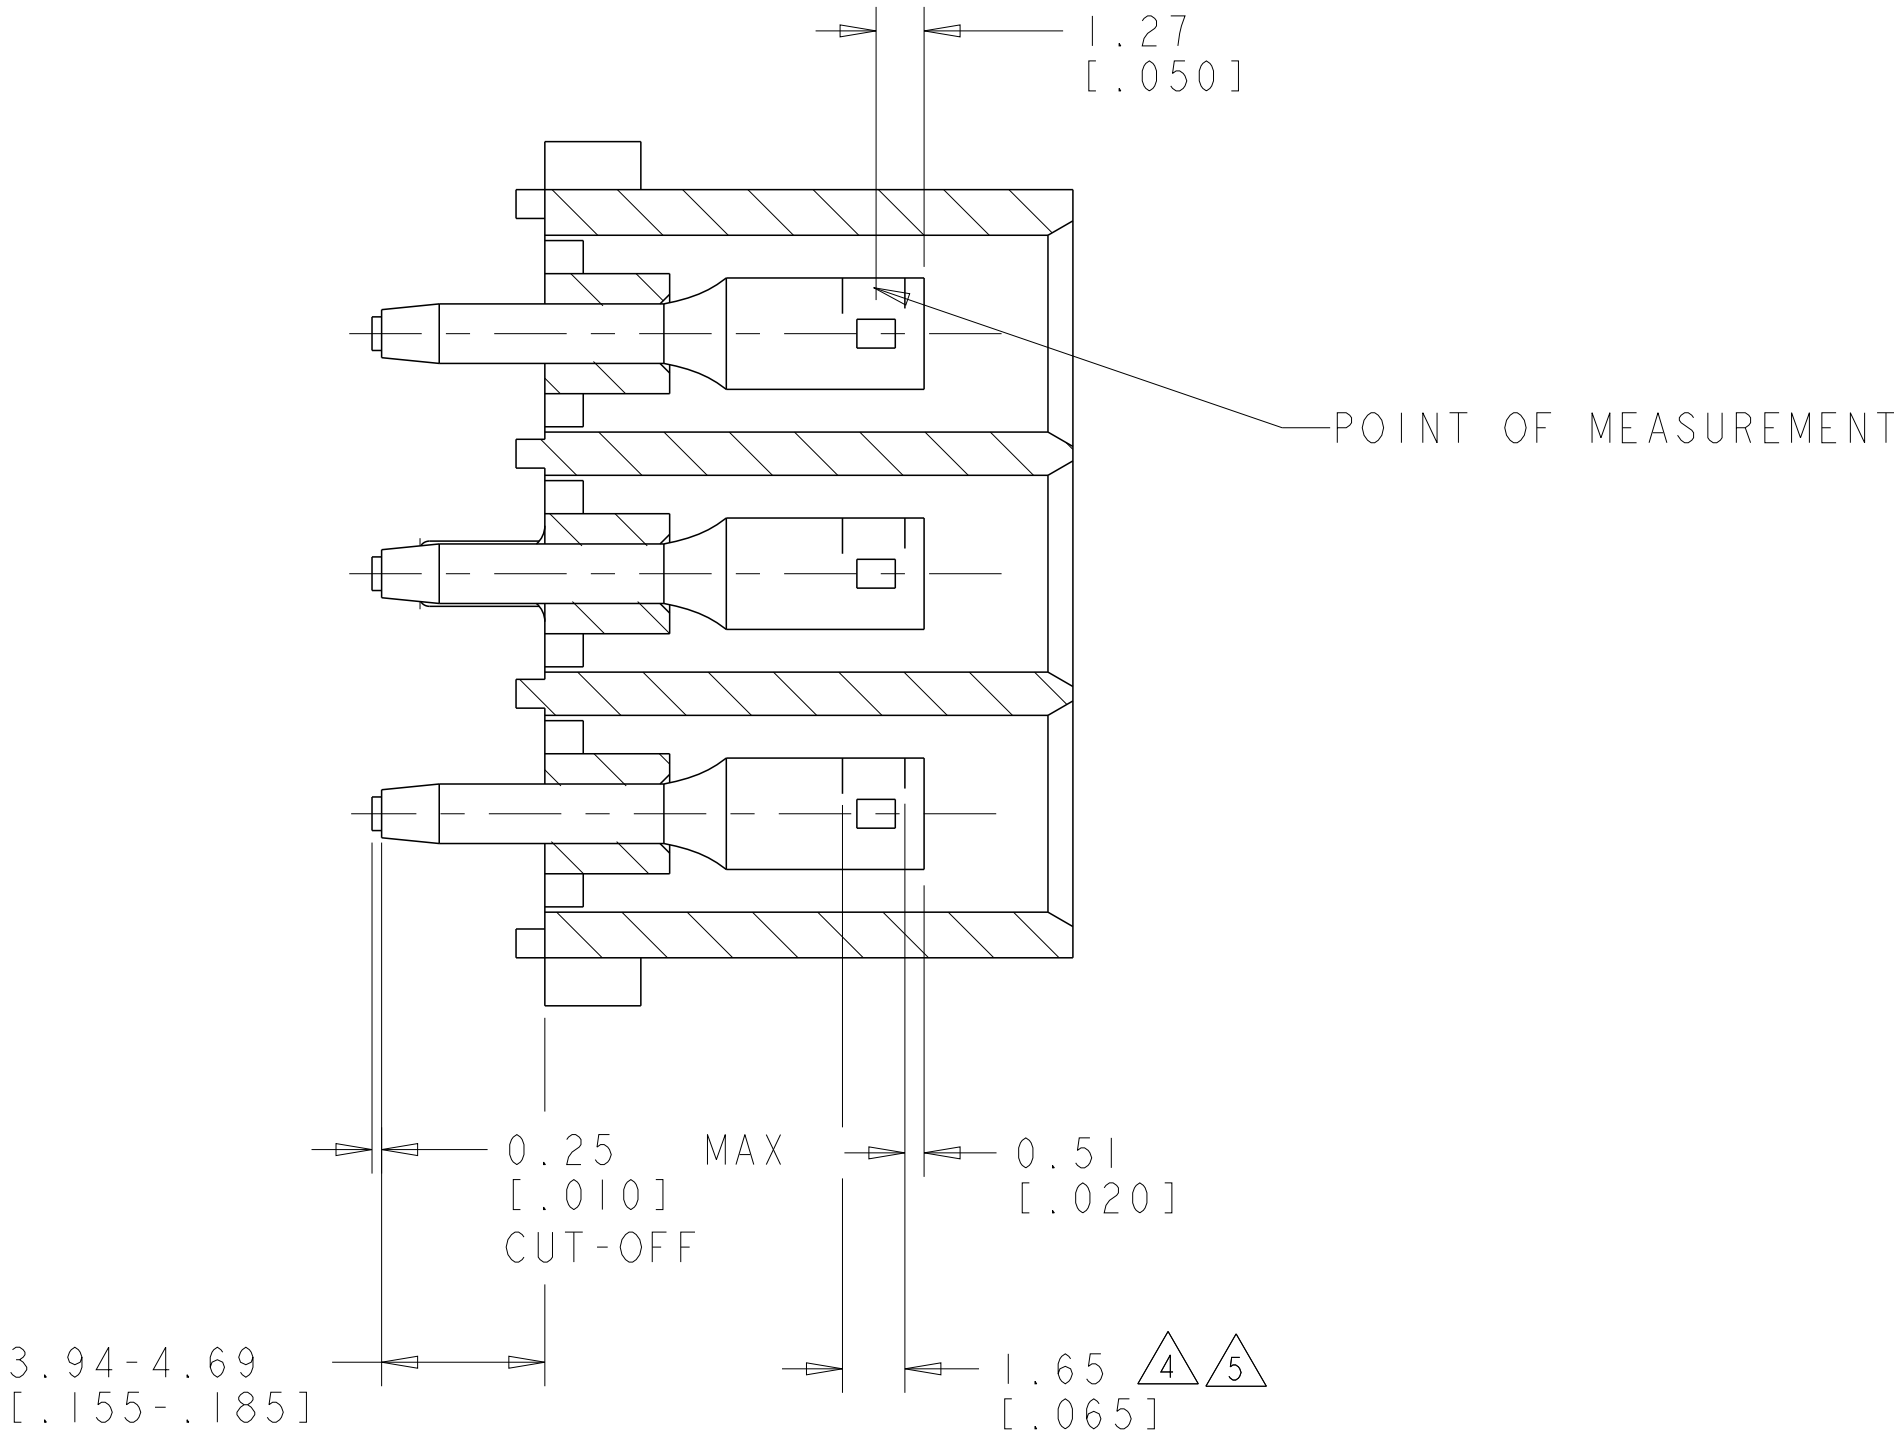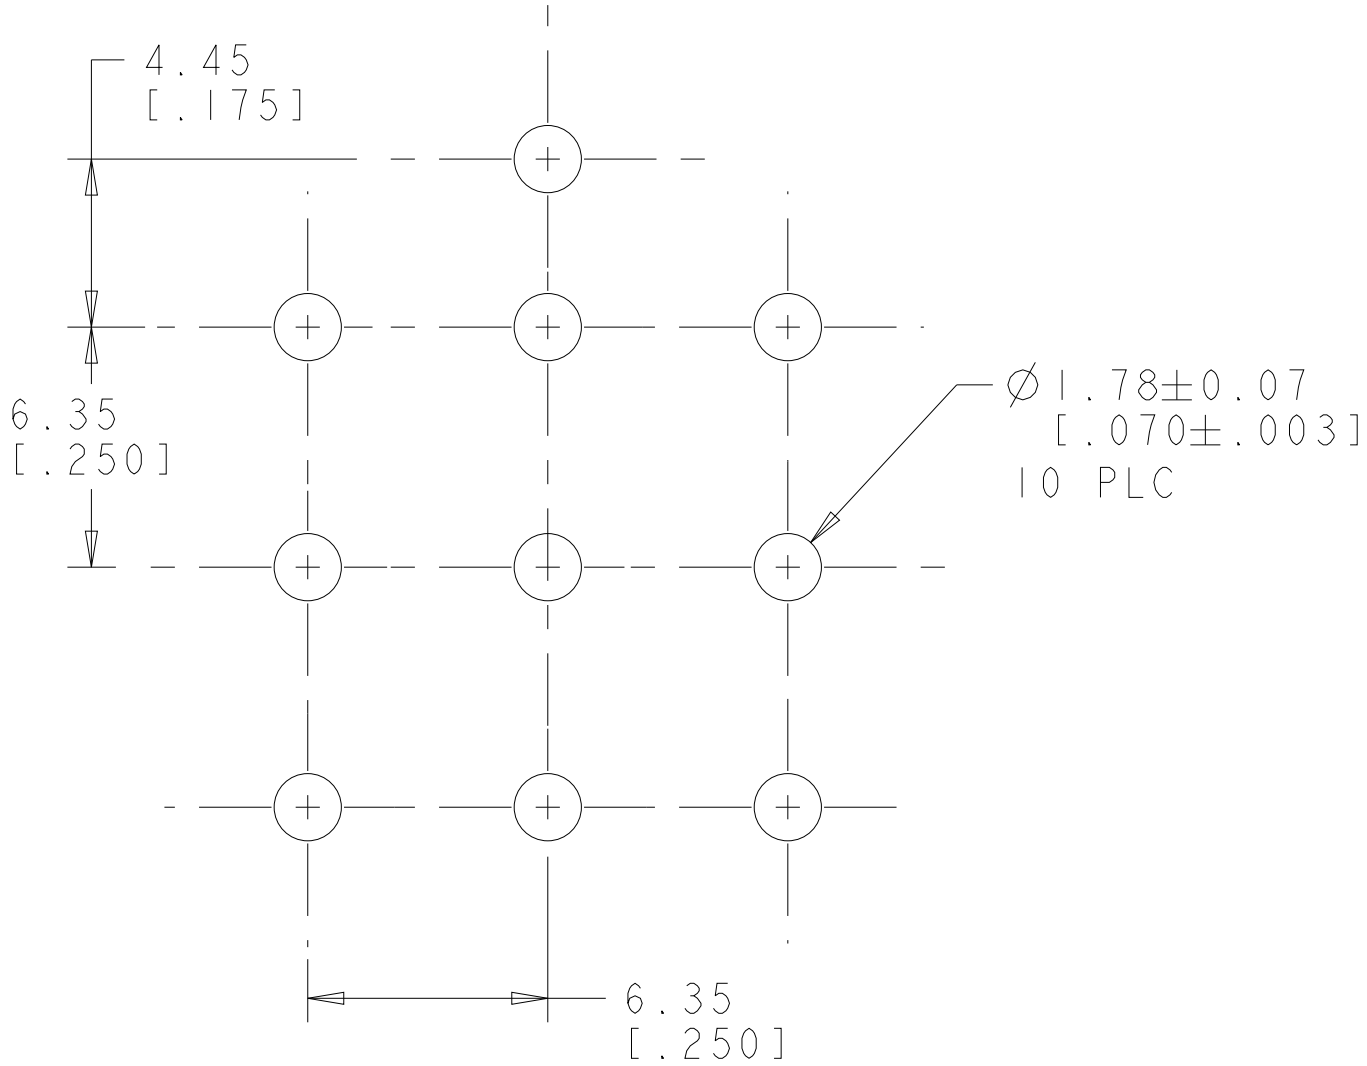

PHOSPOR BRONZE, GOLD 5	NYLON, UL94V-0	643426-3
PHOSPOR BRONZE, GOLD 4	NYLON, UL94V-0	643426-2
PHOSPOR BRONZE, PRE-TIN	NYLON, UL94V-0	643426-1
PIN CONTACT MATERIAL AND FINISH	HOUSING MATERIAL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 29-JUL-2003	 TE Connectivity		
DIMENSIONS: mm[INCHES]		CHK S. RIDGILL 29-JUL-2003			
	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 P L/C ± 1 P L/C ± 2 P L/C ±.0131 (.005) 3 P L/C ± 4 P L/C ± ANGLES ±0° 30'	APVD S. RIDGILL 29-JUL-2003	NAME HEADER ASSEMBLY, SOCKET, POLARIZED, 9 CIRCUIT, UNIVERSAL MATE-N-LOK™		
		PRODUCT SPEC			
	MATERIAL SEE TABLE	APPLICATION SPEC	SIZE CAGE CODE DRAWING NO RESTRICTED TO		
		WEIGHT -			
CUSTOMER DRAWING		SCALE 5:1	SHEET 1	OF 1	REV L