



### 4 PIN DIP PHOTOTRANSISTOR PHOTOCOUPLER EL816 Series

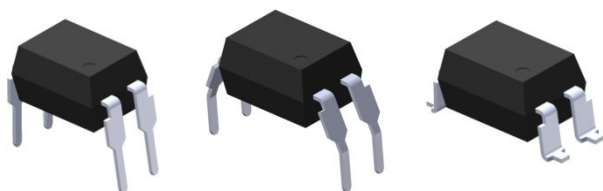

Schematic



#### Features:

- Current transfer ratio  
(CTR: 50~600% at  $I_F = 5\text{mA}$ ,  $V_{CE} = 5\text{V}$ )  
(CTR: 63~320% at  $I_F = 10\text{mA}$ ,  $V_{CE} = 5\text{V}$ )
- High isolation voltage between inputs and output (Viso=5000 V rms)
- Creepage distance >7.62 mm
- Operating temperature up to +110°C
- Compact small outline package
- Pb free and RoHS compliant.
- UL approved (No. E214129)
- VDE approved (No. 132249)
- SEMKO approved
- NEMKO approved
- DEMKO approved
- FIMKO approved
- CSA approved

#### Pin Configuration

1. Anode
2. Cathode
3. Emitter
4. Collector

#### Description

The EL816 series of devices each consist of an infrared emitting diodes, optically coupled to a phototransistor detector. They are packaged in a 4-pin DIP package and available in wide-lead spacing and SMD option.

#### Applications

- Programmable controllers
- System appliances, measuring instruments
- Telecommunication equipments
- Home appliances, such as fan heaters, etc.
- Signal transmission between circuits of different potentials and impedances

## Absolute Maximum Ratings (Ta=25°C)

|        | Parameter                                                                 | Symbol    | Rating     | Unit        |
|--------|---------------------------------------------------------------------------|-----------|------------|-------------|
| Input  | Forward current                                                           | $I_F$     | 60         | mA          |
|        | Peak forward current (1us, pulse)                                         | $I_{FP}$  | 1          | A           |
|        | Reverse voltage                                                           | $V_R$     | 6          | V           |
|        | Power Dissipation<br>No derating required up to $T_a = 100^\circ\text{C}$ | $P_D$     | 100        | mW          |
| Output | Power dissipation<br>Derating factor (above $T_a = 80^\circ\text{C}$ )    | $P_C$     | 150<br>5.8 | mW<br>mW/°C |
|        | Collector current                                                         | $I_C$     | 50         | mA          |
|        | Collector-Emitter voltage                                                 | $V_{CEO}$ | 80         | V           |
|        | Emitter-Collector voltage                                                 | $V_{ECO}$ | 6          | V           |
|        | Total Power Dissipation                                                   | $P_{TOT}$ | 200        | mW          |
|        | Isolation Voltage*1                                                       | $V_{ISO}$ | 5000       | Vrms        |
|        | Operating Temperature                                                     | $T_{OPR}$ | -55 to 110 | °C          |
|        | Storage Temperature                                                       | $T_{STG}$ | -55 to 125 | °C          |
|        | Soldering Temperature*2                                                   | $T_{SOL}$ | 260        | °C          |

### Notes:

\*1 AC for 1 minute, R.H.= 40 ~ 60% R.H. In this test, pins 1, 2 are shorted together, and pins 3, 4 are shorted together.

\*2 For 10 seconds

**Electro-Optical Characteristics (Ta=25°C unless specified otherwise)**

**Input**

| Parameter         | Symbol   | Min. | Typ. | Max. | Unit          | Condition                |
|-------------------|----------|------|------|------|---------------|--------------------------|
| Forward Voltage   | $V_F$    | -    | 1.2  | 1.4  | V             | $I_F = 20\text{mA}$      |
| Reverse Current   | $I_R$    | -    | -    | 10   | $\mu\text{A}$ | $V_R = 4\text{V}$        |
| Input capacitance | $C_{in}$ | -    | 30   | 250  | pF            | $V = 0, f = 1\text{kHz}$ |

**Output**

| Parameter                           | Symbol     | Min | Typ. | Max. | Unit | Condition                               |
|-------------------------------------|------------|-----|------|------|------|-----------------------------------------|
| Collector-Emitter dark current      | $I_{CEO}$  | -   | -    | 100  | nA   | $V_{CE} = 20\text{V}, I_F = 0\text{mA}$ |
| Collector-Emitter breakdown voltage | $BV_{CEO}$ | 80  | -    | -    | V    | $I_C = 0.1\text{mA}$                    |
| Emitter-Collector breakdown voltage | $BV_{ECO}$ | 6   | -    | -    | V    | $I_E = 0.1\text{mA}$                    |

**Transfer Characteristics**

| Parameter              | Symbol | Min | Typ. | Max. | Unit | Condition                               |
|------------------------|--------|-----|------|------|------|-----------------------------------------|
| Current Transfer ratio | EL816  | 50  | -    | 600  | %    | $I_F = 5\text{mA}, V_{CE} = 5\text{V}$  |
|                        | EL816A | 80  | -    | 160  |      |                                         |
|                        | EL816B | 130 | -    | 260  |      |                                         |
|                        | EL816C | 200 | -    | 400  |      |                                         |
|                        | EL816D | 300 | -    | 600  |      |                                         |
|                        | EL816X | 100 | -    | 200  |      |                                         |
|                        | EL816Y | 150 | -    | 300  |      |                                         |
|                        | EL816I | 63  | -    | 125  | %    | $I_F = 10\text{mA}, V_{CE} = 5\text{V}$ |
|                        | EL816J | 100 | -    | 200  |      |                                         |
|                        | EL816K | 160 | -    | 320  |      |                                         |
|                        | EL816I | 22  | -    | -    |      |                                         |
|                        | EL816J | 34  | -    | -    |      |                                         |
|                        | EL816K | 56  | -    | -    |      |                                         |

**Transfer Characteristics ( $T_a=25^{\circ}\text{C}$  unless specified otherwise) Continuity**

| Parameter                            | Symbol        | Min                | Typ. | Max. | Unit          | Condition                                                             |
|--------------------------------------|---------------|--------------------|------|------|---------------|-----------------------------------------------------------------------|
| Collector-Emitter saturation voltage | $V_{CE(sat)}$ | -                  | 0.1  | 0.2  | V             | $I_F = 20\text{mA}$ , $I_C = 1\text{mA}$                              |
| Isolation resistance                 | $R_{IO}$      | $5 \times 10^{10}$ | -    | -    | $\Omega$      | $V_{IO} = 500\text{Vdc}$ ,<br>40~60% R.H.                             |
| Floating capacitance                 | $C_{IO}$      | -                  | 0.6  | 1.0  | pF            | $V_{IO} = 0$ , $f = 1\text{MHz}$                                      |
| Cut-off frequency                    | $f_c$         | -                  | 80   | -    | kHz           | $V_{CE} = 5\text{V}$ , $I_C = 2\text{mA}$<br>$R_L = 100\Omega$ , -3dB |
| Rise time                            | $t_r$         | -                  | 4    | 18   | $\mu\text{s}$ | $V_{CE} = 2\text{V}$ , $I_C = 2\text{mA}$ ,<br>$R_L = 100\Omega$      |
| Fall time                            | $t_f$         | -                  | 3    | 18   | $\mu\text{s}$ |                                                                       |

\* Typical values at  $T_a = 25^{\circ}\text{C}$

EVERLIGHT

## Typical Electro-Optical Characteristics Curves

Figure 1. Forward Current vs Forward Voltage

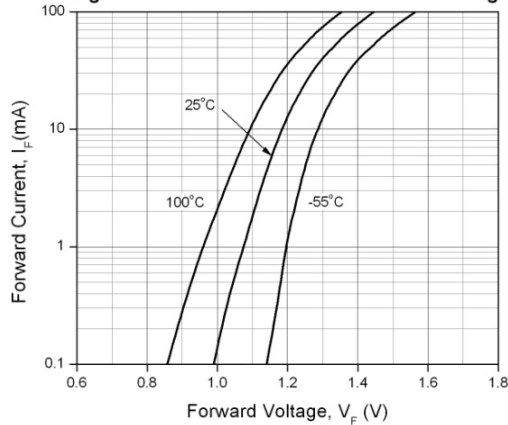


Figure 2. Normalized Collector Current vs Forward Current

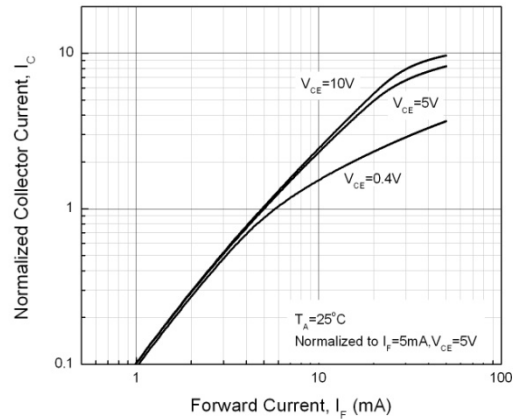


Figure 3. Normalized Current Transfer Ratio vs Forward Current

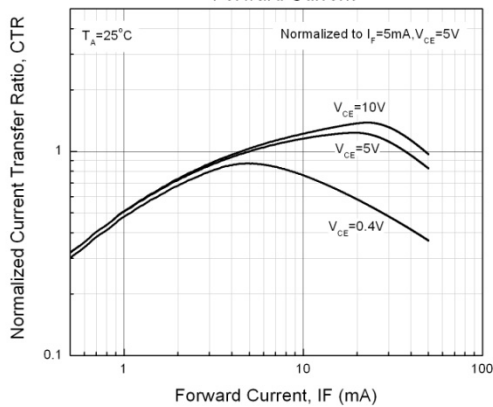


Figure 4. Normalized Collector Current vs Ambient Temperature

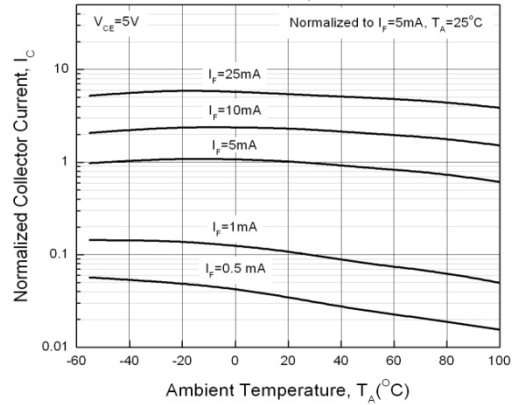


Figure 5. Collector Current vs Collector-Emitter Voltage

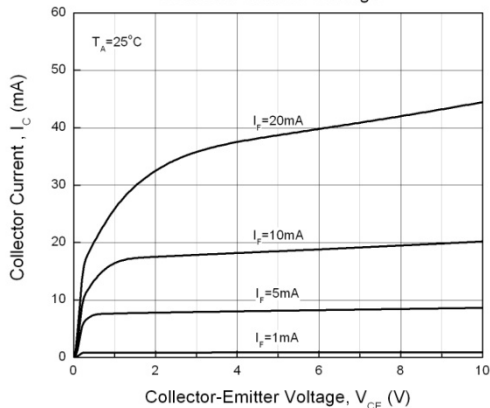


Figure 6. Collector Current vs Collector-Emitter Voltage

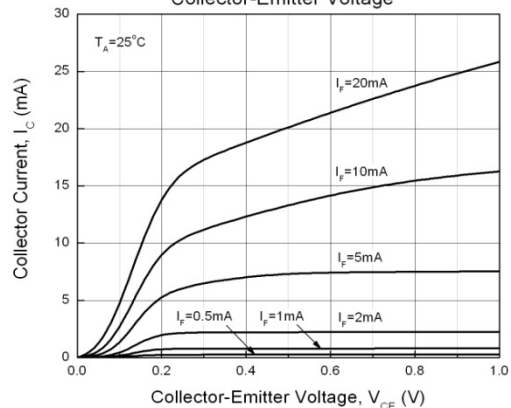


Figure 7. Collector Dark Current vs Ambient Temperature

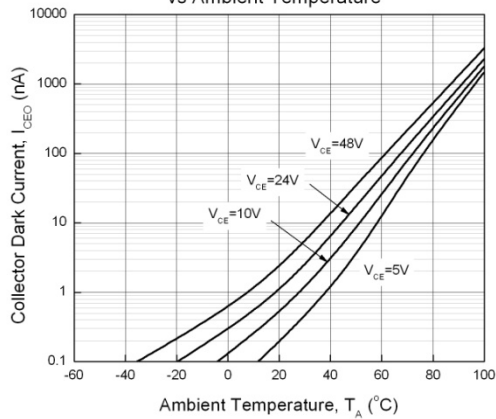


Figure 8. Switching Time vs Load Resistance

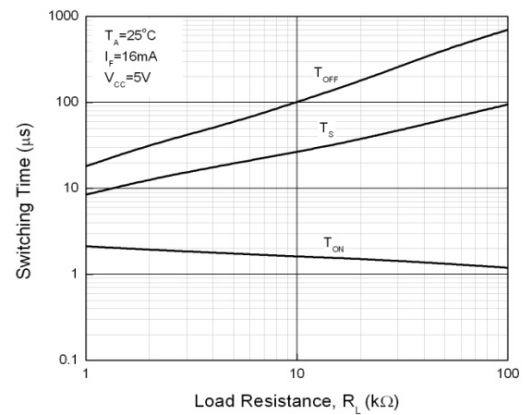


Figure 9. Collector-Emitter Saturation Voltage vs Ambient Temperature

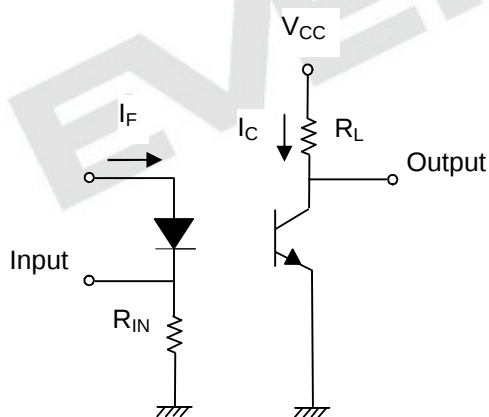
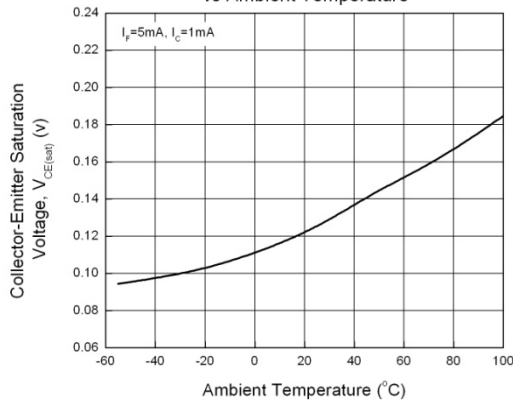


Figure 10. Switching Time Test Circuit & Waveforms

## Order Information

### Part Number

**EL816X(Y)(Z)-FV**




### Note

- X = Lead form option (S, S1, S2, M or none)
- Y = CTR Rank (A, B, C, D, X, Y, I, J, K or none)
- Z = Tape and reel option (TA, TB, TU, TD or none).
- F = Lead frame option (F: Iron, None: copper)
- V = VDE safety (optional).




| Option  | Description                                                   | Packing quantity    |
|---------|---------------------------------------------------------------|---------------------|
| None    | Standard DIP-4                                                | 100 units per tube  |
| M       | Wide lead bend (0.4 inch spacing)                             | 100 units per tube  |
| S (TA)  | Surface mount lead form + TA tape & reel option               | 1000 units per reel |
| S (TB)  | Surface mount lead form + TB tape & reel option               | 1000 units per reel |
| S1 (TA) | Surface mount lead form (low profile) + TA tape & reel option | 1000 units per reel |
| S1 (TB) | Surface mount lead form (low profile) + TB tape & reel option | 1000 units per reel |
| S2 (TA) | Surface mount lead form (Gull-wing) + TA tape & reel option   | 1000 units per reel |
| S2 (TB) | Surface mount lead form (Gull-wing) + TB tape & reel option   | 1000 units per reel |
| S (TU)  | Surface mount lead form + TU tape & reel option               | 1500 units per reel |
| S (TD)  | Surface mount lead form + TD tape & reel option               | 1500 units per reel |
| S1 (TU) | Surface mount lead form (low profile) + TU tape & reel option | 1500 units per reel |
| S1 (TD) | Surface mount lead form (low profile) + TD tape & reel option | 1500 units per reel |
| S2 (TU) | Surface mount lead form (low profile) + TU tape & reel option | 2000 units per reel |
| S2 (TD) | Surface mount lead form (low profile) + TD tape & reel option | 2000 units per reel |

Package Dimension (Dimensions in mm)


Standard DIP Type

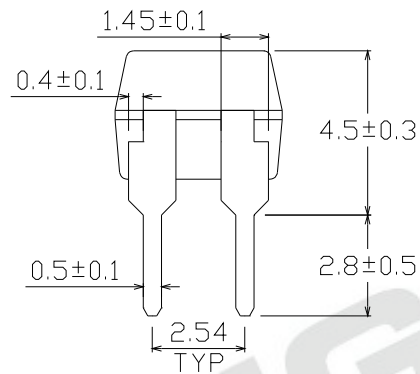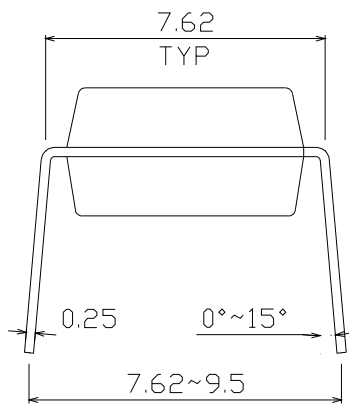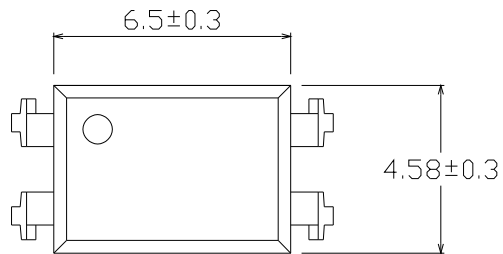


Option M Type

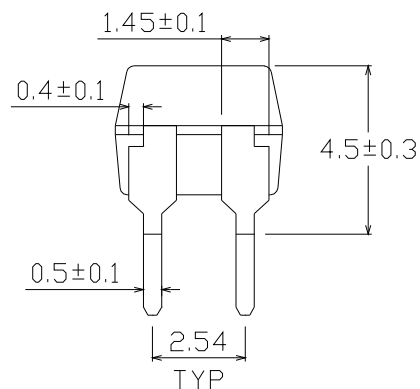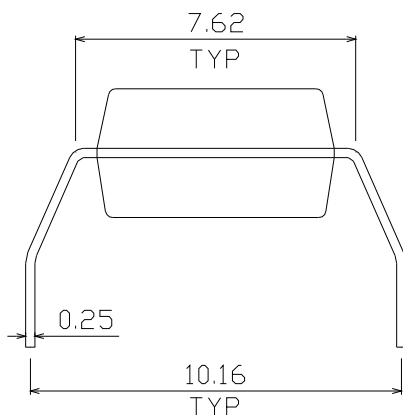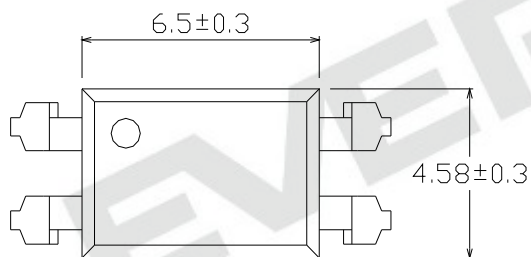


Option S Type

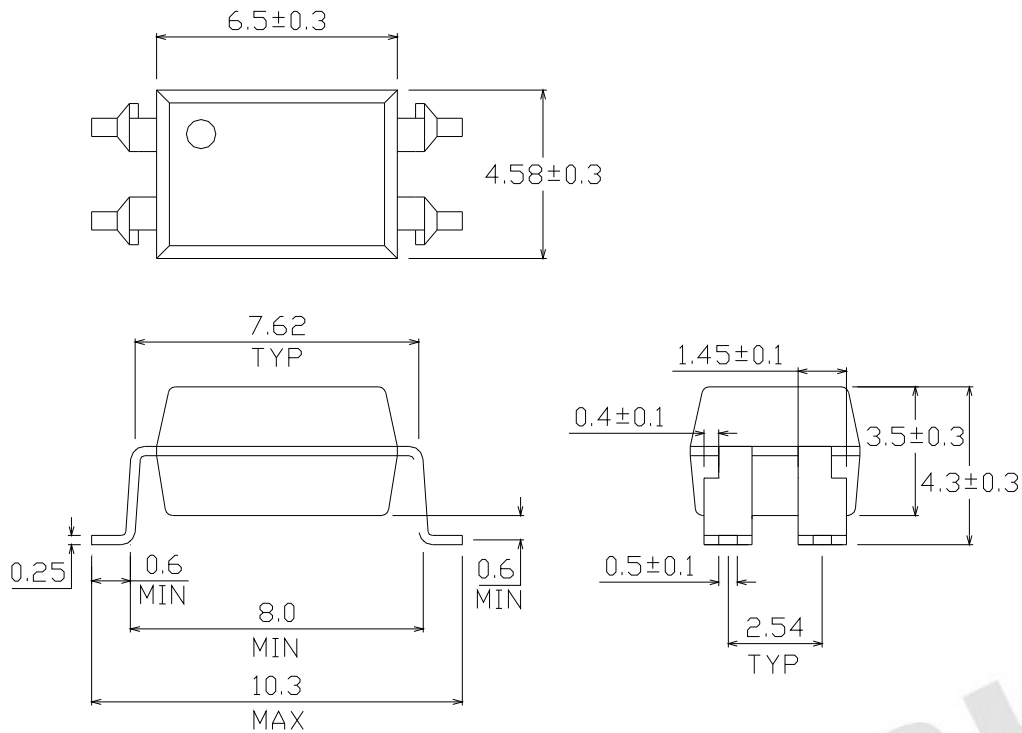

Option S1 Type

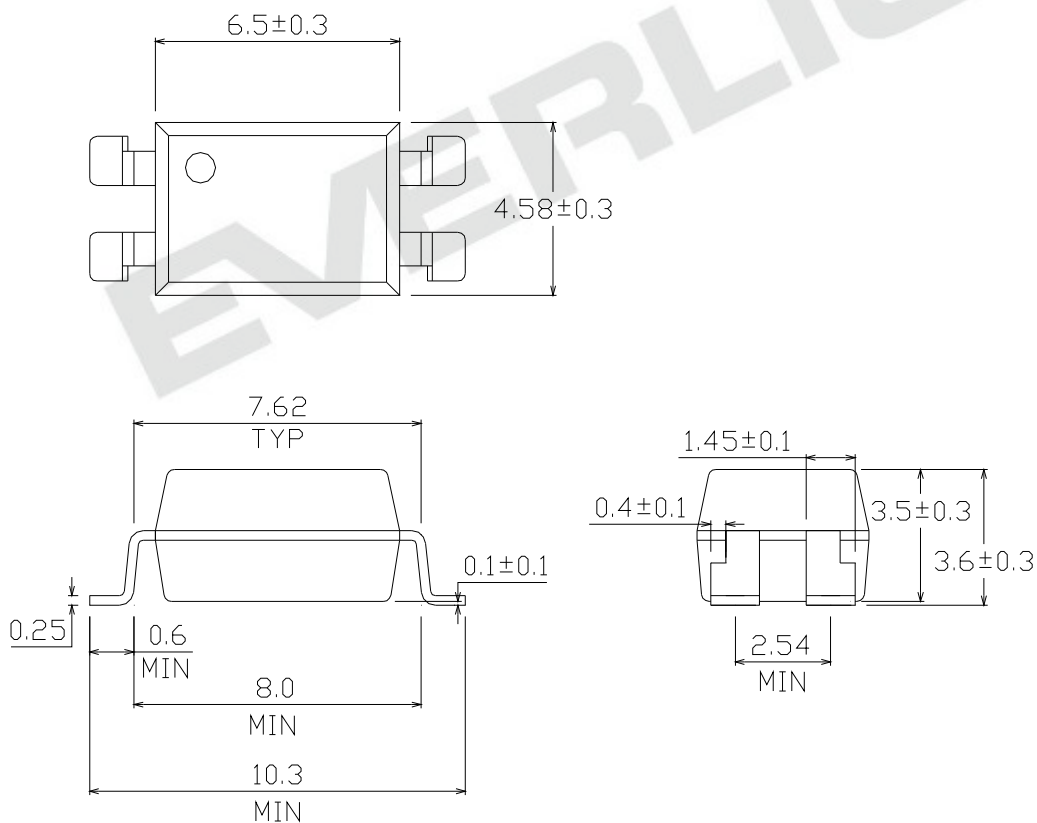


### Option S2 Type

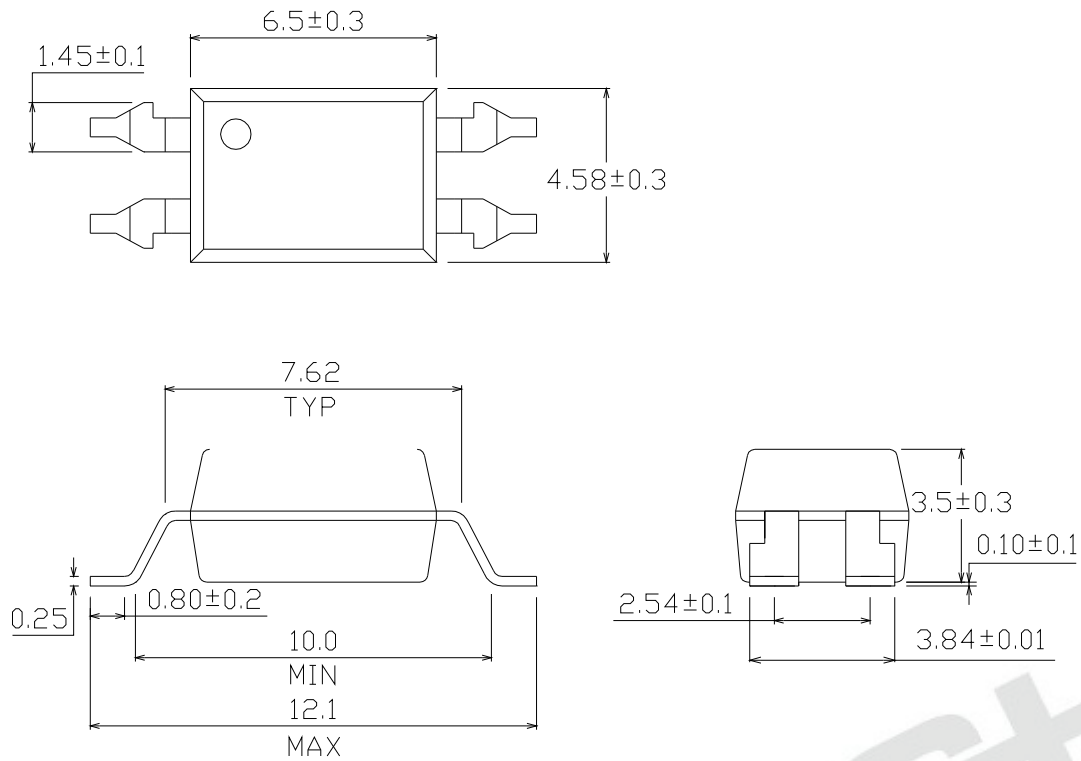


### Recommended pad layout for surface mount leadform

#### For S and S1 option

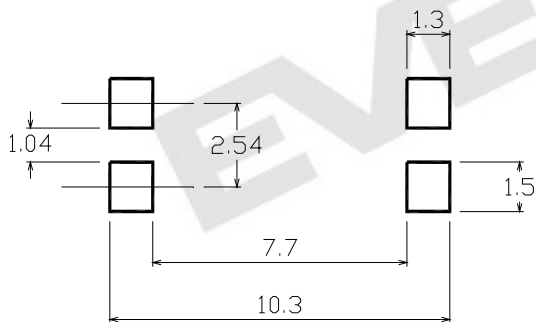

#### For S2 option

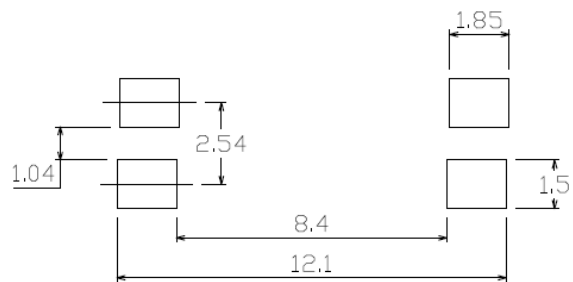

## Device Marking




## Notes


|     |                           |
|-----|---------------------------|
| EL  | denotes EVERLIGHT         |
| 816 | denotes Device Number     |
| R   | denotes CTR Rank          |
| Y   | denotes 1 digit Year code |
| WW  | denotes 2 digit Week code |
| V   | denotes VDE (optional)    |

EVERLIGHT

## Tape & Reel Packing Specifications

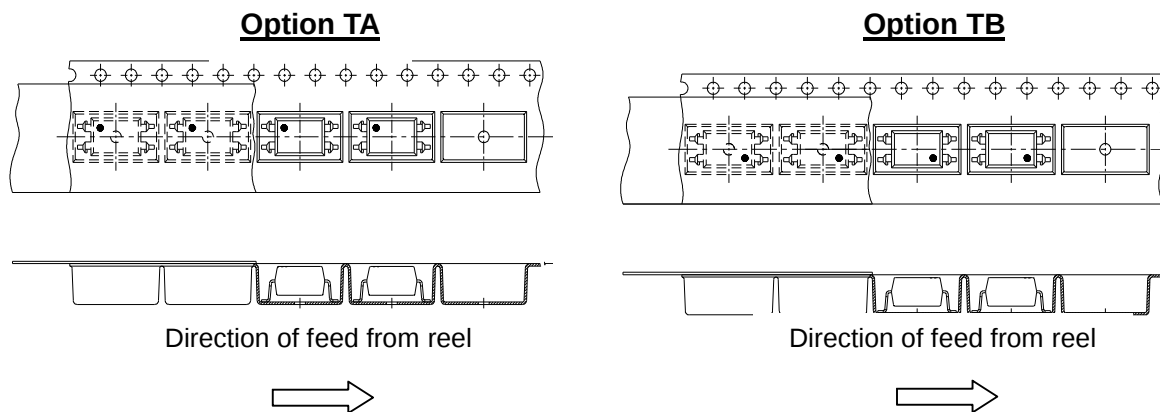




## Tape dimensions

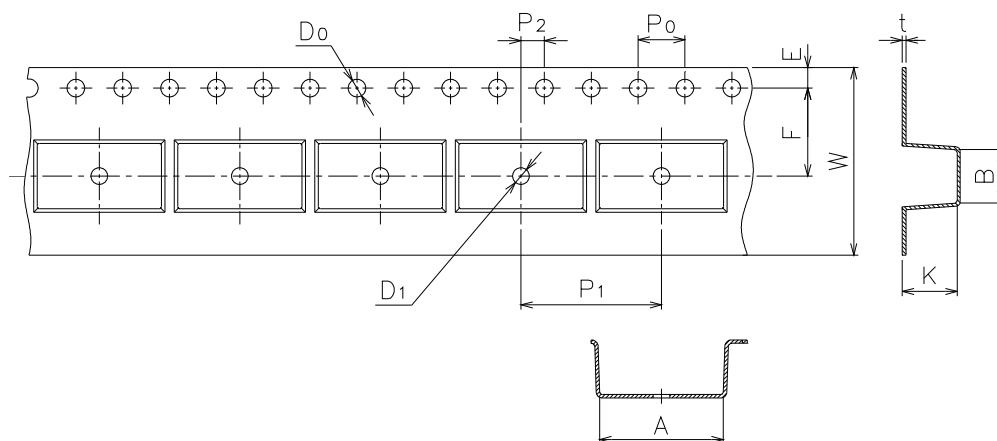

## Tape dimensions




| Dimension No.        | A         | B        | D0       | D1       | E        | F        |
|----------------------|-----------|----------|----------|----------|----------|----------|
| Dimension (mm)       | 10.5±0.1  | 4.65±0.1 | 1.55±0.1 | 1.50±0.1 | 1.75±0.1 | 7.5±0.1  |
| Dimension (mm)<br>S2 | 12.15±0.1 | 4.65±0.1 | 1.55±0.1 | 1.50±0.1 | 1.75±0.1 | 7.5±0.1  |
| Dimension No.        | P0        | P1       | P2       | t        | W        | K        |
| Dimension (mm)       | 4.0±0.1   | 12.0±0.1 | 2.0±0.1  | 0.35±0.1 | 16.0±0.3 | 4.75±0.1 |
| Dimension (mm)<br>S2 | 4.0±0.1   | 16.0±0.1 | 2.0±0.1  | 0.35±0.1 | 16.0±0.3 | 3.90±0.1 |

**Option TD**

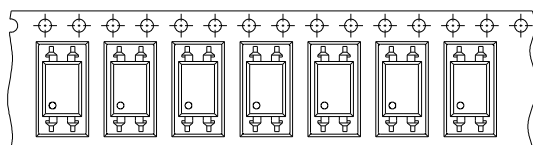


Direction of feed from reel

**Option TU**

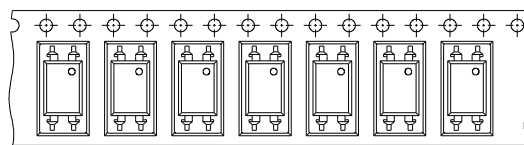

Direction of feed from reel

## Tape dimensions

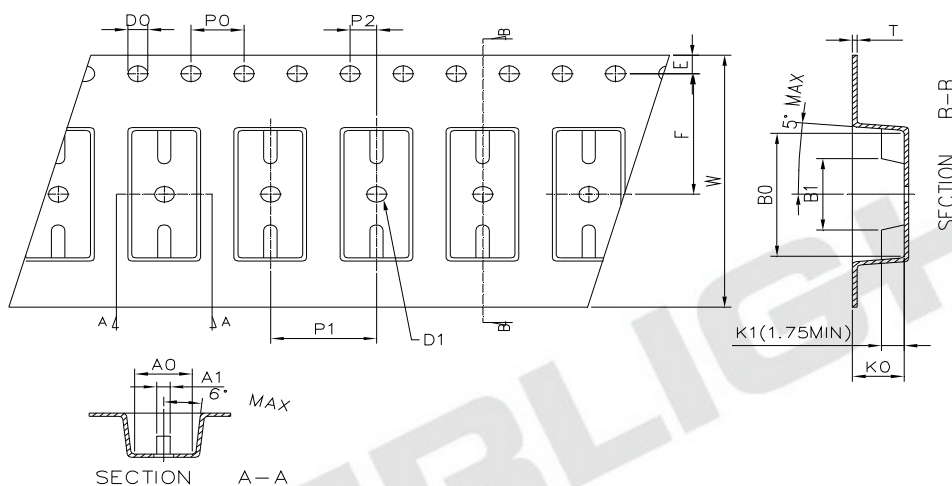


## Tape dimensions

| Dimension No.        | W         | F         | E         | P1       | P2       | P0      |
|----------------------|-----------|-----------|-----------|----------|----------|---------|
| Dimension(mm)        | 16.00±0.3 | 7.5±0.1   | 1.75±0.1  | 8.0±0.1  | 2.0±0.1  | 4.0±0.1 |
| Dimension (mm)<br>S2 | 24.0±0.3  | 11.5±0.1  | 1.75±0.1  | 8.0±0.1  | 2.0±0.1  | 4.0±0.1 |
| Dimension No.        | D0        | B0        | T         | K0       | A0       | D1      |
| Dimension(mm)        | 1.5±0.1   | 10.4±0.1  | 0.4±0.05  | 4.60±0.1 | 5.1±0.1  | 1.5±0.1 |
| Dimension (mm)<br>S2 | 1.5±0.1   | 12.55±0.1 | 0.35±0.05 | 4.0±0.1  | 4.88±0.1 | 1.5±0.1 |

## Precautions for Use

### 1. Soldering Condition

#### 1.1 (A) Maximum Body Case Temperature Profile for evaluation of Reflow Profile

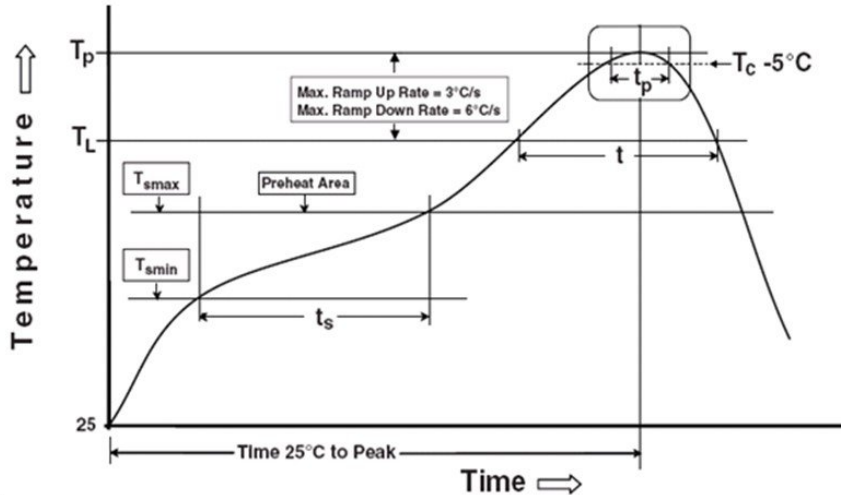

Note:

Reference: IPC/JEDEC J-STD-020D

#### Preheat

|                                              |                 |
|----------------------------------------------|-----------------|
| Temperature min ( $T_{smin}$ )               | 150 °C          |
| Temperature max ( $T_{smax}$ )               | 200°C           |
| Time ( $T_{smin}$ to $T_{smax}$ ) ( $t_s$ )  | 60-120 seconds  |
| Average ramp-up rate ( $T_{smax}$ to $T_p$ ) | 3 °C/second max |

#### Other

|                                                                      |                  |
|----------------------------------------------------------------------|------------------|
| Liquidus Temperature ( $T_L$ )                                       | 217 °C           |
| Time above Liquidus Temperature ( $t_L$ )                            | 60-100 sec       |
| Peak Temperature ( $T_p$ )                                           | 260°C            |
| Time within 5 °C of Actual Peak Temperature: $T_p - 5^\circ\text{C}$ | 30 s             |
| Ramp- Down Rate from Peak Temperature                                | 6°C /second max. |
| Time $25^\circ\text{C}$ to peak temperature                          | 8 minutes max.   |
| Reflow times                                                         | 3 times          |

## DISCLAIMER

1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
2. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
3. These specification sheets include materials protected under copyright of EVERLIGHT corporation. Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent.

EVERLIGHT