PART NO. SOLID LENGTHS	PART NO. SERRATED LENGTHS	MATERIAL	"A" REF.	"B" REF.	"C" REF.	PANEL THICKNESS RANGE	"GAP" REF.
NGS–1	SNGS–1	NYLON (RMS–21)	.125 (3.2)	.031 (0.8)	.031 (0.8)	.026–.036 (0.7–0.9)	.018 (0.5)
NGS–2	SNGS–2		.172 (4.4)		.109 (2.8)	.037–.071 (0.9–1.8)	.037 (0.9)
NGS–2.5	SNGS–2.5					.072–.105 (1.8–2.7)	.060 (1.5)
NGS–3	SNGS–3		.188 (4.8)	.047 (1.2)	.156 (4.0)	.106–.164 (2.7–4.2)	.106 (2.7)
NGS–4	SNGS–4				.188 (4.8)	.165–.187 (4.2–4.7)	.165 (4.2)
NGS–5	SNGS–5				.250 (6.4)	.188–.250 (4.8–6.4)	.187 (4.8)
PGS–1	SPGS–1	POLYETHYLENE (RMS–06)	.125 (3.2)	.031 (0.8)	.031 (0.8)	.026–.036 (0.7–0.9)	.018 (0.5)
PGS–2	SPGS–2		.172 (4.4)		.109 (2.8)	.037–.071 (0.9–1.8)	.037 (0.9)
PGS–2.5	SPGS–2.5					.072–.105 (1.8–2.7)	.060 (1.5)
PGS–3	SPGS–3		.188 (4.8)	.047 (1.2)	.156 (4.0)	.106–.164 (2.6–4.2)	.106 (2.7)
PGS–4	SPGS–4				.188 (4.8)	.165–.187 (4.2–4.7)	.165 (4.2)
PGS–5	SPGS–5				.250 (6.4)	.188–.250 (4.8–6.4)	.187 (4.8)

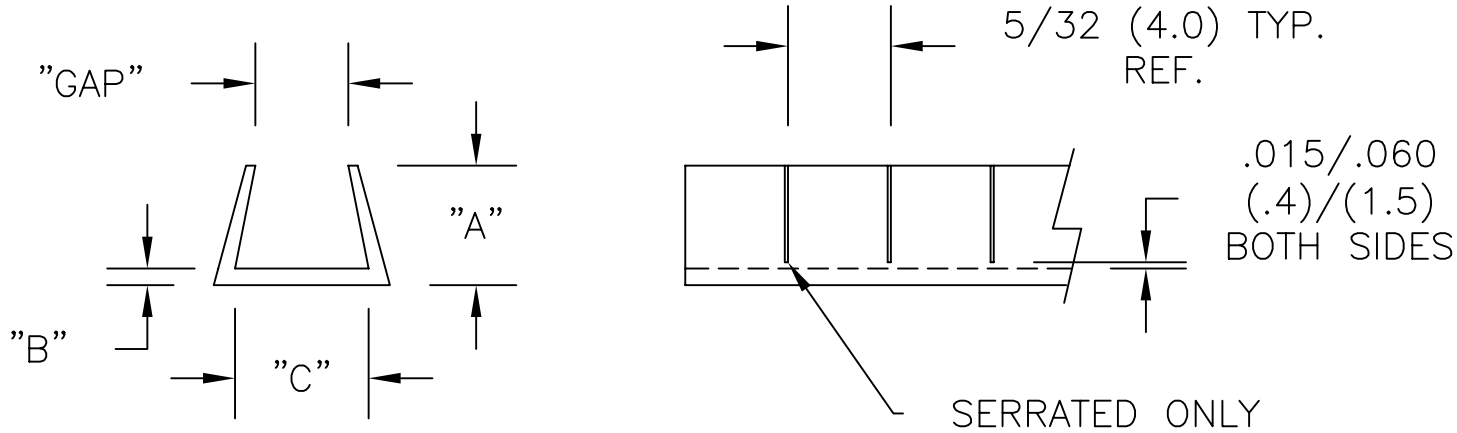

NOTES:
1. COLOR: NATURAL OR BLACK; ADD SUFFIX "B" FOR BLACK
2. LENGTH: 100 FT. (3048 cm)

REV	DESCRIPTION	ENGR DATE
G	RMS–06 WAS RMS–13	DLC 12.11.01
F	REVISED.015/.060 (.4)/(1.5) WAS .015/.055	DLC 7/31/01
E	TABLE CORRECTED PER NGSG PRINT AND CHANGED FROM FRACTIONAL TO DECIMAL	SM 07.24..01
D	CHANGED FILE NO.	SM 06.27.01
C	TABLE CORRECTED	SM 04.10.01
B	ADDED PGSR & SPGSR SERIES	JB 07.10.96
A	CONVERTED TO ACAD	PB 06.28.95

TITLE: GROMMET STRIP–SERIES

DWG IN IN (MM)

TOLERANCES UNLESS NOTED
.XX=±.020
.XXX=±.015
FRAC=±1/64
ANG=±1°

FILE # NGS
MAT'L: SEE NOTES
RE: RICHCO, INC.

DWN: P.B.
DT: 06–28–95

APP:
DT:

RICHCO INC.
PO BOX 804238,CHICAGO,60680
(773) 539–4060

FINAL

PART # SEE TABLE

PRINT TYPE CA