

To all our customers

---

## **Regarding the change of names mentioned in the document, such as Hitachi Electric and Hitachi XX, to Renesas Technology Corp.**

---

The semiconductor operations of Mitsubishi Electric and Hitachi were transferred to Renesas Technology Corporation on April 1st 2003. These operations include microcomputer, logic, analog and discrete devices, and memory chips other than DRAMs (flash memory, SRAMs etc.) Accordingly, although Hitachi, Hitachi, Ltd., Hitachi Semiconductors, and other Hitachi brand names are mentioned in the document, these names have in fact all been changed to Renesas Technology Corp. Thank you for your understanding. Except for our corporate trademark, logo and corporate statement, no changes whatsoever have been made to the contents of the document, and these changes do not constitute any alteration to the contents of the document itself.

Renesas Technology Home Page: <http://www.renesas.com>

Renesas Technology Corp.  
Customer Support Dept.  
April 1, 2003

## Cautions

Keep safety first in your circuit designs!

1. Renesas Technology Corporation puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage.

Remember to give due consideration to safety when making your circuit designs, with appropriate measures such as (i) placement of substitutive, auxiliary circuits, (ii) use of nonflammable material or (iii) prevention against any malfunction or mishap.

Notes regarding these materials

1. These materials are intended as a reference to assist our customers in the selection of the Renesas Technology Corporation product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Renesas Technology Corporation or a third party.
2. Renesas Technology Corporation assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.
3. All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Renesas Technology Corporation without notice due to product improvements or other reasons. It is therefore recommended that customers contact Renesas Technology Corporation or an authorized Renesas Technology Corporation product distributor for the latest product information before purchasing a product listed herein.

The information described here may contain technical inaccuracies or typographical errors.

Renesas Technology Corporation assumes no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors.

Please also pay attention to information published by Renesas Technology Corporation by various means, including the Renesas Technology Corporation Semiconductor home page (<http://www.renesas.com>).

4. When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Renesas Technology Corporation assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.
5. Renesas Technology Corporation semiconductors are not designed or manufactured for use in a device or system that is used under circumstances in which human life is potentially at stake. Please contact Renesas Technology Corporation or an authorized Renesas Technology Corporation product distributor when considering the use of a product contained herein for any specific purposes, such as apparatus or systems for transportation, vehicular, medical, aerospace, nuclear, or undersea repeater use.
6. The prior written approval of Renesas Technology Corporation is necessary to reprint or reproduce in whole or in part these materials.
7. If these products or technologies are subject to the Japanese export control restrictions, they must be exported under a license from the Japanese government and cannot be imported into a country other than the approved destination. Any diversion or reexport contrary to the export control laws and regulations of Japan and/or the country of destination is prohibited.
8. Please contact Renesas Technology Corporation for further details on these materials or the products contained therein.

# Hitachi Single-Chip Microcomputer

## H8/3297 Series

H8/3297  
HD6473297, HD6433297

H8/3296  
HD6433296

H8/3294  
HD6473294, HD6433294

H8/3292  
HD6433292

## Hardware Manual

The revision list can be viewed directly by clicking the title page.

The revision list summarizes the locations of revisions and additions. Details should always be checked by referring to the relevant text.

|             |
|-------------|
| 3rd Edition |
|-------------|

When using this document, keep the following in mind:

1. This document may, wholly or partially, be subject to change without notice.
2. All rights are reserved: No one is permitted to reproduce or duplicate, in any form, the whole or part of this document without Hitachi's permission.
3. Hitachi will not be held responsible for any damage to the user that may result from accidents or any other reasons during operation of the user's unit according to this document.
4. Circuitry and other examples described herein are meant merely to indicate the characteristics and performance of Hitachi's semiconductor products. Hitachi assumes no responsibility for any intellectual property claims or other problems that may result from applications based on the examples described herein.
5. No license is granted by implication or otherwise under any patents or other rights of any third party or Hitachi, Ltd.
6. **MEDICAL APPLICATIONS:** Hitachi's products are not authorized for use in MEDICAL APPLICATIONS without the written consent of the appropriate officer of Hitachi's sales company. Such use includes, but is not limited to, use in life support system. Buyers of Hitachi's products are requested to notify the relevant hitachi sales offices when planning to use the products in MEDICAL APPLICATIONS.

# Preface

The H8/3297 Series is a series of high-performance microcontrollers with a fast H8/300 CPU core and a set of on-chip supporting functions optimized for embedded control. These include ROM, RAM, three types of timers, a serial communication interface, A/D converter, I/O ports, and other functions needed in control system configurations, so that compact, high-performance systems can be implemented easily. The series includes the H8/3297 with 60-kbyte ROM and 2-kbyte RAM, the H8/3296 with 48-kbyte ROM and 2-kbyte RAM, H8/3294 with 32-kbyte ROM and 1-kbyte RAM, and the H8/3292 with 16-kbyte ROM and 512-byte RAM.

The entire H8/3297 Series is available in mask-ROM versions. The H8/3297 and H8/3294 are also available in ZTAT™\* (zero turn-around time) versions, providing a quick and flexible response to conditions from ramp-up through full-scale volume production, even for applications with frequently-changing specifications.

This manual describes the hardware of the H8/3297 Series. Refer to the *H8/300 Series Programming Manual* for a detailed description of the instruction set.

Note: \* ZTAT™ is a registered trademark of Hitachi, Ltd.



## Main Revisions and Additions in this Edition

| Page       | Item                                                                                           | Revisions                                   |
|------------|------------------------------------------------------------------------------------------------|---------------------------------------------|
| 4          | Table 1-1 Features                                                                             | Table amended                               |
| 14         | Table 1-3 Pin Functions                                                                        | Table amended                               |
| 37, 38     | Notes on Bit Manipulation Instructions                                                         | Description amended                         |
| 69         | Figure 4-3 Block Diagram of Interrupt Controller                                               | Figure amended                              |
| 71         | Figure 4-4 Hardware Interrupt-Handling Sequence                                                | Flow amended                                |
| 90         | 6.2 Oscillator Circuit (2) ②                                                                   | Description amended                         |
| 113        | Table 7-9 Port 4 Pin Functions                                                                 | Table amended                               |
| 133        | Table 7-15 Port 7 Register<br>Port 7 Input Register (P7PIN)                                    | Table amended<br>Description amended        |
| 184        | Bit 7—Overflow Flag (OVF)<br>Bit 6—Timer Mode Select                                           | Table amended                               |
| 202 to 205 | Table 11-3 Examples of BRR Settings in Asynchronous Mode (When $\varnothing_P = \varnothing$ ) | Description amended<br>Whole table replaced |
| 206        | Table 11-4 Examples of BRR Settings in Synchronous Mode (When $\varnothing_P = \varnothing$ )  | Description amended<br>Whole table replaced |
| 223        | Figure 11-11 Example of SCI Receive Operation                                                  | Figure amended                              |
| 228        | Figure 11-14 Example of SCI Transmit Operation                                                 | Figure amended                              |
| 231        | Figure 11-16 Example of SCI Receive Operation                                                  | Figure amended                              |
| 254        | 13.2.2 Single-Chip Mode (Mode 3)                                                               | Note added                                  |
| 269        | 15.1.1 System Control Register (SYSCR)                                                         | Note Deleted                                |
| 300 to 302 | Table A-1 Instruction Set                                                                      | Table amended                               |
| 317        | B.1 Addresses                                                                                  | Table amended                               |
| 340        | TCR—Timer Control Register                                                                     | Table amended                               |
| 355        | Figure C-4 (a) Port 4 Block Diagram (Pin P4 <sub>0</sub> )                                     | Figure amended                              |
| 363        | Figure C-6 (a) Port 6 Block Diagram (Pin P6 <sub>0</sub> )                                     | Figure amended                              |
| 364        | Figure C-6 (b) Port 6 Block Diagram (Pin P6 <sub>1</sub> )                                     | Figure amended                              |
| 365        | Figure C-6 (c) Port 6 Block Diagram (Pin P6 <sub>2</sub> )                                     | Figure amended                              |
| 366        | Figure C-6 (d) Port 6 Block Diagram (Pins P6 <sub>3</sub> and P6 <sub>5</sub> )                | Figure amended                              |
| 367        | Figure C-6 (e) Port 6 Block Diagram (Pin P6 <sub>4</sub> )                                     | Figure amended                              |
| 368        | Figure C-6 (f) Port 6 Block Diagram (Pin P6 <sub>6</sub> )                                     | Figure amended                              |
| 369        | Figure C-6 (g) Port 6 Block Diagram (Pin P6 <sub>7</sub> )                                     | Figure amended                              |

# Contents

|           |                                                             |    |
|-----------|-------------------------------------------------------------|----|
| Section 1 | Overview.....                                               | 1  |
| 1.1       | Overview .....                                              | 1  |
| 1.2       | Block Diagram.....                                          | 5  |
| 1.3       | Pin Assignments and Functions.....                          | 6  |
| 1.3.1     | Pin Arrangement.....                                        | 6  |
| 1.3.2     | Pin Functions .....                                         | 9  |
| Section 2 | CPU .....                                                   | 17 |
| 2.1       | Overview .....                                              | 17 |
| 2.1.1     | Features.....                                               | 17 |
| 2.1.2     | Address Space.....                                          | 18 |
| 2.1.3     | Register Configuration.....                                 | 18 |
| 2.2       | Register Descriptions.....                                  | 19 |
| 2.2.1     | General Registers.....                                      | 19 |
| 2.2.2     | Control Registers .....                                     | 19 |
| 2.2.3     | Initial Register Values .....                               | 20 |
| 2.3       | Data Formats.....                                           | 21 |
| 2.3.1     | Data Formats in General Registers.....                      | 22 |
| 2.3.2     | Memory Data Formats.....                                    | 23 |
| 2.4       | Addressing Modes .....                                      | 24 |
| 2.4.1     | Addressing Mode.....                                        | 24 |
| 2.4.2     | Calculation of Effective Address.....                       | 26 |
| 2.5       | Instruction Set.....                                        | 30 |
| 2.5.1     | Data Transfer Instructions .....                            | 31 |
| 2.5.2     | Arithmetic Operations .....                                 | 33 |
| 2.5.3     | Logic Operations .....                                      | 34 |
| 2.5.4     | Shift Operations .....                                      | 34 |
| 2.5.5     | Bit Manipulations .....                                     | 36 |
| 2.5.6     | Branching Instructions.....                                 | 40 |
| 2.5.7     | System Control Instructions .....                           | 42 |
| 2.5.8     | Block Data Transfer Instruction .....                       | 43 |
| 2.6       | CPU States .....                                            | 45 |
| 2.6.1     | Overview.....                                               | 45 |
| 2.6.2     | Program Execution State .....                               | 46 |
| 2.6.3     | Exception-Handling State .....                              | 46 |
| 2.6.4     | Power-Down State.....                                       | 46 |
| 2.7       | Access Timing and Bus Cycle.....                            | 47 |
| 2.7.1     | Access to On-Chip Memory (RAM and ROM) .....                | 47 |
| 2.7.2     | Access to On-Chip Register Field and External Devices ..... | 49 |



|           |                                                |    |
|-----------|------------------------------------------------|----|
| Section 3 | MCU Operating Modes and Address Space .....    | 53 |
| 3.1       | Overview .....                                 | 53 |
| 3.1.1     | Mode Selection .....                           | 53 |
| 3.1.2     | Mode and System Control Registers .....        | 54 |
| 3.2       | System Control Register (SYSCR).....           | 54 |
| 3.3       | Mode Control Register (MDCR).....              | 56 |
| 3.4       | Address Space Map in Each Operating Mode ..... | 57 |
| Section 4 | Exception Handling.....                        | 61 |
| 4.1       | Overview .....                                 | 61 |
| 4.2       | Reset .....                                    | 61 |
| 4.2.1     | Overview.....                                  | 61 |
| 4.2.2     | Reset Sequence .....                           | 61 |
| 4.2.3     | Disabling of Interrupts after Reset.....       | 64 |
| 4.3       | Interrupts .....                               | 64 |
| 4.3.1     | Overview.....                                  | 64 |
| 4.3.2     | Interrupt-Related Registers.....               | 66 |
| 4.3.3     | External Interrupts .....                      | 68 |
| 4.3.4     | Internal Interrupts .....                      | 68 |
| 4.3.5     | Interrupt Handling .....                       | 69 |
| 4.3.6     | Interrupt Response Time.....                   | 74 |
| 4.3.7     | Precaution .....                               | 75 |
| 4.4       | Note on Stack Handling.....                    | 76 |
| Section 5 | Wait-State Controller .....                    | 77 |
| 5.1       | Overview .....                                 | 77 |
| 5.1.1     | Features.....                                  | 77 |
| 5.1.2     | Block Diagram.....                             | 77 |
| 5.1.3     | Input/Output Pins.....                         | 78 |
| 5.1.4     | Register Configuration.....                    | 78 |
| 5.2       | Register Description .....                     | 78 |
| 5.2.1     | Wait-State Control Register (WSCR).....        | 78 |
| 5.3       | Wait Modes.....                                | 80 |
| Section 6 | Clock Pulse Generator.....                     | 83 |
| 6.1       | Overview .....                                 | 83 |
| 6.1.1     | Block Diagram.....                             | 83 |
| 6.1.2     | Wait-State Control Register (WSCR).....        | 84 |
| 6.2       | Oscillator Circuit .....                       | 85 |
| 6.3       | Duty Adjustment Circuit.....                   | 90 |
| 6.4       | Prescaler .....                                | 90 |

|                  |                                                       |            |
|------------------|-------------------------------------------------------|------------|
| <b>Section 7</b> | <b>I/O Ports.....</b>                                 | <b>91</b>  |
| 7.1              | Overview .....                                        | 91         |
| 7.2              | Port 1 .....                                          | 93         |
| 7.2.1            | Overview.....                                         | 93         |
| 7.2.2            | Register Configuration and Descriptions.....          | 94         |
| 7.2.3            | Pin Functions in Each Mode.....                       | 96         |
| 7.2.4            | Input Pull-Up Transistors .....                       | 98         |
| 7.3              | Port 2 .....                                          | 99         |
| 7.3.1            | Overview.....                                         | 99         |
| 7.3.2            | Register Configuration and Descriptions.....          | 100        |
| 7.3.3            | Pin Functions in Each Mode.....                       | 102        |
| 7.3.4            | Input Pull-Up Transistors .....                       | 105        |
| 7.4              | Port 3 .....                                          | 106        |
| 7.4.1            | Overview.....                                         | 106        |
| 7.4.2            | Register Configuration and Descriptions.....          | 107        |
| 7.4.3            | Pin Functions in Each Mode.....                       | 109        |
| 7.4.4            | Input Pull-Up Transistors .....                       | 110        |
| 7.5              | Port 4 .....                                          | 111        |
| 7.5.1            | Overview.....                                         | 111        |
| 7.5.2            | Register Configuration and Descriptions.....          | 112        |
| 7.5.3            | Pin Functions .....                                   | 113        |
| 7.6              | Port 5 .....                                          | 115        |
| 7.6.1            | Overview.....                                         | 115        |
| 7.6.2            | Register Configuration and Descriptions.....          | 115        |
| 7.6.3            | Pin Functions .....                                   | 117        |
| 7.7              | Port 6 .....                                          | 118        |
| 7.7.1            | Overview.....                                         | 118        |
| 7.7.2            | Register Configuration and Descriptions.....          | 119        |
| 7.7.3            | Pin Functions .....                                   | 121        |
| 7.8              | Port 7 .....                                          | 123        |
| 7.8.1            | Overview.....                                         | 123        |
| 7.8.2            | Register Configuration and Descriptions.....          | 124        |
| <b>Section 8</b> | <b>16-Bit Free-Running Timer .....</b>                | <b>125</b> |
| 8.1              | Overview .....                                        | 125        |
| 8.1.1            | Features.....                                         | 125        |
| 8.1.2            | Block Diagram.....                                    | 126        |
| 8.1.3            | Input and Output Pins .....                           | 127        |
| 8.1.4            | Register Configuration.....                           | 127        |
| 8.2              | Register Descriptions.....                            | 128        |
| 8.2.1            | Free-Running Counter (FRC).....                       | 128        |
| 8.2.2            | Output Compare Registers A and B (OCRA and OCRB)..... | 129        |
| 8.2.3            | Input Capture Registers A to D (ICRA to ICRD).....    | 129        |

|                  |                                                                  |            |
|------------------|------------------------------------------------------------------|------------|
| 8.2.4            | Timer Interrupt Enable Register (TIER).....                      | 131        |
| 8.2.5            | Timer Control/Status Register (TCSR) .....                       | 133        |
| 8.2.6            | Timer Control Register (TCR).....                                | 135        |
| 8.2.7            | Timer Output Compare Control Register (TOCR).....                | 137        |
| 8.3              | CPU Interface .....                                              | 139        |
| 8.4              | Operation .....                                                  | 142        |
| 8.4.1            | FRC Incrementation Timing.....                                   | 142        |
| 8.4.2            | Output Compare Timing.....                                       | 144        |
| 8.4.3            | FRC Clear Timing .....                                           | 145        |
| 8.4.4            | Input Capture Timing .....                                       | 146        |
| 8.4.5            | Timing of Input Capture Flag (ICF) Setting.....                  | 149        |
| 8.4.6            | Setting of Output Compare Flags A and B (OCFA and OCFB) .....    | 150        |
| 8.4.7            | Setting of FRC Overflow Flag (OVF).....                          | 151        |
| 8.5              | Interrupts .....                                                 | 151        |
| 8.6              | Sample Application .....                                         | 152        |
| 8.7              | Usage Notes .....                                                | 153        |
| <b>Section 9</b> | <b>8-Bit Timers.....</b>                                         | <b>159</b> |
| 9.1              | Overview .....                                                   | 159        |
| 9.1.1            | Features.....                                                    | 159        |
| 9.1.2            | Block Diagram.....                                               | 160        |
| 9.1.3            | Input and Output Pins .....                                      | 161        |
| 9.1.4            | Register Configuration.....                                      | 161        |
| 9.2              | Register Descriptions.....                                       | 162        |
| 9.2.1            | Timer Counter (TCNT).....                                        | 162        |
| 9.2.2            | Time Constant Registers A and B (TCORA and TCORB) .....          | 162        |
| 9.2.3            | Timer Control Register (TCR).....                                | 163        |
| 9.2.4            | Timer Control/Status Register (TCSR) .....                       | 166        |
| 9.2.5            | Serial/Timer Control Register (STCR).....                        | 168        |
| 9.3              | Operation .....                                                  | 169        |
| 9.3.1            | TCNT Incrementation Timing.....                                  | 169        |
| 9.3.2            | Compare Match Timing.....                                        | 171        |
| 9.3.3            | External Reset of TCNT .....                                     | 173        |
| 9.3.4            | Setting of TCSR Overflow Flag (OVF).....                         | 173        |
| 9.4              | Interrupts .....                                                 | 174        |
| 9.5              | Sample Application .....                                         | 174        |
| 9.6              | Usage Notes .....                                                | 175        |
| 9.6.1            | Contention between TCNT Write and Clear .....                    | 175        |
| 9.6.2            | Contention between TCNT Write and Increment .....                | 176        |
| 9.6.3            | Contention between TCOR Write and Compare-Match .....            | 177        |
| 9.6.4            | Contention between Compare-Match A and Compare-Match B .....     | 178        |
| 9.6.5            | Incrementation Caused by Changing of Internal Clock Source ..... | 178        |

|            |                                                    |     |
|------------|----------------------------------------------------|-----|
| Section 10 | Watchdog Timer .....                               | 181 |
| 10.1       | Overview .....                                     | 181 |
| 10.1.1     | Features.....                                      | 181 |
| 10.1.2     | Block Diagram.....                                 | 182 |
| 10.1.3     | Register Configuration.....                        | 182 |
| 10.2       | Register Descriptions.....                         | 183 |
| 10.2.1     | Timer Counter (TCNT).....                          | 183 |
| 10.2.2     | Timer Control/Status Register (TCSR) .....         | 183 |
| 10.2.3     | Register Access.....                               | 185 |
| 10.3       | Operation .....                                    | 186 |
| 10.3.1     | Watchdog Timer Mode.....                           | 186 |
| 10.3.2     | Interval Timer Mode.....                           | 187 |
| 10.3.3     | Setting the Overflow Flag.....                     | 187 |
| 10.4       | Usage Notes .....                                  | 188 |
| 10.4.1     | Contention between TCNT Write and Increment.....   | 188 |
| 10.4.2     | Changing the Clock Select Bits (CKS2 to CKS0)..... | 188 |
| 10.4.3     | Recovery from Software Standby Mode .....          | 188 |
| Section 11 | Serial Communication Interface.....                | 189 |
| 11.1       | Overview .....                                     | 189 |
| 11.1.1     | Features.....                                      | 189 |
| 11.1.2     | Block Diagram.....                                 | 190 |
| 11.1.3     | Input and Output Pins .....                        | 191 |
| 11.1.4     | Register Configuration.....                        | 191 |
| 11.2       | Register Descriptions.....                         | 192 |
| 11.2.1     | Receive Shift Register (RSR) .....                 | 192 |
| 11.2.2     | Receive Data Register (RDR).....                   | 192 |
| 11.2.3     | Transmit Shift Register (TSR).....                 | 192 |
| 11.2.4     | Transmit Data Register (TDR) .....                 | 193 |
| 11.2.5     | Serial Mode Register (SMR) .....                   | 193 |
| 11.2.6     | Serial Control Register (SCR) .....                | 196 |
| 11.2.7     | Serial Status Register (SSR) .....                 | 199 |
| 11.2.8     | Bit Rate Register (BRR) .....                      | 202 |
| 11.2.9     | Serial/Timer Control Register (STCR).....          | 207 |
| 11.3       | Operation .....                                    | 208 |
| 11.3.1     | Overview.....                                      | 208 |
| 11.3.2     | Asynchronous Mode .....                            | 210 |
| 11.3.3     | Synchronous Mode .....                             | 224 |
| 11.4       | Interrupts .....                                   | 233 |
| 11.5       | Usage Notes .....                                  | 233 |
| Section 12 | A/D Converter .....                                | 237 |
| 12.1       | Overview .....                                     | 237 |

|                   |                                                               |            |
|-------------------|---------------------------------------------------------------|------------|
| 12.1.1            | Features.....                                                 | 237        |
| 12.1.2            | Block Diagram.....                                            | 238        |
| 12.1.3            | Input Pins .....                                              | 239        |
| 12.1.4            | Register Configuration.....                                   | 240        |
| 12.2              | Register Descriptions.....                                    | 241        |
| 12.2.1            | A/D Data Registers A to D (ADDRA to ADDR D).....              | 241        |
| 12.2.2            | A/D Control/Status Register (ADCSR).....                      | 242        |
| 12.2.3            | A/D Control Register (ADCR) .....                             | 244        |
| 12.3              | CPU Interface .....                                           | 245        |
| 12.4              | Operation .....                                               | 246        |
| 12.4.1            | Single Mode (SCAN = 0).....                                   | 246        |
| 12.4.2            | Scan Mode (SCAN = 1).....                                     | 248        |
| 12.4.3            | Input Sampling and A/D Conversion Time .....                  | 250        |
| 12.4.4            | External Trigger Input Timing.....                            | 251        |
| 12.5              | Interrupts .....                                              | 251        |
| 12.6              | Usage Notes .....                                             | 252        |
| <b>Section 13</b> | <b>RAM .....</b>                                              | <b>253</b> |
| 13.1              | Overview .....                                                | 253        |
| 13.1.1            | Block Diagram.....                                            | 253        |
| 13.1.2            | RAM Enable Bit (RAME) in System Control Register (SYSCR)..... | 254        |
| 13.2              | Operation .....                                               | 254        |
| 13.2.1            | Expanded Modes (Modes 1 and 2).....                           | 254        |
| 13.2.2            | Single-Chip Mode (Mode 3).....                                | 254        |
| <b>Section 14</b> | <b>ROM.....</b>                                               | <b>255</b> |
| 14.1              | Overview .....                                                | 255        |
| 14.1.1            | Block Diagram.....                                            | 256        |
| 14.2              | PROM Mode.....                                                | 257        |
| 14.2.1            | PROM Mode Setup.....                                          | 257        |
| 14.2.2            | Socket Adapter Pin Assignments and Memory Map.....            | 257        |
| 14.3              | PROM Programming .....                                        | 260        |
| 14.3.1            | Programming and Verifying.....                                | 260        |
| 14.3.2            | Notes on Programming.....                                     | 264        |
| 14.3.3            | Reliability of Programmed Data .....                          | 264        |
| 14.3.4            | Erasing of Data .....                                         | 265        |
| 14.4              | Handling of Windowed Packages.....                            | 266        |
| <b>Section 15</b> | <b>Power-Down State .....</b>                                 | <b>267</b> |
| 15.1              | Overview .....                                                | 267        |
| 15.1.1            | System Control Register (SYSCR).....                          | 268        |
| 15.2              | Sleep Mode .....                                              | 269        |
| 15.2.1            | Transition to Sleep Mode.....                                 | 269        |

|            |                                                              |     |
|------------|--------------------------------------------------------------|-----|
| 15.2.2     | Exit from Sleep Mode.....                                    | 269 |
| 15.3       | Software Standby Mode .....                                  | 270 |
| 15.3.1     | Transition to Software Standby Mode.....                     | 270 |
| 15.3.2     | Exit from Software Standby Mode.....                         | 270 |
| 15.3.3     | Clock Settling Time for Exit from Software Standby Mode..... | 271 |
| 15.3.4     | Sample Application of Software Standby Mode .....            | 272 |
| 15.3.5     | Usage Note.....                                              | 272 |
| 15.4       | Hardware Standby Mode .....                                  | 273 |
| 15.4.1     | Transition to Hardware Standby Mode.....                     | 273 |
| 15.4.2     | Recovery from Hardware Standby Mode.....                     | 273 |
| 15.4.3     | Timing Relationships.....                                    | 274 |
| Section 16 | Electrical Specifications.....                               | 275 |
| 16.1       | Absolute Maximum Ratings .....                               | 275 |
| 16.2       | Electrical Characteristics .....                             | 275 |
| 16.2.1     | DC Characteristics .....                                     | 275 |
| 16.2.2     | AC Characteristics .....                                     | 285 |
| 16.2.3     | A/D Converter Characteristics.....                           | 289 |
| 16.3       | MCU Operational Timing.....                                  | 290 |
| 16.3.1     | Bus Timing .....                                             | 290 |
| 16.3.2     | Control Signal Timing .....                                  | 292 |
| 16.3.3     | 16-Bit Free-Running Timer Timing .....                       | 294 |
| 16.3.4     | 8-Bit Timer Timing.....                                      | 295 |
| 16.3.5     | Serial Communication Interface Timing .....                  | 296 |
| 16.3.6     | I/O Port Timing.....                                         | 297 |
| 16.3.7     | External Clock Output Timing .....                           | 297 |
| Appendix A | CPU Instruction Set.....                                     | 299 |
| A.1        | Instruction Set List.....                                    | 299 |
| A.2        | Operation Code Map.....                                      | 307 |
| A.3        | Number of States Required for Execution.....                 | 309 |
| Appendix B | Register Field .....                                         | 315 |
| B.1        | Register Addresses and Bit Names.....                        | 315 |
| B.2        | Register Descriptions.....                                   | 320 |
| Appendix C | I/O Port Block Diagrams .....                                | 352 |
| C.1        | Port 1 Block Diagram .....                                   | 352 |
| C.2        | Port 2 Block Diagram .....                                   | 353 |
| C.3        | Port 3 Block Diagram .....                                   | 354 |
| C.4        | Port 4 Block Diagrams.....                                   | 355 |
| C.5        | Port 5 Block Diagrams.....                                   | 360 |
| C.6        | Port 6 Block Diagrams.....                                   | 363 |
| C.7        | Port 7 Block Diagrams.....                                   | 370 |

Appendix D Pin States ..... 371

D.1 Port States in Each Mode..... 371

Appendix E Timing of Transition to and Recovery  
from Hardware Standby Mode..... 373

Appendix F Product Code Lineup ..... 374

Appendix G Package Dimensions ..... 376

# Section 1 Overview

## 1.1 Overview

The H8/3297 Series of single-chip microcomputers features an H8/300 CPU core and a complement of on-chip supporting modules implementing a variety of system functions.

The H8/300 CPU is a high-speed processor with an architecture featuring powerful bit-manipulation instructions, ideally suited for realtime control applications. The on-chip supporting modules implement peripheral functions needed in system configurations. These include ROM, RAM, three types of timers (a 16-bit free-running timer, 8-bit timers, and a watchdog timer), a serial communication interface (SCI), an A/D converter, and I/O ports.

The H8/3297 Series can operate in single-chip mode or in two expanded modes, depending on the requirements of the application.

The entire H8/3297 Series is available with mask ROM. The H8/3297 and H8/3294 are also available in ZTAT™ versions\* that can be programmed at the user site.

Note: \* ZTAT™ (zero turn-around time) is a trademark of Hitachi, Ltd.

Table 1-1 lists the features of the H8/3297 Series.



**Table 1-1 Features**

| Item                                                | Specification                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-----------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CPU                                                 | <p>Two-way general register configuration</p> <ul style="list-style-type: none"><li>• Eight 16-bit registers, or</li><li>• Sixteen 8-bit registers</li></ul> <p>High-speed operation</p> <ul style="list-style-type: none"><li>• Maximum clock rate (<math>\phi</math> clock): 16 MHz at 5 V, 12 MHz at 4 V or 10 MHz at 3 V</li><li>• 8- or 16-bit register-register add/subtract: 125 ns (16 MHz), 167 ns (12 MHz), 200 ns (10 MHz)</li><li>• <math>8 \times 8</math>-bit multiply: 875 ns (16 MHz), 1167 ns (12 MHz), 1400 ns (10 MHz)</li><li>• <math>16 \div 8</math>-bit divide: 875 ns (16 MHz), 1167 ns (12 MHz), 1400 ns (10 MHz)</li></ul> <p>Streamlined, concise instruction set</p> <ul style="list-style-type: none"><li>• Instruction length: 2 or 4 bytes</li><li>• Register-register arithmetic and logic operations</li><li>• MOV instruction for data transfer between registers and memory</li></ul> <p>Instruction set features</p> <ul style="list-style-type: none"><li>• Multiply instruction (<math>8 \text{ bits} \times 8 \text{ bits}</math>)</li><li>• Divide instruction (<math>16 \text{ bits} \div 8 \text{ bits}</math>)</li><li>• Bit-accumulator instructions</li><li>• Register-indirect specification of bit positions</li></ul> |
| Memory                                              | <ul style="list-style-type: none"><li>• H8/3297: 60k-byte ROM; 2k-byte RAM</li><li>• H8/3296: 48k-byte ROM; 2k-byte RAM</li><li>• H8/3294: 32k-byte ROM; 1k-byte RAM</li><li>• H8/3292: 16k-byte ROM; 512-byte RAM</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 16-bit free-running timer<br>(1 channel)            | <ul style="list-style-type: none"><li>• One 16-bit free-running counter (can also count external events)</li><li>• Two output-compare lines</li><li>• Four input capture lines (can be buffered)</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| 8-bit timer<br>(2 channels)                         | <p>Each channel has</p> <ul style="list-style-type: none"><li>• One 8-bit up-counter (can also count external events)</li><li>• Two time constant registers</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Watchdog timer<br>(WDT)<br>(1 channel)              | <ul style="list-style-type: none"><li>• Overflow can generate a reset or NMI interrupt</li><li>• Also usable as interval timer</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Serial communication interface (SCI)<br>(1 channel) | <ul style="list-style-type: none"><li>• Asynchronous or synchronous mode (selectable)</li><li>• Full duplex: can transmit and receive simultaneously</li><li>• On-chip baud rate generator</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| A/D converter                                       | <ul style="list-style-type: none"><li>• 10-bit resolution</li><li>• Eight channels: single or scan mode (selectable)</li><li>• Start of A/D conversion can be externally triggered</li><li>• Sample-and-hold function</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| I/O ports                                           | <ul style="list-style-type: none"><li>• 43 input/output lines (16 of which can drive LEDs)</li><li>• 8 input-only lines</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |

**Table 1-1 Features (cont)**


| Item             | Specification                                                                                                                                                                                                                            |
|------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Interrupts       | <ul style="list-style-type: none"><li>• Four external interrupt lines: <math>\overline{\text{NMI}}</math>, <math>\overline{\text{IRQ}}_0</math> to <math>\overline{\text{IRQ}}_2</math></li><li>• 19 on-chip interrupt sources</li></ul> |
| Wait control     | <ul style="list-style-type: none"><li>• Three selectable wait modes</li></ul>                                                                                                                                                            |
| Operating modes  | <ul style="list-style-type: none"><li>• Expanded mode with on-chip ROM disabled (mode 1)</li><li>• Expanded mode with on-chip ROM enabled (mode 2)</li><li>• Single-chip mode (mode 3)</li></ul>                                         |
| Power-down modes | <ul style="list-style-type: none"><li>• Sleep mode</li><li>• Software standby mode</li><li>• Hardware standby mode</li></ul>                                                                                                             |
| Other features   | <ul style="list-style-type: none"><li>• On-chip oscillator</li></ul>                                                                                                                                                                     |

**Table 1-1 Features (cont)**

| Item         | Specification                  |                                                    |                                     |          |
|--------------|--------------------------------|----------------------------------------------------|-------------------------------------|----------|
|              | Series lineup                  | Part Number                                        |                                     | ROM      |
|              |                                | 5-V Version<br>(16 MHz)<br>4-V Version<br>(12 MHz) | 3-V Version<br>(10 MHz)             |          |
| Product Name |                                |                                                    | Package                             |          |
| H8/3297 ZTAT | HD6473297C16                   | HD6473297C16                                       | 64-pin windowed shrink DIP (DC-64S) | PROM     |
|              | HD6473297P16                   | HD6473297P16                                       | 64-pin shrink DIP (DP-64S)          |          |
|              | HD6473297F16                   | HD6473297F16                                       | 64-pin QFP (FP-64A)                 |          |
|              | HD6473297TF16                  | HD6473297TF16                                      | 80-pin TQFP (TFP-80C)               |          |
| H8/3297      | HD6433297P16<br>HD6433297P12   | HD6433297VP10                                      | 64-pin shrink DIP (DP-64S)          | Mask ROM |
|              | HD6433297F16<br>HD6433297F12   | HD6433297VF10                                      | 64-pin QFP (FP-64A)                 |          |
|              | HD6433297TF16<br>HD6433297TF12 | HD6433297VTF10                                     | 80-pin TQFP (TFP-80C)               |          |
|              |                                |                                                    |                                     |          |
| H8/3296      | HD6433296P16<br>HD6433296P12   | HD6433296VP10                                      | 64-pin shrink DIP (DP-64S)          | Mask ROM |
|              | HD6433296F16<br>HD6433296F12   | HD6433296VF10                                      | 64-pin QFP (FP-64A)                 |          |
|              | HD6433296TF16<br>HD6433296TF12 | HD6433296VTF10                                     | 80-pin TQFP (TFP-80C)               |          |
|              |                                |                                                    |                                     |          |
| H8/3294 ZTAT | HD6473294P16                   | HD6473294P16                                       | 64-pin shrink DIP (DP-64S)          | PROM     |
|              | HD6473294F16                   | HD6473294F16                                       | 64-pin QFP (FP-64A)                 |          |
|              | HD6473294TF16                  | HD6473294TF16                                      | 80-pin TQFP (TFP-80C)               |          |
| H8/3294      | HD6433294P16<br>HD6433294P12   | HD6433294VP10                                      | 64-pin shrink DIP (DP-64S)          | Mask ROM |
|              | HD6433294F16<br>HD6433294F12   | HD6433294VF10                                      | 64-pin QFP (FP-64A)                 |          |
|              | HD6433294TF16<br>HD6433294TF12 | HD6433294VTF10                                     | 80-pin TQFP (TFP-80C)               |          |
|              |                                |                                                    |                                     |          |
| H8/3292      | HD6433292P16<br>HD6433292P12   | HD6433292VP10                                      | 64-pin shrink DIP (DP-64S)          | Mask ROM |
|              | HD6433292F16<br>HD6433292F12   | HD6433292VF10                                      | 64-pin QFP (FP-64A)                 |          |
|              | HD6433292TF16<br>HD6433292TF12 | HD6433292VTF10                                     | 80-pin TQFP (TFP-80C)               |          |
|              |                                |                                                    |                                     |          |

## 1.2 Block Diagram

Figure 1-1 shows a block diagram of the H8/3297 Series.

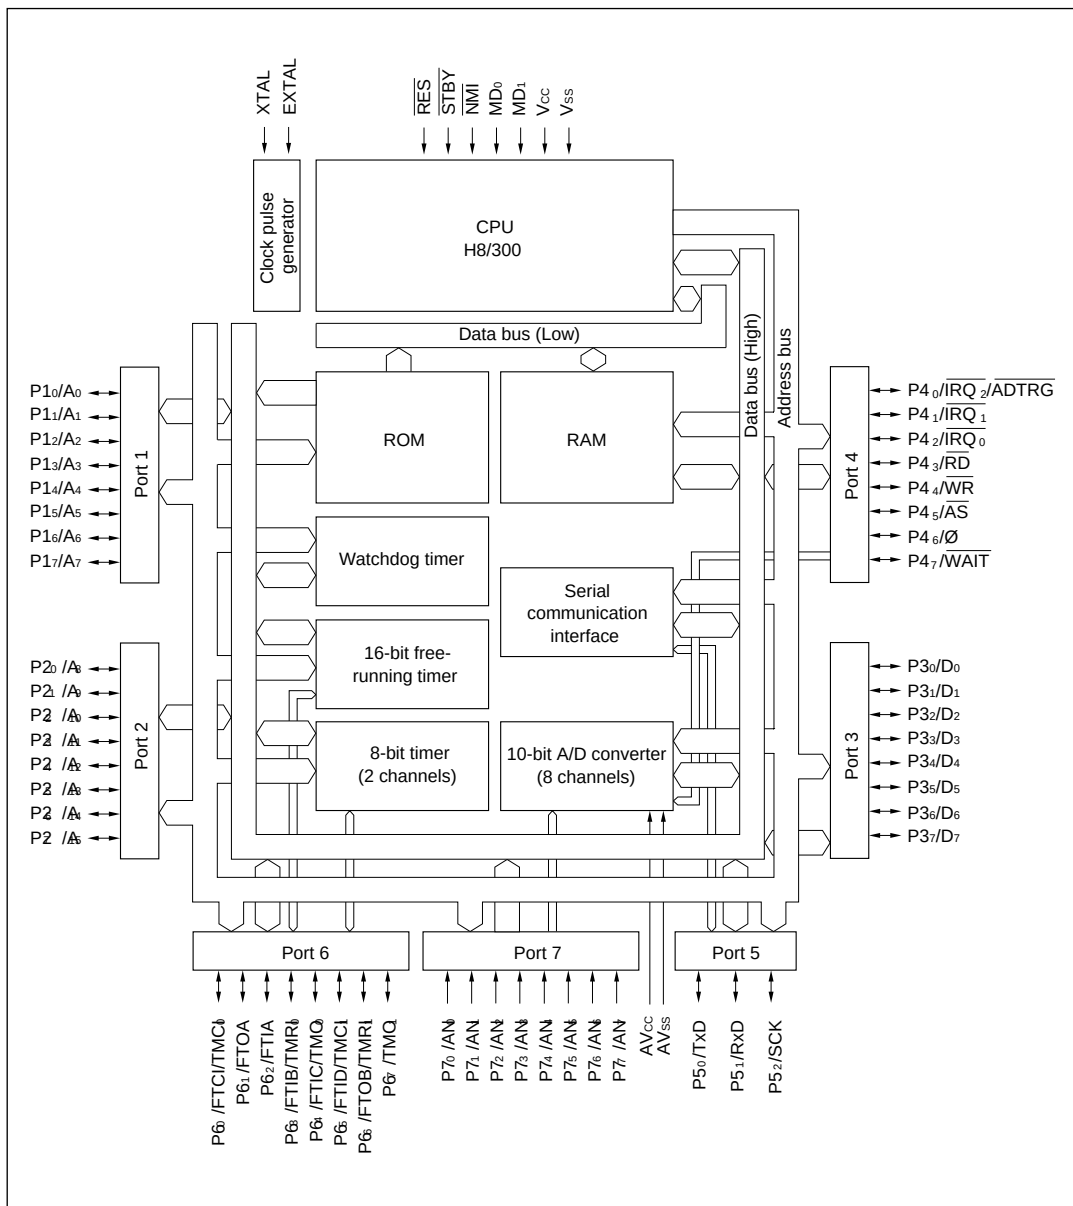


**Figure 1-1 Block Diagram**


## 1.3 Pin Assignments and Functions

### 1.3.1 Pin Arrangement


Figure 1-2 shows the pin arrangement of the DC-64S and DP-64S packages. Figure 1-3 shows the pin arrangement of the FP-64A package. Figure 1-4 shows the pin arrangement of the TFP-80C package.

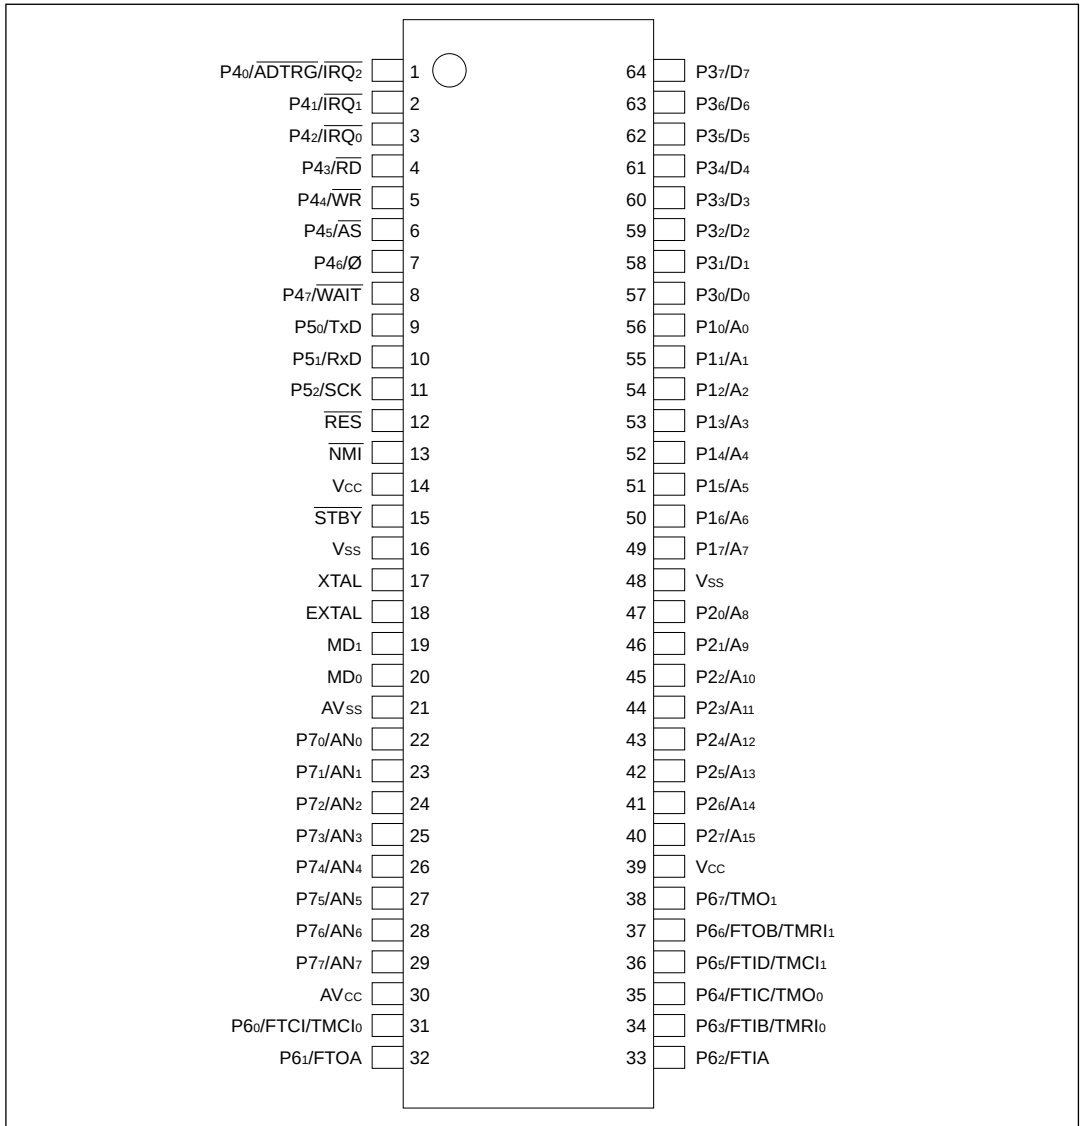

**Figure 1-2 Pin Arrangement (DC-64S and DP-64S, Top view)**

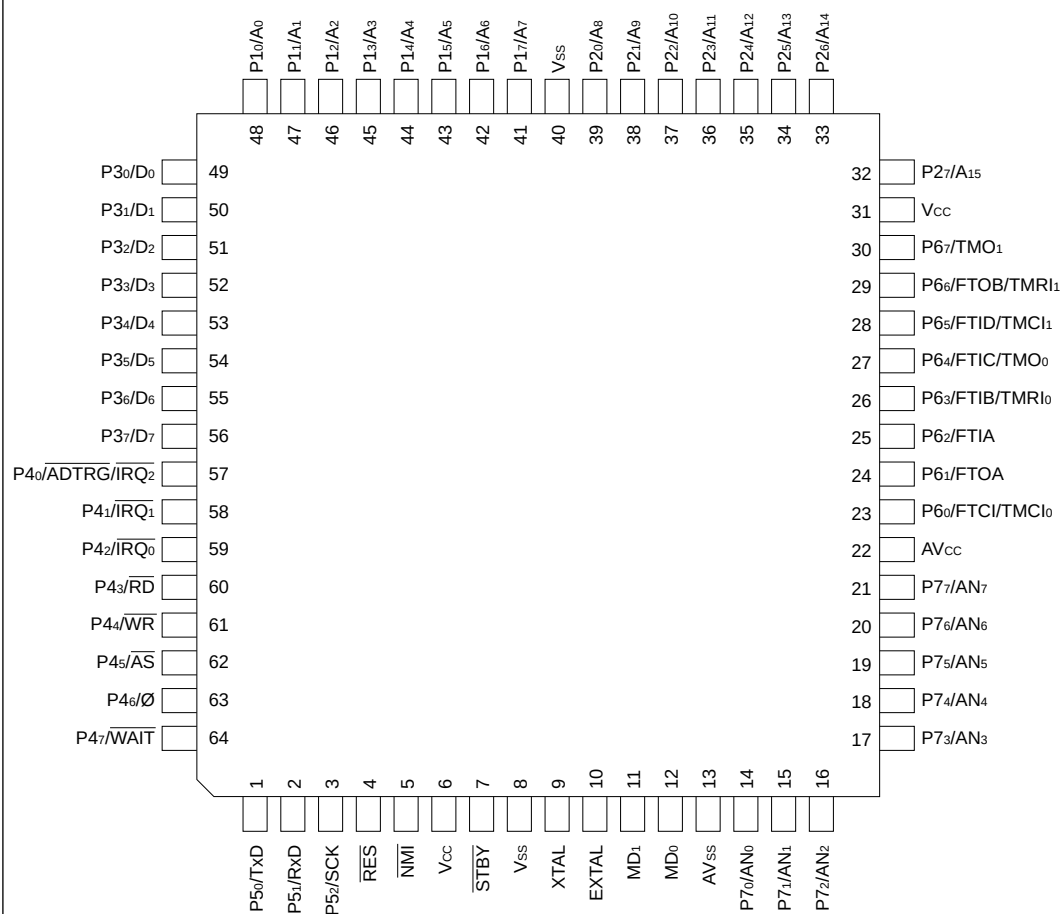

**Figure 1-3 Pin Arrangement (FP-64A, Top view)**

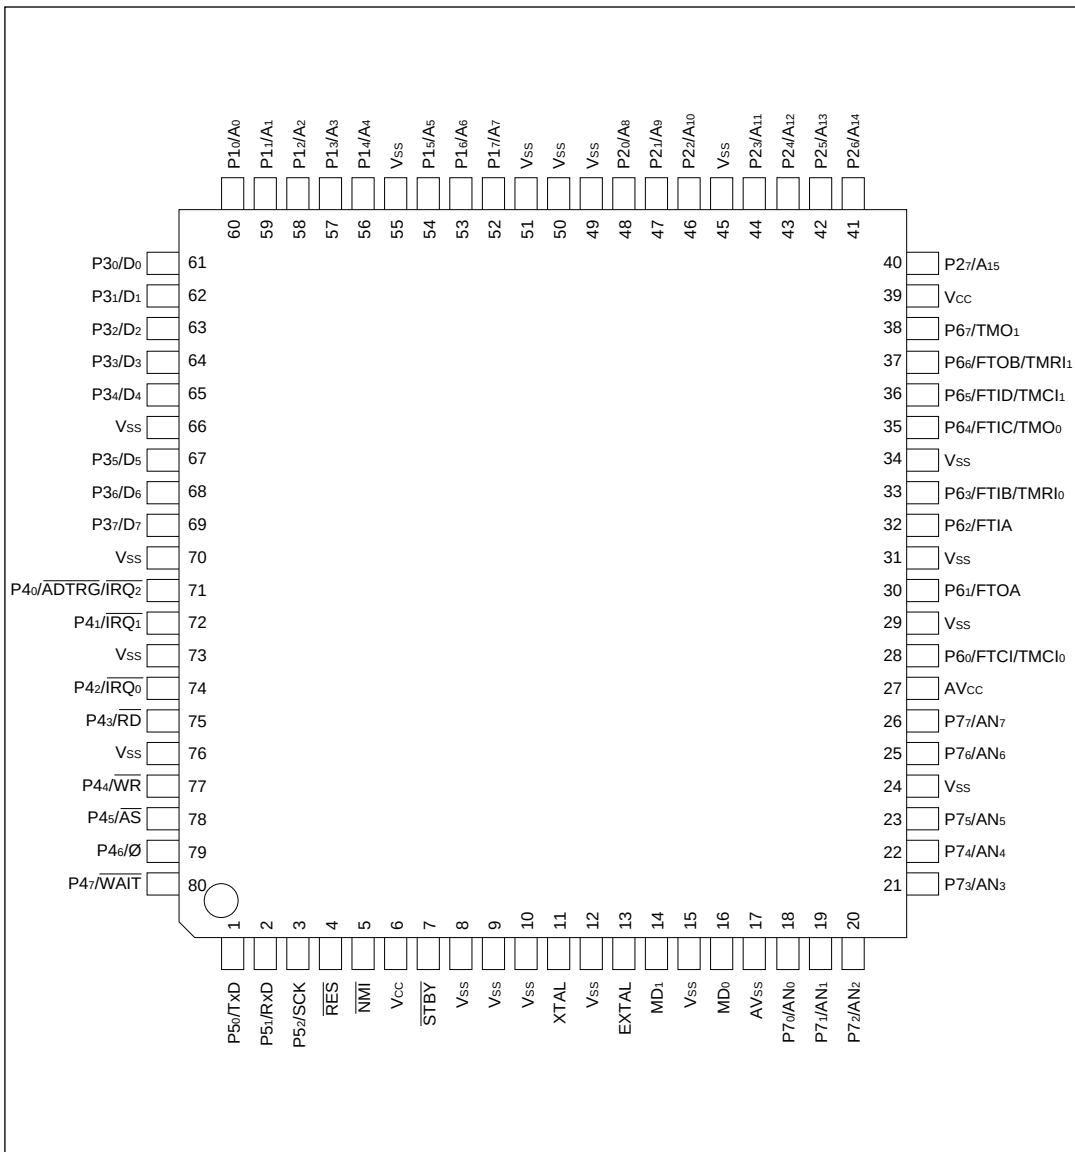

**Figure 1-4 Pin Arrangement (TFP-80C, Top view)**

### 1.3.2 Pin Functions

**(1) Pin Assignments in Each Operating Mode:** Table 1-2 lists the assignments of the pins of the DC-64S, DP-64S, FP-64A, and TFP-80C packages in each operating mode.

**Table 1-2 Pin Assignments in Each Operating Mode**

| Pin No. |        |         |                                          |                                          |                                          |                  |  |
|---------|--------|---------|------------------------------------------|------------------------------------------|------------------------------------------|------------------|--|
| DC-64S  |        |         | Expanded modes                           |                                          | Single-chip mode                         | PROM             |  |
| DP-64S  | FP-64A | TFP-80C | Mode 1                                   | Mode 2                                   | Mode 3                                   | mode             |  |
| 1       | 57     | 71      | P4 <sub>0</sub> /IRQ <sub>2</sub> /ADTRG | P4 <sub>0</sub> /IRQ <sub>2</sub> /ADTRG | P4 <sub>0</sub> /IRQ <sub>2</sub> /ADTRG | EA <sub>16</sub> |  |
| 2       | 58     | 72      | P4 <sub>1</sub> /IRQ <sub>1</sub>        | P4 <sub>1</sub> /IRQ <sub>1</sub>        | P4 <sub>1</sub> /IRQ <sub>1</sub>        | EA <sub>15</sub> |  |
| —       | —      | 73      | V <sub>SS</sub>                          | V <sub>SS</sub>                          | V <sub>SS</sub>                          | V <sub>SS</sub>  |  |
| 3       | 59     | 74      | P4 <sub>2</sub> /IRQ <sub>0</sub>        | P4 <sub>2</sub> /IRQ <sub>0</sub>        | P4 <sub>2</sub> /IRQ <sub>0</sub>        | PGM              |  |
| 4       | 60     | 75      | RD                                       | RD                                       | P4 <sub>3</sub>                          | NC               |  |
| —       | —      | 76      | V <sub>SS</sub>                          | V <sub>SS</sub>                          | V <sub>SS</sub>                          | V <sub>SS</sub>  |  |
| 5       | 61     | 77      | WR                                       | WR                                       | P4 <sub>4</sub>                          | NC               |  |
| 6       | 62     | 78      | AS                                       | AS                                       | P4 <sub>5</sub>                          | NC               |  |
| 7       | 63     | 79      | ∅                                        | ∅                                        | P4 <sub>6</sub> /∅                       | NC               |  |
| 8       | 64     | 80      | P4 <sub>7</sub> /WAIT                    | P4 <sub>7</sub> /WAIT                    | P4 <sub>7</sub>                          | NC               |  |
| 9       | 1      | 1       | P5 <sub>0</sub> /TxD                     | P5 <sub>0</sub> /TxD                     | P5 <sub>0</sub> /TxD                     | NC               |  |
| 10      | 2      | 2       | P5 <sub>1</sub> /RxD                     | P5 <sub>1</sub> /RxD                     | P5 <sub>1</sub> /RxD                     | NC               |  |
| 11      | 3      | 3       | P5 <sub>2</sub> /SCK                     | P5 <sub>2</sub> /SCK                     | P5 <sub>2</sub> /SCK                     | NC               |  |
| 12      | 4      | 4       | RES                                      | RES                                      | RES                                      | V <sub>PP</sub>  |  |
| 13      | 5      | 5       | NMI                                      | NMI                                      | NMI                                      | EA <sub>9</sub>  |  |
| 14      | 6      | 6       | V <sub>CC</sub>                          | V <sub>CC</sub>                          | V <sub>CC</sub>                          | V <sub>CC</sub>  |  |
| 15      | 7      | 7       | STBY                                     | STBY                                     | STBY                                     | V <sub>SS</sub>  |  |
| 16      | 8      | 8       | V <sub>SS</sub>                          | V <sub>SS</sub>                          | V <sub>SS</sub>                          | V <sub>SS</sub>  |  |
| —       | —      | 9       | V <sub>SS</sub>                          | V <sub>SS</sub>                          | V <sub>SS</sub>                          | V <sub>SS</sub>  |  |
| —       | —      | 10      | V <sub>SS</sub>                          | V <sub>SS</sub>                          | V <sub>SS</sub>                          | V <sub>SS</sub>  |  |
| 17      | 9      | 11      | XTAL                                     | XTAL                                     | XTAL                                     | NC               |  |
| —       | —      | 12      | V <sub>SS</sub>                          | V <sub>SS</sub>                          | V <sub>SS</sub>                          | V <sub>SS</sub>  |  |
| 18      | 10     | 13      | EXTAL                                    | EXTAL                                    | EXTAL                                    | NC               |  |
| 19      | 11     | 14      | MD <sub>1</sub>                          | MD <sub>1</sub>                          | MD <sub>1</sub>                          | V <sub>SS</sub>  |  |

Note: Pins marked NC should be left unconnected.

For details on PROM mode, refer to 14.2, PROM Mode.



**Table 1-2 Pin Assignments in Each Operating Mode (cont)**

| Pin No. |        |         |                                         |                                         |                                         |                        |
|---------|--------|---------|-----------------------------------------|-----------------------------------------|-----------------------------------------|------------------------|
| DC-64S  |        |         | Expanded modes                          |                                         | Single-chip mode                        | PROM                   |
| DP-64S  | FP-64A | TFP-80C | Mode 1                                  | Mode 2                                  | Mode 3                                  | mode                   |
| —       | —      | 15      | V <sub>SS</sub>                         | V <sub>SS</sub>                         | V <sub>SS</sub>                         | V <sub>SS</sub>        |
| 20      | 12     | 16      | MD <sub>0</sub>                         | MD <sub>0</sub>                         | MD <sub>0</sub>                         | V <sub>SS</sub>        |
| 21      | 13     | 17      | AV <sub>SS</sub>                        | AV <sub>SS</sub>                        | AV <sub>SS</sub>                        | V <sub>SS</sub>        |
| 22      | 14     | 18      | P7 <sub>0</sub> /AN <sub>0</sub>        | P7 <sub>0</sub> /AN <sub>0</sub>        | P7 <sub>0</sub> /AN <sub>0</sub>        | NC                     |
| 23      | 15     | 19      | P7 <sub>1</sub> /AN <sub>1</sub>        | P7 <sub>1</sub> /AN <sub>1</sub>        | P7 <sub>1</sub> /AN <sub>1</sub>        | NC                     |
| 24      | 16     | 20      | P7 <sub>2</sub> /AN <sub>2</sub>        | P7 <sub>2</sub> /AN <sub>2</sub>        | P7 <sub>2</sub> /AN <sub>2</sub>        | NC                     |
| 25      | 17     | 21      | P7 <sub>3</sub> /AN <sub>3</sub>        | P7 <sub>3</sub> /AN <sub>3</sub>        | P7 <sub>3</sub> /AN <sub>3</sub>        | NC                     |
| 26      | 18     | 22      | P7 <sub>4</sub> /AN <sub>4</sub>        | P7 <sub>4</sub> /AN <sub>4</sub>        | P7 <sub>4</sub> /AN <sub>4</sub>        | NC                     |
| 27      | 19     | 23      | P7 <sub>5</sub> /AN <sub>5</sub>        | P7 <sub>5</sub> /AN <sub>5</sub>        | P7 <sub>5</sub> /AN <sub>5</sub>        | NC                     |
| —       | —      | 24      | V <sub>SS</sub>                         | V <sub>SS</sub>                         | V <sub>SS</sub>                         | V <sub>SS</sub>        |
| 28      | 20     | 25      | P7 <sub>6</sub> /AN <sub>6</sub>        | P7 <sub>6</sub> /AN <sub>6</sub>        | P7 <sub>6</sub> /AN <sub>6</sub>        | NC                     |
| 29      | 21     | 26      | P7 <sub>7</sub> /AN <sub>7</sub>        | P7 <sub>7</sub> /AN <sub>7</sub>        | P7 <sub>7</sub> /AN <sub>7</sub>        | NC                     |
| 30      | 22     | 27      | AV <sub>CC</sub>                        | AV <sub>CC</sub>                        | AV <sub>CC</sub>                        | V <sub>CC</sub>        |
| 31      | 23     | 28      | P6 <sub>0</sub> /FTCI/TMCI <sub>0</sub> | P6 <sub>0</sub> /FTCI/TMCI <sub>0</sub> | P6 <sub>0</sub> /FTCI/TMCI <sub>0</sub> | NC                     |
| —       | —      | 29      | V <sub>SS</sub>                         | V <sub>SS</sub>                         | V <sub>SS</sub>                         | V <sub>SS</sub>        |
| 32      | 24     | 30      | P6 <sub>1</sub> /FTOA                   | P6 <sub>1</sub> /FTOA                   | P6 <sub>1</sub> /FTOA                   | NC                     |
| —       | —      | 31      | V <sub>SS</sub>                         | V <sub>SS</sub>                         | V <sub>SS</sub>                         | V <sub>SS</sub>        |
| 33      | 25     | 32      | P6 <sub>2</sub> /FTIA                   | P6 <sub>2</sub> /FTIA                   | P6 <sub>2</sub> /FTIA                   | NC                     |
| 34      | 26     | 33      | P6 <sub>3</sub> /FTIB/TMRI <sub>0</sub> | P6 <sub>3</sub> /FTIB/TMRI <sub>0</sub> | P6 <sub>3</sub> /FTIB/TMRI <sub>0</sub> | V <sub>CC</sub>        |
| —       | —      | 34      | V <sub>SS</sub>                         | V <sub>SS</sub>                         | V <sub>SS</sub>                         | V <sub>SS</sub>        |
| 35      | 27     | 35      | P6 <sub>4</sub> /FTIC/TMO <sub>0</sub>  | P6 <sub>4</sub> /FTIC/TMO <sub>0</sub>  | P6 <sub>4</sub> /FTIC/TMO <sub>0</sub>  | V <sub>CC</sub>        |
| 36      | 28     | 36      | P6 <sub>5</sub> /FTID/TMCI <sub>1</sub> | P6 <sub>5</sub> /FTID/TMCI <sub>1</sub> | P6 <sub>5</sub> /FTID/TMCI <sub>1</sub> | NC                     |
| 37      | 29     | 37      | P6 <sub>6</sub> /FTOB/TMRI <sub>1</sub> | P6 <sub>6</sub> /FTOB/TMRI <sub>1</sub> | P6 <sub>6</sub> /FTOB/TMRI <sub>1</sub> | NC                     |
| 38      | 30     | 38      | P6 <sub>7</sub> /TMO <sub>1</sub>       | P6 <sub>7</sub> /TMO <sub>1</sub>       | P6 <sub>7</sub> /TMO <sub>1</sub>       | NC                     |
| 39      | 31     | 39      | V <sub>CC</sub>                         | V <sub>CC</sub>                         | V <sub>CC</sub>                         | V <sub>CC</sub>        |
| 40      | 32     | 40      | A <sub>15</sub>                         | A2 <sub>7</sub> /A <sub>15</sub>        | P2 <sub>7</sub>                         | $\overline{\text{CE}}$ |
| 41      | 33     | 41      | A <sub>14</sub>                         | P2 <sub>6</sub> /A <sub>14</sub>        | P2 <sub>6</sub>                         | EA <sub>14</sub>       |
| 42      | 34     | 42      | A <sub>13</sub>                         | P2 <sub>5</sub> /A <sub>13</sub>        | P2 <sub>5</sub>                         | EA <sub>13</sub>       |

Note: Pins marked NC should be left unconnected.

For details on PROM mode, refer to 14.2, PROM Mode.

**Table 1-2 Pin Assignments in Each Operating Mode (cont)**

| Pin No. |        |         |                 |                                  |                  |                        |
|---------|--------|---------|-----------------|----------------------------------|------------------|------------------------|
| DC-64S  |        |         | Expanded modes  |                                  | Single-chip mode | PROM                   |
| DP-64S  | FP-64A | TFP-80C | Mode 1          | Mode 2                           | Mode 3           | mode                   |
| 43      | 35     | 43      | A <sub>12</sub> | P2 <sub>4</sub> /A <sub>12</sub> | P2 <sub>4</sub>  | EA <sub>12</sub>       |
| 44      | 36     | 44      | A <sub>11</sub> | P2 <sub>3</sub> /A <sub>11</sub> | P2 <sub>3</sub>  | EA <sub>11</sub>       |
| —       | —      | 45      | V <sub>SS</sub> | V <sub>SS</sub>                  | V <sub>SS</sub>  | V <sub>SS</sub>        |
| 45      | 37     | 46      | A <sub>10</sub> | P2 <sub>2</sub> /A <sub>10</sub> | P2 <sub>2</sub>  | EA <sub>10</sub>       |
| 46      | 38     | 47      | A <sub>9</sub>  | P2 <sub>1</sub> /A <sub>9</sub>  | P2 <sub>1</sub>  | $\overline{\text{OE}}$ |
| 47      | 39     | 48      | A <sub>8</sub>  | P2 <sub>0</sub> /A <sub>8</sub>  | P2 <sub>0</sub>  | EA <sub>8</sub>        |
| —       | —      | 49      | V <sub>SS</sub> | V <sub>SS</sub>                  | V <sub>SS</sub>  | V <sub>SS</sub>        |
| 48      | 40     | 50      | V <sub>SS</sub> | V <sub>SS</sub>                  | V <sub>SS</sub>  | V <sub>SS</sub>        |
| —       | —      | 51      | V <sub>SS</sub> | V <sub>SS</sub>                  | V <sub>SS</sub>  | V <sub>SS</sub>        |
| 49      | 41     | 52      | A <sub>7</sub>  | P1 <sub>7</sub> /A <sub>7</sub>  | P1 <sub>7</sub>  | EA <sub>7</sub>        |
| 50      | 42     | 53      | A <sub>6</sub>  | P1 <sub>6</sub> /A <sub>6</sub>  | P1 <sub>6</sub>  | EA <sub>6</sub>        |
| 51      | 43     | 54      | A <sub>5</sub>  | P1 <sub>5</sub> /A <sub>5</sub>  | P1 <sub>5</sub>  | EA <sub>5</sub>        |
| —       | —      | 55      | V <sub>SS</sub> | V <sub>SS</sub>                  | V <sub>SS</sub>  | V <sub>SS</sub>        |
| 52      | 44     | 56      | A <sub>4</sub>  | P1 <sub>4</sub> /A <sub>4</sub>  | P1 <sub>4</sub>  | EA <sub>4</sub>        |
| 53      | 45     | 57      | A <sub>3</sub>  | P1 <sub>3</sub> /A <sub>3</sub>  | P1 <sub>3</sub>  | EA <sub>3</sub>        |
| 54      | 46     | 58      | A <sub>2</sub>  | P1 <sub>2</sub> /A <sub>2</sub>  | P1 <sub>2</sub>  | EA <sub>2</sub>        |
| 55      | 47     | 59      | A <sub>1</sub>  | P1 <sub>1</sub> /A <sub>1</sub>  | P1 <sub>1</sub>  | EA <sub>1</sub>        |
| 56      | 48     | 60      | A <sub>0</sub>  | P1 <sub>0</sub> /A <sub>0</sub>  | P1 <sub>0</sub>  | EA <sub>0</sub>        |
| 57      | 49     | 61      | D <sub>0</sub>  | D <sub>0</sub>                   | P3 <sub>0</sub>  | EO <sub>0</sub>        |
| 58      | 50     | 62      | D <sub>1</sub>  | D <sub>1</sub>                   | P3 <sub>1</sub>  | EO <sub>1</sub>        |
| 59      | 51     | 63      | D <sub>2</sub>  | D <sub>2</sub>                   | P3 <sub>2</sub>  | EO <sub>2</sub>        |
| 60      | 52     | 64      | D <sub>3</sub>  | D <sub>3</sub>                   | P3 <sub>3</sub>  | EO <sub>3</sub>        |
| 61      | 53     | 65      | D <sub>4</sub>  | D <sub>4</sub>                   | P3 <sub>4</sub>  | EO <sub>4</sub>        |
| —       | —      | 66      | V <sub>SS</sub> | V <sub>SS</sub>                  | V <sub>SS</sub>  | V <sub>SS</sub>        |
| 62      | 54     | 67      | D <sub>5</sub>  | D <sub>5</sub>                   | P3 <sub>5</sub>  | EO <sub>5</sub>        |
| 63      | 55     | 68      | D <sub>6</sub>  | D <sub>6</sub>                   | P3 <sub>6</sub>  | EO <sub>6</sub>        |
| 64      | 56     | 69      | D <sub>7</sub>  | D <sub>7</sub>                   | P3 <sub>7</sub>  | EO <sub>7</sub>        |
| —       | —      | 70      | V <sub>SS</sub> | V <sub>SS</sub>                  | V <sub>SS</sub>  | V <sub>SS</sub>        |

Note: Pins marked NC should be left unconnected.

For details on PROM mode, refer to 14.2, PROM Mode.

(2) **Pin Functions:** Table 1-3 gives a concise description of the function of each pin.

**Table 1-3 Pin Functions**

| Type           | Symbol            | Pin No.               |                       |                                                                                     | I/O | Name and function                                                                                                                                                                                                                                                            |
|----------------|-------------------|-----------------------|-----------------------|-------------------------------------------------------------------------------------|-----|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                |                   | DC-64S<br>DP-64S      | FP-64A                | TFP-80C                                                                             |     |                                                                                                                                                                                                                                                                              |
| Power          | $V_{CC}$          | 14, 39                | 6, 31                 | 6, 39                                                                               | I   | <b>Power:</b> Connected to the power supply (+5 V or +3 V). Connect both $V_{CC}$ pins to the system power supply (+5 V or +3 V).                                                                                                                                            |
|                | $V_{SS}$          | 16, 48                | 8, 40                 | 8, 9, 10,<br>12, 15, 24,<br>29, 31, 34,<br>45, 49, 50,<br>51, 55, 66,<br>70, 73, 76 | I   | <b>Ground:</b> Connected to ground (0 V). Connect all $V_{SS}$ pins to system ground (0 V).                                                                                                                                                                                  |
| Clock          | XTAL              | 17                    | 9                     | 11                                                                                  | I   | <b>Crystal:</b> Connected to a crystal oscillator. The crystal frequency should be the same as the desired system clock frequency. If an external clock is input at the EXTAL pin, a reverse-phase clock should be input at the XTAL pin.                                    |
|                | EXTAL             | 18                    | 10                    | 13                                                                                  | I   | <b>External crystal:</b> Connected to a crystal oscillator or external clock. The frequency of the external clock should be the same as the desired system clock frequency. See section 6.2, Oscillator Circuit for examples of connections to a crystal and external clock. |
|                | $\emptyset$       | 7                     | 63                    | 79                                                                                  | O   | <b>System clock:</b> Supplies the system clock to peripheral devices.                                                                                                                                                                                                        |
| System control | $\overline{RES}$  | 12                    | 4                     | 4                                                                                   | I   | <b>Reset:</b> A Low input causes the chip to reset.                                                                                                                                                                                                                          |
|                | $\overline{STBY}$ | 15                    | 7                     | 7                                                                                   | I   | <b>Standby:</b> A transition to the hardware standby mode (a power-down state) occurs when a Low input is received at the $\overline{STBY}$ pin.                                                                                                                             |
| Address bus    | $A_{15}$ to $A_0$ | 40 to 47,<br>49 to 56 | 32 to 39,<br>41 to 48 | 40 to 44,<br>46 to 48,<br>52 to 54,<br>56 to 60                                     | O   | <b>Address bus:</b> Address output pins.                                                                                                                                                                                                                                     |

**Table 1-3 Pin Functions (cont)**

|                        |                                                        | Pin No.          |                                         |                       |     |                                                                                                                                                                                                                                                                                                                                                                                                   |                 |                 |      |             |   |   |        |                                         |   |   |        |                                        |   |   |        |                  |
|------------------------|--------------------------------------------------------|------------------|-----------------------------------------|-----------------------|-----|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|-----------------|------|-------------|---|---|--------|-----------------------------------------|---|---|--------|----------------------------------------|---|---|--------|------------------|
| Type                   | Symbol                                                 | DC-64S<br>DP-64S | FP-64A                                  | TFP-80C               | I/O | Name and function                                                                                                                                                                                                                                                                                                                                                                                 |                 |                 |      |             |   |   |        |                                         |   |   |        |                                        |   |   |        |                  |
| Data bus               | D <sub>7</sub> to D <sub>0</sub>                       | 64 to 57         | 56 to 49                                | 65 to 61,<br>69 to 67 | I/O | <b>Data bus:</b> 8-Bit bidirectional data bus.                                                                                                                                                                                                                                                                                                                                                    |                 |                 |      |             |   |   |        |                                         |   |   |        |                                        |   |   |        |                  |
| Bus control            | $\overline{\text{WAIT}}$                               | 8                | 64                                      | 80                    | I   | <b>Wait:</b> Requests the CPU to insert wait states into the bus cycle when an external address is accessed.                                                                                                                                                                                                                                                                                      |                 |                 |      |             |   |   |        |                                         |   |   |        |                                        |   |   |        |                  |
|                        | $\overline{\text{RD}}$                                 | 4                | 60                                      | 75                    | O   | <b>Read:</b> Goes Low to indicate that the CPU is reading an external address.                                                                                                                                                                                                                                                                                                                    |                 |                 |      |             |   |   |        |                                         |   |   |        |                                        |   |   |        |                  |
|                        | $\overline{\text{WR}}$                                 | 5                | 61                                      | 77                    | O   | <b>Write:</b> Goes Low to indicate that the CPU is writing to an external address.                                                                                                                                                                                                                                                                                                                |                 |                 |      |             |   |   |        |                                         |   |   |        |                                        |   |   |        |                  |
|                        | $\overline{\text{AS}}$                                 | 6                | 62                                      | 78                    | O   | <b>Address strobe:</b> Goes Low to indicate that there is a valid address on the address bus.                                                                                                                                                                                                                                                                                                     |                 |                 |      |             |   |   |        |                                         |   |   |        |                                        |   |   |        |                  |
| Interrupt signals      | $\overline{\text{NMI}}$                                | 13               | 5                                       | 5                     | I   | <b>Nonmaskable interrupt:</b> Highest-priority interrupt request. The NMIEG bit in the system control register (SYSCR) determines whether the interrupt is recognized at the rising or falling edge of the NMI input.                                                                                                                                                                             |                 |                 |      |             |   |   |        |                                         |   |   |        |                                        |   |   |        |                  |
|                        | $\overline{\text{IRQ}}_0$ to $\overline{\text{IRQ}}_2$ | 1 to 3           | 57 to 59                                | 71, 72, 74            | I   | <b>Interrupt request 0 to 2:</b> Maskable interrupt request pins.                                                                                                                                                                                                                                                                                                                                 |                 |                 |      |             |   |   |        |                                         |   |   |        |                                        |   |   |        |                  |
| Operating mode control | MD <sub>1</sub> ,<br>MD <sub>0</sub>                   | 19,<br>20        | 11,<br>12                               | 14,<br>16             | I   | <b>Mode:</b> Input pins for setting the MCU operating mode according to the table below.                                                                                                                                                                                                                                                                                                          |                 |                 |      |             |   |   |        |                                         |   |   |        |                                        |   |   |        |                  |
|                        |                                                        |                  |                                         |                       |     |                                                                                                                                                                                                                                                                                                                                                                                                   |                 |                 |      |             |   |   |        |                                         |   |   |        |                                        |   |   |        |                  |
|                        |                                                        |                  |                                         |                       |     |                                                                                                                                                                                                                                                                                                                                                                                                   |                 |                 |      |             |   |   |        |                                         |   |   |        |                                        |   |   |        |                  |
|                        |                                                        |                  |                                         |                       |     |                                                                                                                                                                                                                                                                                                                                                                                                   |                 |                 |      |             |   |   |        |                                         |   |   |        |                                        |   |   |        |                  |
|                        |                                                        |                  |                                         |                       |     |                                                                                                                                                                                                                                                                                                                                                                                                   |                 |                 |      |             |   |   |        |                                         |   |   |        |                                        |   |   |        |                  |
|                        |                                                        |                  |                                         |                       |     | <table><thead><tr><th>MD<sub>1</sub></th><th>MD<sub>0</sub></th><th>Mode</th><th>Description</th></tr></thead><tbody><tr><td>0</td><td>1</td><td>Mode 1</td><td>Expanded mode with on-chip ROM disabled</td></tr><tr><td>1</td><td>0</td><td>Mode 2</td><td>Expanded mode with on-chip ROM enabled</td></tr><tr><td>1</td><td>1</td><td>Mode 3</td><td>Single-chip mode</td></tr></tbody></table> | MD <sub>1</sub> | MD <sub>0</sub> | Mode | Description | 0 | 1 | Mode 1 | Expanded mode with on-chip ROM disabled | 1 | 0 | Mode 2 | Expanded mode with on-chip ROM enabled | 1 | 1 | Mode 3 | Single-chip mode |
| MD <sub>1</sub>        | MD <sub>0</sub>                                        | Mode             | Description                             |                       |     |                                                                                                                                                                                                                                                                                                                                                                                                   |                 |                 |      |             |   |   |        |                                         |   |   |        |                                        |   |   |        |                  |
| 0                      | 1                                                      | Mode 1           | Expanded mode with on-chip ROM disabled |                       |     |                                                                                                                                                                                                                                                                                                                                                                                                   |                 |                 |      |             |   |   |        |                                         |   |   |        |                                        |   |   |        |                  |
| 1                      | 0                                                      | Mode 2           | Expanded mode with on-chip ROM enabled  |                       |     |                                                                                                                                                                                                                                                                                                                                                                                                   |                 |                 |      |             |   |   |        |                                         |   |   |        |                                        |   |   |        |                  |
| 1                      | 1                                                      | Mode 3           | Single-chip mode                        |                       |     |                                                                                                                                                                                                                                                                                                                                                                                                   |                 |                 |      |             |   |   |        |                                         |   |   |        |                                        |   |   |        |                  |

**Table 1-3 Pin Functions (cont)**

| Type                                 | Symbol                                | Pin No.          |          |                  | I/O | Name and function                                                                                                                                                                                         |
|--------------------------------------|---------------------------------------|------------------|----------|------------------|-----|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                      |                                       | DC-64S<br>DP-64S | FP-64A   | TFP-80C          |     |                                                                                                                                                                                                           |
| 16-bit free-running timer (FRT)      | FTOA, FTOB                            | 32, 37           | 24, 29   | 30, 37           | O   | <b>FRT output compare A and B:</b> Output pins controlled by comparators A and B of the free-running timer.                                                                                               |
|                                      | FTCI                                  | 31               | 23       | 28               | I   | <b>FRT counter clock input:</b> Input pin for an external clock signal for the free-running timer.                                                                                                        |
|                                      | FTIA to FTID                          | 33 to 36         | 25 to 28 | 32, 33, 35, 36   | I   | <b>FRT input capture A to D:</b> Input capture pins for the free-running timer.                                                                                                                           |
| 8-bit timer                          | TMO <sub>0</sub> , TMO <sub>1</sub>   | 35, 38           | 27, 30   | 35, 38           | O   | <b>8-bit timer output (channels 0 and 1):</b> Compare-match output pins for the 8-bit timers.                                                                                                             |
|                                      | TMCI <sub>0</sub> , TMCI <sub>1</sub> | 31, 36           | 23, 28   | 28, 36           | I   | <b>8-bit timer counter clock input (channels 0 and 1):</b> External clock input pins for the 8-bit timer counters.                                                                                        |
|                                      | TMRI <sub>0</sub> , TMRI <sub>1</sub> | 34, 37           | 26, 29   | 33, 37           | I   | <b>8-bit timer counter reset input (channels 0 and 1):</b> A High input at these pins resets the 8-bit timer counters.                                                                                    |
| Serial communication interface (SCI) | TxD                                   | 9                | 1        | 1                | O   | <b>Transmit data:</b> Data output pin for the serial communication interface.                                                                                                                             |
|                                      | RxD                                   | 10               | 2        | 2                | I   | <b>Receive data:</b> Data input pin for the serial communication interface.                                                                                                                               |
|                                      | SCK                                   | 11               | 3        | 3                | I/O | <b>Serial clock:</b> Input/output pin for the serial clock.                                                                                                                                               |
| A/D converter                        | AN <sub>7</sub> to AN <sub>0</sub>    | 29 to 22         | 21 to 14 | 26, 25, 23 to 18 | I   | <b>Analog input:</b> Analog signal input pins for the A/D converter.                                                                                                                                      |
|                                      | ADTRG                                 | 1                | 57       | 71               | I   | <b>A/D trigger:</b> External trigger input for starting the A/D converter.                                                                                                                                |
|                                      | AV <sub>CC</sub>                      | 30               | 22       | 27               | I   | <b>Programmable Wait Mode:</b> The number of wait states ( $T_W$ ) selected by bits WC1 and WC0 are inserted in all accesses to external addresses, regardless of the $\overline{\text{WAIT}}$ pin state. |
|                                      | AV <sub>SS</sub>                      | 21               | 13       | 17               | I   | <b>Analog ground:</b> Ground pin for the A/D converter. Connect to system ground.                                                                                                                         |

**Table 1-3 Pin Functions (cont)**

| Type                | Symbol                             | Pin No.          |          |                                | I/O | Name and function                                                                                                                                                                                   |
|---------------------|------------------------------------|------------------|----------|--------------------------------|-----|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                     |                                    | DC-64S<br>DP-64S | FP-64A   | TFP-80C                        |     |                                                                                                                                                                                                     |
| General-purpose I/O | P1 <sub>7</sub> to P1 <sub>0</sub> | 49 to 56         | 41 to 48 | 52 to 54,<br>56 to 60          | I/O | <b>Port 1:</b> An 8-bit input/output port with programmable MOS input pull-ups and LED driving capability. The direction of each bit can be selected in the port 1 data direction register (P1DDR). |
|                     | P2 <sub>7</sub> to P2 <sub>0</sub> | 40 to 47         | 32 to 39 | 40 to 44,<br>46 to 48          | I/O | <b>Port 2:</b> An 8-bit input/output port with programmable MOS input pull-ups and LED driving capability. The direction of each bit can be selected in the port 2 data direction register (P2DDR). |
|                     | P3 <sub>7</sub> to P3 <sub>0</sub> | 64 to 57         | 56 to 49 | 69 to 67,<br>65 to 61          | I/O | <b>Port 3:</b> An 8-bit input/output port with programmable MOS input pull-ups. The direction of each bit can be selected in the port 3 data direction register (P3DDR).                            |
|                     | P4 <sub>7</sub> to P4 <sub>0</sub> | 8 to 1           | 64 to 57 | 80 to 77,<br>75, 74, 72,<br>71 | I/O | <b>Port 4:</b> An 8-bit input/output port. The direction of each bit can be selected in the port 4 data direction register (P4DDR).                                                                 |
|                     | P5 <sub>2</sub> to P5 <sub>0</sub> | 11 to 9          | 3 to 1   | 3 to 1                         | I/O | <b>Port 5:</b> A 3-bit input/output port. The direction of each bit can be selected in the port 5 data direction register (P5DDR).                                                                  |
|                     | P6 <sub>7</sub> to P6 <sub>0</sub> | 38 to 31         | 30 to 23 | 38 to 35,<br>33, 32, 30,<br>28 | I/O | <b>Port 6:</b> An 8-bit input/output port. The direction of each bit can be selected in the port 6 data direction register (P6DDR).                                                                 |
|                     | P7 <sub>7</sub> to P7 <sub>0</sub> | 29 to 22         | 21 to 14 | 26, 25,<br>23 to 18            | I   | <b>Port 7:</b> An 8-bit input port.                                                                                                                                                                 |



## 2.1 Overview

The H8/300 CPU is a fast central processing unit with eight 16-bit general registers (also configurable as 16 eight-bit registers) and a concise instruction set designed for high-speed operation.

### 2.1.1 Features

The main features of the H8/300 CPU are listed below.

- Two-way register configuration
  - Sixteen 8-bit general registers, or
  - Eight 16-bit general registers
- Instruction set with 57 basic instructions, including:
  - Multiply and divide instructions
  - Powerful bit-manipulation instructions
- Eight addressing modes
  - Register direct (Rn)
  - Register indirect (@Rn)
  - Register indirect with displacement (@(d:16, Rn))
  - Register indirect with post-increment or pre-decrement (@Rn+ or @-Rn)
  - Absolute address (@aa:8 or @aa:16)
  - Immediate (#xx:8 or #xx:16)
  - PC-relative (@(d:8, PC))
  - Memory indirect (@@aa:8)
- Maximum 64-kbyte address space
- High-speed operation
  - All frequently-used instructions are executed in two to four states
- Maximum clock rate (ø clock): 16 MHz at 5 V, 12 MHz at 4 V or 10 MHz at 3 V
  - 8- or 16-bit register-register add or subtract: 125 ns (16 MHz), 167 ns (12 MHz), 200 ns (10 MHz)
  - $8 \times$  8-bit multiply: 875 ns (16 MHz), 1167 ns (12 MHz), 1400 ns (10 MHz)
  - $16 \div$  8-bit divide: 875 ns (16 MHz), 1167 ns (12 MHz), 1400 ns (10 MHz)
- Power-down mode
  - SLEEP instruction



2.1.2 Address Space

The H8/300 CPU supports an address space with a maximum size of 64 kbytes for program code and data combined. The memory map differs depending on the mode (mode 1, 2, or 3). For details, see section 3.4, Address Space Map in Each Operating Mode.

2.1.3 Register Configuration

Figure 2-1 shows the internal register structure of the H8/300 CPU. There are two groups of registers: the general registers and control registers.

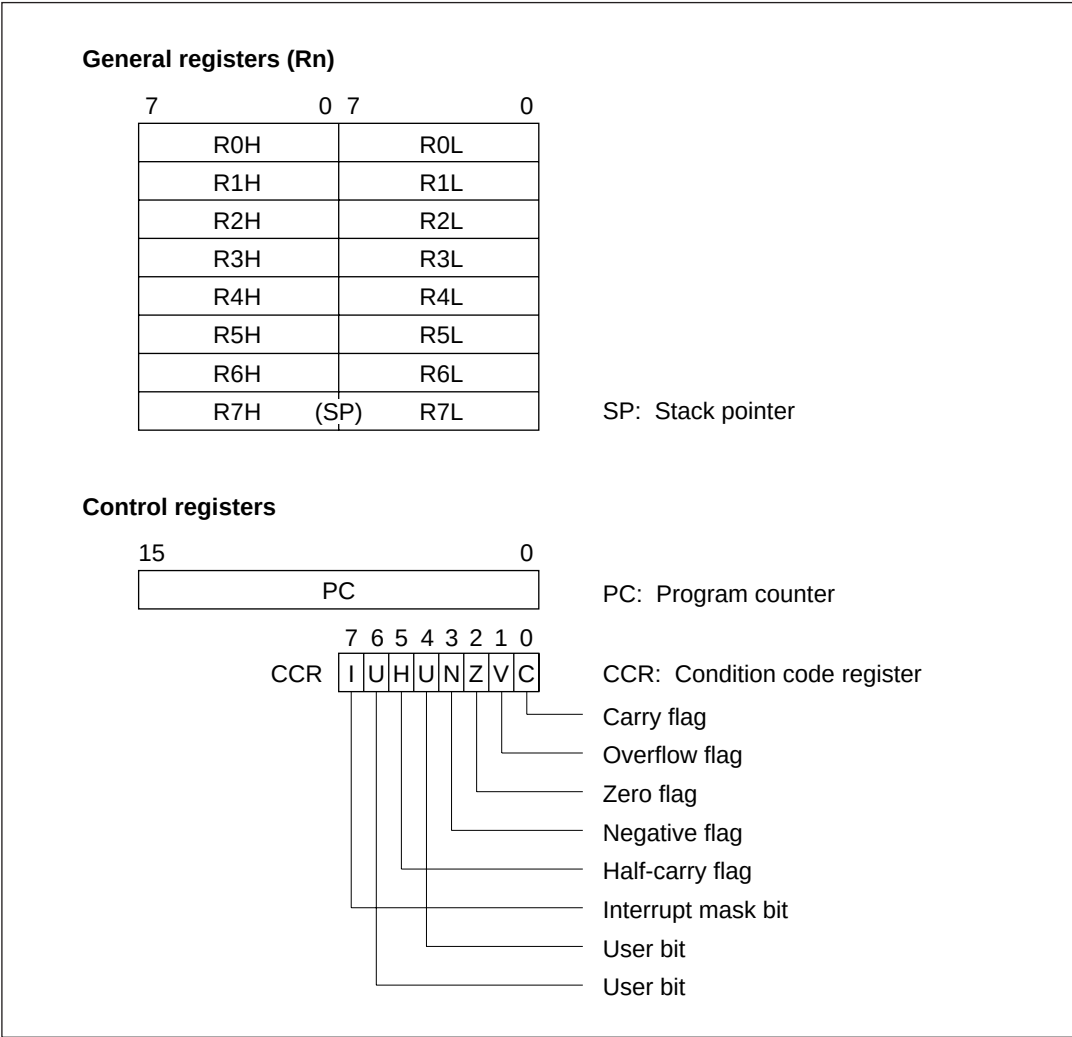


Figure 2-1 CPU Registers

## 2.2 Register Descriptions

### 2.2.1 General Registers

All the general registers can be used as both data registers and address registers. When used as address registers, the general registers are accessed as 16-bit registers (R0 to R7). When used as data registers, they can be accessed as 16-bit registers, or the high and low bytes can be accessed separately as 8-bit registers (R0H to R7H and R0L to R7L).

R7 also functions as the stack pointer, used implicitly by hardware in processing interrupts and subroutine calls. In assembly-language coding, R7 can also be denoted by the letters SP. As indicated in figure 2-2, R7 (SP) points to the top of the stack.

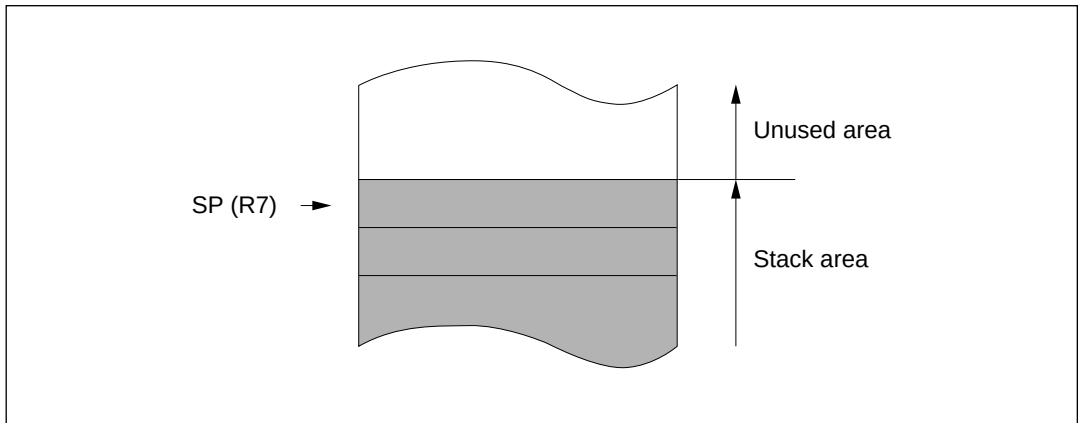


Figure 2-2 Stack Pointer

### 2.2.2 Control Registers

The CPU control registers include a 16-bit program counter (PC) and an 8-bit condition code register (CCR).

**(1) Program Counter (PC):** This 16-bit register indicates the address of the next instruction the CPU will execute. Each instruction is accessed in 16 bits (1 word), so the least significant bit of the PC is ignored (always regarded as 0).

**(2) Condition Code Register (CCR):** This 8-bit register contains internal status information, including carry (C), overflow (V), zero (Z), negative (N), and half-carry (H) flags and the interrupt mask bit (I).

**Bit 7—Interrupt Mask Bit (I):** When this bit is set to 1, all interrupts except NMI are masked. This bit is set to 1 automatically by a reset and at the start of interrupt handling.

**Bit 6—User Bit (U):** This bit can be written and read by software (using the LDC, STC, ANDC, ORC, and XORC instructions).

**Bit 5—Half-Carry Flag (H):** This flag is set to 1 when the ADD.B, ADDX.B, SUB.B, SUBX.B, NEG.B, or CMP.B instruction causes a carry or borrow out of bit 3, and is cleared to 0 otherwise. Similarly, it is set to 1 when the ADD.W, SUB.W, or CMP.W instruction causes a carry or borrow out of bit 11, and cleared to 0 otherwise. It is used implicitly in the DAA and DAS instructions.

**Bit 4—User Bit (U):** This bit can be written and read by software (using the LDC, STC, ANDC, ORC, and XORC instructions).

**Bit 3—Negative Flag (N):** This flag indicates the most significant bit (sign bit) of the result of an instruction.

**Bit 2—Zero Flag (Z):** This flag is set to 1 to indicate a zero result and cleared to 0 to indicate a nonzero result.

**Bit 1—Overflow Flag (V):** This flag is set to 1 when an arithmetic overflow occurs, and cleared to 0 at other times.

**Bit 0—Carry Flag (C):** This flag is used by:

- Add and subtract instructions, to indicate a carry or borrow at the most significant bit of the result
- Shift and rotate instructions, to store the value shifted out of the most significant or least significant bit
- Bit manipulation and bit load instructions, as a bit accumulator

The LDC, STC, ANDC, ORC, and XORC instructions enable the CPU to load and store the CCR, and to set or clear selected bits by logic operations. The N, Z, V, and C flags are used in conditional branching instructions (B<sub>CC</sub>).

For the action of each instruction on the flag bits, see the *H8/300 Series Programming Manual*.

### 2.2.3 Initial Register Values

When the CPU is reset, the program counter (PC) is loaded from the vector table and the interrupt mask bit (I) in the CCR is set to 1. The other CCR bits and the general registers are not initialized. In particular, the stack pointer (R7) is not initialized. The stack pointer and CCR should be initialized by software, by the first instruction executed after a reset.

## 2.3 Data Formats

The H8/300 CPU can process 1-bit data, 4-bit (BCD) data, 8-bit (byte) data, and 16-bit (word) data.

- Bit manipulation instructions operate on 1-bit data specified as bit  $n$  ( $n = 0, 1, 2, \dots, 7$ ) in a byte operand.
- All arithmetic and logic instructions except ADDS and SUBS can operate on byte data.
- The DAA and DAS instruction perform decimal arithmetic adjustments on byte data in packed BCD form. Each nibble of the byte is treated as a decimal digit.
- The MOV.W, ADD.W, SUB.W, CMP.W, ADDS, SUBS, MULXU ( $8 \text{ bits} \times 8 \text{ bits}$ ), and DIVXU ( $16 \text{ bits} \div 8 \text{ bits}$ ) instructions operate on word data.

2.3.1 Data Formats in General Registers

Data of all the sizes above can be stored in general registers as shown in figure 2-3.

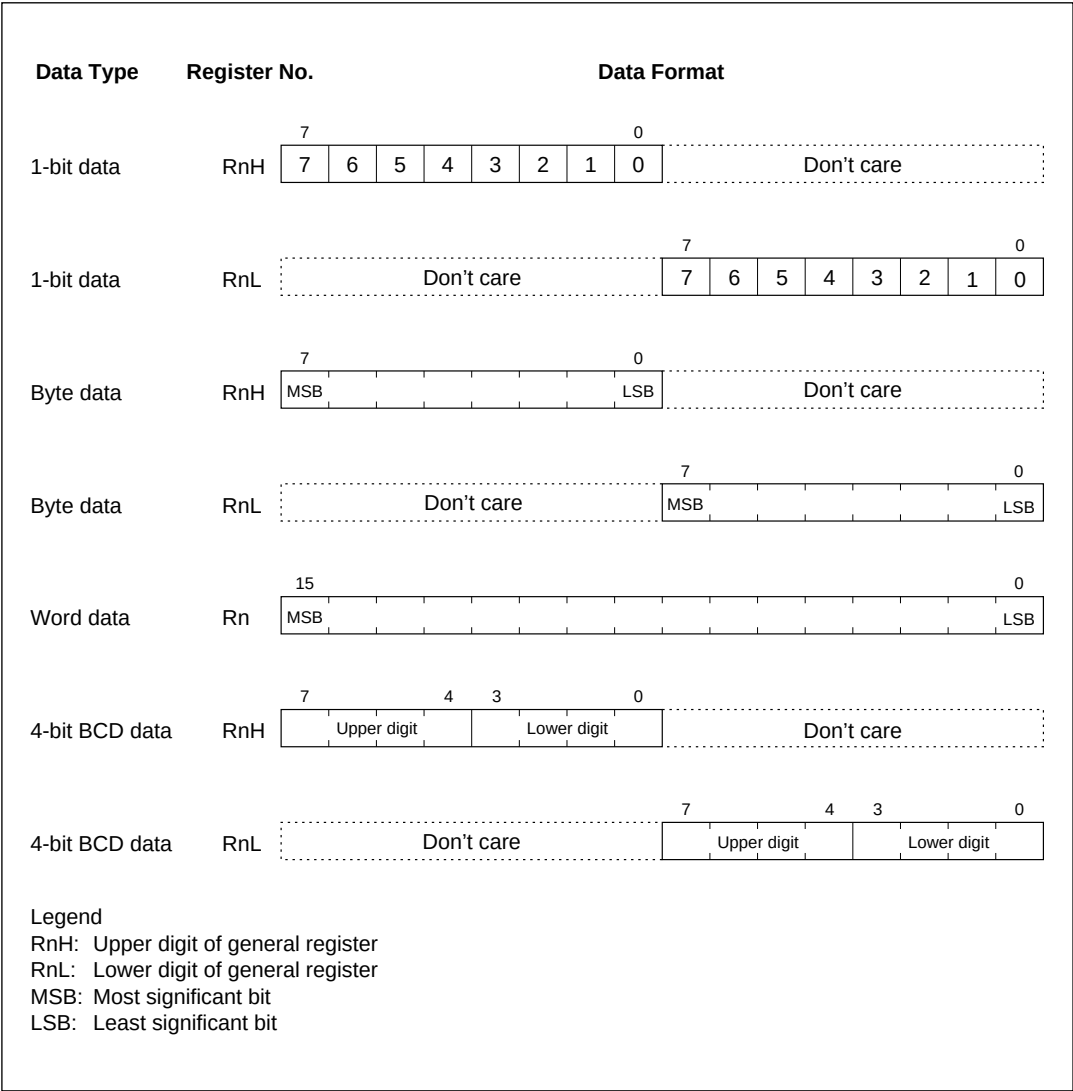


Figure 2-3 Register Data Formats

2.3.2 Memory Data Formats

Figure 2-4 indicates the data formats in memory.

Word data stored in memory must always begin at an even address. In word access the least significant bit of the address is regarded as 0. If an odd address is specified, no address error occurs but the access is performed at the preceding even address. This rule affects MOV.W instructions and branching instructions, and implies that only even addresses should be stored in the vector table.

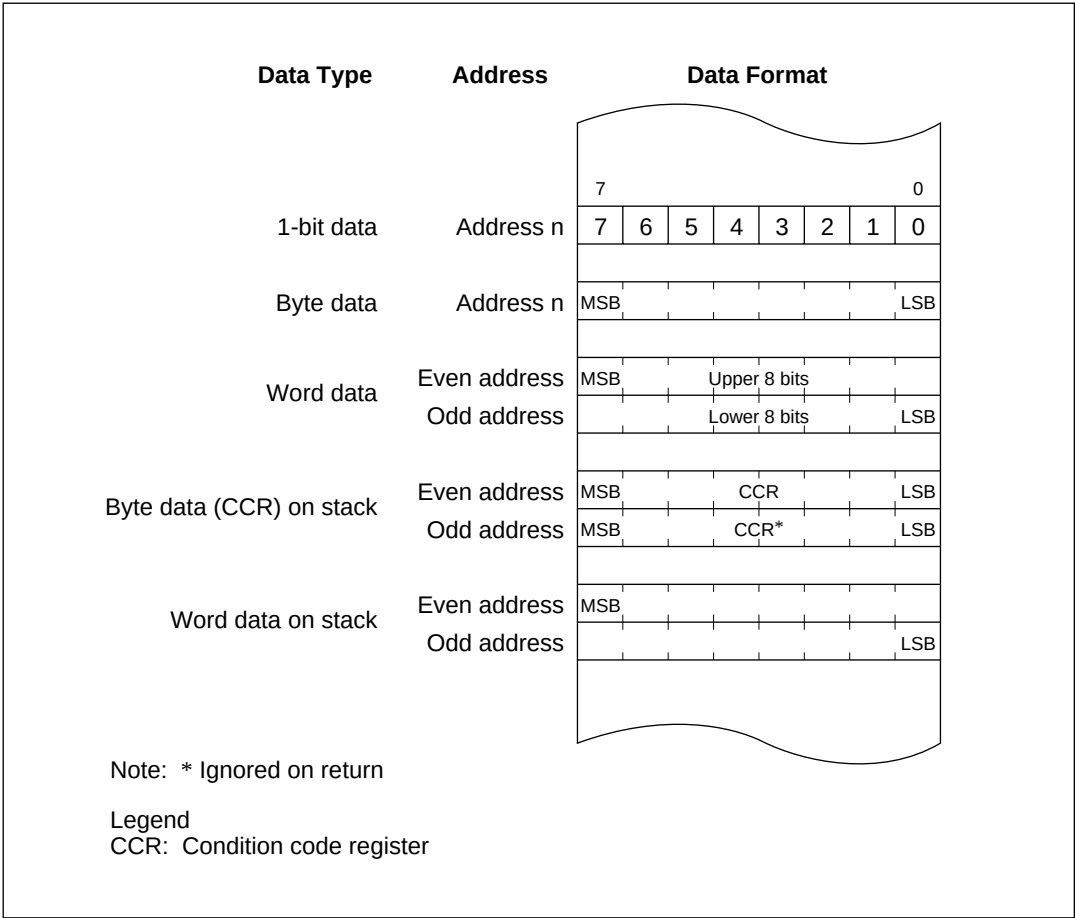


Figure 2-4 Memory Data Formats

When the stack is addressed by register R7, it must always be accessed a word at a time. When the CCR is pushed on the stack, two identical copies of the CCR are pushed to make a complete word. When they are restored, the lower byte is ignored.

## 2.4 Addressing Modes

### 2.4.1 Addressing Mode

The H8/300 CPU supports eight addressing modes. Each instruction uses a subset of these addressing modes.

**Table 2-1 Addressing Modes**

| No. | Addressing Mode                                                               | Symbol          |
|-----|-------------------------------------------------------------------------------|-----------------|
| (1) | Register direct                                                               | Rn              |
| (2) | Register indirect                                                             | @Rn             |
| (3) | Register indirect with displacement                                           | @(d:16, Rn)     |
| (4) | Register indirect with post-increment<br>Register indirect with pre-decrement | @Rn+<br>@-Rn    |
| (5) | Absolute address                                                              | @aa:8 or @aa:16 |
| (6) | Immediate                                                                     | #xx:8 or #xx:16 |
| (7) | Program-counter-relative                                                      | @(d:8, PC)      |
| (8) | Memory indirect                                                               | @@aa:8          |

**(1) Register Direct—Rn:** The register field of the instruction specifies an 8- or 16-bit general register containing the operand. In most cases the general register is accessed as an 8-bit register. Only the MOV.W, ADD.W, SUB.W, CMP.W, ADDS, SUBS, MULXU (8 bits × 8 bits), and DIVXU (16 bits ÷ 8 bits) instructions have 16-bit operands.

**(2) Register Indirect—@Rn:** The register field of the instruction specifies a 16-bit general register containing the address of the operand.

**(3) Register Indirect with Displacement—@(d:16, Rn):** This mode, which is used only in MOV instructions, is similar to register indirect but the instruction has a second word (bytes 3 and 4) which is added to the contents of the specified general register to obtain the operand address. For the MOV.W instruction, the resulting address must be even.

**(4) Register Indirect with Post-Increment or Pre-Decrement—@Rn+ or @-Rn:**

- Register indirect with Post-Increment—@Rn+

The @Rn+ mode is used with MOV instructions that load registers from memory.

It is similar to the register indirect mode, but the 16-bit general register specified in the register field of the instruction is incremented after the operand is accessed. The size of the increment is 1 or 2 depending on the size of the operand: 1 for MOV.B; 2 for MOV.W. For MOV.W, the original contents of the 16-bit general register must be even.

- **Register Indirect with Pre-Decrement—@-Rn**

The @-Rn mode is used with MOV instructions that store register contents to memory.

It is similar to the register indirect mode, but the 16-bit general register specified in the register field of the instruction is decremented before the operand is accessed. The size of the decrement is 1 or 2 depending on the size of the operand: 1 for MOV.B; 2 for MOV.W. For MOV.W, the original contents of the 16-bit general register must be even.

**(5) Absolute Address—@aa:8 or @aa:16:** The instruction specifies the absolute address of the operand in memory. The MOV.B instruction uses an 8-bit absolute address of the form H'FFxx. The upper 8 bits are assumed to be 1, so the possible address range is H'FF00 to H'FFFF (65280 to 65535). The MOV.B, MOV.W, JMP, and JSR instructions can use 16-bit absolute addresses.

**(6) Immediate—#xx:8 or #xx:16:** The instruction contains an 8-bit operand in its second byte, or a 16-bit operand in its third and fourth bytes. Only MOV.W instructions can contain 16-bit immediate values.

The ADDS and SUBS instructions implicitly contain the value 1 or 2 as immediate data. Some bit manipulation instructions contain 3-bit immediate data (#xx:3) in the second or fourth byte of the instruction, specifying a bit number.

**(7) Program-Counter-Relative—@(d:8, PC):** This mode is used to generate branch addresses in the Bcc and BSR instructions. An 8-bit value in byte 2 of the instruction code is added as a sign-extended value to the program counter contents. The result must be an even number. The possible branching range is -126 to +128 bytes (-63 to +64 words) from the current address.

**(8) Memory Indirect—@@aa:8:** This mode can be used by the JMP and JSR instructions. The second byte of the instruction code specifies an 8-bit absolute address from H'0000 to H'00FF (0 to 255). The word located at this address contains the branch address. The upper 8 bits of the absolute address are 0 (H'00), thus the branch address is limited to values from 0 to 255 (H'0000 to H'00FF). Note that some of the addresses in this range are also used in the vector table. Refer to section 3.4, Address Space Map in Each Operating Mode.

If an odd address is specified as a branch destination or as the operand address of a MOV.W instruction, the least significant bit is regarded as 0, causing word access to be performed at the address preceding the specified address. See section 2.3.2, Memory Data Formats, for further information.



## 2.4.2 Calculation of Effective Address

Table 2-2 shows how the H8/300 calculates effective addresses in each addressing mode.

Arithmetic, logic, and shift instructions use register direct addressing (1). The ADD.B, ADDX.B, SUBX.B, CMP.B, AND.B, OR.B, and XOR.B instructions can also use immediate addressing (6).

The MOV instruction uses all the addressing modes except program-counter relative (7) and memory indirect (8).

Bit manipulation instructions use register direct (1), register indirect (2), or 8-bit absolute (5) addressing to identify a byte operand, and 3-bit immediate addressing to identify a bit within the byte. The BSET, BCLR, BNOT, and BTST instructions can also use register direct addressing (1) to identify the bit.

Table 2-2 Effective Address Calculation

| No. | Addressing Mode and Instruction Format                                                                | Effective Address Calculation                                                                                                                       | Effective Address                                                                                        |
|-----|-------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|
| 1   | Register direct, Rn<br><div><div>1587430</div><div>opregmreg</div></div>                              | <div><div>1516150</div><div>16-bit register contents</div></div>                                                                                    | <div><div>303</div><div>regmreg</div></div> <div>Operands are contained in registers regm and regn</div> |
| 2   | Register indirect, @Rn<br><div><div>1576430</div><div>opreg</div></div>                               | <div><div>1516150</div><div>16-bit register contents</div></div>                                                                                    |                                                                                                          |
| 3   | Register indirect with displacement, @(d:16, Rn)<br><div><div>1576430</div><div>opregdisp</div></div> | <div><div>1516150</div><div>16-bit register contents</div></div> <div><div>15150</div><div>disp</div></div> <div><div>15150</div><div>+</div></div> | <div><div>15150</div></div>                                                                              |
| 4   | Register indirect with post-increment, @Rn+<br><div><div>1576430</div><div>opreg</div></div>          | <div><div>1516150</div><div>16-bit register contents</div></div> <div><div>15150</div><div>+</div><div>1 or 2*</div></div>                          | <div><div>15150</div></div>                                                                              |
|     | Register indirect with pre-decrement, @-Rn<br><div><div>1576430</div><div>opreg</div></div>           | <div><div>1516150</div><div>16-bit register contents</div></div> <div><div>15150</div><div>-</div><div>1 or 2*</div></div>                          | <div><div>15150</div></div>                                                                              |

Note: \* 1 for a byte operand, 2 for a word operand

Table 2-2 Effective Address Calculation (cont)

| No. | Addressing Mode and Instruction Format | Effective Address Calculation                | Effective address                          |
|-----|----------------------------------------|----------------------------------------------|--------------------------------------------|
| 5   | Absolute address<br>@aa:8              | <div><div>15870</div><div>opabs</div></div>  | <div><div>15870</div><div>H'FF</div></div> |
|     |                                        | <div><div>15870</div><div>opabs</div></div>  | <div><div>15870</div><div></div></div>     |
| 6   | Immediate<br>#xx:8                     | <div><div>15870</div><div>opIMM</div></div>  |                                            |
|     |                                        | <div><div>15870</div><div>opIMM</div></div>  |                                            |
| 7   | PC-relative<br>@(d:8, PC)              | <div><div>15870</div><div>opdisp</div></div> | <div><div>15870</div><div></div></div>     |
|     |                                        | <div><div>15870</div><div>opdisp</div></div> | <div><div>15870</div><div></div></div>     |

Operand is 1- or 2-byte immediate data

Table 2-2 Effective Address Calculation (cont)

| Addressing Mode and Instruction Format |                         | Effective Address Calculation                                                                                                                                                                                                                                                                                                                                                                                                                                      | Effective Address |
|----------------------------------------|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|
| 8                                      | Memory indirect, @@aa:8 | <p>The diagram illustrates the effective address calculation for the memory indirect addressing mode. It starts with an instruction format divided into three parts: 'op' (bits 15-8), 'aa' (bits 7-0), and 'abs' (bits 15-0). The 'op' field points to a memory location containing the value 'H'00'. This value points to another memory location containing the value '0'. This '0' then points to a final memory location, which is the effective address.</p> |                   |

Legend

- reg: General register
- op: Operation code
- disp: Displacement
- IMM: Immediate data
- abs: Absolute address

## 2.5 Instruction Set

The H8/300 CPU has 57 types of instructions, which are classified by function in table 2-3.

**Table 2-3 Instruction Classification**

| Function              | Instructions                                                                            | Types    |
|-----------------------|-----------------------------------------------------------------------------------------|----------|
| Data transfer         | MOV, MOVTP <sup>*3</sup> , MOVFP <sup>*3</sup> , PUSH <sup>*1</sup> , POP <sup>*1</sup> | 3        |
| Arithmetic operations | ADD, SUB, ADDX, SUBX, INC, DEC, ADDS, SUBS, DAA, DAS, MULXU, DIVXU, CMP, NEG            | 14       |
| Logic operations      | AND, OR, XOR, NOT                                                                       | 4        |
| Shift                 | SHAL, SHAR, SHLL, SHLR, ROTL, ROTR, ROTXL, ROTXR                                        | 8        |
| Bit manipulation      | BSET, BCLR, BNOT, BTST, BAND, BAND, BOR, BIOR, BXOR, BIXOR, BLD, BILD, BST, BIST        | 14       |
| Branch                | Bcc <sup>*2</sup> , JMP, BSR, JSR, RTS                                                  | 5        |
| System control        | RTE, SLEEP, LDC, STC, ANDC, ORC, XORC, NOP                                              | 8        |
| Block data transfer   | EEPMOV                                                                                  | 1        |
|                       |                                                                                         | Total 57 |

- Notes: 1. PUSH Rn is equivalent to MOV.W Rn, @-SP.  
 POP Rn is equivalent to MOV.W @SP+, Rn.  
 2. Bcc is a conditional branch instruction in which cc represents a condition code.  
 3. Not supported by the H8/3297 Series.

The following sections give a concise summary of the instructions in each category, and indicate the bit patterns of their object code. The notation used is defined next.

### Operation Notation

|       |                                |        |                       |
|-------|--------------------------------|--------|-----------------------|
| Rd    | General register (destination) | #xx:3  | 3-Bit immediate data  |
| Rs    | General register (source)      | #xx:8  | 8-Bit immediate data  |
| Rn    | General register               | #xx:16 | 16-Bit immediate data |
| (EAd) | Destination operand            | disp   | Displacement          |
| (EAs) | Source operand                 | +      | Addition              |
| SP    | Stack pointer                  | -      | Subtraction           |
| PC    | Program counter                | ×      | Multiplication        |
| CCR   | Condition code register        | ÷      | Division              |
| N     | N (negative) flag of CCR       | ^      | AND logical           |
| Z     | Z (zero) flag of CCR           | ∨      | OR logical            |
| V     | V (overflow) flag of CCR       | ⊕      | Exclusive OR logical  |
| C     | C (carry) flag of CCR          | →      | Move                  |
| #imm  | Immediate data                 | ¬      | Not                   |


## 2.5.1 Data Transfer Instructions

Table 2-4 describes the data transfer instructions. Figure 2-5 shows their object code formats.

**Table 2-4 Data Transfer Instructions**

| Instruction | Size* | Function                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-------------|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| MOV         | B/W   | (EAs) → Rd, Rs → (EAd)<br>Moves data between two general registers or between a general register and memory, or moves immediate data to a general register. The Rn, @Rn, @(d:16, Rn), @aa:16, #xx:8 or #xx:16, @-Rn, and @Rn+ addressing modes are available for byte or word data. The @aa:8 addressing mode is available for byte data only. The @-R7 and @R7+ modes require word operands. Do not specify byte size for these two modes. |
| MOVTPE      | B     | Not supported by the H8/3437 Series.                                                                                                                                                                                                                                                                                                                                                                                                        |
| MOVFPPE     | B     | Not supported by the H8/3437 Series.                                                                                                                                                                                                                                                                                                                                                                                                        |
| PUSH        | W     | Rn → @-SP<br>Pushes a 16-bit general register onto the stack. Equivalent to MOV.W Rn, @-SP.                                                                                                                                                                                                                                                                                                                                                 |
| POP         | W     | @SP+ → Rn<br>Pops a 16-bit general register from the stack. Equivalent to MOV.W @SP+, Rn.                                                                                                                                                                                                                                                                                                                                                   |

Note: \* Size: Operand size  
B: Byte  
W: Word

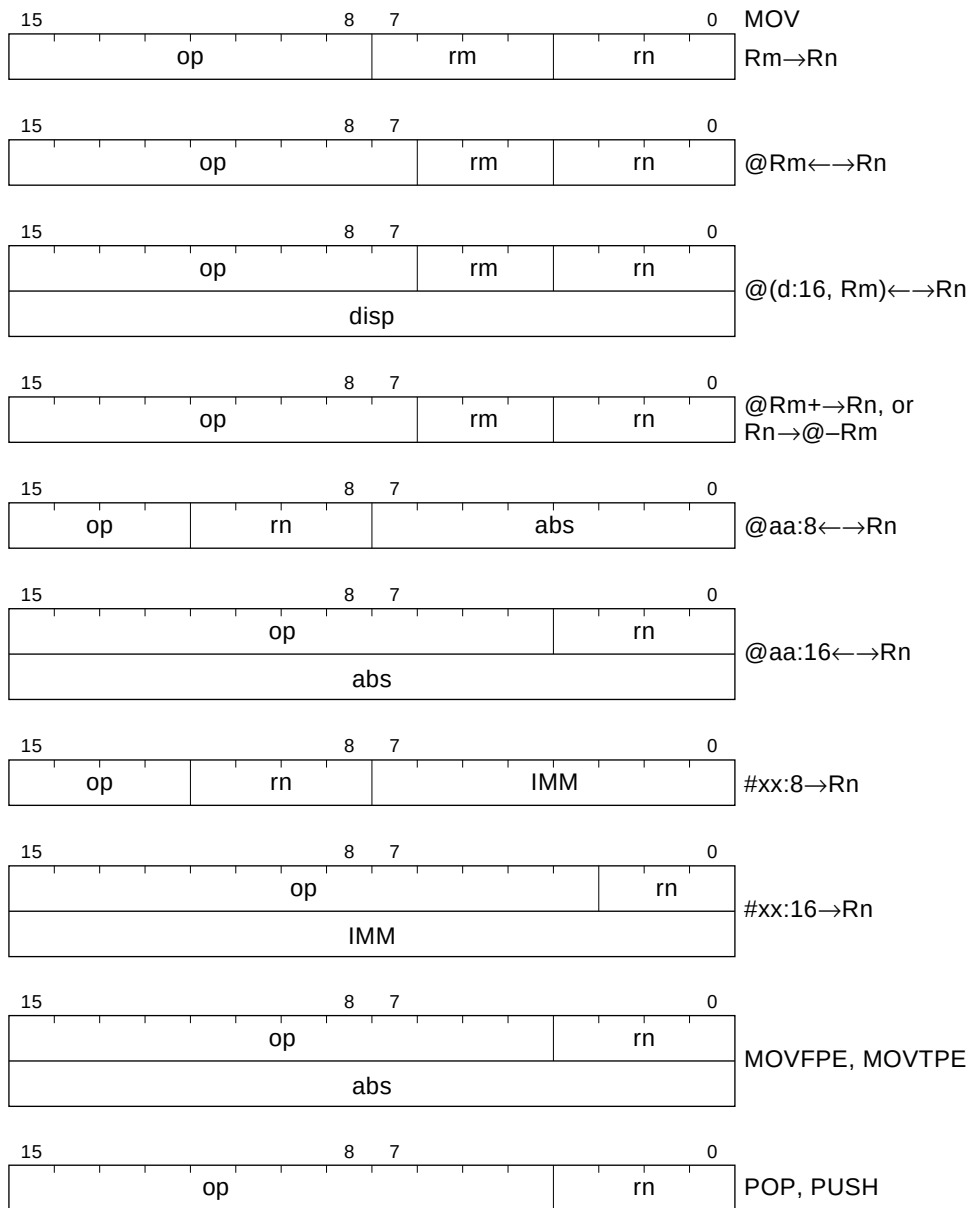

**Legend**

op: Operation field  
 rm, rn: Register field  
 disp: Displacement  
 abs: Absolute address  
 IMM: Immediate data

**Figure 2-5 Data Transfer Instruction Codes**

## 2.5.2 Arithmetic Operations

Table 2-5 describes the arithmetic instructions. See figure 2-6 in section 2.5.4, Shift Operations, for their object codes.

**Table 2-5 Arithmetic Instructions**

| Instruction  | Size* | Function                                                                                                                                                                                                                                                                                                                                              |
|--------------|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ADD<br>SUB   | B/W   | $Rd \pm Rs \rightarrow Rd$ , $Rd + \#imm \rightarrow Rd$<br>Performs addition or subtraction on data in two general registers, or addition on immediate data and data in a general register. Immediate data cannot be subtracted from data in a general register. Word data can be added or subtracted only when both words are in general registers. |
| ADDX<br>SUBX | B     | $Rd \pm Rs \pm C \rightarrow Rd$ , $Rd \pm \#imm \pm C \rightarrow Rd$<br>Performs addition or subtraction with carry or borrow on byte data in two general registers, or addition or subtraction on immediate data and data in a general register.                                                                                                   |
| INC<br>DEC   | B     | $Rd \pm \#1 \rightarrow Rd$<br>Increments or decrements a general register.                                                                                                                                                                                                                                                                           |
| ADDS<br>SUBS | W     | $Rd \pm \#imm \rightarrow Rd$<br>Adds or subtracts immediate data to or from data in a general register. The immediate data must be 1 or 2.                                                                                                                                                                                                           |
| DAA<br>DAS   | B     | $Rd \text{ decimal adjust} \rightarrow Rd$<br>Decimal-adjusts (adjusts to packed BCD) an addition or subtraction result in a general register by referring to the CCR.                                                                                                                                                                                |
| MULXU        | B     | $Rd \times Rs \rightarrow Rd$<br>Performs 8-bit $\times$ 8-bit unsigned multiplication on data in two general registers, providing a 16-bit result.                                                                                                                                                                                                   |
| DIVXU        | B     | $Rd \div Rs \rightarrow Rd$<br>Performs 16-bit $\div$ 8-bit unsigned division on data in two general registers, providing an 8-bit quotient and 8-bit remainder.                                                                                                                                                                                      |
| CMP          | B/W   | $Rd - Rs$ , $Rd - \#imm$<br>Compares data in a general register with data in another general register or with immediate data. Word data can be compared only between two general registers.                                                                                                                                                           |
| NEG          | B     | $0 - Rd \rightarrow Rd$<br>Obtains the two's complement (arithmetic complement) of data in a general register.                                                                                                                                                                                                                                        |

Note: \* Size: Operand size  
B: Byte  
W: Word



### 2.5.3 Logic Operations

Table 2-6 describes the four instructions that perform logic operations. See figure 2-6 in section 2.5.4, Shift Operations, for their object codes.

**Table 2-6 Logic Operation Instructions**

| Instruction | Size* | Function                                                                                                                                                                            |
|-------------|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| AND         | B     | $Rd \wedge Rs \rightarrow Rd$ , $Rd \wedge \#imm \rightarrow Rd$<br>Performs a logical AND operation on a general register and another general register or immediate data.          |
| OR          | B     | $Rd \vee Rs \rightarrow Rd$ , $Rd \vee \#imm \rightarrow Rd$<br>Performs a logical OR operation on a general register and another general register or immediate data.               |
| XOR         | B     | $Rd \oplus Rs \rightarrow Rd$ , $Rd \oplus \#imm \rightarrow Rd$<br>Performs a logical exclusive OR operation on a general register and another general register or immediate data. |
| NOT         | B     | $\neg (Rd) \rightarrow (Rd)$<br>Obtains the one's complement (logical complement) of general register contents.                                                                     |

Note: \* Size: Operand size  
B: Byte


### 2.5.4 Shift Operations

Table 2-7 describes the eight shift instructions. Figure 2-6 shows the object code formats of the arithmetic, logic, and shift instructions.

**Table 2-7 Shift Instructions**

| Instruction    | Size* | Function                                                                                                         |
|----------------|-------|------------------------------------------------------------------------------------------------------------------|
| SHAL<br>SHAR   | B     | $Rd \text{ shift} \rightarrow Rd$<br>Performs an arithmetic shift operation on general register contents.        |
| SHLL<br>SHLR   | B     | $Rd \text{ shift} \rightarrow Rd$<br>Performs a logical shift operation on general register contents.            |
| ROTL<br>ROTR   | B     | $Rd \text{ rotate} \rightarrow Rd$<br>Rotates general register contents.                                         |
| ROTXL<br>ROTXR | B     | $Rd \text{ rotate through carry} \rightarrow Rd$<br>Rotates general register contents through the C (carry) bit. |

Note: \* Size: Operand size  
B: Byte

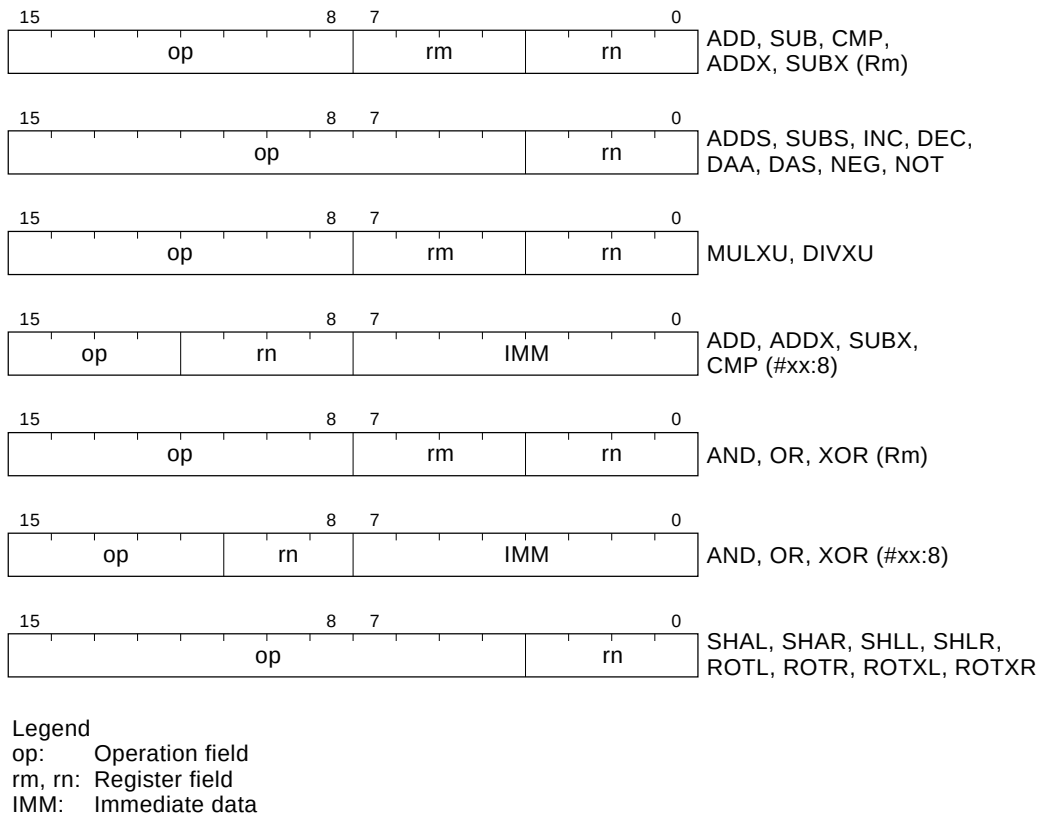

**Figure 2-6   Arithmetic, Logic, and Shift Instruction Codes**

## 2.5.5 Bit Manipulations

Table 2-8 describes the bit-manipulation instructions. Figure 2-7 shows their object code formats.

**Table 2-8 Bit-Manipulation Instructions**

| Instruction | Size* | Function                                                                                                                                                                                                                                                                                                                                      |
|-------------|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| BSET        | B     | $1 \rightarrow \langle \text{bit no.} \rangle \text{ of } \langle \text{EAd} \rangle$<br>Sets a specified bit in a general register or memory to 1. The bit is specified by a bit number, given in 3-bit immediate data or the lower three bits of a general register.                                                                        |
| BCLR        | B     | $0 \rightarrow \langle \text{bit no.} \rangle \text{ of } \langle \text{EAd} \rangle$<br>Clears a specified bit in a general register or memory to 0. The bit is specified by a bit number, given in 3-bit immediate data or the lower three bits of a general register.                                                                      |
| BNOT        | B     | $\neg \langle \text{bit no.} \rangle \text{ of } \langle \text{EAd} \rangle \rightarrow \langle \text{bit no.} \rangle \text{ of } \langle \text{EAd} \rangle$<br>Inverts a specified bit in a general register or memory. The bit is specified by a bit number, given in 3-bit immediate data or the lower three bits of a general register. |
| BTST        | B     | $\neg \langle \text{bit no.} \rangle \text{ of } \langle \text{EAd} \rangle \rightarrow Z$<br>Tests a specified bit in a general register or memory and sets or clears the Z flag accordingly. The bit is specified by a bit number, given in 3-bit immediate data or the lower three bits of a general register.                             |
| BAND        | B     | $C \wedge \langle \text{bit no.} \rangle \text{ of } \langle \text{EAd} \rangle \rightarrow C$<br>ANDs the C flag with a specified bit in a general register or memory.                                                                                                                                                                       |
| BIAND       |       | $C \wedge [\neg \langle \text{bit no.} \rangle \text{ of } \langle \text{EAd} \rangle] \rightarrow C$<br>ANDs the C flag with the inverse of a specified bit in a general register or memory.<br>The bit number is specified by 3-bit immediate data.                                                                                         |
| BOR         | B     | $C \vee \langle \text{bit no.} \rangle \text{ of } \langle \text{EAd} \rangle \rightarrow C$<br>ORs the C flag with a specified bit in a general register or memory.                                                                                                                                                                          |
| BIOR        |       | $C \vee [\neg \langle \text{bit no.} \rangle \text{ of } \langle \text{EAd} \rangle] \rightarrow C$<br>ORs the C flag with the inverse of a specified bit in a general register or memory.<br>The bit number is specified by 3-bit immediate data.                                                                                            |
| BXOR        | B     | $C \oplus \langle \text{bit no.} \rangle \text{ of } \langle \text{EAd} \rangle \rightarrow C$<br>XORs the C flag with a specified bit in a general register or memory.                                                                                                                                                                       |

Note: \* Size: Operand size  
B: Byte

**Table 2-8 Bit-Manipulation Instructions (cont)**

| Instruction | Size* | Function                                                                                                                                                                                                    |
|-------------|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| BIXOR       | B     | $C \oplus \neg [(\text{<bit no.> of <EAd>})] \rightarrow C$<br>XORs the C flag with the inverse of a specified bit in a general register or memory.<br>The bit number is specified by 3-bit immediate data. |
| BLD         | B     | $(\text{<bit no.> of <EAd>}) \rightarrow C$<br>Copies a specified bit in a general register or memory to the C flag.                                                                                        |
| BILD        |       | $\neg (\text{<bit no.> of <EAd>}) \rightarrow C$<br>Copies the inverse of a specified bit in a general register or memory to the C flag.<br>The bit number is specified by 3-bit immediate data.            |
| BST         | B     | $C \rightarrow (\text{<bit no.> of <EAd>})$<br>Copies the C flag to a specified bit in a general register or memory.                                                                                        |
| BIST        |       | $\neg C \rightarrow (\text{<bit no.> of <EAd>})$<br>Copies the inverse of the C flag to a specified bit in a general register or memory.<br>The bit number is specified by 3-bit immediate data.            |

Note: \* Size: Operand size  
B: Byte

**Notes on Bit Manipulation Instructions:** BSET, BCLR, BNOT, BST, and BIST are read-modify-write instructions. They read a byte of data, modify one bit in the byte, then write the byte back. Care is required when these instructions are applied to registers with write-only bits and to the I/O port registers.

| Step |        | Description                                                |
|------|--------|------------------------------------------------------------|
| 1    | Read   | Read one data byte at the specified address                |
| 2    | Modify | Modify one bit in the data byte                            |
| 3    | Write  | Write the modified data byte back to the specified address |

**Example 1:** BCLR is executed to clear bit 0 in the port 1 data direction register (P1DDR) under the following conditions.

P1<sub>7</sub>: Input pin, low  
P1<sub>6</sub>: Input pin, high  
P1<sub>5</sub> – P1<sub>0</sub>: Output pins, low

The intended purpose of this BCLR instruction is to switch P1<sub>0</sub> from output to input.

### Before Execution of BCLR Instruction

|              | P1 <sub>7</sub> | P1 <sub>6</sub> | P1 <sub>5</sub> | P1 <sub>4</sub> | P1 <sub>3</sub> | P1 <sub>2</sub> | P1 <sub>1</sub> | P1 <sub>0</sub> |
|--------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| Input/output | Input           | Input           | Output          | Output          | Output          | Output          | Output          | Output          |
| Pin state    | Low             | High            | Low             | Low             | Low             | Low             | Low             | Low             |
| DDR          | 0               | 0               | 1               | 1               | 1               | 1               | 1               | 1               |
| DR           | 1               | 0               | 0               | 0               | 0               | 0               | 0               | 0               |

### Execution of BCLR Instruction

BCLR #0, @P1DDR ;clear bit 0 in data direction register

### After Execution of BCLR Instruction

|              | P1 <sub>7</sub> | P1 <sub>6</sub> | P1 <sub>5</sub> | P1 <sub>4</sub> | P1 <sub>3</sub> | P1 <sub>2</sub> | P1 <sub>1</sub> | P1 <sub>0</sub> |
|--------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| Input/output | Output          | Output          | Output          | Output          | Output          | Output          | Output          | Input           |
| Pin state    | Low             | High            | Low             | Low             | Low             | Low             | Low             | High            |
| DDR          | 1               | 1               | 1               | 1               | 1               | 1               | 1               | 0               |
| DR           | 1               | 0               | 0               | 0               | 0               | 0               | 0               | 0               |

**Explanation:** To execute the BCLR instruction, the CPU begins by reading P1DDR. Since P1DDR is a write-only register, it is read as H'FF, even though its true value is H'3F.

Next the CPU clears bit 0 of the read data, changing the value to H'FE.

Finally, the CPU writes this value (H'FE) back to P1DDR to complete the BCLR instruction.

As a result, P1<sub>0</sub>DDR is cleared to 0, making P1<sub>0</sub> an input pin. In addition, P1<sub>7</sub>DDR and P1<sub>6</sub>DDR are set to 1, making P1<sub>7</sub> and P1<sub>6</sub> output pins.

**BSET, BCLR, BNOT, BTST**

|                               |   |   |   |     |    |  |  |  |
|-------------------------------|---|---|---|-----|----|--|--|--|
| 15                            | 8 | 7 | 0 |     |    |  |  |  |
| op                            |   |   |   | IMM | rn |  |  |  |
| Operand: register direct (Rn) |   |   |   |     |    |  |  |  |
| Bit no.: immediate (#xx:3)    |   |   |   |     |    |  |  |  |

|                               |   |   |   |    |  |    |  |
|-------------------------------|---|---|---|----|--|----|--|
| 15                            | 8 | 7 | 0 |    |  |    |  |
| op                            |   |   |   | rm |  | rn |  |
| Operand: register direct (Rn) |   |   |   |    |  |    |  |
| Bit no.: register direct (Rm) |   |   |   |    |  |    |  |

|                                  |   |   |   |    |  |   |   |     |   |   |   |   |   |
|----------------------------------|---|---|---|----|--|---|---|-----|---|---|---|---|---|
| 15                               | 8 | 7 | 0 |    |  |   |   |     |   |   |   |   |   |
| op                               |   |   |   | rn |  | 0 | 0 | 0   | 0 |   |   |   |   |
| op                               |   |   |   |    |  |   |   | IMM |   | 0 | 0 | 0 | 0 |
| Operand: register indirect (@Rn) |   |   |   |    |  |   |   |     |   |   |   |   |   |
| Bit no.: immediate (#xx:3)       |   |   |   |    |  |   |   |     |   |   |   |   |   |

|                                  |   |   |   |    |  |   |   |   |   |
|----------------------------------|---|---|---|----|--|---|---|---|---|
| 15                               | 8 | 7 | 0 |    |  |   |   |   |   |
| op                               |   |   |   | rn |  | 0 | 0 | 0 | 0 |
| op                               |   |   |   | rm |  | 0 | 0 | 0 | 0 |
| Operand: register indirect (@Rn) |   |   |   |    |  |   |   |   |   |
| Bit no.: register direct (Rm)    |   |   |   |    |  |   |   |   |   |

|                            |   |   |   |     |  |  |  |     |  |   |   |   |   |
|----------------------------|---|---|---|-----|--|--|--|-----|--|---|---|---|---|
| 15                         | 8 | 7 | 0 |     |  |  |  |     |  |   |   |   |   |
| op                         |   |   |   | abs |  |  |  |     |  |   |   |   |   |
| op                         |   |   |   |     |  |  |  | IMM |  | 0 | 0 | 0 | 0 |
| Operand: absolute (@aa:8)  |   |   |   |     |  |  |  |     |  |   |   |   |   |
| Bit no.: immediate (#xx:3) |   |   |   |     |  |  |  |     |  |   |   |   |   |

|                               |   |   |   |     |  |   |   |   |   |
|-------------------------------|---|---|---|-----|--|---|---|---|---|
| 15                            | 8 | 7 | 0 |     |  |   |   |   |   |
| op                            |   |   |   | abs |  |   |   |   |   |
| op                            |   |   |   | rm  |  | 0 | 0 | 0 | 0 |
| Operand: absolute (@aa:8)     |   |   |   |     |  |   |   |   |   |
| Bit no.: register direct (Rm) |   |   |   |     |  |   |   |   |   |

**BAND, BOR, BXOR, BLD, BST**

|                               |   |   |     |    |
|-------------------------------|---|---|-----|----|
| 15                            | 8 | 7 | 0   |    |
| op                            |   |   | IMM | rn |
| Operand: register direct (Rn) |   |   |     |    |
| Bit no.: immediate (#xx:3)    |   |   |     |    |

|                                  |   |   |     |         |
|----------------------------------|---|---|-----|---------|
| 15                               | 8 | 7 | 0   |         |
| op                               |   |   | rn  | 0 0 0 0 |
| op                               |   |   | IMM | 0 0 0 0 |
| Operand: register indirect (@Rn) |   |   |     |         |
| Bit no.: immediate (#xx:3)       |   |   |     |         |

|                            |   |   |     |         |
|----------------------------|---|---|-----|---------|
| 15                         | 8 | 7 | 0   |         |
| op                         |   |   | abs |         |
| op                         |   |   | IMM | 0 0 0 0 |
| Operand: absolute (@aa:8)  |   |   |     |         |
| Bit no.: immediate (#xx:3) |   |   |     |         |

**Legend**

op: Operation field  
 rm, rn: Register field  
 abs: Absolute address  
 IMM: Immediate data


**Figure 2-7 Bit Manipulation Instruction Codes**

## 2.5.6 Branching Instructions

Table 2-9 describes the branching instructions. Figure 2-8 shows their object code formats.

**Table 2-9 Branching Instructions**

| Instruction | Size     | Function                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                           |          |             |           |          |         |               |        |          |         |               |       |     |         |      |                |     |         |             |                |           |         |                               |         |           |         |                 |         |     |         |           |         |     |         |       |         |     |         |                |         |     |         |              |         |     |         |      |         |     |         |       |         |     |         |                  |                  |     |         |           |                  |     |         |              |                           |     |         |               |                           |
|-------------|----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|----------|-------------|-----------|----------|---------|---------------|--------|----------|---------|---------------|-------|-----|---------|------|----------------|-----|---------|-------------|----------------|-----------|---------|-------------------------------|---------|-----------|---------|-----------------|---------|-----|---------|-----------|---------|-----|---------|-------|---------|-----|---------|----------------|---------|-----|---------|--------------|---------|-----|---------|------|---------|-----|---------|-------|---------|-----|---------|------------------|------------------|-----|---------|-----------|------------------|-----|---------|--------------|---------------------------|-----|---------|---------------|---------------------------|
| Bcc         | —        | Branches if condition cc is true.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                           |          |             |           |          |         |               |        |          |         |               |       |     |         |      |                |     |         |             |                |           |         |                               |         |           |         |                 |         |     |         |           |         |     |         |       |         |     |         |                |         |     |         |              |         |     |         |      |         |     |         |       |         |     |         |                  |                  |     |         |           |                  |     |         |              |                           |     |         |               |                           |
|             |          | <table><thead><tr><th>Mnemonic</th><th>cc field</th><th>Description</th><th>Condition</th></tr></thead><tbody><tr><td>BRA (BT)</td><td>0 0 0 0</td><td>Always (true)</td><td>Always</td></tr><tr><td>BRN (BF)</td><td>0 0 0 1</td><td>Never (false)</td><td>Never</td></tr><tr><td>BHI</td><td>0 0 1 0</td><td>High</td><td><math>C \vee Z = 0</math></td></tr><tr><td>BLS</td><td>0 0 1 1</td><td>Low or same</td><td><math>C \vee Z = 1</math></td></tr><tr><td>BCC (BHS)</td><td>0 1 0 0</td><td>Carry clear<br/>(High or same)</td><td><math>C = 0</math></td></tr><tr><td>BCS (BLO)</td><td>0 1 0 1</td><td>Carry set (low)</td><td><math>C = 1</math></td></tr><tr><td>BNE</td><td>0 1 1 0</td><td>Not equal</td><td><math>Z = 0</math></td></tr><tr><td>BEQ</td><td>0 1 1 1</td><td>Equal</td><td><math>Z = 1</math></td></tr><tr><td>BVC</td><td>1 0 0 0</td><td>Overflow clear</td><td><math>V = 0</math></td></tr><tr><td>BVS</td><td>1 0 0 1</td><td>Overflow set</td><td><math>V = 1</math></td></tr><tr><td>BPL</td><td>1 0 1 0</td><td>Plus</td><td><math>N = 0</math></td></tr><tr><td>BMI</td><td>1 0 1 1</td><td>Minus</td><td><math>N = 1</math></td></tr><tr><td>BGE</td><td>1 1 0 0</td><td>Greater or equal</td><td><math>N \oplus V = 0</math></td></tr><tr><td>BLT</td><td>1 1 0 1</td><td>Less than</td><td><math>N \oplus V = 1</math></td></tr><tr><td>BGT</td><td>1 1 1 0</td><td>Greater than</td><td><math>Z \vee (N \oplus V) = 0</math></td></tr><tr><td>BLE</td><td>1 1 1 1</td><td>Less or equal</td><td><math>Z \vee (N \oplus V) = 1</math></td></tr></tbody></table> | Mnemonic                  | cc field | Description | Condition | BRA (BT) | 0 0 0 0 | Always (true) | Always | BRN (BF) | 0 0 0 1 | Never (false) | Never | BHI | 0 0 1 0 | High | $C \vee Z = 0$ | BLS | 0 0 1 1 | Low or same | $C \vee Z = 1$ | BCC (BHS) | 0 1 0 0 | Carry clear<br>(High or same) | $C = 0$ | BCS (BLO) | 0 1 0 1 | Carry set (low) | $C = 1$ | BNE | 0 1 1 0 | Not equal | $Z = 0$ | BEQ | 0 1 1 1 | Equal | $Z = 1$ | BVC | 1 0 0 0 | Overflow clear | $V = 0$ | BVS | 1 0 0 1 | Overflow set | $V = 1$ | BPL | 1 0 1 0 | Plus | $N = 0$ | BMI | 1 0 1 1 | Minus | $N = 1$ | BGE | 1 1 0 0 | Greater or equal | $N \oplus V = 0$ | BLT | 1 1 0 1 | Less than | $N \oplus V = 1$ | BGT | 1 1 1 0 | Greater than | $Z \vee (N \oplus V) = 0$ | BLE | 1 1 1 1 | Less or equal | $Z \vee (N \oplus V) = 1$ |
| Mnemonic    | cc field | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Condition                 |          |             |           |          |         |               |        |          |         |               |       |     |         |      |                |     |         |             |                |           |         |                               |         |           |         |                 |         |     |         |           |         |     |         |       |         |     |         |                |         |     |         |              |         |     |         |      |         |     |         |       |         |     |         |                  |                  |     |         |           |                  |     |         |              |                           |     |         |               |                           |
| BRA (BT)    | 0 0 0 0  | Always (true)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Always                    |          |             |           |          |         |               |        |          |         |               |       |     |         |      |                |     |         |             |                |           |         |                               |         |           |         |                 |         |     |         |           |         |     |         |       |         |     |         |                |         |     |         |              |         |     |         |      |         |     |         |       |         |     |         |                  |                  |     |         |           |                  |     |         |              |                           |     |         |               |                           |
| BRN (BF)    | 0 0 0 1  | Never (false)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Never                     |          |             |           |          |         |               |        |          |         |               |       |     |         |      |                |     |         |             |                |           |         |                               |         |           |         |                 |         |     |         |           |         |     |         |       |         |     |         |                |         |     |         |              |         |     |         |      |         |     |         |       |         |     |         |                  |                  |     |         |           |                  |     |         |              |                           |     |         |               |                           |
| BHI         | 0 0 1 0  | High                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | $C \vee Z = 0$            |          |             |           |          |         |               |        |          |         |               |       |     |         |      |                |     |         |             |                |           |         |                               |         |           |         |                 |         |     |         |           |         |     |         |       |         |     |         |                |         |     |         |              |         |     |         |      |         |     |         |       |         |     |         |                  |                  |     |         |           |                  |     |         |              |                           |     |         |               |                           |
| BLS         | 0 0 1 1  | Low or same                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | $C \vee Z = 1$            |          |             |           |          |         |               |        |          |         |               |       |     |         |      |                |     |         |             |                |           |         |                               |         |           |         |                 |         |     |         |           |         |     |         |       |         |     |         |                |         |     |         |              |         |     |         |      |         |     |         |       |         |     |         |                  |                  |     |         |           |                  |     |         |              |                           |     |         |               |                           |
| BCC (BHS)   | 0 1 0 0  | Carry clear<br>(High or same)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | $C = 0$                   |          |             |           |          |         |               |        |          |         |               |       |     |         |      |                |     |         |             |                |           |         |                               |         |           |         |                 |         |     |         |           |         |     |         |       |         |     |         |                |         |     |         |              |         |     |         |      |         |     |         |       |         |     |         |                  |                  |     |         |           |                  |     |         |              |                           |     |         |               |                           |
| BCS (BLO)   | 0 1 0 1  | Carry set (low)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | $C = 1$                   |          |             |           |          |         |               |        |          |         |               |       |     |         |      |                |     |         |             |                |           |         |                               |         |           |         |                 |         |     |         |           |         |     |         |       |         |     |         |                |         |     |         |              |         |     |         |      |         |     |         |       |         |     |         |                  |                  |     |         |           |                  |     |         |              |                           |     |         |               |                           |
| BNE         | 0 1 1 0  | Not equal                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | $Z = 0$                   |          |             |           |          |         |               |        |          |         |               |       |     |         |      |                |     |         |             |                |           |         |                               |         |           |         |                 |         |     |         |           |         |     |         |       |         |     |         |                |         |     |         |              |         |     |         |      |         |     |         |       |         |     |         |                  |                  |     |         |           |                  |     |         |              |                           |     |         |               |                           |
| BEQ         | 0 1 1 1  | Equal                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | $Z = 1$                   |          |             |           |          |         |               |        |          |         |               |       |     |         |      |                |     |         |             |                |           |         |                               |         |           |         |                 |         |     |         |           |         |     |         |       |         |     |         |                |         |     |         |              |         |     |         |      |         |     |         |       |         |     |         |                  |                  |     |         |           |                  |     |         |              |                           |     |         |               |                           |
| BVC         | 1 0 0 0  | Overflow clear                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | $V = 0$                   |          |             |           |          |         |               |        |          |         |               |       |     |         |      |                |     |         |             |                |           |         |                               |         |           |         |                 |         |     |         |           |         |     |         |       |         |     |         |                |         |     |         |              |         |     |         |      |         |     |         |       |         |     |         |                  |                  |     |         |           |                  |     |         |              |                           |     |         |               |                           |
| BVS         | 1 0 0 1  | Overflow set                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | $V = 1$                   |          |             |           |          |         |               |        |          |         |               |       |     |         |      |                |     |         |             |                |           |         |                               |         |           |         |                 |         |     |         |           |         |     |         |       |         |     |         |                |         |     |         |              |         |     |         |      |         |     |         |       |         |     |         |                  |                  |     |         |           |                  |     |         |              |                           |     |         |               |                           |
| BPL         | 1 0 1 0  | Plus                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | $N = 0$                   |          |             |           |          |         |               |        |          |         |               |       |     |         |      |                |     |         |             |                |           |         |                               |         |           |         |                 |         |     |         |           |         |     |         |       |         |     |         |                |         |     |         |              |         |     |         |      |         |     |         |       |         |     |         |                  |                  |     |         |           |                  |     |         |              |                           |     |         |               |                           |
| BMI         | 1 0 1 1  | Minus                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | $N = 1$                   |          |             |           |          |         |               |        |          |         |               |       |     |         |      |                |     |         |             |                |           |         |                               |         |           |         |                 |         |     |         |           |         |     |         |       |         |     |         |                |         |     |         |              |         |     |         |      |         |     |         |       |         |     |         |                  |                  |     |         |           |                  |     |         |              |                           |     |         |               |                           |
| BGE         | 1 1 0 0  | Greater or equal                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | $N \oplus V = 0$          |          |             |           |          |         |               |        |          |         |               |       |     |         |      |                |     |         |             |                |           |         |                               |         |           |         |                 |         |     |         |           |         |     |         |       |         |     |         |                |         |     |         |              |         |     |         |      |         |     |         |       |         |     |         |                  |                  |     |         |           |                  |     |         |              |                           |     |         |               |                           |
| BLT         | 1 1 0 1  | Less than                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | $N \oplus V = 1$          |          |             |           |          |         |               |        |          |         |               |       |     |         |      |                |     |         |             |                |           |         |                               |         |           |         |                 |         |     |         |           |         |     |         |       |         |     |         |                |         |     |         |              |         |     |         |      |         |     |         |       |         |     |         |                  |                  |     |         |           |                  |     |         |              |                           |     |         |               |                           |
| BGT         | 1 1 1 0  | Greater than                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | $Z \vee (N \oplus V) = 0$ |          |             |           |          |         |               |        |          |         |               |       |     |         |      |                |     |         |             |                |           |         |                               |         |           |         |                 |         |     |         |           |         |     |         |       |         |     |         |                |         |     |         |              |         |     |         |      |         |     |         |       |         |     |         |                  |                  |     |         |           |                  |     |         |              |                           |     |         |               |                           |
| BLE         | 1 1 1 1  | Less or equal                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | $Z \vee (N \oplus V) = 1$ |          |             |           |          |         |               |        |          |         |               |       |     |         |      |                |     |         |             |                |           |         |                               |         |           |         |                 |         |     |         |           |         |     |         |       |         |     |         |                |         |     |         |              |         |     |         |      |         |     |         |       |         |     |         |                  |                  |     |         |           |                  |     |         |              |                           |     |         |               |                           |
| JMP         | —        | Branches unconditionally to a specified address.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                           |          |             |           |          |         |               |        |          |         |               |       |     |         |      |                |     |         |             |                |           |         |                               |         |           |         |                 |         |     |         |           |         |     |         |       |         |     |         |                |         |     |         |              |         |     |         |      |         |     |         |       |         |     |         |                  |                  |     |         |           |                  |     |         |              |                           |     |         |               |                           |
| JSR         | —        | Branches to a subroutine at a specified address.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                           |          |             |           |          |         |               |        |          |         |               |       |     |         |      |                |     |         |             |                |           |         |                               |         |           |         |                 |         |     |         |           |         |     |         |       |         |     |         |                |         |     |         |              |         |     |         |      |         |     |         |       |         |     |         |                  |                  |     |         |           |                  |     |         |              |                           |     |         |               |                           |
| BSR         | —        | Branches to a subroutine at a specified displacement from the current address.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                           |          |             |           |          |         |               |        |          |         |               |       |     |         |      |                |     |         |             |                |           |         |                               |         |           |         |                 |         |     |         |           |         |     |         |       |         |     |         |                |         |     |         |              |         |     |         |      |         |     |         |       |         |     |         |                  |                  |     |         |           |                  |     |         |              |                           |     |         |               |                           |
| RTS         | —        | Returns from a subroutine.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                           |          |             |           |          |         |               |        |          |         |               |       |     |         |      |                |     |         |             |                |           |         |                               |         |           |         |                 |         |     |         |           |         |     |         |       |         |     |         |                |         |     |         |              |         |     |         |      |         |     |         |       |         |     |         |                  |                  |     |         |           |                  |     |         |              |                           |     |         |               |                           |

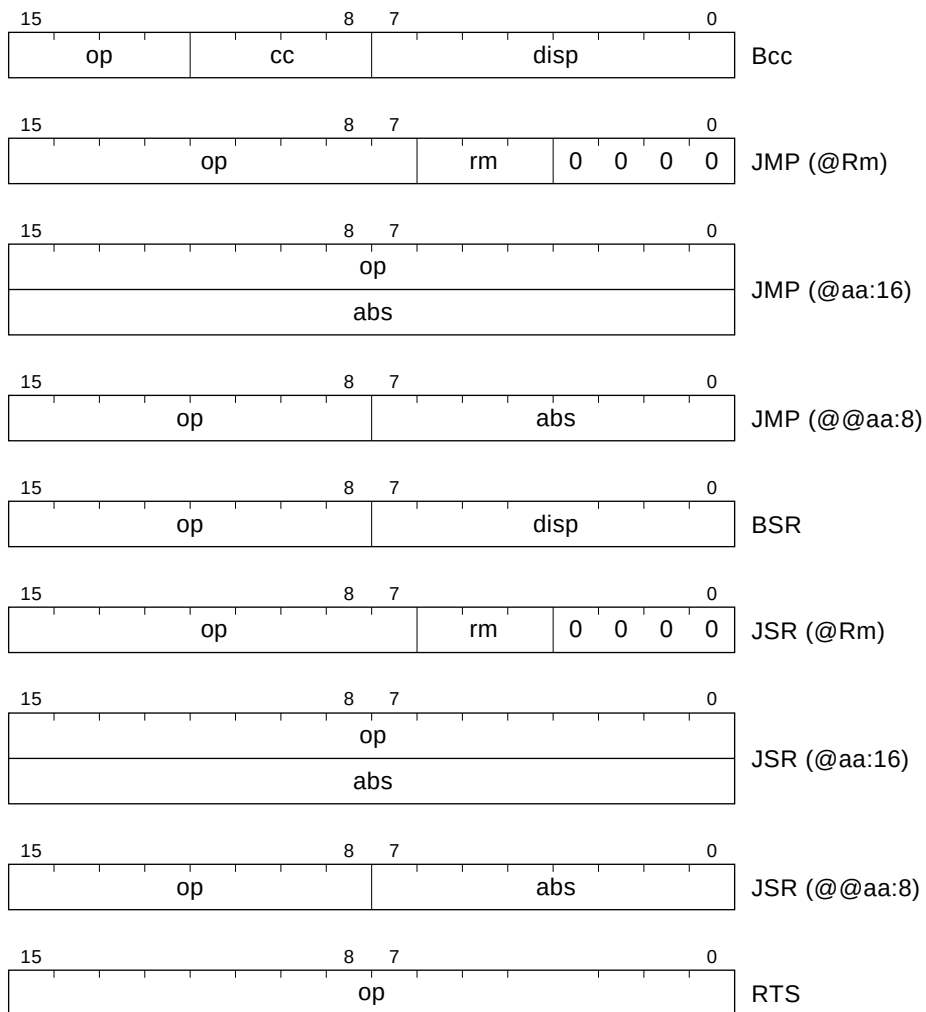

#### Legend

op: Operation field  
 cc: Condition field  
 rm: Register field  
 disp: Displacement  
 abs: Absolute address

**Figure 2-8 Branching Instruction Codes**



2.5.7 System Control Instructions

Table 2-10 describes the system control instructions. Figure 2-9 shows their object code formats.

Table 2-10 System Control Instructions

| Inst5ruction | Size | Function                                                                                                                         |
|--------------|------|----------------------------------------------------------------------------------------------------------------------------------|
| RTE          | —    | Returns from an exception-handling routine.                                                                                      |
| SLEEP        | —    | Causes a transition to the power-down state.                                                                                     |
| LDC          | B    | $Rs \rightarrow CCR, \#imm \rightarrow CCR$<br>Moves immediate data or general register contents to the condition code register. |
| STC          | B    | $CCR \rightarrow Rd$<br>Copies the condition code register to a specified general register.                                      |
| ANDC         | B    | $CCR \wedge \#imm \rightarrow CCR$<br>Logically ANDs the condition code register with immediate data.                            |
| ORC          | B    | $CCR \vee \#imm \rightarrow CCR$<br>Logically ORs the condition code register with immediate data.                               |
| XORC         | B    | $CCR \oplus \#imm \rightarrow CCR$<br>Logically exclusive-ORs the condition code register with immediate data.                   |
| NOP          | —    | $PC + 2 \rightarrow PC$<br>Only increments the program counter.                                                                  |

Note: \* Size: Operand size  
B: Byte

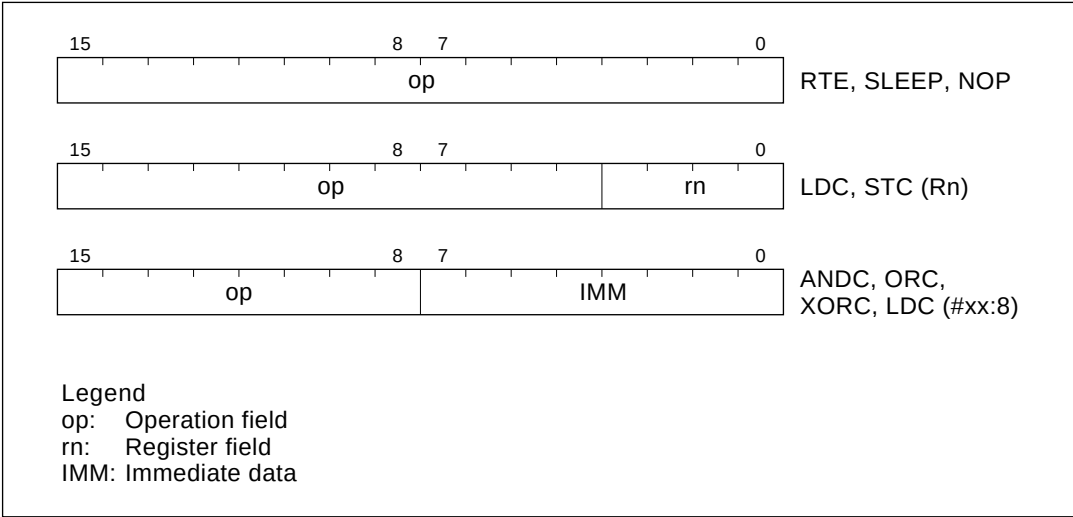


Figure 2-9 System Control Instruction Codes

2.5.8 Block Data Transfer Instruction

Table 2-11 describes the EEPMOV instruction. Figure 2-10 shows its object code format.

Table 2-11 Block Data Transfer Instruction/EEPROM Write Operation

| Instruction | Size | Function                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-------------|------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EEPMOV      | —    | <div>if R4L ≠ 0 then</div> <div>repeat @R5+ → @R6+</div> <div>R4L – 1 → R4L</div> <div>until R4L = 0</div> <div>else next;</div> <div>Moves a data block according to parameters set in general registers R4L, R5, and R6.</div> <div>R4L: size of block (bytes)</div> <div>R5: starting source address</div> <div>R6: starting destination address</div> <div>Execution of the next instruction starts as soon as the block transfer is completed.</div> |


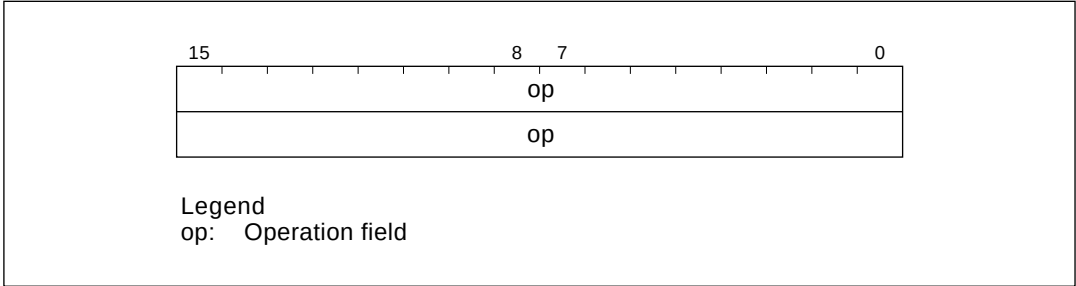



Figure 2-10 Block Data Transfer Instruction/EEPROM Write Operation Code

## Notes on EEPMOV Instruction

1. The EEPMOV instruction is a block data transfer instruction. It moves the number of bytes specified by R4L from the address specified by R5 to the address specified by R6.

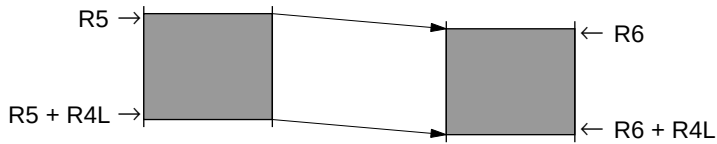


2. When setting R4L and R6, make sure that the final destination address ( $R6 + R4L$ ) does not exceed  $H'FFFF$ . The value in R6 must not change from  $H'FFFF$  to  $H'0000$  during execution of the instruction.

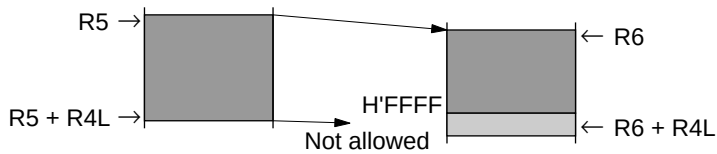


## 2.6 CPU States

### 2.6.1 Overview

The CPU has three states: the program execution state, exception-handling state, and power-down state. The power-down state is further divided into three modes: sleep mode, software standby mode, and hardware standby mode. Figure 2-11 summarizes these states, and figure 2-12 shows a map of the state transitions.

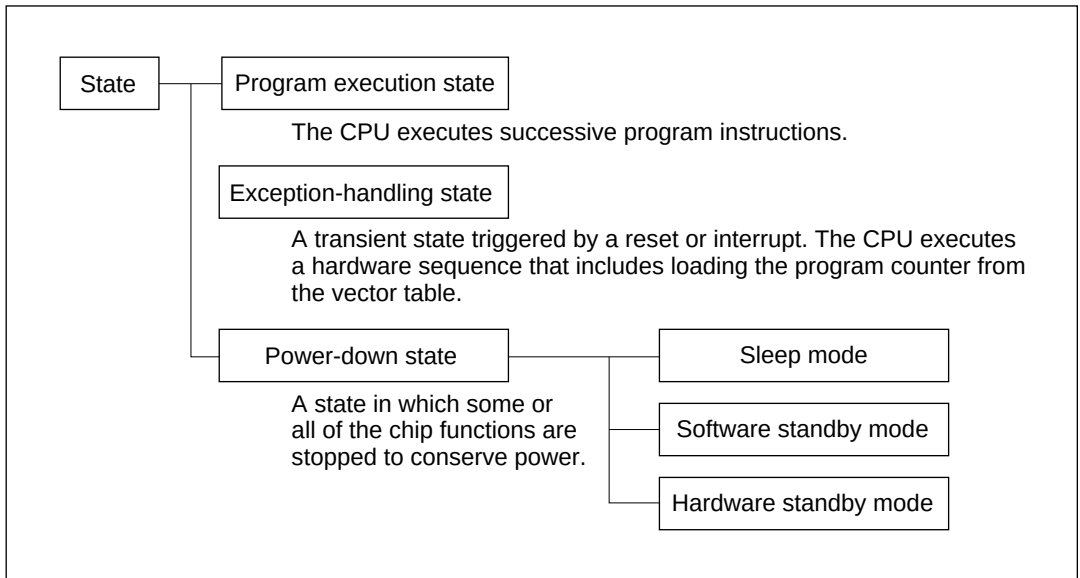

**Figure 2-11 Operating States**

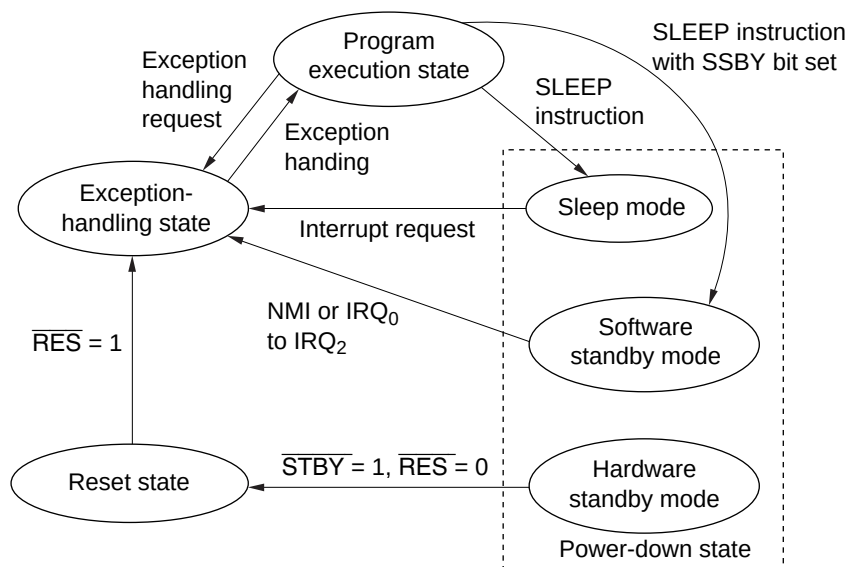

- Notes:
1. A transition to the reset state occurs when  $\overline{RES}$  goes low, except when the chip is in the hardware standby mode.
  2. A transition from any state to the hardware standby mode occurs when  $\overline{STBY}$  goes low.

**Figure 2-12 State Transitions**

## 2.6.2 Program Execution State

In this state the CPU executes program instructions.

## 2.6.3 Exception-Handling State

The exception-handling state is a transient state that occurs when the CPU is reset or interrupted and changes its normal processing flow. In interrupt exception handling, the CPU references the stack pointer (R7) and saves the program counter and condition code register on the stack. For further details see section 4, Exception Handling.

## 2.6.4 Power-Down State

The power-down state includes three modes: sleep mode, software standby mode, and hardware standby mode.

**(1) Sleep Mode:** Is entered when a SLEEP instruction is executed. The CPU halts, but CPU register contents remain unchanged and the on-chip supporting modules continue to function.

**(2) Software Standby Mode:** Is entered if the SLEEP instruction is executed while the SSBY (Software Standby) bit in the system control register (SYSCR) is set. The CPU and all on-chip supporting modules halt. The on-chip supporting modules are initialized, but the contents of the on-chip RAM and CPU registers remain unchanged as long as a specified voltage is supplied. I/O port outputs also remain unchanged.

**(3) Hardware Standby Mode:** Is entered when the input at the  $\overline{\text{STBY}}$  pin goes low. All chip functions halt, including I/O port output. The on-chip supporting modules are initialized, but on-chip RAM contents are held.


See section 15, Power-Down State, for further information.

## 2.7 Access Timing and Bus Cycle


The CPU is driven by the system clock ( $\phi$ ). The period from one rising edge of the system clock to the next is referred to as a “state.” Memory access is performed in a two- or three-state bus cycle. On-chip memory, on-chip supporting modules, and external devices are accessed in different bus cycles as described below.

### 2.7.1 Access to On-Chip Memory (RAM and ROM)

On-chip ROM and RAM are accessed in a cycle of two states designated  $T_1$  and  $T_2$ . Either byte or word data can be accessed, via a 16-bit data bus. Figure 2-13 shows the on-chip memory access cycle. Figure 2-14 shows the associated pin states.

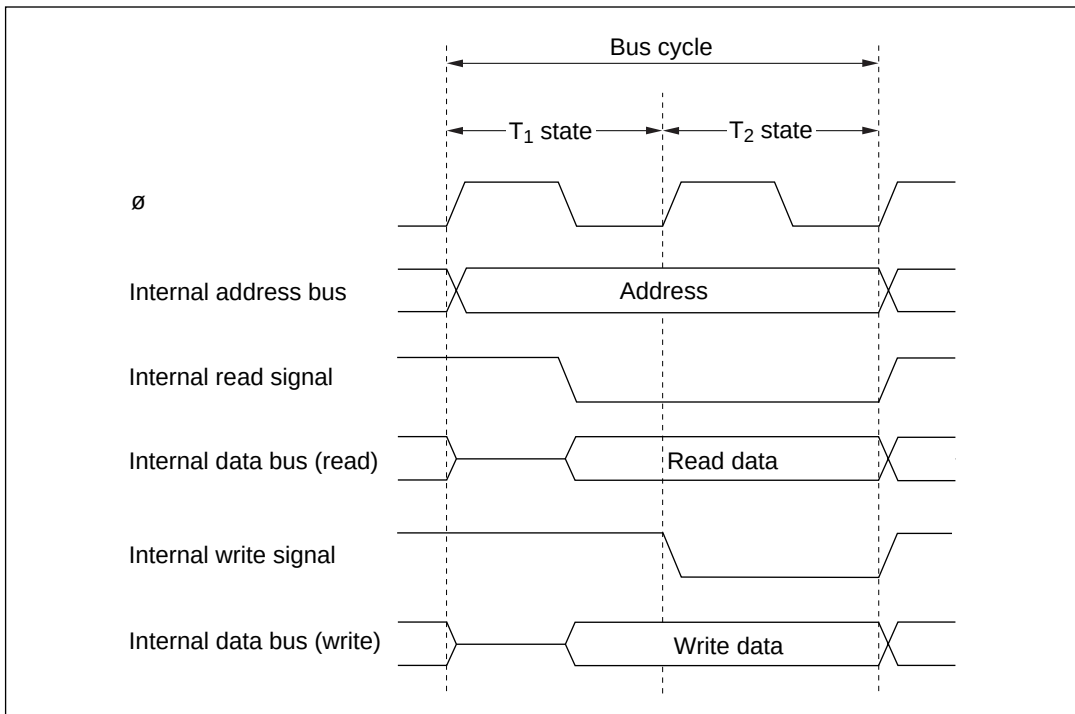

**Figure 2-13 On-Chip Memory Access Cycle**

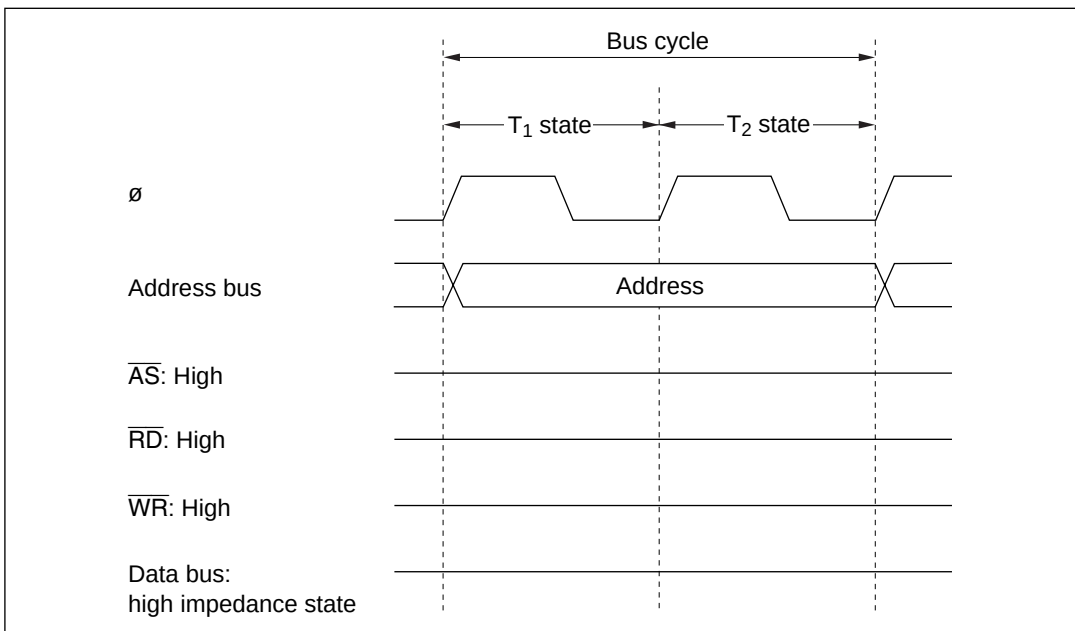


**Figure 2-14 Pin States during On-Chip Memory Access Cycle**

## 2.7.2 Access to On-Chip Register Field and External Devices


The on-chip supporting module registers and external devices are accessed in a cycle consisting of three states:  $T_1$ ,  $T_2$ , and  $T_3$ . Only one byte of data can be accessed per cycle, via an 8-bit data bus. Access to word data or instruction codes requires two consecutive cycles (six states).

Figure 2-15 shows the access cycle for the on-chip register field. Figure 2-16 shows the associated pin states. Figures 2-17 (a) and (b) show the read and write access timing for external devices.

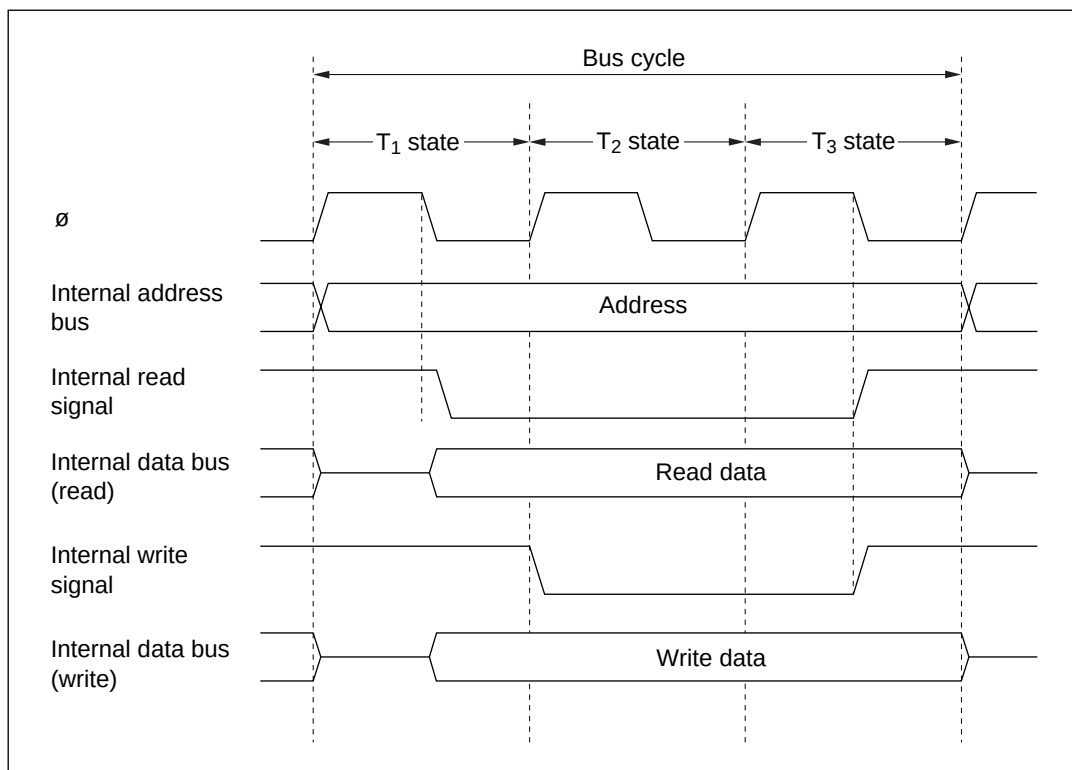


**Figure 2-15 On-Chip Register Field Access Cycle**




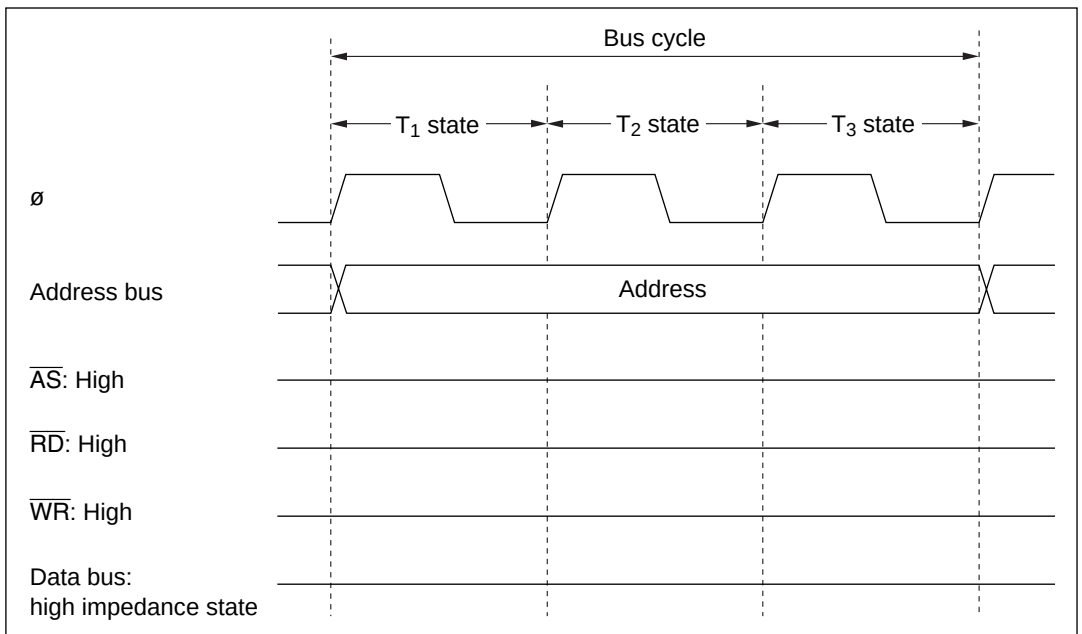

**Figure 2-16 Pin States during On-Chip Register Field Access Cycle**

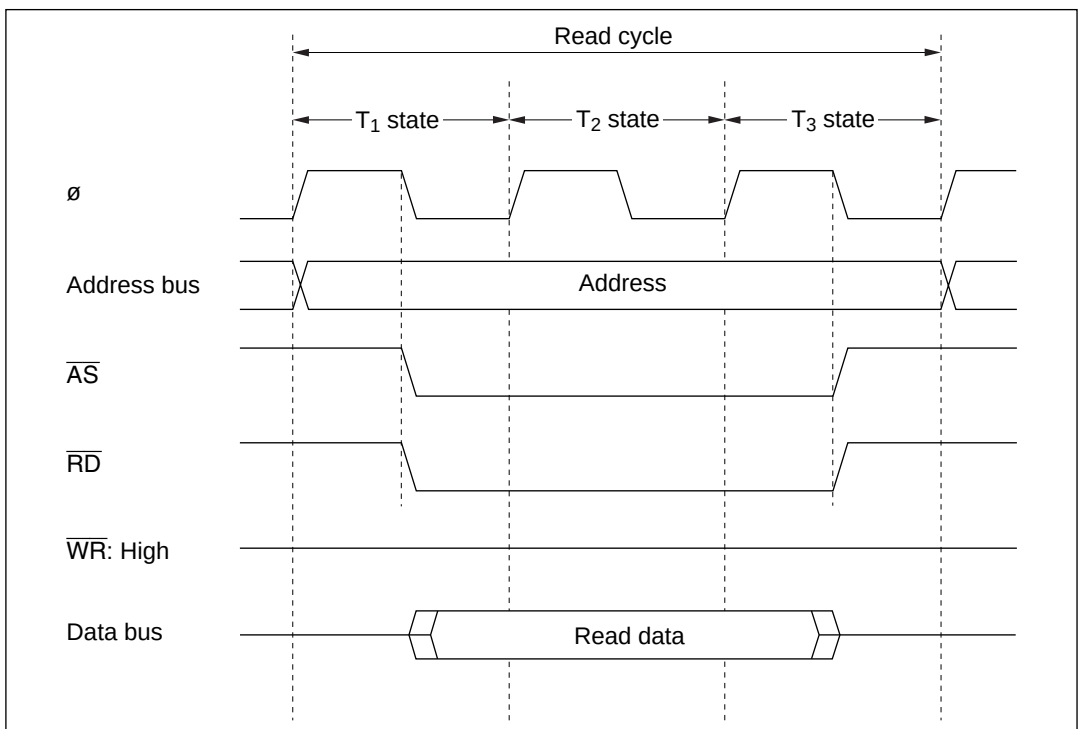

**Figure 2-17 (a) External Device Access Timing (Read)**

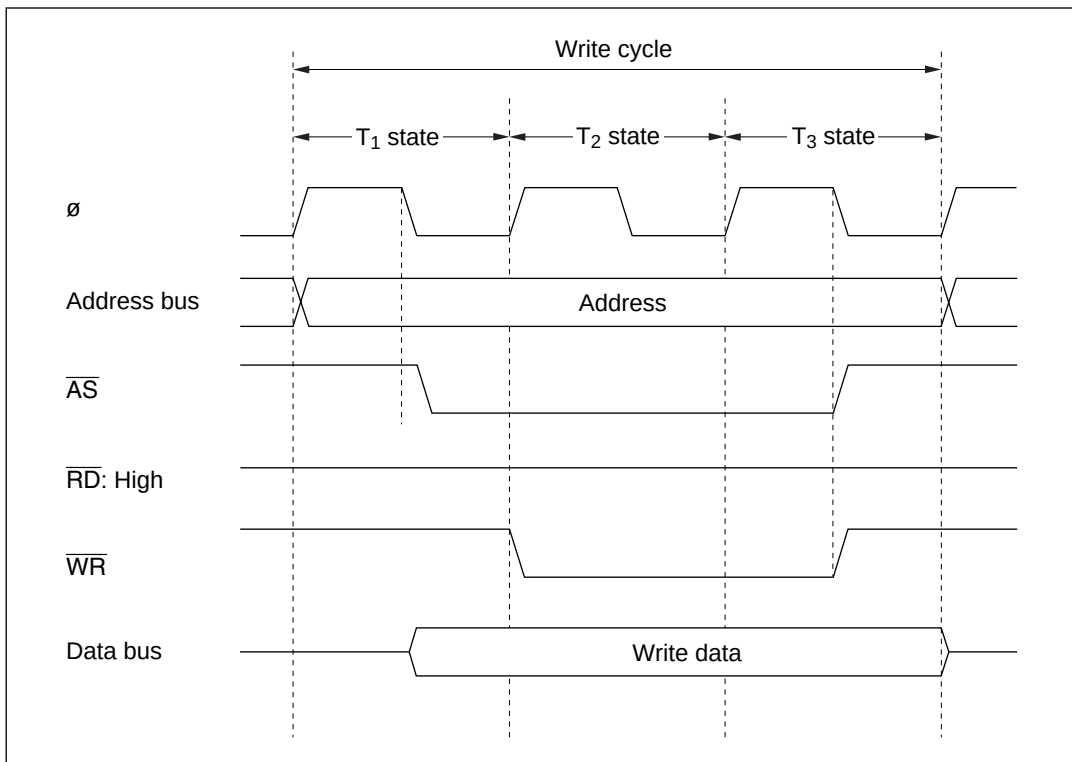

**Figure 2-17 (b) External Device Access Timing (Write)**



## Section 3 MCU Operating Modes and Address Space

### 3.1 Overview

#### 3.1.1 Mode Selection

The H8/3297 Series operates in three modes numbered 1, 2, and 3. The mode is selected by the inputs at the mode pins (MD<sub>1</sub> and MD<sub>0</sub>). See table 3-1.

**Table 3-1 Operating Modes**

| Mode   | MD <sub>1</sub> | MD <sub>0</sub> | Address space | On-chip ROM | On-chip RAM |
|--------|-----------------|-----------------|---------------|-------------|-------------|
| Mode 0 | Low             | Low             | —             | —           | —           |
| Mode 1 | Low             | High            | Expanded      | Disabled    | Enabled*    |
| Mode 2 | High            | Low             | Expanded      | Enabled     | Enabled*    |
| Mode 3 | High            | High            | Single-chip   | Enabled     | Enabled     |

Note: \* If the RAME bit in the system control register (SYSCR) is cleared to 0, off-chip memory can be accessed instead.

Modes 1 and 2 are expanded modes that permit access to off-chip memory and peripheral devices. The maximum address space supported by these externally expanded modes is 64 kbytes.

In mode 3 (single-chip mode), only on-chip ROM and RAM and the on-chip register field are used. All ports are available for general-purpose input and output.

Mode 0 is inoperative in the H8/3297 Series. Avoid setting the mode pins to mode 0.

3.1.2 Mode and System Control Registers

Table 3-2 lists the registers related to the chip’s operating mode: the system control register (SYSCR) and mode control register (MDCR). The mode control register indicates the inputs to the mode pins MD<sub>1</sub> and MD<sub>0</sub>.

Table 3-2 Mode and System Control Registers

| Name                    | Abbreviation | Read/Write | Address |
|-------------------------|--------------|------------|---------|
| System control register | SYSCR        | R/W        | H'FFC4  |
| Mode control register   | MDCR         | R          | H'FFC5  |

3.2 System Control Register (SYSCR)

|               |      |      |      |      |      |       |   |      |
|---------------|------|------|------|------|------|-------|---|------|
| Bit           | 7    | 6    | 5    | 4    | 3    | 2     | 1 | 0    |
|               | SSBY | STS2 | STS1 | STS0 | XRST | NMIEG | — | RAME |
| Initial value | 0    | 0    | 0    | 0    | 1    | 0     | 1 | 1    |
| Read/Write    | R/W  | R/W  | R/W  | R/W  | R    | R/W   | — | R/W  |

The system control register (SYSCR) is an 8-bit register that controls the operation of the chip.

**Bit 7—Software Standby (SSBY):** Enables transition to the software standby mode. For details, see section 15, Power-Down State.

On recovery from software standby mode by an external interrupt, the SSBY bit remains set to 1. It can be cleared by writing 0.

| Bit 7<br>SSBY | Description                                                              |
|---------------|--------------------------------------------------------------------------|
| 0             | The SLEEP instruction causes a transition to sleep mode. (Initial value) |
| 1             | The SLEEP instruction causes a transition to software standby mode.      |

**Bits 6 to 4—Standby Timer Select 2 to 0 (STS2 to STS0):** These bits select the clock settling time when the chip recovers from the software standby mode by an external interrupt. During the selected time the CPU and on-chip supporting modules continue to stand by. These bits should be set according to the clock frequency so that the settling time is at least 8 ms. For specific settings, see section 15.3.3, Clock Settling Time for Exit from Software Standby Mode.

| Bit 6<br>STS2 | Bit 5<br>STS1 | Bit 4<br>STS0 | Description                                  |
|---------------|---------------|---------------|----------------------------------------------|
| 0             | 0             | 0             | Settling time = 8,192 states (Initial value) |
| 0             | 0             | 1             | Settling time = 16,384 states                |
| 0             | 1             | 0             | Settling time = 32,768 states                |
| 0             | 1             | 1             | Settling time = 65,536 states                |
| 1             | 0             | —             | Settling time = 131,072 states               |
| 1             | 1             | —             | Disabled                                     |

**Bit 3—External Reset (XRST):** Indicates the source of a reset. A reset can be generated by input of an external reset signal, or by a watchdog timer overflow when the watchdog timer is used. XRST is a read-only bit. It is set to 1 by an external reset, and cleared to 0 by watchdog timer overflow.

| Bit 3<br>XRST | Description                                         |
|---------------|-----------------------------------------------------|
| 0             | Reset was caused by watchdog timer overflow.        |
| 1             | Reset was caused by external input. (Initial value) |

**Bit 2—NMI Edge (NMIEG):** Selects the valid edge of the NMI input.

| Bit 2<br>NMIEG | Description                                                                                         |
|----------------|-----------------------------------------------------------------------------------------------------|
| 0              | An interrupt is requested on the falling edge of the $\overline{\text{NMI}}$ input. (Initial value) |
| 1              | An interrupt is requested on the rising edge of the $\overline{\text{NMI}}$ input.                  |

**Bit 1—Reserved:** This bit cannot be modified and is always read as 1.

**Bit 0—RAM Enable (RAME):** Enables or disables the on-chip RAM. The RAME bit is initialized by a reset, but is not initialized in the software standby mode.

| Bit 0<br>RAME | Description                                 |
|---------------|---------------------------------------------|
| 0             | The on-chip RAM is disabled.                |
| 1             | The on-chip RAM is enabled. (Initial value) |

### 3.3 Mode Control Register (MDCR)

| Bit           | 7 | 6 | 5 | 4 | 3 | 2 | 1    | 0    |
|---------------|---|---|---|---|---|---|------|------|
|               | — | — | — | — | — | — | MDS1 | MDS0 |
| Initial value | 1 | 1 | 1 | 0 | 0 | 1 | *    | *    |
| Read/Write    | — | — | — | — | — | — | R    | R    |

Note: \* Initialized according to MD<sub>1</sub> and MD<sub>0</sub> inputs.  
The mode control register (MDCR) is an 8-bit register that indicates the operating mode of the chip.

**Bits 7 to 5—Reserved:** These bits cannot be modified and are always read as 1.

**Bits 4 and 3—Reserved:** These bits cannot be modified and are always read as 0.

**Bit 2—Reserved:** This bit cannot be modified and is always read as 1.

**Bits 1 and 0—Mode Select 1 and 0 (MDS1 and MDS0):** These bits indicate the values of the mode pins (MD<sub>1</sub> and MD<sub>0</sub>), thereby indicating the current operating mode of the chip. MDS1 corresponds to MD<sub>1</sub> and MDS0 to MD<sub>0</sub>. These bits can be read but not written. When the mode control register is read, the levels at the mode pins (MD<sub>1</sub> and MD<sub>0</sub>) are latched in these bits.

### 3.4 Address Space Map in Each Operating Mode

Figures 3-1 to 3-4 show memory maps of the H8/3297, H8/3296, H8/3294, and H8/3292 in modes 1, 2, and 3.



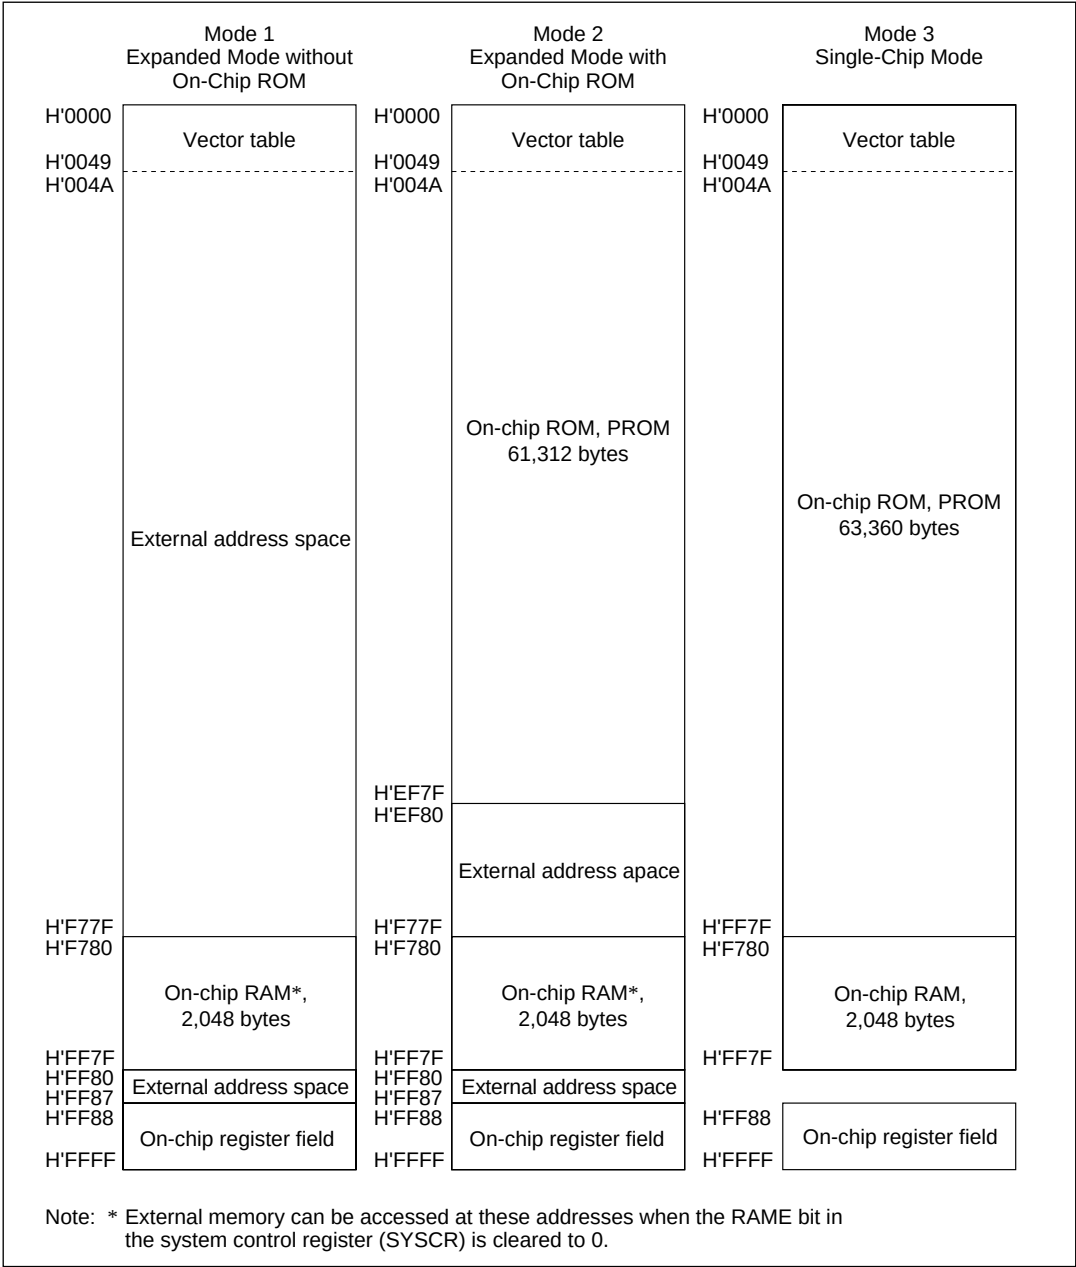


Figure 3-1 H8/3297 Address Space Map




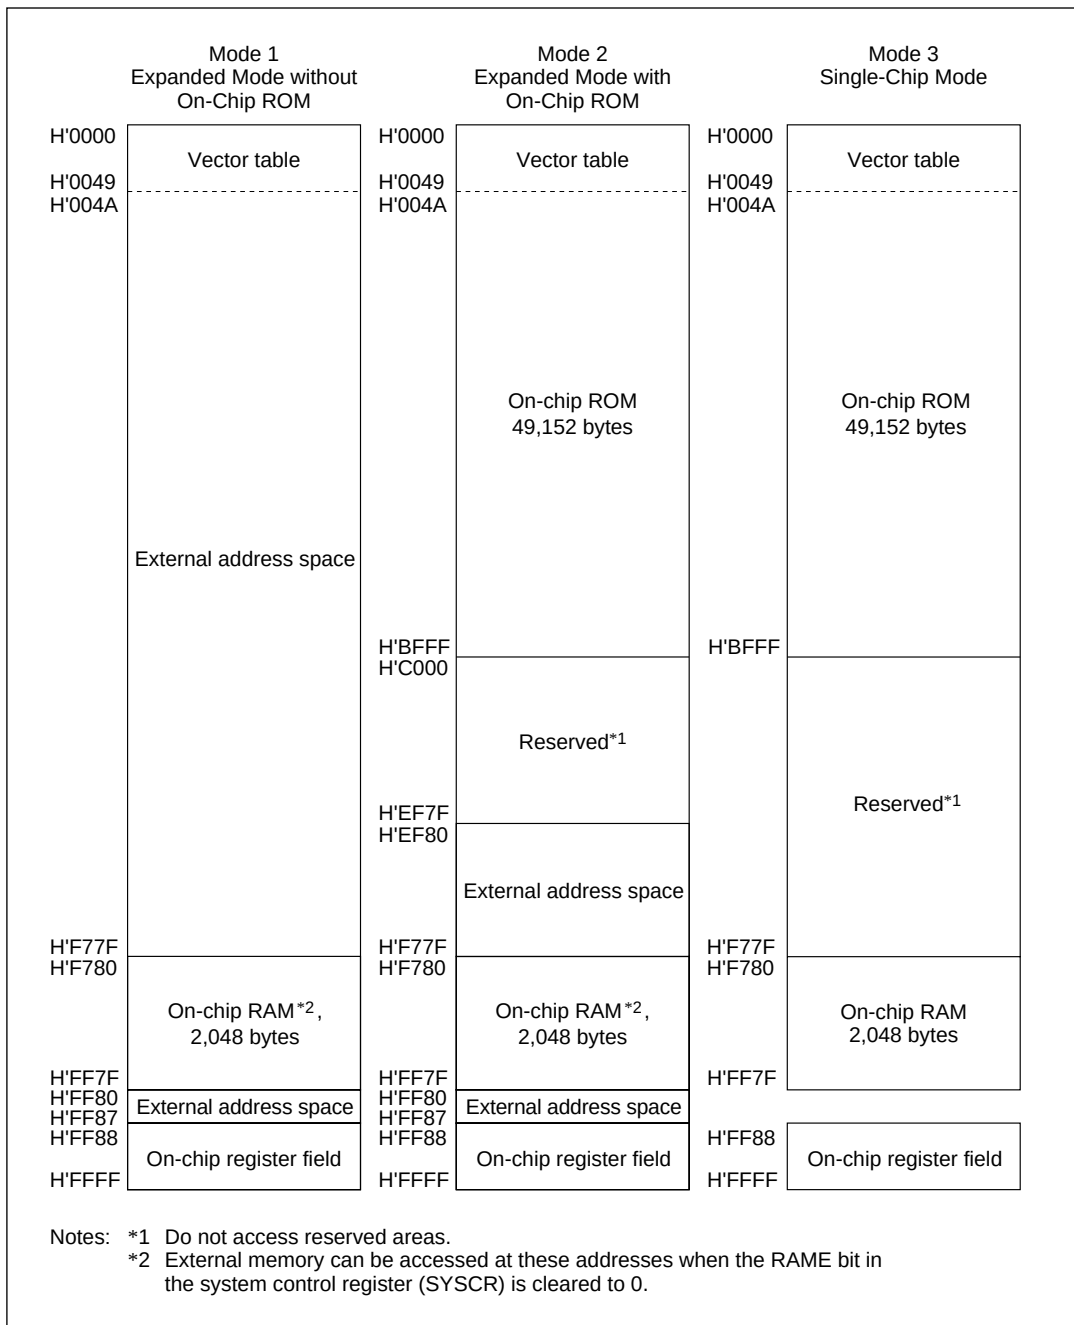

**Figure 3-2 H8/3296 Address Space Map**

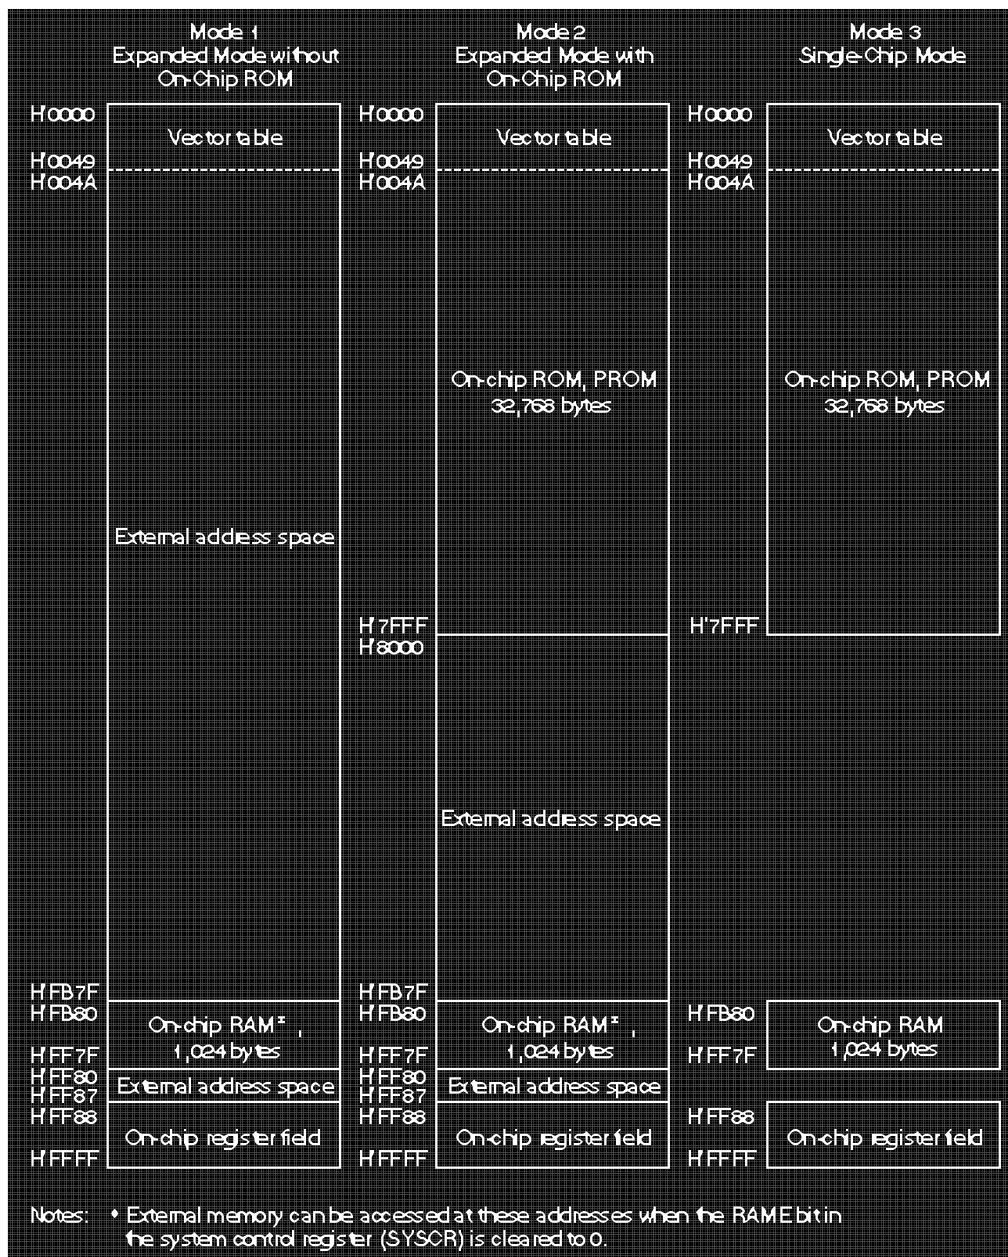

**Figure 3-3 H8/3294 Address Space Map**

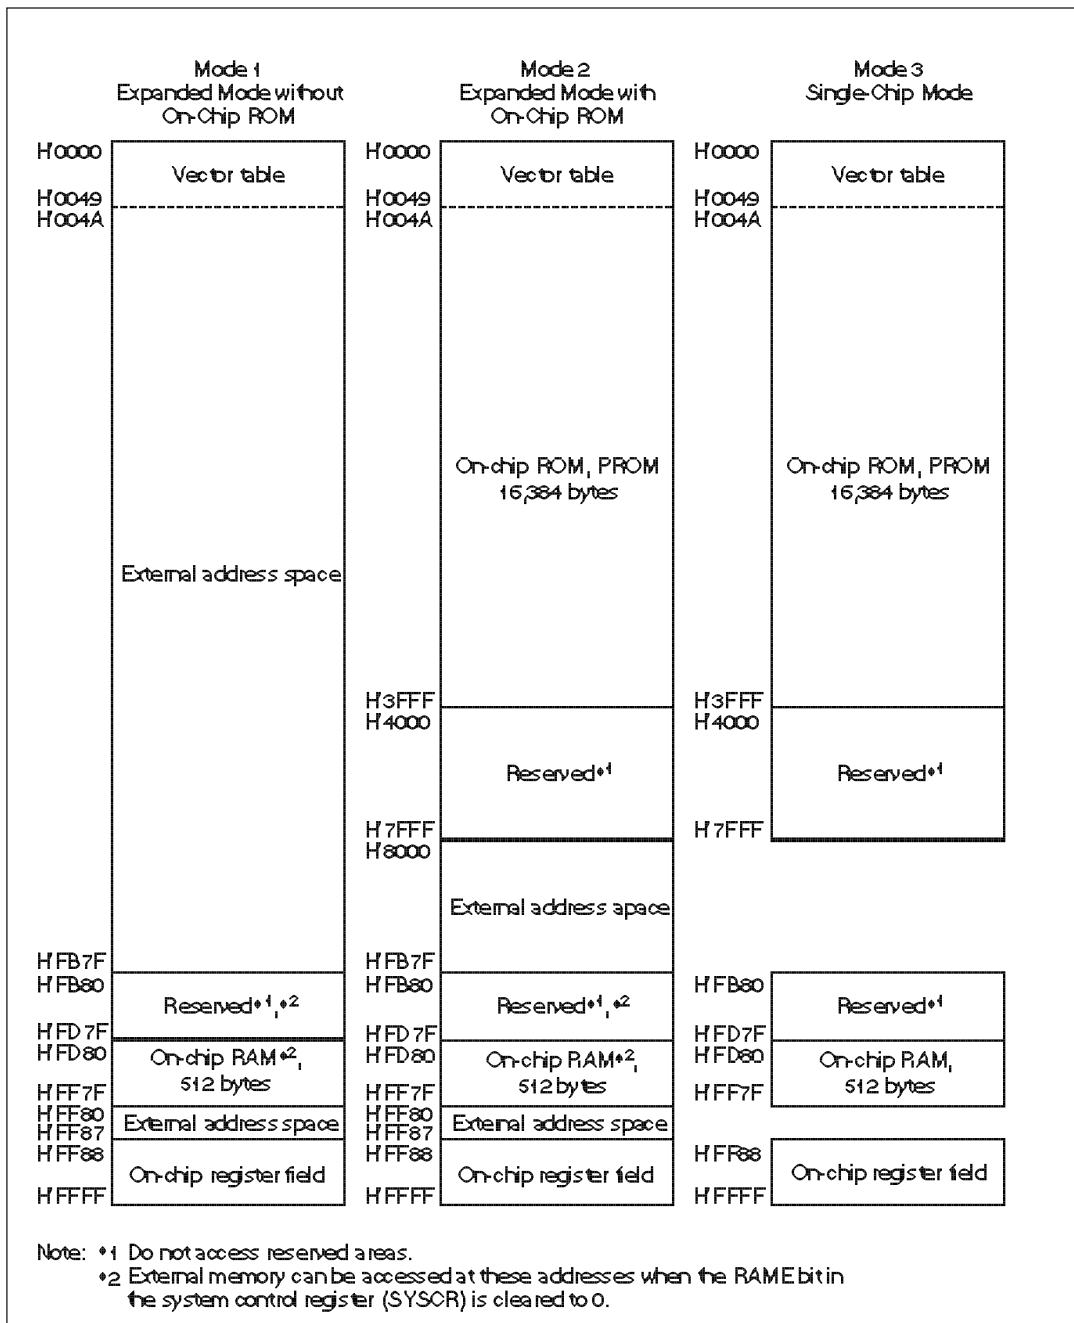

**Figure 3-4 H8/3292 Address Space Map**

# Section 4 Exception Handling

## 4.1 Overview

The H8/3297 Series recognizes two kinds of exceptions: interrupts and the reset. Table 4-1 indicates their priority and the timing of their hardware exception-handling sequence.

**Table 4-1 Hardware Exception-Handling Sequences and Priority**

| Priority                            | Type of Exception | Detection Timing              | Timing of Exception-Handling Sequence                                                                                                                                                     |
|-------------------------------------|-------------------|-------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <div>High<br/>↑<br/>↓<br/>Low</div> | Reset             | Synchronized with clock       | The hardware exception-handling sequence begins as soon as $\overline{\text{RES}}$ changes from low to high.                                                                              |
|                                     | Interrupt         | End of instruction execution* | When an interrupt is requested, the hardware exception-handling sequence begins at the end of the current instruction, or at the end of the current hardware exception-handling sequence. |

Note: \* Not detected after ANDC, ORC, XORC, and LDC instructions.

## 4.2 Reset

### 4.2.1 Overview

A reset has the highest exception-handling priority. When the  $\overline{\text{RES}}$  pin goes low, or when there is a watchdog timer reset (when the reset option is selected for watchdog timer overflow), all current processing stops and the chip enters the reset state. The internal state of the CPU and the registers of the on-chip supporting modules are initialized. The reset exception-handling sequence starts when  $\overline{\text{RES}}$  returns from low to high, or at the end of a watchdog reset pulse.

### 4.2.2 Reset Sequence


The reset state begins when  $\overline{\text{RES}}$  goes low or a watchdog reset is generated. To ensure correct resetting, at power-on the  $\overline{\text{RES}}$  pin should be held low for at least 20 ms. In a reset during operation, the  $\overline{\text{RES}}$  pin should be held low for at least 10 system clock cycles. The watchdog reset pulse width is always 518 system clocks. For the pin states during a reset, see appendix D, Pin States.

The following sequence is carried out when reset exception handling begins.


- (1) The internal state of the CPU and the registers of the on-chip supporting modules are initialized, and the I bit in the condition code register (CCR) is set to 1.
- (2) The CPU loads the program counter with the first word in the vector table (stored at addresses H'0000 and H'0001) and starts program execution.

The  $\overline{\text{RES}}$  pin should be held low when power is switched off, as well as when power is switched on.

Figure 4-1 indicates the timing of the reset sequence in modes 2 and 3. Figure 4-2 indicates the timing in mode 1.

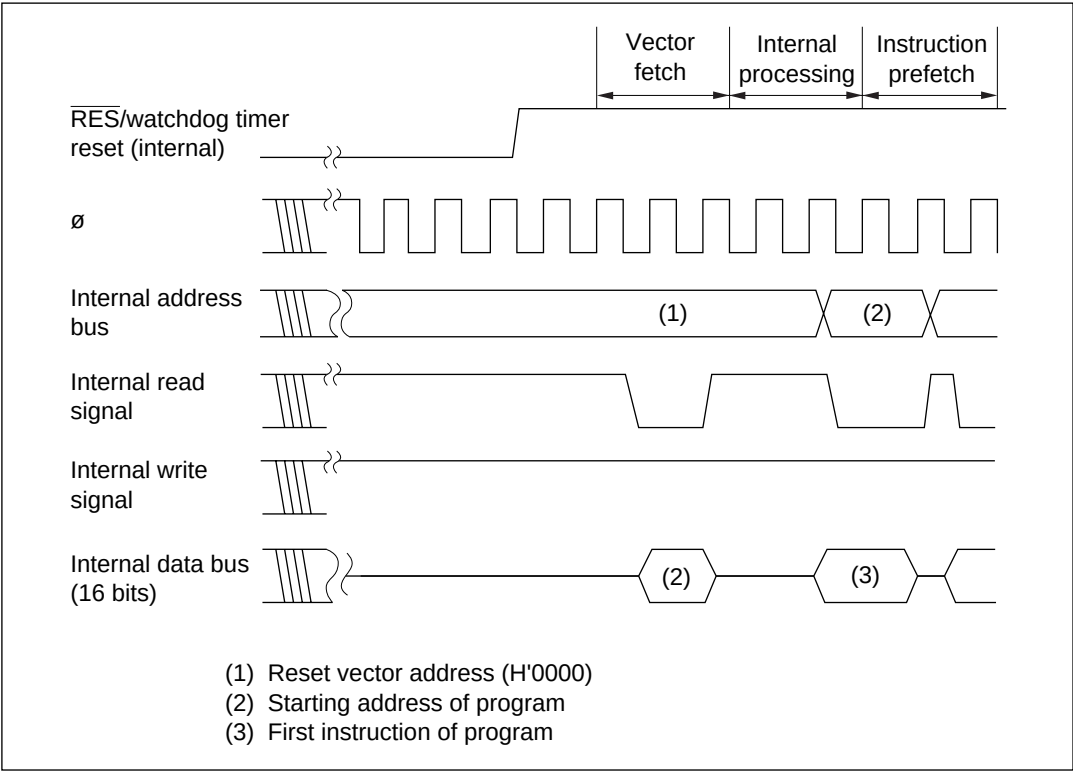

**Figure 4-1 Reset Sequence (Mode 2 or 3, Program Stored in On-Chip ROM)**

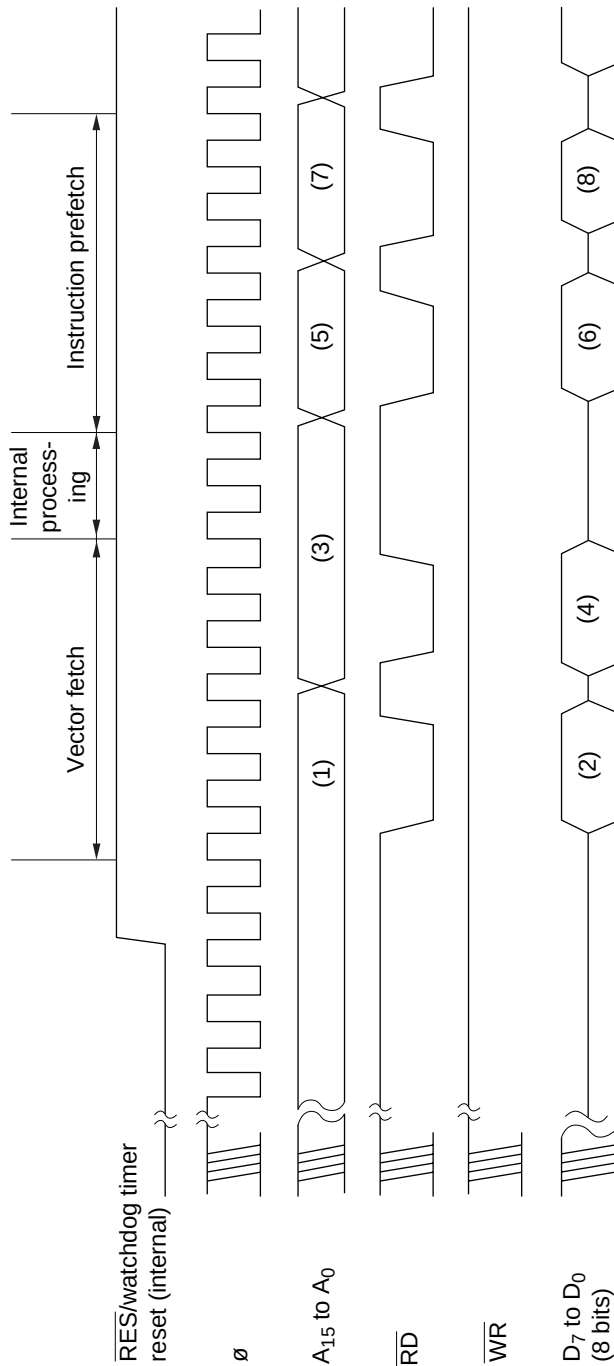

- (1), (3) Reset vector address: (1) = H'0000, (3) = H'0001  
 (2), (4) Starting address of program (contents of reset vector): (2) = upper byte, (4) = lower byte  
 (5), (7) Starting address of program: (5) = (2) (4), (7) = (2) (4) + 1  
 (6), (8) First instruction of program: (6) = first byte, (8) = second byte

**Figure 4-2 Reset Sequence (Mode 1)**

### 4.2.3 Disabling of Interrupts after Reset

After a reset, if an interrupt were to be accepted before initialization of the stack pointer (SP: R7), the program counter and condition code register might not be saved correctly, leading to a program crash. To prevent this, all interrupts, including NMI, are disabled immediately after a reset. The first program instruction is therefore always executed. This instruction should initialize the stack pointer (example: MOV.W #xx:16, SP).

After reset exception handling, in order to initialize the contents of CCR, a CCR manipulation instruction can be executed before an instruction to initialize the stack pointer. Immediately after execution of a CCR manipulation instruction, all interrupts including NMI are disabled. Use the next instruction to initialize the stack pointer.

## 4.3 Interrupts

### 4.3.1 Overview

The interrupt sources include four external sources (NMI, and IRQ<sub>0</sub> to IRQ<sub>2</sub>), and 19 internal sources in the on-chip supporting modules. Table 4-2 lists the interrupt sources in priority order and gives their vector addresses. When two or more interrupts are requested, the interrupt with highest priority is served first.

The features of these interrupts are:

- NMI has the highest priority and is always accepted. All internal and external interrupts except NMI can be masked by the I bit in the CCR. When the I bit is set to 1, interrupts other than NMI are not accepted.
- IRQ<sub>0</sub> to IRQ<sub>2</sub> can be sensed on the falling edge of the input signal, or level-sensed. The type of sensing can be selected for each interrupt individually. NMI is edge-sensed, and either the rising or falling edge can be selected.
- All interrupts are individually vectored. The software interrupt-handling routine does not have to determine what type of interrupt has occurred.
- The watchdog timer can generate either an NMI or overflow interrupt, depending on the needs of the application. For details, see section 10, Watchdog Timer.

**Table 4-2 Interrupts**

| Interrupt source               |                         | No. | Vector Table Address | Priority  |
|--------------------------------|-------------------------|-----|----------------------|-----------|
| NMI                            |                         | 3   | H'0006 to H'0007     | High<br>↑ |
| IRQ0                           |                         | 4   | H'0008 to H'0009     |           |
| IRQ1                           |                         | 5   | H'000A to H'000B     |           |
| IRQ2                           |                         | 6   | H'000C to H'000D     |           |
| Reserved                       |                         | 7   | H'000E to H'000F     |           |
|                                |                         | 8   | H'0010 to H'0011     |           |
|                                |                         | 9   | H'0012 to H'0013     |           |
|                                |                         | 10  | H'0014 to H'0015     |           |
|                                |                         | 11  | H'0016 to H'0017     |           |
| 16-bit free-running timer      | ICIA (Input capture A)  | 12  | H'0018 to H'0019     |           |
|                                | ICIB (Input capture B)  | 13  | H'001A to H'001B     |           |
|                                | ICIC (Input capture C)  | 14  | H'001C to H'001D     |           |
|                                | ICID (Input capture D)  | 15  | H'001E to H'001F     |           |
|                                | OCIA (Output compare A) | 16  | H'0020 to H'0021     |           |
|                                | OCIB (Output compare B) | 17  | H'0022 to H'0023     |           |
|                                | FOVI (Overflow)         | 18  | H'0024 to H'0025     |           |
| 8-bit timer 0                  | CMIOA (Compare-match A) | 19  | H'0026 to H'0027     | ↓<br>Low  |
|                                | CMIOB (Compare-match B) | 20  | H'0028 to H'0029     |           |
|                                | OVI0 (Overflow)         | 21  | H'002A to H'002B     |           |
| 8-bit timer 1                  | CM1A (Compare-match A)  | 22  | H'002C to H'002D     |           |
|                                | CM1B (Compare-match B)  | 23  | H'002E to H'002F     |           |
|                                | OVI1 (Overflow)         | 24  | H'0030 to H'0031     |           |
| Reserved                       |                         | 25  | H'0032 to H'0033     |           |
|                                |                         | 26  | H'0034 to H'0035     |           |
| Serial communication interface | ERI (Receive error)     | 27  | H'0036 to H'0037     |           |
|                                | RXI (Receive end)       | 28  | H'0038 to H'0039     |           |
|                                | TXI (TDR empty)         | 29  | H'003A to H'003B     |           |
|                                | TEI (TSR empty)         | 30  | H'003C to H'003D     |           |
| Reserved                       |                         | 31  | H'003E to H'003F     |           |
|                                |                         | 32  | H'0040 to H'0041     |           |
|                                |                         | 33  | H'0042 to H'0043     |           |
|                                |                         | 34  | H'0044 to H'0045     |           |
| A/D converter                  | ADI (Conversion end)    | 35  | H'0046 to H'0047     |           |
| Watchdog timer                 | WOVF (WDT overflow)     | 36  | H'0048 to H'0049     |           |

Notes: 1. H'0000 and H'0001 contain the reset vector.

2. H'0002 to H'0005 are reserved in the H8/3297 Series and are not available to the user.



4.3.2 Interrupt-Related Registers

The interrupt-related registers are the system control register (SYSCR), IRQ sense control register (ISCR), and IRQ enable register (IER).

Table 4-3 Registers Read by Interrupt Controller

| Name                       | Abbreviation | Read/write | Address |
|----------------------------|--------------|------------|---------|
| System control register    | SYSCR        | R/W        | H'FFC4  |
| IRQ sense control register | ISCR         | R/W        | H'FFC6  |
| IRQ enable register        | IER          | R/W        | H'FFC7  |

System Control Register (SYSCR)

|               |      |      |      |      |      |       |   |      |
|---------------|------|------|------|------|------|-------|---|------|
| Bit           | 7    | 6    | 5    | 4    | 3    | 2     | 1 | 0    |
|               | SSBY | STS2 | STS1 | STS0 | XRST | NMIEG | — | RAME |
| Initial value | 0    | 0    | 0    | 0    | 1    | 0     | 1 | 1    |
| Read/Write    | R/W  | R/W  | R/W  | R/W  | R    | R/W   | — | R/W  |

The valid edge on the  $\overline{\text{NMI}}$  line is controlled by bit 2 (NMIEG) in the system control register.

**Bit 2—NMI Edge (NMIEG):** Determines whether a nonmaskable interrupt is generated on the falling or rising edge of the  $\overline{\text{NMI}}$  input signal.

| Bit 2<br>NMIEG | Description                                                                                |
|----------------|--------------------------------------------------------------------------------------------|
| 0              | An interrupt is generated on the falling edge of $\overline{\text{NMI}}$ . (Initial state) |
| 1              | An interrupt is generated on the rising edge of $\overline{\text{NMI}}$ .                  |

See section 3.2, System Control Register, for information on the other SYSCR bits.

IRQ Sense Control Register (ISCR)—H'FFC6

|               |   |   |   |   |   |        |        |        |
|---------------|---|---|---|---|---|--------|--------|--------|
| Bit           | 7 | 6 | 5 | 4 | 3 | 2      | 1      | 0      |
|               | — | — | — | — | — | IRQ2SC | IRQ1SC | IRQ0SC |
| Initial value | 1 | 1 | 1 | 1 | 1 | 0      | 0      | 0      |
| Read/Write    | — | — | — | — | — | R/W    | R/W    | R/W    |

**Bits 7 to 3—Reserved:** These bits cannot be modified and are always read as 1

**Bits 2 to 0—IRQ<sub>2</sub> to IRQ<sub>0</sub> Sense Control (IRQ2SC to IRQ0SC):** These bits determine whether  $\overline{\text{IRQ}}_2$  to  $\overline{\text{IRQ}}_0$  are level-sensed or sensed on the falling edge.

**Bits 2 to 0**

| IRQ2SC to IRQ0SC | Description                                                                                                           |
|------------------|-----------------------------------------------------------------------------------------------------------------------|
| 0                | An interrupt is generated when $\overline{\text{IRQ}}_2$ to $\overline{\text{IRQ}}_0$ inputs are low. (Initial state) |
| 1                | An interrupt is generated by the falling edge of the $\overline{\text{IRQ}}_2$ to $\overline{\text{IRQ}}_0$ inputs.   |

**IRQ Enable Register (IER)**

| Bit           | 7 | 6 | 5 | 4 | 3 | 2     | 1     | 0     |
|---------------|---|---|---|---|---|-------|-------|-------|
|               | — | — | — | — | — | IRQ2E | IRQ1E | IRQ0E |
| Initial value | 1 | 1 | 1 | 1 | 1 | 0     | 0     | 0     |
| Read/Write    | — | — | — | — | — | R/W   | R/W   | R/W   |

**Bits 7 to 3—Reserved:** These bits cannot be modified and are always read as 1

**Bits 2 to 0—IRQ<sub>2</sub> to IRQ<sub>0</sub> Enable (IRQ2E to IRQ0E):** These bits enable or disable the IRQ<sub>2</sub> to IRQ<sub>0</sub> interrupts individually.

**Bits 2 to 0**

| IRQ2E to IRQ0E | Description                                                                           |
|----------------|---------------------------------------------------------------------------------------|
| 0              | IRQ <sub>2</sub> to IRQ <sub>0</sub> interrupt requests are disabled. (Initial state) |
| 1              | IRQ <sub>2</sub> to IRQ <sub>0</sub> interrupt requests are enabled.                  |

When edge sensing is selected (by setting bits IRQ2SC to IRQ0SC to 1), it is possible for an interrupt-handling routine to be executed even though the corresponding enable bit (IRQ2E to IRQ0E) is cleared to 0 and the interrupt is disabled. If an interrupt is requested while the enable bit (IRQ2E to IRQ0E) is set to 1, the request will be held pending until served. If the enable bit is cleared to 0 while the request is still pending, the request will remain pending, although new requests will not be recognized. If the interrupt mask bit (I) in the CCR is cleared to 0, the interrupt-handling routine can be executed even though the enable bit is now 0.

If execution of interrupt-handling routines under these conditions is not desired, it can be avoided by using the following procedure to disable and clear interrupt requests.

1. Set the I bit to 1 in the CCR, masking interrupts. Note that the I bit is set to 1 automatically when execution jumps to an interrupt vector.
2. Clear the desired bits from IRQ2E to IRQ0E to 0 to disable new interrupt requests.
3. Clear the corresponding IRQ2SC to IRQ0SC bits to 0, then set them to 1 again. Pending IRQn interrupt requests are cleared when I = 1 in the CCR, IRQnSC = 0, and IRQnE = 0.

### 4.3.3 External Interrupts

The four external interrupts are NMI and IRQ<sub>2</sub> to IRQ<sub>0</sub>. These four interrupts can be used to recover from software standby mode.

**(1) NMI:** A nonmaskable interrupt is generated on the rising or falling edge of the  $\overline{\text{NMI}}$  input signal regardless of whether the I (interrupt mask) bit is set in the CCR. The valid edge is selected by the NMIEG bit in the system control register. The NMI vector number is 3. In the NMI hardware exception-handling sequence the I bit in the CCR is set to 1.

**(2) IRQ<sub>2</sub> to IRQ<sub>0</sub>:** These interrupt signals are level-sensed or sensed on the falling edge of the input, as selected by ISCR bits IRQ2SC to IRQ0SC. These interrupts can be masked collectively by the I bit in the CCR, and can be enabled and disabled individually by setting and clearing bits IRQ2E to IRQ0E in the IRQ enable register.

When one of these interrupts is accepted, the I bit is set to 1. IRQ<sub>2</sub> to IRQ<sub>0</sub> have interrupt vector numbers 4 to 6. They are prioritized in order from IRQ<sub>2</sub> (low) to IRQ<sub>0</sub> (high). For details, see table 4-2.


Interrupts IRQ<sub>2</sub> to IRQ<sub>0</sub> do not depend on whether pins  $\overline{\text{IRQ}}_2$  to  $\overline{\text{IRQ}}_0$  are input or output pins. When using external interrupts IRQ<sub>2</sub> to IRQ<sub>0</sub>, clear the corresponding DDR bits to 0 to set these pins to the input state, and do not use these pins as input or output pins for the timers, serial communication interface, or A/D converter.

### 4.3.4 Internal Interrupts

Nineteen internal interrupts can be requested by the on-chip supporting modules. Each interrupt source has its own vector number, so the interrupt-handling routine does not have to determine which interrupt has occurred. All internal interrupts are masked when the I bit in the CCR is set to 1. When one of these interrupts is accepted, the I bit is set to 1 to mask further interrupts (except  $\overline{\text{NMI}}$ ). The vector numbers are 12 to 36. For the priority order, see table 4-2.

### 4.3.5 Interrupt Handling

Interrupts are controlled by an interrupt controller that arbitrates between simultaneous interrupt requests, commands the CPU to start the hardware interrupt exception-handling sequence, and furnishes the necessary vector number. Figure 4-3 shows a block diagram of the interrupt controller.

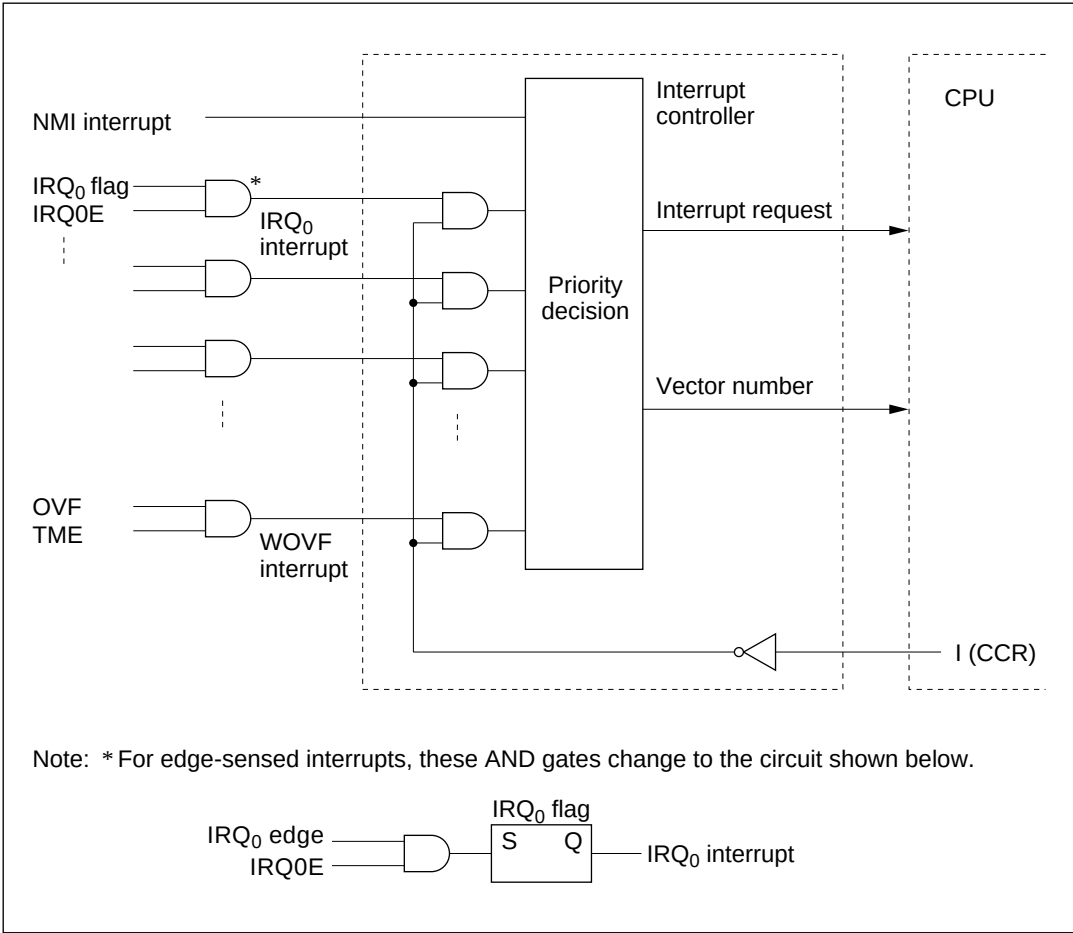

**Figure 4-3 Block Diagram of Interrupt Controller**


The IRQ interrupts and interrupts from the on-chip supporting modules (except for reset selected for a watchdog timer overflow) all have corresponding enable bits. When the enable bit is cleared to 0, the interrupt signal is not sent to the interrupt controller, so the interrupt is ignored. These interrupts can also all be masked by setting the CPU's interrupt mask bit (I) to 1. Accordingly, these interrupts are accepted only when their enable bit is set to 1 and the I bit is cleared to 0.

The nonmaskable interrupt (NMI) is always accepted, except in the reset state and hardware standby mode.


When an NMI or another enabled interrupt is requested, the interrupt controller transfers the interrupt request to the CPU and indicates the corresponding vector number. (When two or more interrupts are requested, the interrupt controller selects the vector number of the interrupt with the highest priority.) When notified of an interrupt request, at the end of the current instruction or current hardware exception-handling sequence, the CPU starts the hardware exception-handling sequence for the interrupt and latches the vector number.

Figure 4-4 is a flowchart of the interrupt (and reset) operations. Figure 4-6 shows the interrupt timing sequence for the case in which the software interrupt-handling routine is in on-chip ROM and the stack is in on-chip RAM.

- (1) An interrupt request is sent to the interrupt controller when an NMI interrupt occurs, and when an interrupt occurs on an IRQ input line or in an on-chip supporting module provided the enable bit of that interrupt is set to 1.
- (2) The interrupt controller checks the I bit in CCR and accepts the interrupt request if the I bit is cleared to 0. If the I bit is set to 1 only NMI requests are accepted; other interrupt requests remain pending.
- (3) Among all accepted interrupt requests, the interrupt controller selects the request with the highest priority and passes it to the CPU. Other interrupt requests remain pending.
- (4) When it receives the interrupt request, the CPU waits until completion of the current instruction or hardware exception-handling sequence, then starts the hardware exception-handling sequence for the interrupt and latches the interrupt vector number.
- (5) In the hardware exception-handling sequence, the CPU first pushes the PC and CCR onto the stack. See figure 4-5. The stacked PC indicates the address of the first instruction that will be executed on return from the software interrupt-handling routine.
- (6) Next the I bit in CCR is set to 1, masking all further interrupts except NMI.
- (7) The vector address corresponding to the vector number is generated, the vector table entry at this vector address is loaded into the program counter, and execution branches to the software interrupt-handling routine at the address indicated by that entry.

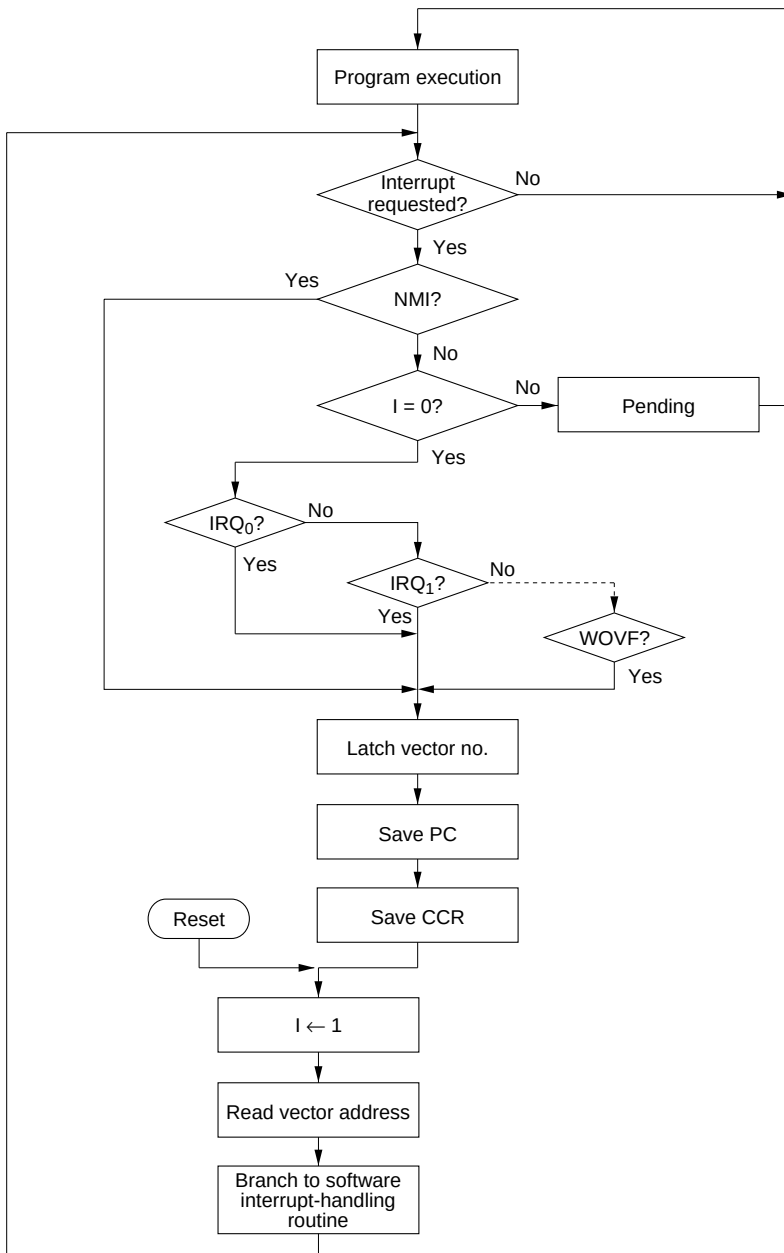


**Figure 4-4 Hardware Interrupt-Handling Sequence**

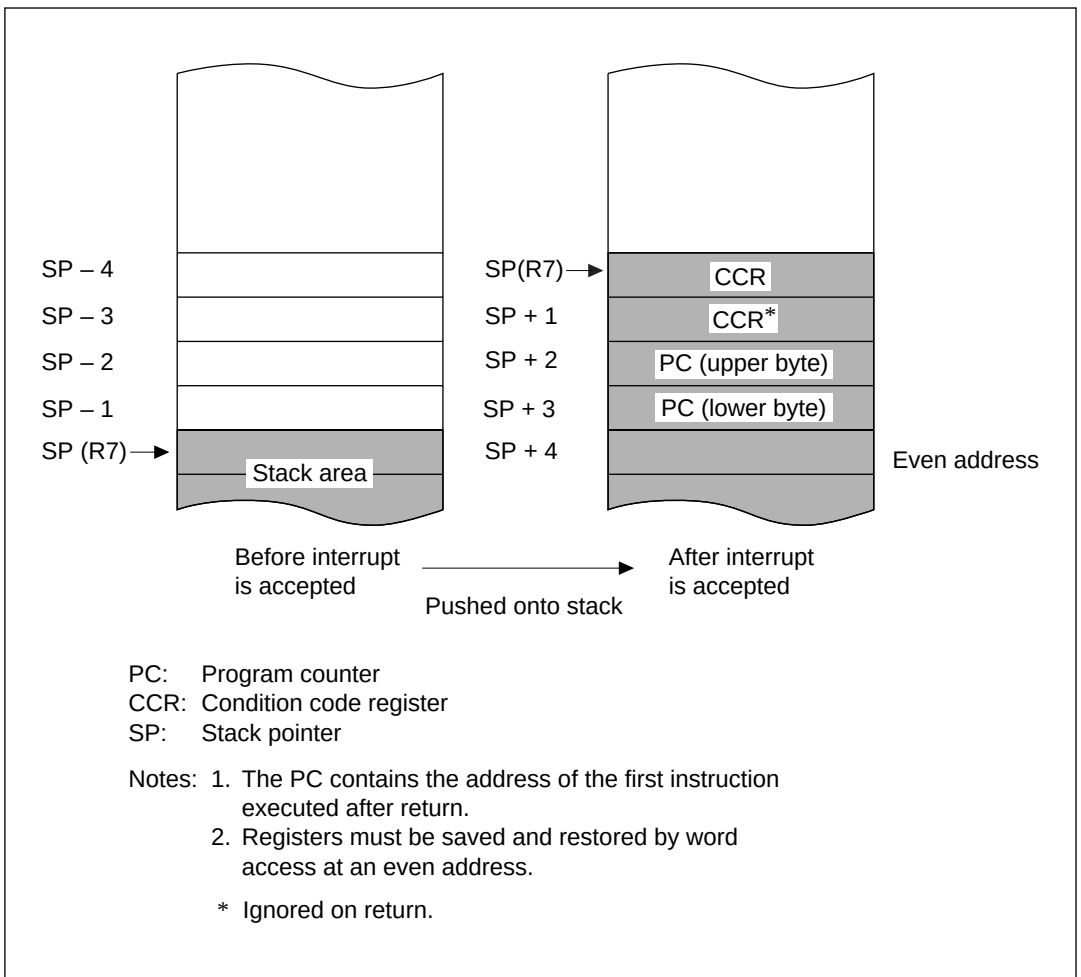

**Figure 4-5 Usage of Stack in Interrupt Handling**

The CCR is comprised of one byte, but when it is saved to the stack, it is treated as one word of data. During interrupt processing, two identical bytes of CCR data are saved to the stack to create one word of data. When the RTE instruction is executed to restore the value from the stack, the byte located at the even address is loaded into CCR, and the byte located at the odd address is ignored.

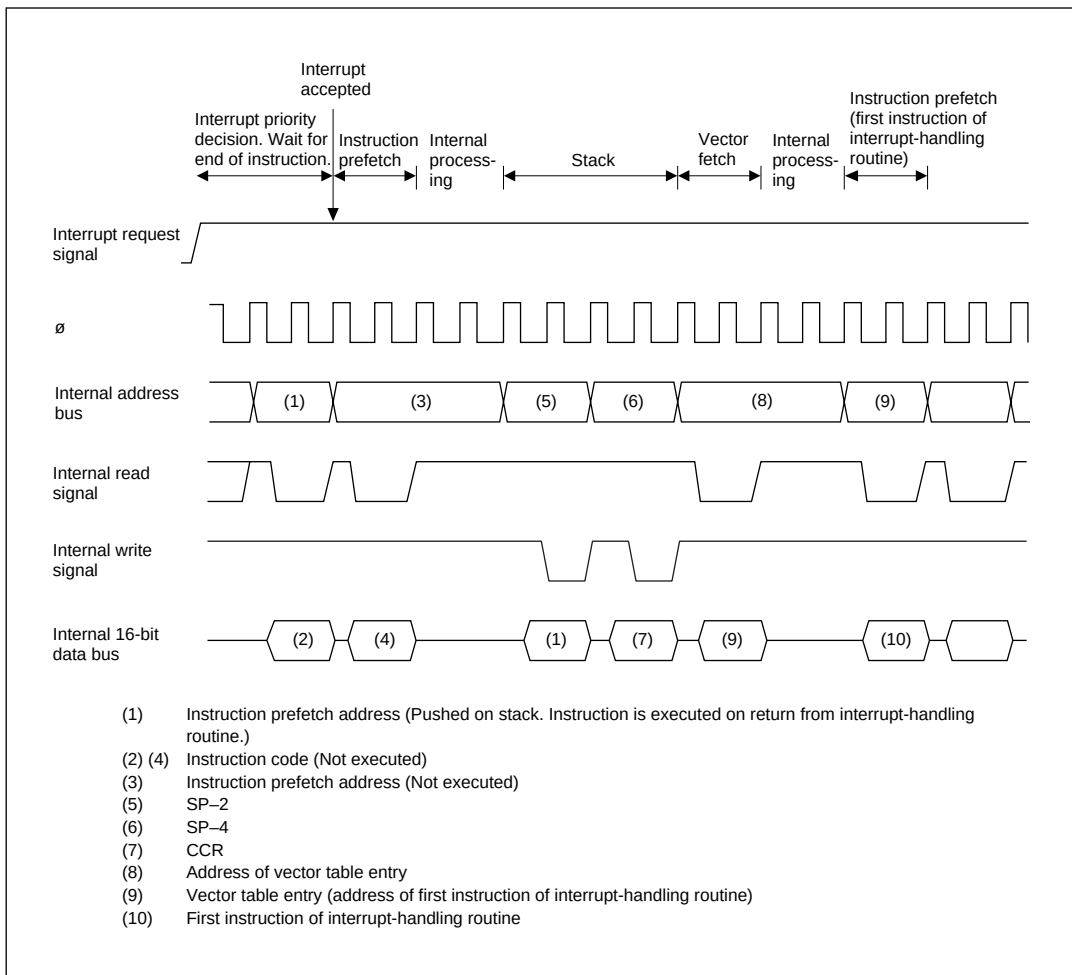

**Figure 4-6 Timing of Interrupt Sequence**



### 4.3.6 Interrupt Response Time

Table 4-4 indicates the number of states that elapse from an interrupt request signal until the first instruction of the software interrupt-handling routine is executed. Since on-chip memory is accessed 16 bits at a time, very fast interrupt service can be obtained by placing interrupt-handling routines in on-chip ROM and the stack in on-chip RAM.

**Table 4-4 Number of States before Interrupt Service**

| No.   | Reason for Wait                                          | Number of States |                         |
|-------|----------------------------------------------------------|------------------|-------------------------|
|       |                                                          | On-Chip Memory   | External Memory         |
| 1     | Interrupt priority decision                              | 2* <sup>3</sup>  | 2* <sup>3</sup>         |
| 2     | Wait for completion of current instruction* <sup>1</sup> | 1 to 13          | 5 to 17* <sup>2</sup>   |
| 3     | Save PC and CCR                                          | 4                | 12* <sup>2</sup>        |
| 4     | Fetch vector                                             | 2                | 6* <sup>2</sup>         |
| 5     | Fetch instruction                                        | 4                | 12* <sup>2</sup>        |
| 6     | Internal processing                                      | 4                | 4                       |
| Total |                                                          | 17 to 29         | 41 to 53 * <sup>2</sup> |

Notes: 1. These values do not apply if the current instruction is EEPMOV.  
2. If wait states are inserted in external memory access, add the number of wait states.  
3. 1 for internal interrupts.


#### 4.3.7 Precaution

Note that the following type of contention can occur in interrupt handling.

When software clears the enable bit of an interrupt to 0 to disable the interrupt, the interrupt becomes disabled after execution of the clearing instruction. If an enable bit is cleared by a BCLR or MOV instruction, for example, and the interrupt is requested during execution of that instruction, at the instant when the instruction ends the interrupt is still enabled, so after execution of the instruction, the hardware exception-handling sequence is executed for the interrupt. If a higher-priority interrupt is requested at the same time, however, the hardware exception-handling sequence is executed for the higher-priority interrupt and the interrupt that was disabled is ignored.

Similar considerations apply when an interrupt request flag is cleared to 0.

Figure 4-7 shows an example in which the OCIAE bit is cleared to 0.

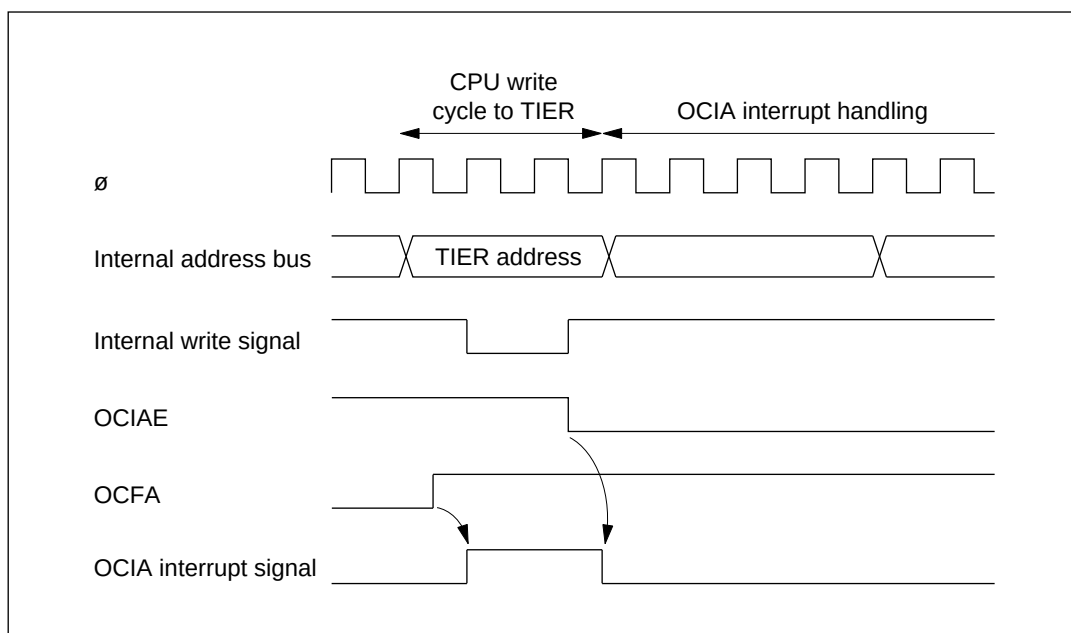


**Figure 4-7 Contention between Interrupt and Disabling Instruction**

The above contention does not occur if the enable bit or flag is cleared to 0 while the interrupt mask bit (I) is set to 1.

### 4.4 Note on Stack Handling

In word access, the least significant bit of the address is always assumed to be 0. The stack is always accessed by word access. Care should be taken to keep an even value in the stack pointer (general register R7). Use the PUSH and POP (or MOV.W Rn, @-SP and MOV.W @SP+, Rn) instructions to push and pop registers on the stack.

Setting the stack pointer to an odd value can cause programs to crash. Figure 4-8 shows an example of damage caused when the stack pointer contains an odd address.

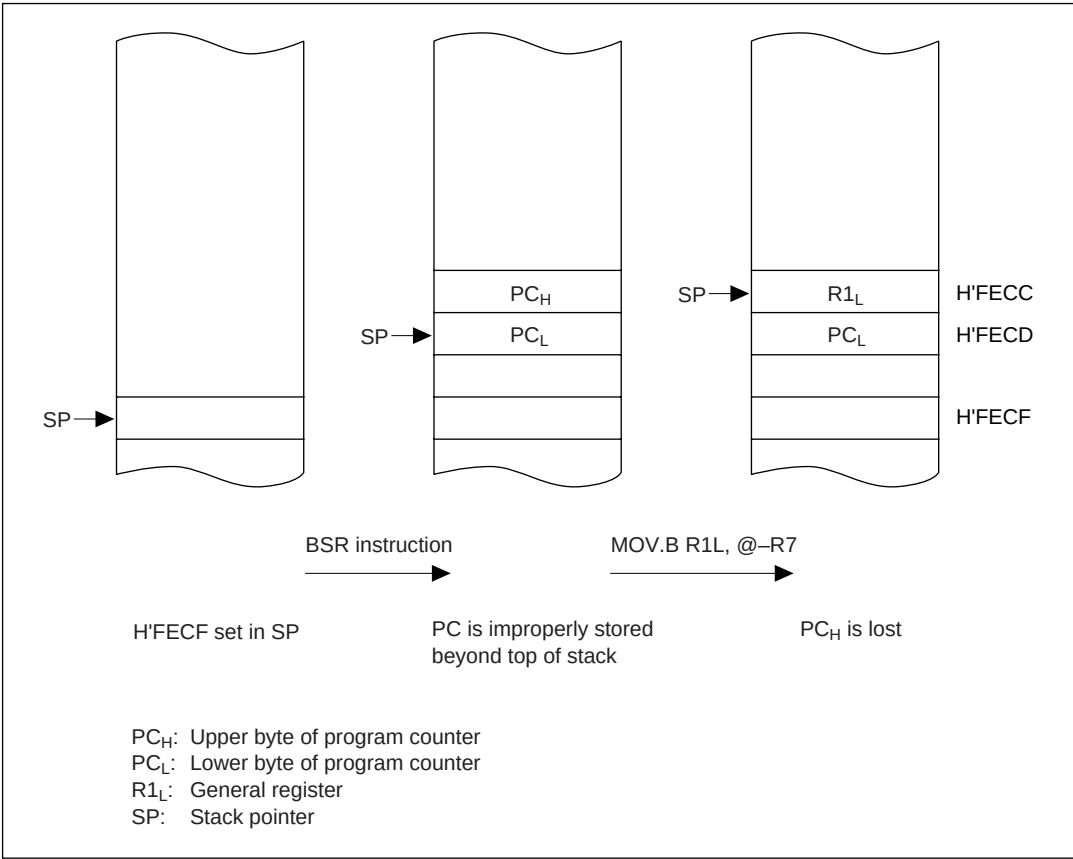

**Figure 4-8 Example of Damage Caused by Setting an Odd Address in R7**

## Section 5 Wait-State Controller

### 5.1 Overview

The H8/3297 Series has an on-chip wait-state controller that enables insertion of wait states into bus cycles for interfacing to low-speed external devices.


#### 5.1.1 Features

Features of the wait-state controller are listed below.

- Three selectable wait modes: programmable wait mode, pin auto-wait mode, and pin wait mode
- Automatic insertion of zero to three wait states

#### 5.1.2 Block Diagram

Figure 5-1 shows a block diagram of the wait-state controller.

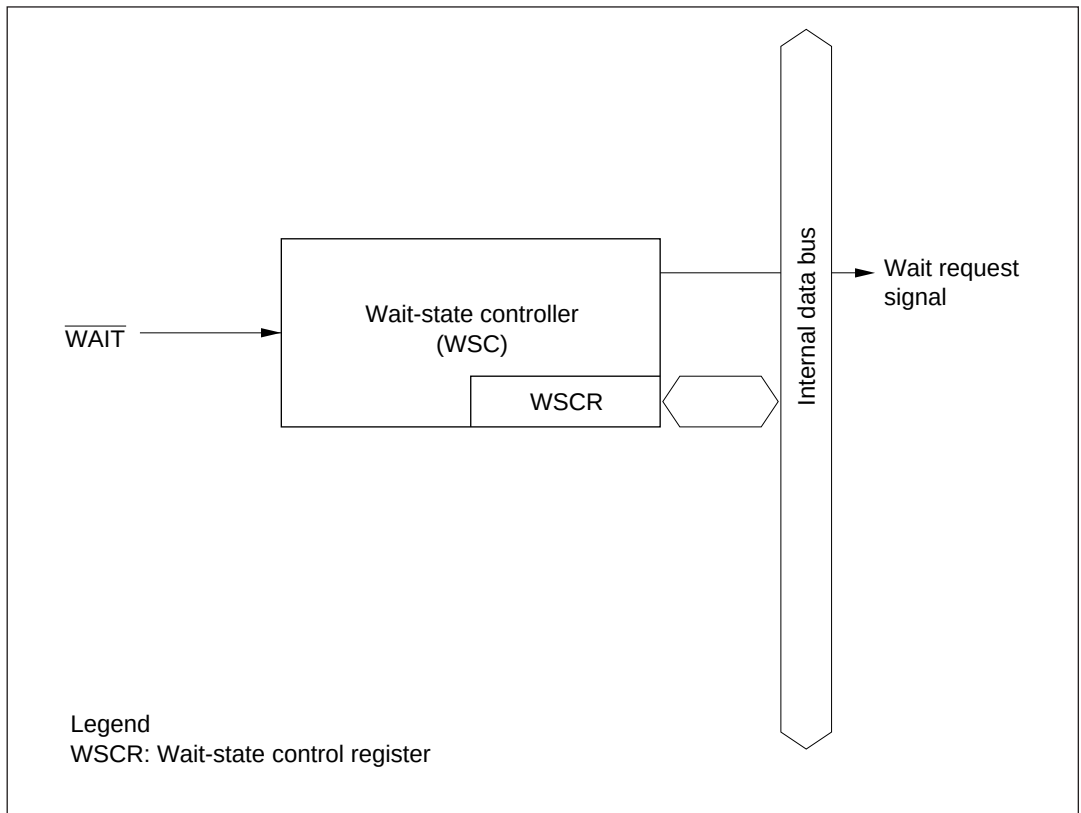

**Figure 5-1 Block Diagram of Wait-State Controller**

5.1.3 Input/Output Pins

Table 5-1 summarizes the wait-state controller’s input pin.

Table 5-1 Wait-State Controller Pins

| Name | Abbreviation | I/O   | Function                                             |
|------|--------------|-------|------------------------------------------------------|
| Wait | WAIT         | Input | Wait request signal for access to external addresses |

5.1.4 Register Configuration

Table 5-2 summarizes the wait-state controller’s register.

Table 5-2 Register Configuration

| Address | Name                        | Abbreviation | R/W | Initial Value |
|---------|-----------------------------|--------------|-----|---------------|
| H'FFC2  | Wait-state control register | WSCR         | R/W | H'08          |

5.2 Register Description

5.2.1 Wait-State Control Register (WSCR)

WSCR is an 8-bit readable/writable register that selects the wait mode for the wait-state controller (WSC) and specifies the number of wait states. It also controls frequency division of the clock signals supplied to the supporting modules.

|               |     |     |       |     |      |      |     |     |
|---------------|-----|-----|-------|-----|------|------|-----|-----|
| Bit           | 7   | 6   | 5     | 4   | 3    | 2    | 1   | 0   |
|               | —   | —   | CKDBL | —   | WMS1 | WMS0 | WC1 | WC0 |
| Initial value | 0   | 0   | 0     | 0   | 1    | 0    | 0   | 0   |
| Read/Write    | R/W | R/W | R/W   | R/W | R/W  | R/W  | R/W | R/W |

WSCR is initialized to H'08 by a reset and in hardware standby mode. It is not initialized in software standby mode.

## Bits 7 and 6—Reserved

**Bit 5—Clock Double (CKDBL):** Controls frequency division of clock signals supplied to supporting modules. For details, see section 6, Clock Pulse Generator.

**Bit 4—Reserved:** This bit is reserved, but it can be written and read. Its initial value is 0.

**Bits 3 and 2—Wait Mode Select 1 and 0 (WMS1/0):** These bits select the wait mode.

| Bit 3<br>WMS1 | Bit 2<br>WMS0 | Description                                      |
|---------------|---------------|--------------------------------------------------|
| 0             | 0             | Programmable wait mode                           |
|               | 1             | No wait states inserted by wait-state controller |
| 1             | 0             | Pin wait mode (Initial value)                    |
|               | 1             | Pin auto-wait mode                               |

**Bits 1 and 0—Wait Count 1 and 0 (WC1/0):** These bits select the number of wait states inserted in access to external address areas.

| Bit 1<br>WC1 | Bit 0<br>WC0 | Description                                                      |
|--------------|--------------|------------------------------------------------------------------|
| 0            | 0            | No wait states inserted by wait-state controller (Initial value) |
|              | 1            | 1 state inserted                                                 |
| 1            | 0            | 2 states inserted                                                |
|              | 1            | 3 states inserted                                                |

### 5.3 Wait Modes

**Analog power supply:** Analog power supply pin for the A/D converter. If the A/D converter is not used, connect  $AV_{CC}$  to the system power supply ( $V_{CC}$ ). Figure 5-2 shows the timing when the wait count is 1 ( $WC = 0$ ,  $WC0 = 1$ ).


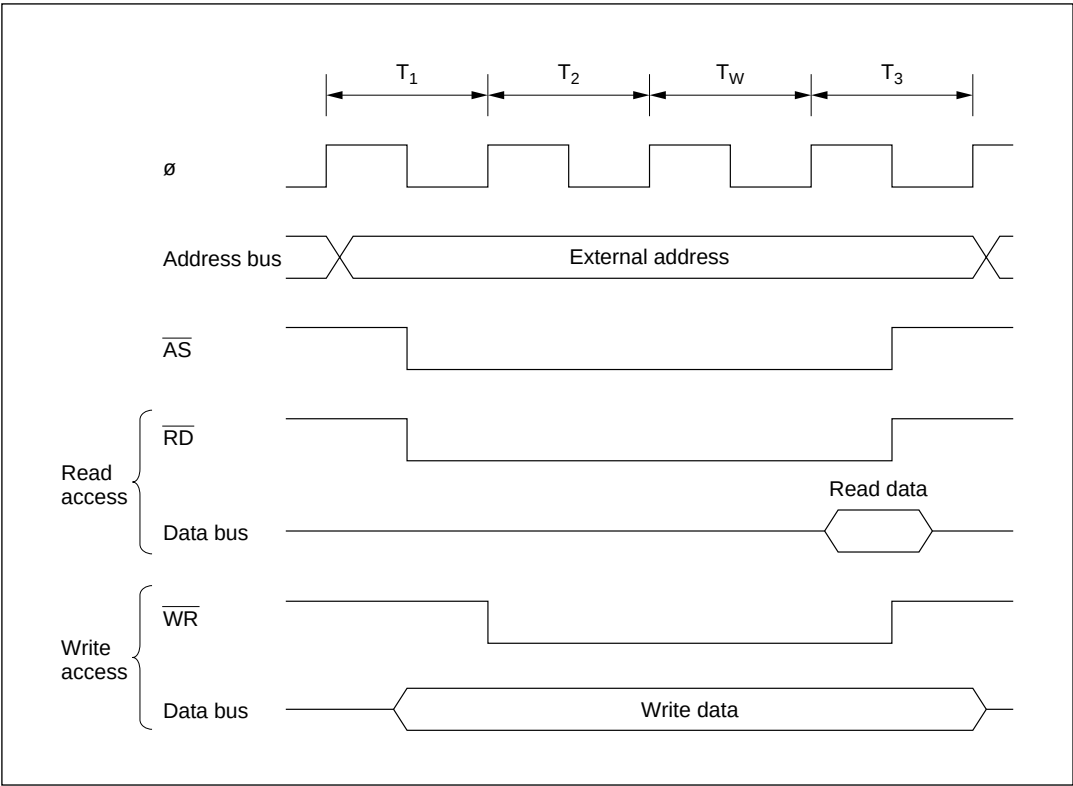


Figure 5-2 Programmable Wait Mode

**Pin Wait Mode:** In all accesses to external addresses, the number of wait states ( $T_W$ ) selected by bits WC1 and WC0 are inserted. If the  $\overline{\text{WAIT}}$  pin is low at the fall of the system clock ( $\phi$ ) in the last of these wait states, an additional wait state is inserted. If the  $\overline{\text{WAIT}}$  pin remains low, wait states continue to be inserted until the  $\overline{\text{WAIT}}$  signal goes high.

Pin wait mode is useful for inserting four or more wait states, or for inserting different numbers of wait states for different external devices.

Figure 5-3 shows the timing when the wait count is 1 ( $\text{WC1} = 0, \text{WC0} = 1$ ) and one additional wait state is inserted by  $\overline{\text{WAIT}}$  input.

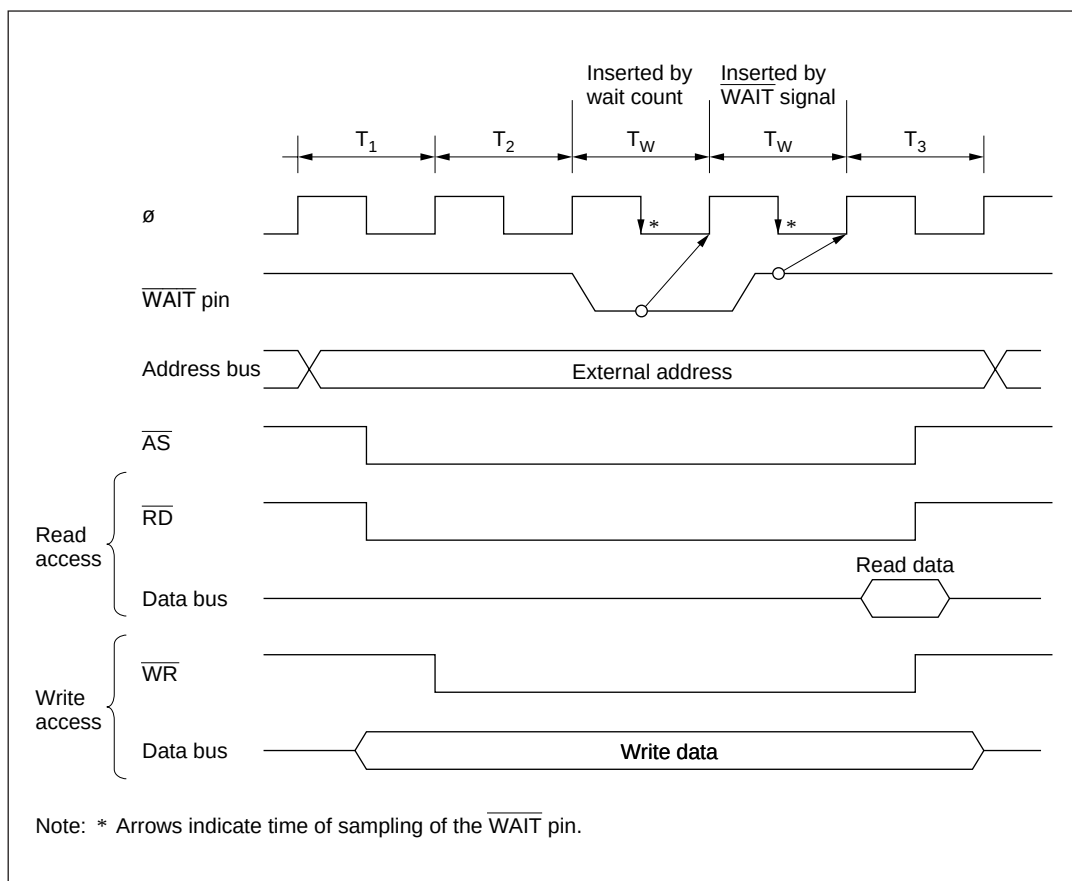


**Figure 5-3 Pin Wait Mode**



**Pin Auto-Wait Mode:** If the  $\overline{\text{WAIT}}$  pin is low, the number of wait states ( $T_W$ ) selected by bits WC1 and WC0 are inserted. WC1 and WC0 are inserted.

In pin auto-wait mode, if the  $\overline{\text{WAIT}}$  pin is low at the fall of the system clock ( $\phi$ ) in the  $T_2$  state, the number of wait states ( $T_W$ ) selected by bits WC1 and WC0 are inserted. No additional wait states are inserted even if the  $\overline{\text{WAIT}}$  pin remains low. Pin auto-wait mode can be used for an easy interface to low-speed memory, simply by routing the chip select signal to the  $\overline{\text{WAIT}}$  pin.

Figure 5-4 shows the timing when the wait count is 1.

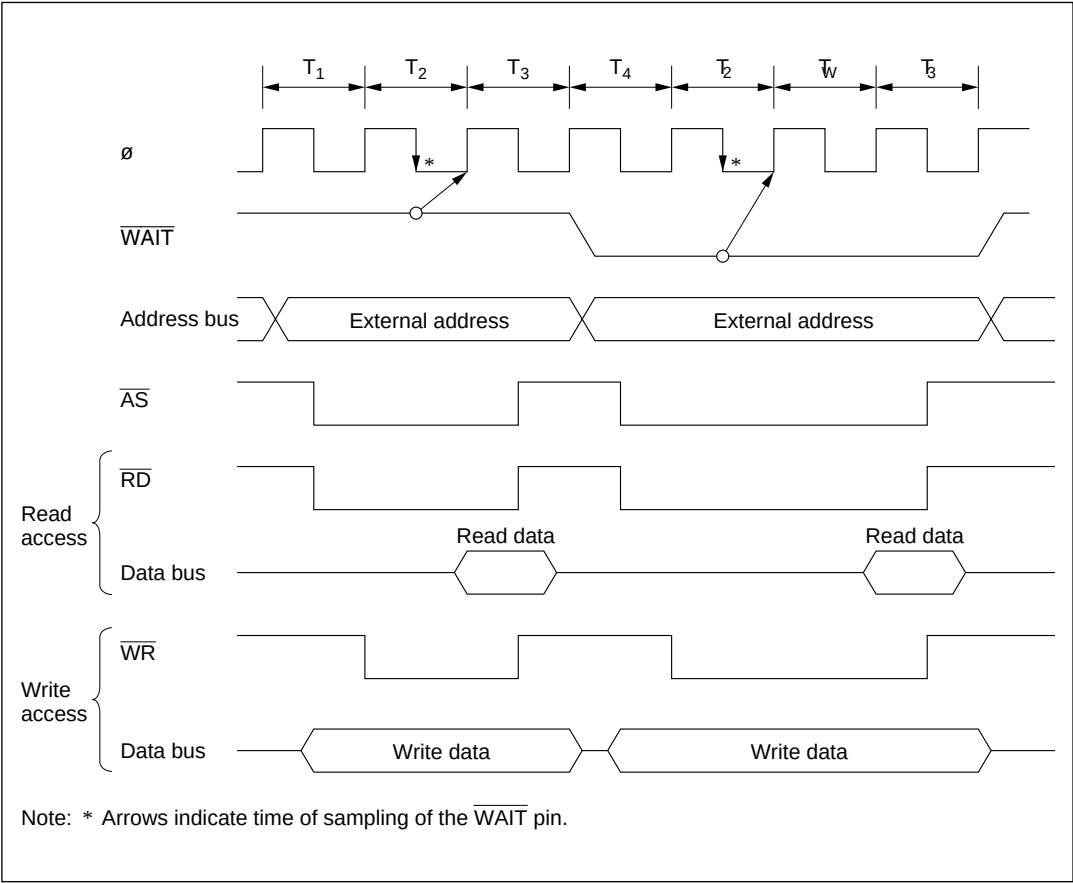

**Figure 5-4 Pin Auto-Wait Mode**


## Section 6 Clock Pulse Generator

### 6.1 Overview

The H8/3297 Series has a built-in clock pulse generator (CPG) consisting of an oscillator circuit, a duty adjustment circuit, and a divider and a prescaler that generates clock signals for the on-chip supporting modules.

#### 6.1.1 Block Diagram

Figure 6-1 shows a block diagram of the clock pulse generator.

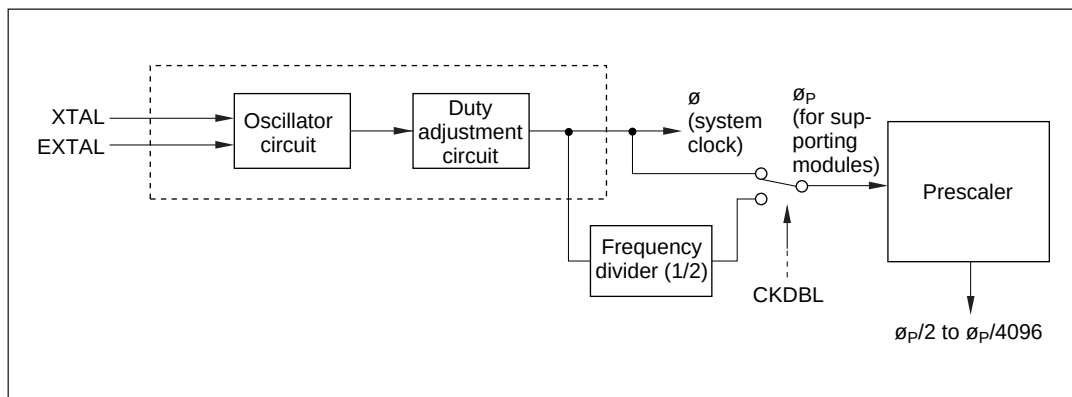

**Figure 6-1 Block Diagram of Clock Pulse Generator**

Input an external clock signal to the EXTAL pin, or connect a crystal resonator to the XTAL and EXTAL pins. The system clock frequency ( $\emptyset$ ) will be the same as the input frequency. This same system clock frequency ( $\emptyset_p$ ) can be supplied to timers and other supporting modules, or it can be divided by two. The selection is made by software, by controlling the CKDBL bit.

6.1.2 Wait-State Control Register (WSCR)

WSCR is an 8-bit readable/writable register that controls frequency division of the clock signals supplied to the supporting modules. It also controls wait-state insertion.

WSCR is initialized to H'08 by a reset and in hardware standby mode. It is not initialized in software standby mode.

|               |     |     |       |     |      |      |     |     |
|---------------|-----|-----|-------|-----|------|------|-----|-----|
| Bit           | 7   | 6   | 5     | 4   | 3    | 2    | 1   | 0   |
|               | —   | —   | CKDBL | —   | WMS1 | WMS0 | WC1 | WC0 |
| Initial value | 0   | 0   | 0     | 0   | 1    | 0    | 0   | 0   |
| Read/Write    | R/W | R/W | R/W   | R/W | R/W  | R/W  | R/W | R/W |

Bits 7 and 6—Reserved

**Bit 5—Clock Double (CKDBL):** Controls the frequency division of clock signals supplied to supporting modules.

| Bit 5<br>CKDBL | Description                                                                                                            |
|----------------|------------------------------------------------------------------------------------------------------------------------|
| 0              | The undivided system clock ( $\phi$ ) is supplied as the clock ( $\phi_P$ ) for supporting modules.<br>(Initial value) |
| 1              | The system clock ( $\phi$ ) is divided by two and supplied as the clock ( $\phi_P$ ) for supporting modules.           |

**Bit 4—Reserved:** This bit is reserved, but it can be written and read. Its initial value is 0.

Bits 3 and 2—Wait Mode Select 1 and 0 (WMS1/0)

Bits 1 and 0—Wait Count 1 and 0 (WC1/0)

These bits control wait-state insertion. For details, see section 5, Wait-State Controller.

# 6.2 Oscillator Circuit

If an external crystal is connected across the EXTAL and XTAL pins, the on-chip oscillator circuit generates a system clock signal. Alternatively, an external clock signal can be applied to the EXTAL pin.

## (1) Connecting an External Crystal

① **Circuit Configuration:** An external crystal can be connected as in the example in figure 6-2. Table 6-1 indicates the appropriate damping resistance  $R_d$ . An AT-cut parallel resonance crystal should be used.


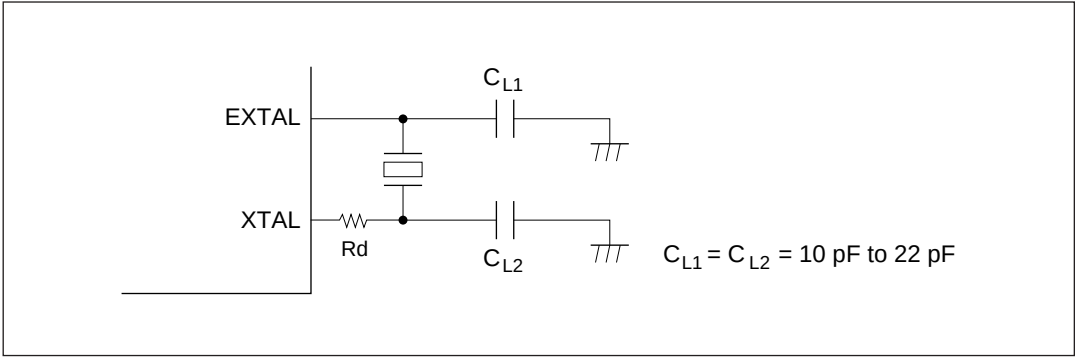


Figure 6-2 Connection of Crystal Oscillator (Example)

Table 6-1 Damping Resistance

| Frequency (MHz)        | 2   | 4   | 8   | 12 | 16 |
|------------------------|-----|-----|-----|----|----|
| $R_d$ max ( $\Omega$ ) | 1 k | 500 | 200 | 0  | 0  |

② **Crystal Oscillator:** Figure 6-3 shows an equivalent circuit of the crystal resonator. The crystal resonator should have the characteristics listed in table 6-2.

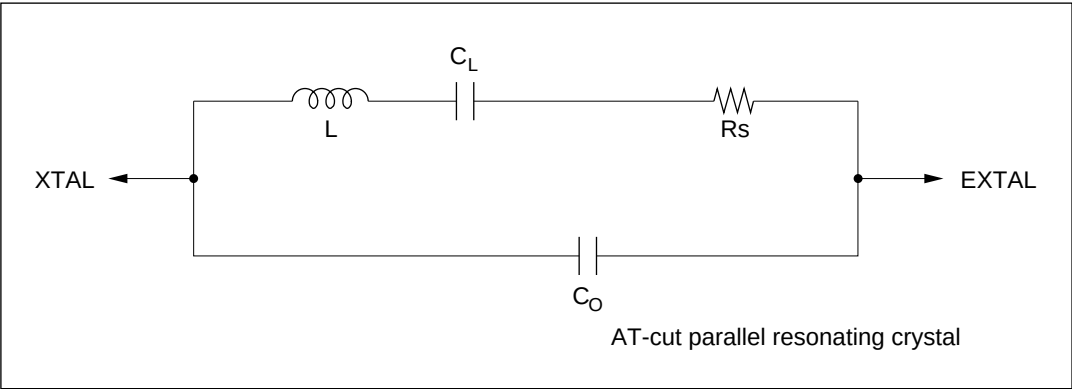


**Figure 6-3    Equivalent Circuit of External Crystal**

**Table 6-2    External Crystal Parameters**

|                 |          |     |    |    |    |
|-----------------|----------|-----|----|----|----|
| Frequency (MHz) | 2        | 4   | 8  | 12 | 16 |
| Rs max (Ω)      | 500      | 120 | 80 | 60 | 50 |
| C0 (pF)         | 7 pF max |     |    |    |    |

Use a crystal with the same frequency as the desired system clock frequency (ø).

③ **Note on Board Design:** When an external crystal is connected, other signal lines should be kept away from the crystal circuit to prevent induction from interfering with correct oscillation. See figure 6-4. The crystal and its load capacitors should be placed as close as possible to the XTAL and EXTAL pins.

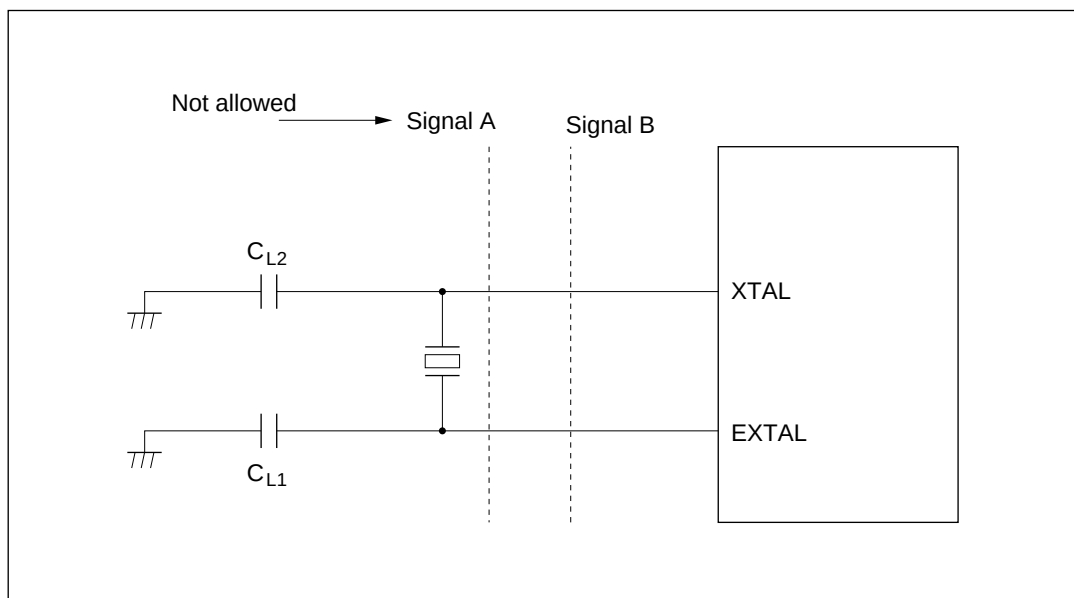


**Figure 6-4 Notes on Board Design around External Crystal**


## (2) Input of External Clock Signal

① **Circuit Configuration:** An external clock signal can be input as shown in the examples in figure 6-5. In example (b) in figure 6-5, the external clock signal should be kept high during standby.

If the XTAL pin is left open, make sure the stray capacitance does not exceed 10 pF.

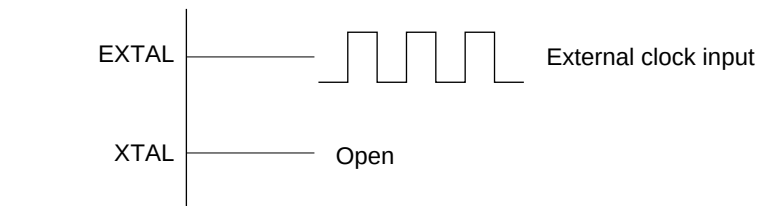

(a) Connections with XTAL pin left open

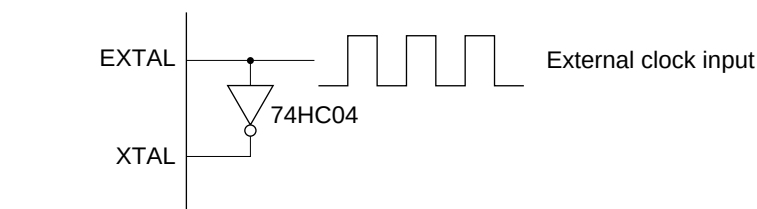

(b) Connections with inverted clock input at XTAL pin


**Figure 6-5 External Clock Input (Example)**

## ② External Clock Input

The external clock signal should have the same frequency as the desired system clock ( $\phi$ ). Clock timing parameters are given in table 6-3 and figure 6-6.

**Table 6-3 Clock Timing**

| Item                                     | Symbol    | $V_{CC} = 2.7 \text{ to } 5.5 \text{ V}$ |     | $V_{CC} = 5.0 \text{ V} \pm 10\%$ |     | Unit      | Test Conditions                       |
|------------------------------------------|-----------|------------------------------------------|-----|-----------------------------------|-----|-----------|---------------------------------------|
|                                          |           | Min                                      | Max | Min                               | Max |           |                                       |
| Low pulse width of external clock input  | $t_{EXL}$ | 40                                       | —   | 20                                | —   | ns        | Figure 6-6                            |
| High pulse width of external clock input | $t_{EXH}$ | 40                                       | —   | 20                                | —   | ns        |                                       |
| External clock rise time                 | $t_{EXr}$ | —                                        | 10  | —                                 | 5   | ns        |                                       |
| External clock fall time                 | $t_{EXf}$ | —                                        | 10  | —                                 | 5   | ns        |                                       |
| Clock pulse width low                    | $t_{CL}$  | 0.3                                      | 0.7 | 0.3                               | 0.7 | $t_{cyc}$ | $\phi \geq 5 \text{ MHz}$ Figure 16-4 |
|                                          |           | 0.4                                      | 0.6 | 0.4                               | 0.6 | $t_{cyc}$ | $\phi < 5 \text{ MHz}$                |
| Clock pulse width high                   | $t_{CH}$  | 0.3                                      | 0.7 | 0.3                               | 0.7 | $t_{cyc}$ | $\phi \geq 5 \text{ MHz}$             |
|                                          |           | 0.4                                      | 0.6 | 0.4                               | 0.6 | $t_{cyc}$ | $\phi < 5 \text{ MHz}$                |

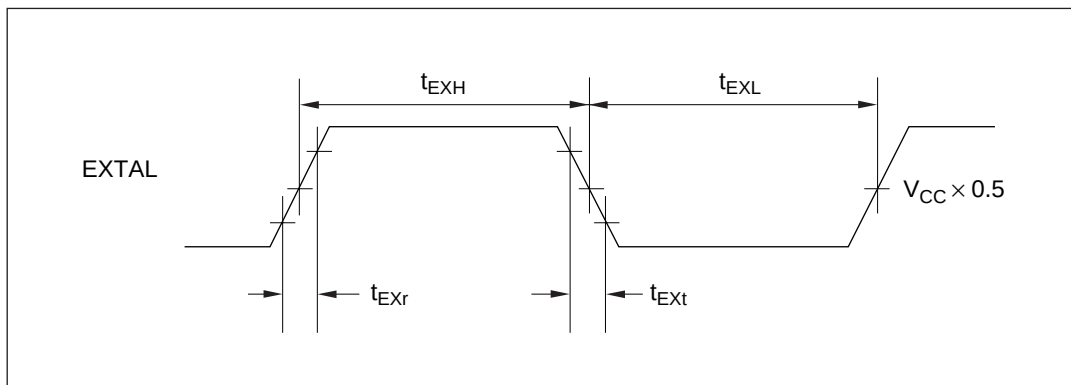

**Figure 6-6 External Clock Input Timing**




Table 6.4 shows the external clock output settling delay time, and figure 6.7 shows the external clock output settling delay timing. The oscillator and duty adjustment circuit have the function of adjusting the waveform of the external clock input at the EXTAL pin. When the specified clock signal is input at the EXTAL pin, internal clock signal output settles after the elapse of the external clock output settling delay time ( $t_{\text{DEXT}}$ ). As the clock signal output remains unsettled during the  $t_{\text{DEXT}}$  period, the reset signal should be driven low to retain the reset state.

**Table 6-4 External Clock Output Settling Delay Time**

Conditions:  $V_{\text{CC}} = 2.7 \text{ V to } 5.5 \text{ V}$ ,  $AV_{\text{CC}} 2.7 \text{ V to } 5.5 \text{ V}$ ,  $V_{\text{SS}} = AV_{\text{SS}} = 0 \text{ V}$

| Item                                      | Symbol              | Min | Max | Unit          | Note       |
|-------------------------------------------|---------------------|-----|-----|---------------|------------|
| External clock output settling delay time | $t_{\text{DEXT}}^*$ | 500 | –   | $\mu\text{s}$ | Figure 6-7 |

Note: \*  $t_{\text{DEXT}}$  includes an  $\overline{\text{RES}}$  pulse width ( $t_{\text{RESW}}$ ) of  $10 t_{\text{cyc}}$ .

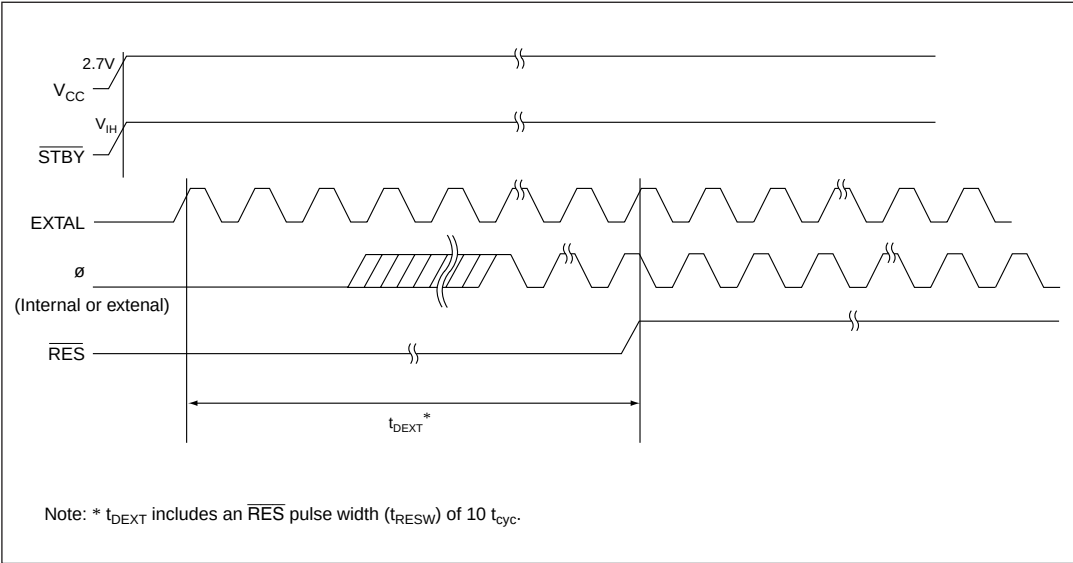

**Figure 6-7 External Clock Output Settling Delay Time**

### 6.3 Duty Adjustment Circuit

When the clock frequency is 5 MHz or above, the duty adjustment circuit adjusts the duty cycle of the signal from the oscillator circuit to generate the system clock ( $\phi$ ).

### 6.4 Prescaler

The clock for the on-chip supporting modules ( $\phi_p$ ) has either the same frequency as the system clock ( $\phi$ ) or this frequency divided by two, depending on the CKDBL bit. The prescaler divides the frequency of  $\phi_p$  to generate internal clock signals with frequencies from  $\phi_p/2$  to  $\phi_p/4096$ .

# Section 7 I/O Ports

## 7.1 Overview

The H8/3297 Series has five 8-bit input/output ports, one 8-bit input port, and one 3-bit input/output port.

Table 7-1 lists the functions of each port in each operating mode. As table 7-1 indicates, the port pins are multiplexed, and the pin functions differ depending on the operating mode.

Each port has a data direction register (DDR) that selects input or output, and a data register (DR) that stores output data. If bit manipulation instructions will be executed on the port data direction registers, see “Notes on Bit Manipulation Instructions” in section 2.5.5, Bit Manipulation Instructions.

Ports 1 to 4, and 6 can drive one TTL load and a 90-pF capacitive load. Port 5 can drive one TTL load and a 30-pF capacitive load. Ports 1 and 2 can drive LEDs (with 10-mA current sink). Ports 1 to 6 can drive a darlington pair. Ports 1 to 3 have built-in MOS pull-up transistors.

For block diagrams of the ports, see appendix C, I/O Port Block Diagrams.

**Table 7-1 Port Functions**

| Port   | Description                                                                                                                     | Pins                                                                                                                                                                                                                                                                                                      | Expanded Modes                                                                                                                                                                                                                                                 |                                                                            | Single-Chip Mode          |
|--------|---------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------|---------------------------|
|        |                                                                                                                                 |                                                                                                                                                                                                                                                                                                           | Mode 1                                                                                                                                                                                                                                                         | Mode 2                                                                     | Mode 3                    |
| Port 1 | <ul style="list-style-type: none"> <li>• 8-bit I/O port</li> <li>• Can drive LEDs</li> <li>• Built-in input pull-ups</li> </ul> | P1 <sub>7</sub> to P1 <sub>0</sub> /A <sub>7</sub> to A <sub>0</sub>                                                                                                                                                                                                                                      | Lower address output (A <sub>7</sub> to A <sub>0</sub> )                                                                                                                                                                                                       | Lower address output (A <sub>7</sub> to A <sub>0</sub> ) or general input  | General input/output      |
| Port 2 | <ul style="list-style-type: none"> <li>• 8-bit I/O port</li> <li>• Can drive LEDs</li> <li>• Built-in input pull-ups</li> </ul> | P2 <sub>7</sub> to P2 <sub>0</sub> /A <sub>15</sub> to A <sub>8</sub>                                                                                                                                                                                                                                     | Upper address output (A <sub>15</sub> to A <sub>8</sub> )                                                                                                                                                                                                      | Upper address output (A <sub>15</sub> to A <sub>8</sub> ) or general input | General input/output      |
| Port 3 | <ul style="list-style-type: none"> <li>• 8-bit I/O port</li> <li>• Built-in input pull-ups</li> </ul>                           | P3 <sub>7</sub> to P3 <sub>0</sub> /<br>D <sub>7</sub> to D <sub>0</sub> /                                                                                                                                                                                                                                | Data bus (D <sub>7</sub> to D <sub>0</sub> )                                                                                                                                                                                                                   |                                                                            | General input/output      |
| Port 4 | <ul style="list-style-type: none"> <li>• 8-bit I/O port</li> </ul>                                                              | P4 <sub>7</sub> /WAIT                                                                                                                                                                                                                                                                                     | Expanded data bus control input (WAIT)/ General input/output                                                                                                                                                                                                   |                                                                            | General input/output      |
|        |                                                                                                                                 | P4 <sub>6</sub> /ø                                                                                                                                                                                                                                                                                        | System clock (ø) output                                                                                                                                                                                                                                        |                                                                            | ø output or general input |
|        |                                                                                                                                 | P4 <sub>5</sub> /AS<br>P4 <sub>4</sub> /WR<br>P4 <sub>3</sub> /RD                                                                                                                                                                                                                                         | Expanded data bus control output (RD, WR, AS)                                                                                                                                                                                                                  |                                                                            | General input/output      |
|        |                                                                                                                                 | P4 <sub>2</sub> /IRQ <sub>0</sub><br>P4 <sub>1</sub> /IRQ <sub>1</sub><br>P4 <sub>0</sub> /IRQ <sub>2</sub> /ADTRG                                                                                                                                                                                        | Trigger input to A/D converter (ADTRG), external interrupt input (IRQ <sub>2</sub> to IRQ <sub>0</sub> ), or general input/output                                                                                                                              |                                                                            |                           |
| Port 5 | <ul style="list-style-type: none"> <li>• 3-bit I/O port</li> </ul>                                                              | P5 <sub>2</sub> /SCK<br>P5 <sub>1</sub> /RxD<br>P5 <sub>0</sub> /TxD                                                                                                                                                                                                                                      | Serial communication interface input/output (Tx/D, Rx/D, SCK) or general input/output                                                                                                                                                                          |                                                                            |                           |
| Port 6 | <ul style="list-style-type: none"> <li>• 8-bit I/O port</li> </ul>                                                              | P6 <sub>7</sub> /TMO <sub>1</sub><br>P6 <sub>6</sub> /FTOB/TMRI <sub>1</sub><br>P6 <sub>5</sub> /FTID/TMCI <sub>1</sub><br>P6 <sub>4</sub> /FTIC/TMO <sub>0</sub><br>P6 <sub>3</sub> /FTIB/TMRI <sub>0</sub><br>P6 <sub>2</sub> /FTIA<br>P6 <sub>1</sub> /FTOA<br>P6 <sub>0</sub> /FTCI/TMCI <sub>0</sub> | 16-bit free-running timer input/output (FTCI, FTOA, FTIA, FTIB, FTIC, FTID, FTOB), 8-bit timer 0/1 input/output (TMCI <sub>0</sub> , TMO <sub>0</sub> , TMRI <sub>0</sub> , TMCI <sub>1</sub> , TMO <sub>1</sub> , TMRI <sub>1</sub> ) or general input/output |                                                                            |                           |
| Port 7 | <ul style="list-style-type: none"> <li>• 8-bit input port</li> </ul>                                                            | P7 <sub>7</sub> to P7 <sub>0</sub><br>AN <sub>7</sub> to AN <sub>0</sub>                                                                                                                                                                                                                                  | Analog input to A/D converter (AN <sub>7</sub> to AN <sub>0</sub> ) or general input                                                                                                                                                                           |                                                                            |                           |

# 7.2 Port 1

## 7.2.1 Overview

Port 1 is an 8-bit input/output port with the pin configuration shown in figure 7-1. The pin functions differ depending on the operating mode.

Port 1 has built-in, software-controllable MOS input pull-up transistors that can be used in modes 2 and 3.

Pins in port 1 can drive one TTL load and a 90-pF capacitive load. They can also drive LEDs and darlington transistors.

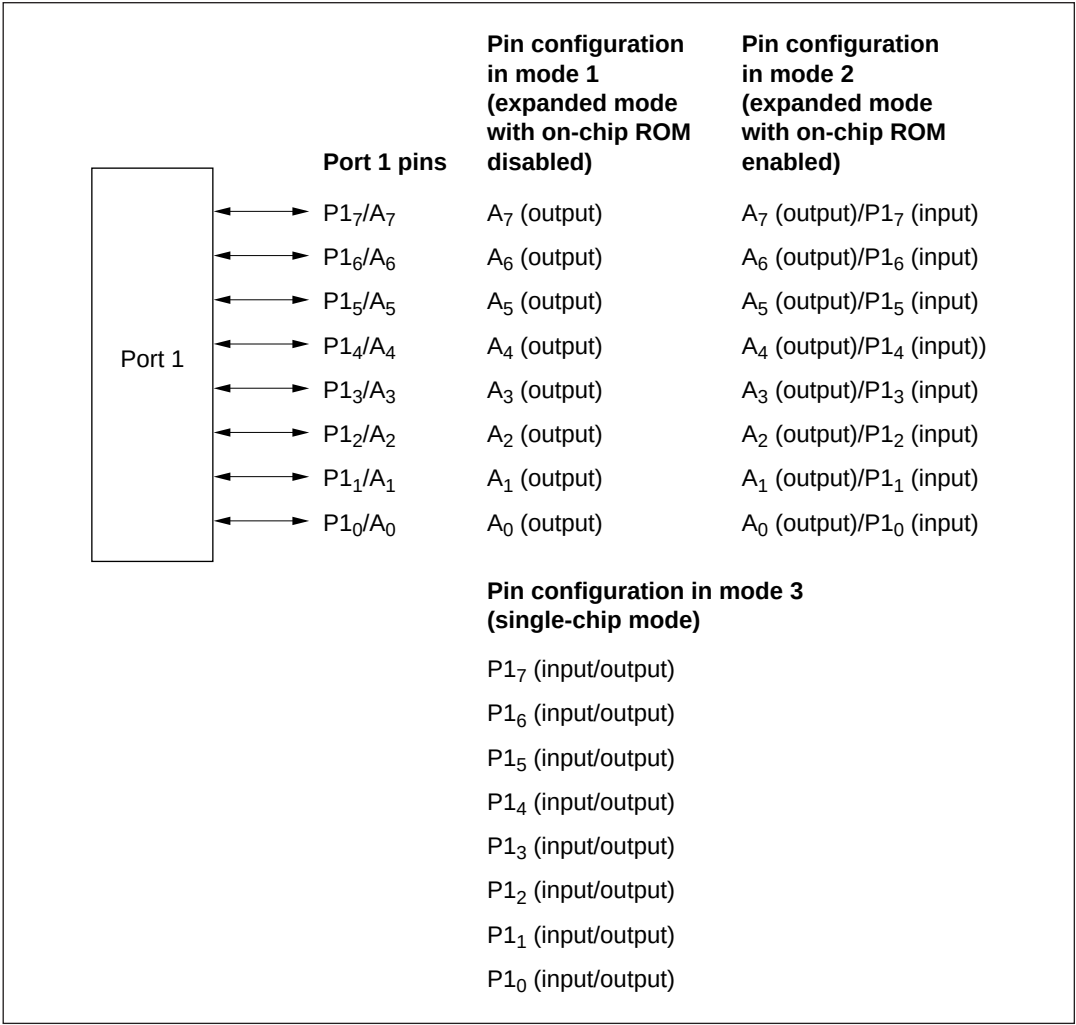


Figure 7-1 Port 1 Pin Configuration

7.2.2 Register Configuration and Descriptions

Table 7-2 summarizes the port 1 registers.

Table 7-2 Port 1 Registers

| Name                                  | Abbreviation | Read/Write | Initial Value                         | Address |
|---------------------------------------|--------------|------------|---------------------------------------|---------|
| Port 1 data direction register        | P1DDR        | W          | H'FF (mode 1)<br>H'00 (modes 2 and 3) | H'FFB0  |
| Port 1 data register                  | P1DR         | R/W        | H'00                                  | H'FFB2  |
| Port 1 input pull-up control register | P1PCR        | R/W        | H'00                                  | H'FFAC  |

Port 1 Data Direction Register (P1DDR)

| Bit           | 7                   | 6                   | 5                   | 4                   | 3                   | 2                   | 1                   | 0                   |
|---------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|
|               | P1 <sub>7</sub> DDR | P1 <sub>6</sub> DDR | P1 <sub>5</sub> DDR | P1 <sub>4</sub> DDR | P1 <sub>3</sub> DDR | P1 <sub>2</sub> DDR | P1 <sub>1</sub> DDR | P1 <sub>0</sub> DDR |
| Mode 1        |                     |                     |                     |                     |                     |                     |                     |                     |
| Initial value | 1                   | 1                   | 1                   | 1                   | 1                   | 1                   | 1                   | 1                   |
| Read/Write    | —                   | —                   | —                   | —                   | —                   | —                   | —                   | —                   |
| Modes 2 and 3 |                     |                     |                     |                     |                     |                     |                     |                     |
| Initial value | 0                   | 0                   | 0                   | 0                   | 0                   | 0                   | 0                   | 0                   |
| Read/Write    | W                   | W                   | W                   | W                   | W                   | W                   | W                   | W                   |

P1DDR controls the input/output direction of each pin in port 1.

**Mode 1:** The P1DDR values are fixed at 1. Port 1 consists of lower address output pins. P1DDR values cannot be modified and are always read as 1.

In hardware standby mode, the address bus is in the high-impedance state.

**Mode 2:** A pin in port 1 is used for address output if the corresponding P1DDR bit is set to 1, and for general input if this bit is cleared to 0.

**Mode 3:** A pin in port 1 is used for general output if the corresponding P1DDR bit is set to 1, and for general input if this bit is cleared to 0.

In modes 2 and 3, P1DDR is a write-only register. Read data is invalid. If read, all bits always read 1. P1DDR is initialized to H'00 by a reset and in hardware standby mode. In software standby mode it retains its existing values, so if a transition to software standby mode occurs while a P1DDR bit is set to 1, the corresponding pin remains in the output state.

### Port 1 Data Register (P1DR)

| Bit           | 7              | 6              | 5              | 4              | 3              | 2              | 1              | 0              |
|---------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|
|               | P <sub>7</sub> | P <sub>6</sub> | P <sub>5</sub> | P <sub>4</sub> | P <sub>3</sub> | P <sub>2</sub> | P <sub>1</sub> | P <sub>0</sub> |
| Initial value | 0              | 0              | 0              | 0              | 0              | 0              | 0              | 0              |
| Read/Write    | R/W            | R/W            | R/W            | R/W            | R/W            | R/W            | R/W            | R/W            |

P1DR is an 8-bit register that stores data for pins P<sub>17</sub> to P<sub>10</sub>. When a P1DDR bit is set to 1, if port 1 is read, the value in P1DR is obtained directly, regardless of the actual pin state. When a P1DDR bit is cleared to 0, if port 1 is read the pin state is obtained.

P1DR is initialized to H'00 by a reset and in hardware standby mode. In software standby mode it retains its existing values.

### Port 1 Input Pull-Up Control Register (P1PCR)

| Bit           | 7                   | 6                   | 5                   | 4                   | 3                   | 2                   | 1                   | 0                   |
|---------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|
|               | P <sub>17</sub> PCR | P <sub>16</sub> PCR | P <sub>15</sub> PCR | P <sub>14</sub> PCR | P <sub>13</sub> PCR | P <sub>12</sub> PCR | P <sub>11</sub> PCR | P <sub>10</sub> PCR |
| Initial value | 0                   | 0                   | 0                   | 0                   | 0                   | 0                   | 0                   | 0                   |
| Read/Write    | R/W                 | R/W                 | R/W                 | R/W                 | R/W                 | R/W                 | R/W                 | R/W                 |


P1PCR is an 8-bit readable/writable register that controls the input pull-up transistors in port 1. If a P1DDR bit is cleared to 0 (designating input) and the corresponding P1PCR bit is set to 1, the input pull-up transistor is turned on.

P1PCR is initialized to H'00 by a reset and in hardware standby mode. In software standby mode it retains its existing values.

### 7.2.3 Pin Functions in Each Mode


Port 1 has different pin functions in different modes. A separate description for each mode is given below.

**Pin Functions in Mode 1:** In mode 1 (expanded mode with on-chip ROM disabled), port 1 is automatically used for lower address output ( $A_7$  to  $A_0$ ). Figure 7-2 shows the pin functions in mode 1.

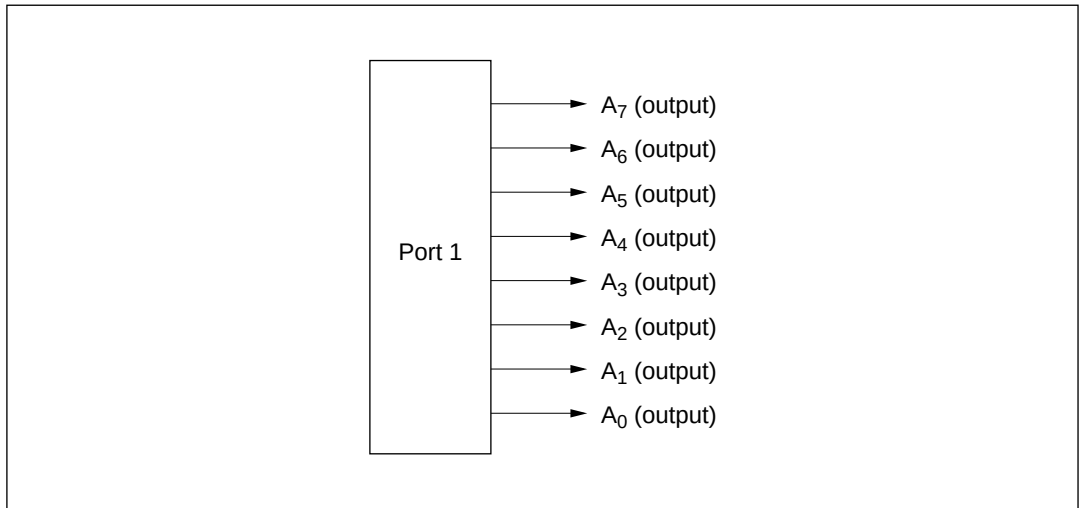

**Figure 7-2 Pin Functions in Mode 1 (Port 1)**


**Mode 2:** In mode 2 (expanded mode with on-chip ROM enabled), port 1 can provide lower address output pins and general input pins. Each pin becomes a lower address output pin if its P1DDR bit is set to 1, and a general input pin if this bit is cleared to 0. Following a reset, all pins are input pins. To be used for address output, their P1DDR bits must be set to 1. Figure 7-3 shows the pin functions in mode 2.

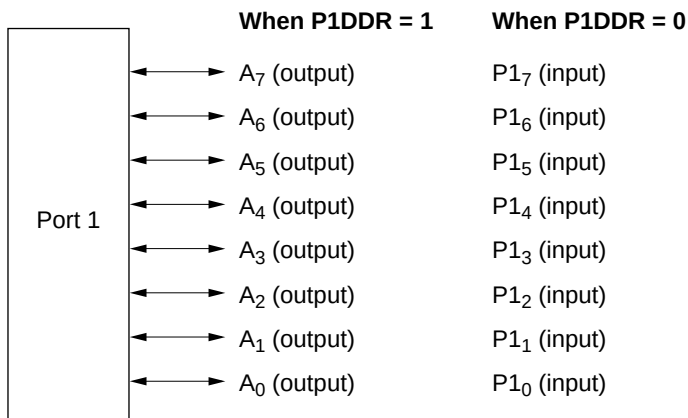

**Figure 7-3 Pin Functions in Mode 2 (Port 1)**



**Mode 3:** In mode 3 (single-chip mode), the input or output direction of each pin can be selected individually. A pin becomes a general input pin when its P1DDR bit is cleared to 0 and a general output pin when this bit is set to 1. Figure 7-4 shows the pin functions in mode 3.

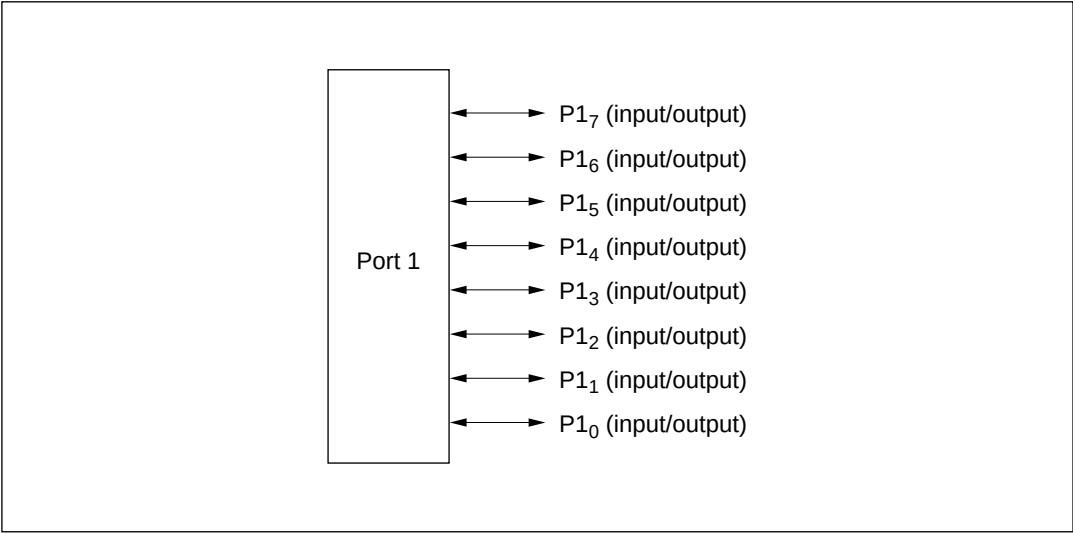

**Figure 7-4 Pin Functions in Mode 3 (Port 1)**

**7.2.4 Input Pull-Up Transistors**

Port 1 has built-in programmable input pull-up transistors that are available in modes 2 and 3. The pull-up for each bit can be turned on and off individually. To turn on an input pull-up in mode 2 or 3, set the corresponding P1PCR bit to 1 and clear the corresponding P1DDR bit to 0. P1PCR is cleared to H'00 by a reset and in hardware standby mode, turning all input pull-ups off. In software standby mode, the previous state is maintained.

Table 7-3 indicates the states of the input pull-up transistors in each operating mode.

**Table 7-3 States of Input Pull-Up Transistors (Port 1)**

| Mode | Reset | Hardware Standby | Software Standby | Other Operating Modes |
|------|-------|------------------|------------------|-----------------------|
| 1    | Off   | Off              | Off              | Off                   |
| 2    | Off   | Off              | On/off           | On/off                |
| 3    | Off   | Off              | On/off           | On/off                |

Notes: Off: The input pull-up transistor is always off.  
On/off: The input pull-up transistor is on if P1PCR = 1 and P1DDR = 0, but off otherwise.


## 7.3 Port 2

### 7.3.1 Overview

Port 2 is an 8-bit input/output port with the pin configuration shown in figure 7-5. The pin functions differ depending on the operating mode.

Port 2 has built-in, software-controllable MOS input pull-up transistors that can be used in modes 2 and 3.

Pins in port 2 can drive one TTL load and a 90-pF capacitive load. They can also drive LEDs and darlington transistors.

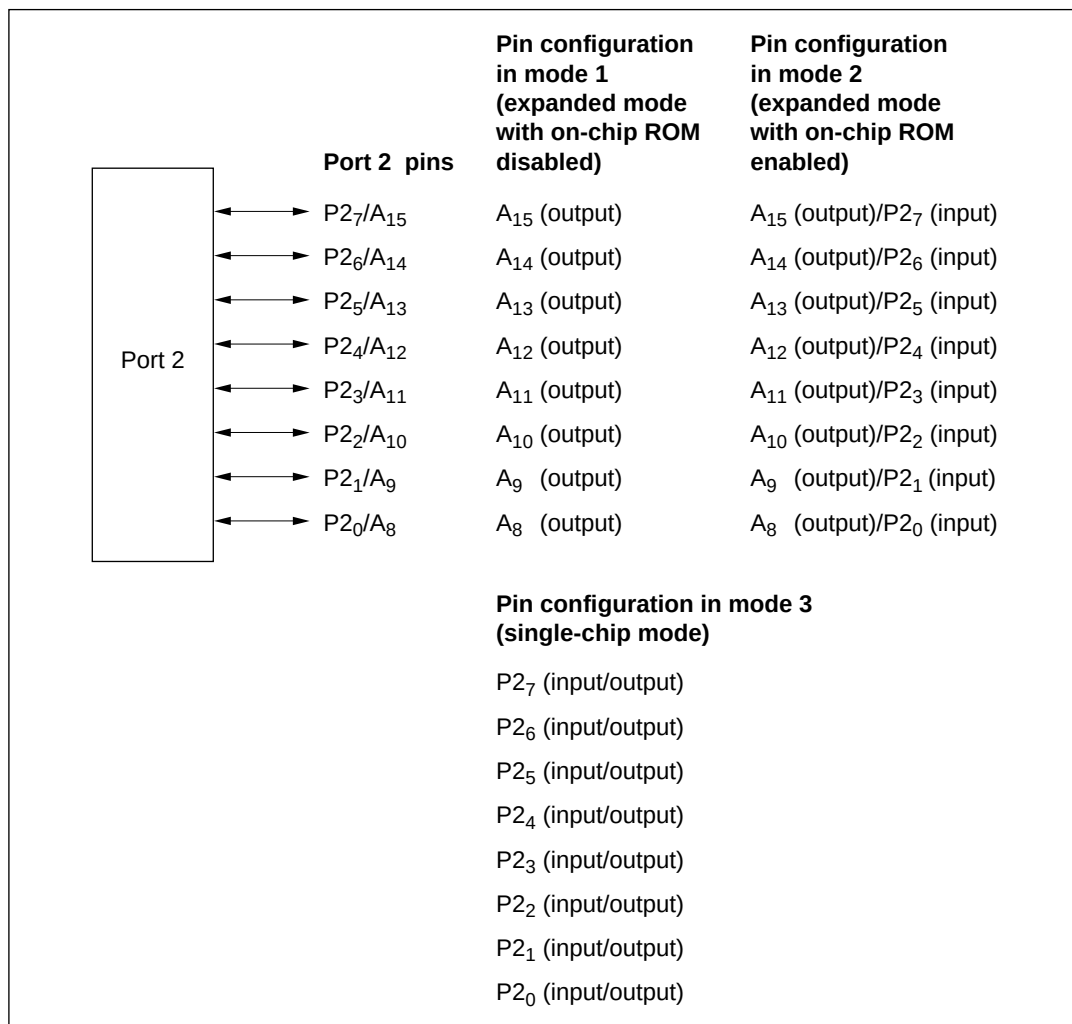

**Figure 7-5 Port 2 Pin Configuration**

7.3.2 Register Configuration and Descriptions

Table 7-4 summarizes the port 2 registers.

Table 7-4 Port 2 Registers

| Name                                  | Abbreviation | Read/Write | Initial Value                         | Address |
|---------------------------------------|--------------|------------|---------------------------------------|---------|
| Port 2 data direction register        | P2DDR        | W          | H'FF (mode 1)<br>H'00 (modes 2 and 3) | H'FFB1  |
| Port 2 data register                  | P2DR         | R/W        | H'00                                  | H'FFB3  |
| Port 2 input pull-up control register | P2PCR        | R/W        | H'00                                  | H'FFAD  |

Port 2 Data Direction Register (P2DDR)

|               |                     |                     |                     |                     |                     |                     |                     |                     |
|---------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|
| Bit           | 7                   | 6                   | 5                   | 4                   | 3                   | 2                   | 1                   | 0                   |
|               | P2 <sub>7</sub> DDR | P2 <sub>6</sub> DDR | P2 <sub>5</sub> DDR | P2 <sub>4</sub> DDR | P2 <sub>3</sub> DDR | P2 <sub>2</sub> DDR | P2 <sub>1</sub> DDR | P2 <sub>0</sub> DDR |
| Mode 1        |                     |                     |                     |                     |                     |                     |                     |                     |
| Initial value | 1                   | 1                   | 1                   | 1                   | 1                   | 1                   | 1                   | 1                   |
| Read/Write    | —                   | —                   | —                   | —                   | —                   | —                   | —                   | —                   |
| Modes 2 and 3 |                     |                     |                     |                     |                     |                     |                     |                     |
| Initial value | 0                   | 0                   | 0                   | 0                   | 0                   | 0                   | 0                   | 0                   |
| Read/Write    | W                   | W                   | W                   | W                   | W                   | W                   | W                   | W                   |

P2DDR controls the input/output direction of each pin in port 2.

**Mode 1:** The P2DDR values are fixed at 1. Port 2 consists of upper address output pins. P2DDR values cannot be modified and are always read as 1.

In hardware standby mode, the address bus is in the high-impedance state.

**Mode 2:** A pin in port 2 is used for address output if the corresponding P2DDR bit is set to 1, and for general input if this bit is cleared to 0.

**Mode 3:** A pin in port 2 is used for general output if the corresponding P2DDR bit is set to 1, and for general input if this bit is cleared to 0.

In modes 2 and 3, P2DDR is a write-only register. Read data is invalid. If read, all bits always read 1. P2DDR is initialized to H'00 by a reset and in hardware standby mode. In software standby mode it retains its existing values, so if a transition to software standby mode occurs while a P2DDR bit is set to 1, the corresponding pin remains in the output state.

## Port 2 Data Register (P2DR)

| Bit           | 7               | 6               | 5               | 4               | 3               | 2               | 1               | 0               |
|---------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
|               | P2 <sub>7</sub> | P2 <sub>6</sub> | P2 <sub>5</sub> | P2 <sub>4</sub> | P2 <sub>3</sub> | P2 <sub>2</sub> | P2 <sub>1</sub> | P2 <sub>0</sub> |
| Initial value | 0               | 0               | 0               | 0               | 0               | 0               | 0               | 0               |
| Read/Write    | R/W             | R/W             | R/W             | R/W             | R/W             | R/W             | R/W             | R/W             |

P2DR is an 8-bit register that stores data for pins P2<sub>7</sub> to P2<sub>0</sub>. When a P2DDR bit is set to 1, if port 2 is read, the value in P2DR is obtained directly, regardless of the actual pin state. When a P2DDR bit is cleared to 0, if port 2 is read the pin state is obtained.

P2DR is initialized to H'00 by a reset and in hardware standby mode. In software standby mode it retains its existing values.

## Port 2 Input Pull-Up Control Register (P2PCR)

| Bit           | 7                   | 6                   | 5                   | 4                   | 3                   | 2                   | 1                   | 0                   |
|---------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|
|               | P2 <sub>7</sub> PCR | P2 <sub>6</sub> PCR | P2 <sub>5</sub> PCR | P2 <sub>4</sub> PCR | P2 <sub>3</sub> PCR | P2 <sub>2</sub> PCR | P2 <sub>1</sub> PCR | P2 <sub>0</sub> PCR |
| Initial value | 0                   | 0                   | 0                   | 0                   | 0                   | 0                   | 0                   | 0                   |
| Read/Write    | R/W                 | R/W                 | R/W                 | R/W                 | R/W                 | R/W                 | R/W                 | R/W                 |


P2PCR is an 8-bit readable/writable register that controls the input pull-up transistors in port 2. If a P2DDR bit is cleared to 0 (designating input) and the corresponding P2PCR bit is set to 1, the input pull-up transistor is turned on.

P2PCR is initialized to H'00 by a reset and in hardware standby mode. In software standby mode it retains its existing values.

### 7.3.3 Pin Functions in Each Mode


Port 2 has different pin functions in different modes. A separate description for each mode is given below.

**Pin Functions in Mode 1:** In mode 1 (expanded mode with on-chip ROM disabled), port 2 is automatically used for upper address output ( $A_{15}$  to  $A_8$ ). Figure 7-6 shows the pin functions in mode 1.

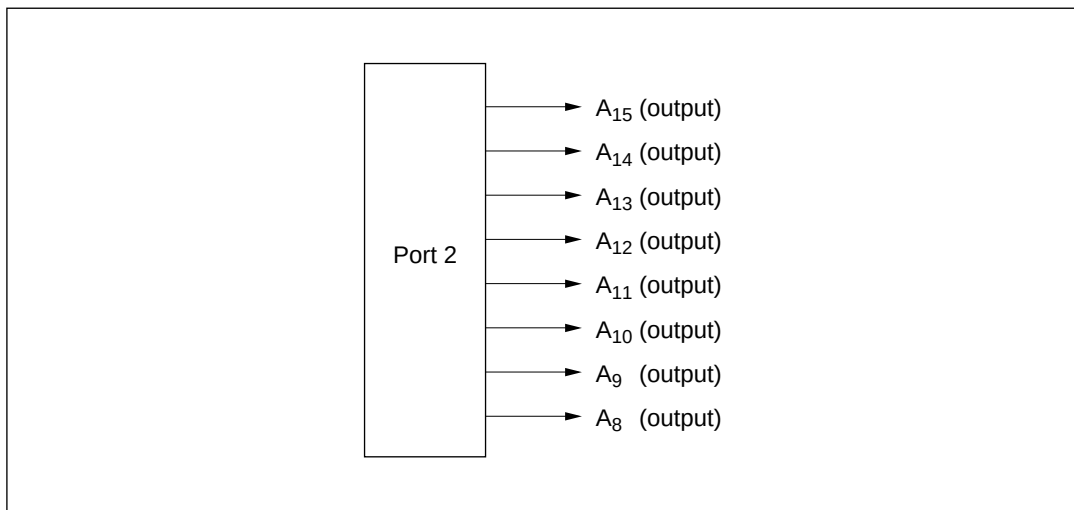


**Figure 7-6 Pin Functions in Mode 1 (Port 2)**

**Mode 2:** In mode 2 (expanded mode with on-chip ROM enabled), port 2 can provide upper address output pins and general input pins. Each pin becomes an upper address output pin if its P2DDR bit is set to 1, and a general input pin if this bit is cleared to 0. Following a reset, all pins are input pins. To be used for address output, their P2DDR bits must be set to 1. Figure 7-7 shows the pin functions in mode 2.

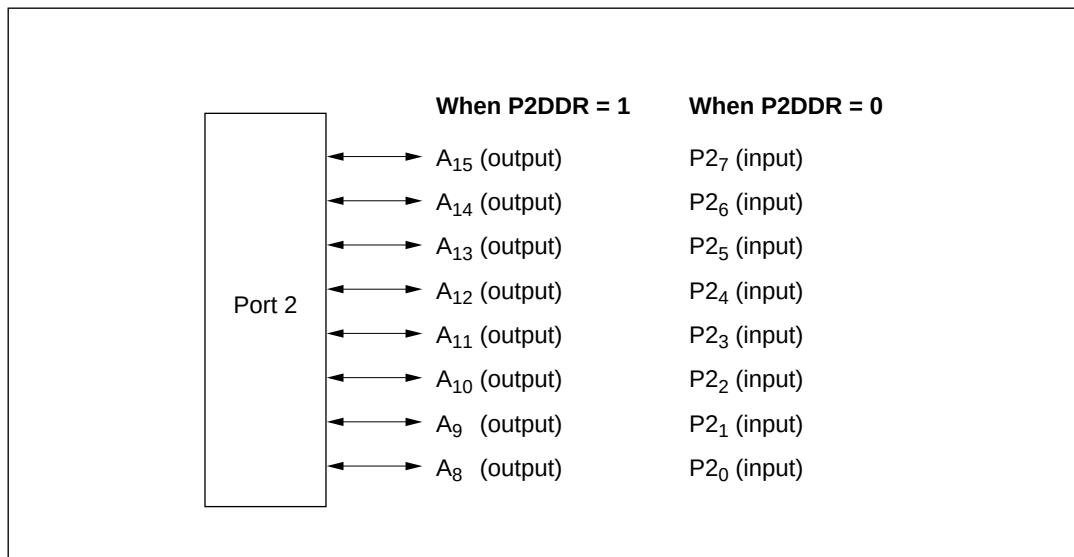

**Figure 7-7 Pin Functions in Mode 2 (Port 2)**

**Mode 3:** In mode 3 (single-chip mode), the input or output direction of each pin can be selected individually. A pin becomes a general input pin when its P2DDR bit is cleared to 0, and a general output pin when this bit is set to 1. Figure 7-8 shows the pin functions in mode 3.

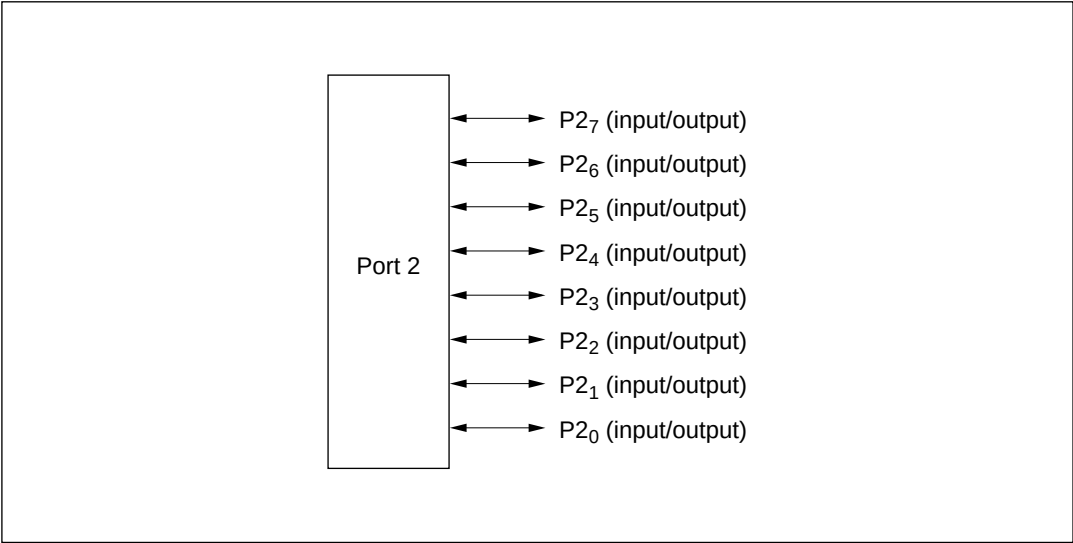

**Figure 7-8 Pin Functions in Mode 3 (Port 2)**

### 7.3.4 Input Pull-Up Transistors

Port 2 has built-in programmable input pull-up transistors that are available in modes 2 and 3. The pull-up for each bit can be turned on and off individually. To turn on an input pull-up in mode 2 or 3, set the corresponding P2PCR bit to 1 and clear the corresponding P2DDR bit to 0. P2PCR is cleared to H'00 by a reset and in hardware standby mode, turning all input pull-ups off. In software standby mode, the previous state is maintained.

Table 7-5 indicates the states of the input pull-up transistors in each operating mode.

**Table 7-5 States of Input Pull-Up Transistors (Port 2)**

| Mode | Reset | Hardware Standby | Software Standby | Other Operating Modes |
|------|-------|------------------|------------------|-----------------------|
| 1    | Off   | Off              | Off              | Off                   |
| 2    | Off   | Off              | On/off           | On/off                |
| 3    | Off   | Off              | On/off           | On/off                |

Notes: Off: The input pull-up transistor is always off.

On/off: The input pull-up transistor is on if P2PCR = 1 and P2DDR = 0, but off otherwise.




# 7.4 Port 3

## 7.4.1 Overview

Port 3 is an 8-bit input/output port with the pin configuration shown in Figure 7-9. The pin functions differ depending on the operating mode.

Port 3 has built-in, software-controllable MOS input pull-up transistors that can be used in mode 3.

Pins in port 3 can drive one TTL load and a 90-pF capacitive load. They can also drive a darlington pair.

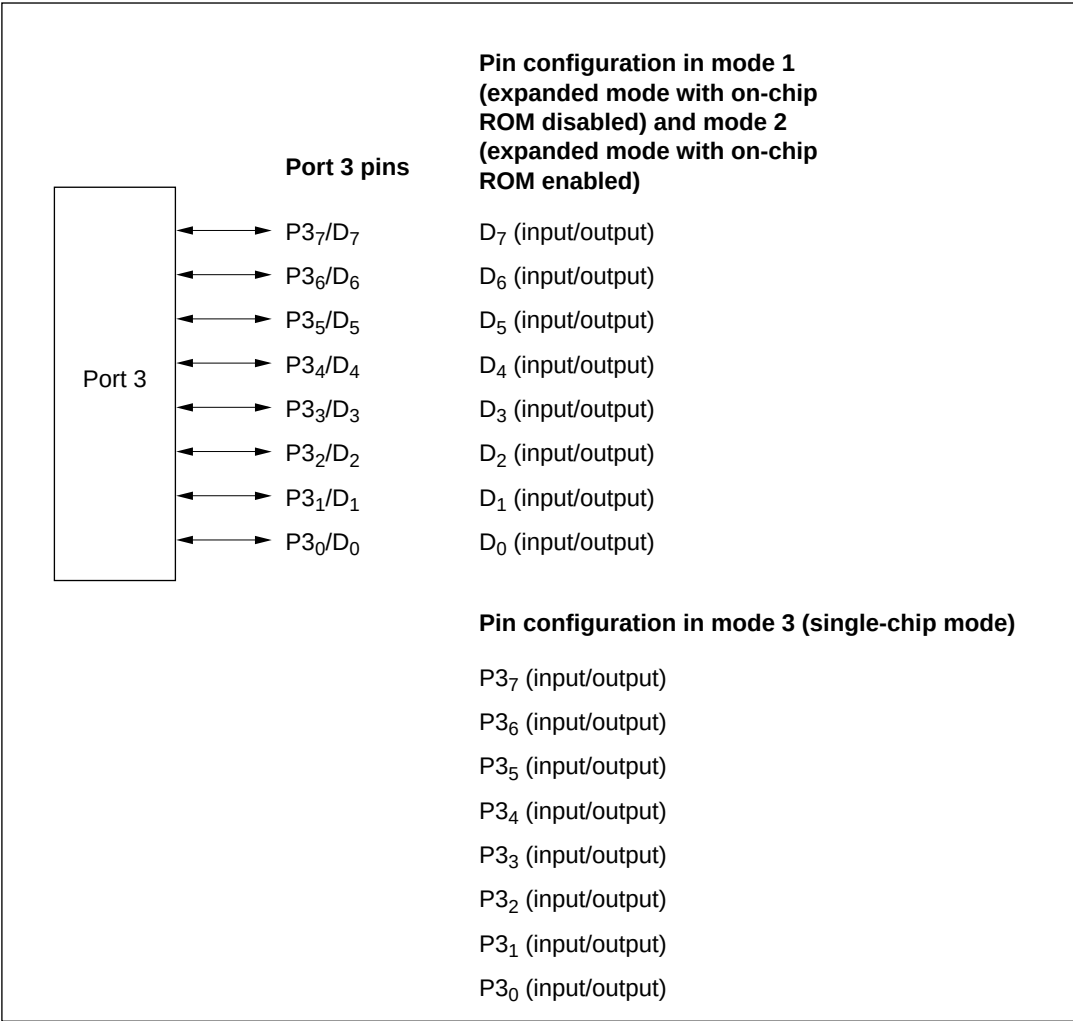

**Figure 7-9 Port 3 Pin Configuration**

7.4.2 Register Configuration and Descriptions

Table 7-6 summarizes the port 3 registers.

Table 7-6 Port 3 Registers

| Name                                  | Abbreviation | Read/Write | Initial Value | Address |
|---------------------------------------|--------------|------------|---------------|---------|
| Port 3 data direction register        | P3DDR        | W          | H'00          | H'FFB4  |
| Port 3 data register                  | P3DR         | R/W        | H'00          | H'FFB6  |
| Port 3 input pull-up control register | P3PCR        | R/W        | H'00          | H'FFAE  |

Port 3 Data Direction Register (P3DDR)

|               |                     |                     |                     |                     |                     |                     |                     |                     |
|---------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|
| Bit           | 7                   | 6                   | 5                   | 4                   | 3                   | 2                   | 1                   | 0                   |
|               | P3 <sub>7</sub> DDR | P3 <sub>6</sub> DDR | P3 <sub>5</sub> DDR | P3 <sub>4</sub> DDR | P3 <sub>3</sub> DDR | P3 <sub>2</sub> DDR | P3 <sub>1</sub> DDR | P3 <sub>0</sub> DDR |
| Initial value | 0                   | 0                   | 0                   | 0                   | 0                   | 0                   | 0                   | 0                   |
| Read/Write    | W                   | W                   | W                   | W                   | W                   | W                   | W                   | W                   |

P3DDR is an 8-bit readable/writable register that controls the input/output direction of each pin in port 3. P3DDR is a write-only register. Read data is invalid. If read, all bits always read 1.

**Modes 1 and 2:** In mode 1 (expanded mode with on-chip ROM disabled) and mode 2 (expanded mode with on-chip ROM enabled), the input/output directions designated by P3DDR are ignored. Port 3 automatically consists of the input/output pins of the 8-bit data bus (D<sub>7</sub> to D<sub>0</sub>).

The data bus is in the high-impedance state during reset, and during hardware and software standby.

**Mode 3:** A pin in port 3 is used for general output if the corresponding P3DDR bit is set to 1, and for general input if this bit is cleared to 0. P3DDR is initialized to H'00 by a reset and in hardware standby mode. In software standby mode it retains its existing values, so if a transition to software standby mode occurs while a P3DDR bit is set to 1, the corresponding pin remains in the output state.

### Port 3 Data Register (P3DR)

| Bit           | 7               | 6               | 5               | 4               | 3               | 2               | 1               | 0               |
|---------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
|               | P3 <sub>7</sub> | P3 <sub>6</sub> | P3 <sub>5</sub> | P3 <sub>4</sub> | P3 <sub>3</sub> | P3 <sub>2</sub> | P3 <sub>1</sub> | P3 <sub>0</sub> |
| Initial value | 0               | 0               | 0               | 0               | 0               | 0               | 0               | 0               |
| Read/Write    | R/W             | R/W             | R/W             | R/W             | R/W             | R/W             | R/W             | R/W             |

P3DR is an 8-bit register that stores data for pins P3<sub>7</sub> to P3<sub>0</sub>. When a P3DDR bit is set to 1, if port 3 is read, the value in P3DR is obtained directly, regardless of the actual pin state. When a P3DDR bit is cleared to 0, if port 3 is read the pin state is obtained.

P3DR is initialized to H'00 by a reset and in hardware standby mode. In software standby mode it retains its existing values.

### Port 3 Input Pull-Up Control Register (P3PCR)

| Bit           | 7                   | 6                   | 5                   | 4                   | 3                   | 2                   | 1                   | 0                   |
|---------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|
|               | P3 <sub>7</sub> PCR | P3 <sub>6</sub> PCR | P3 <sub>5</sub> PCR | P3 <sub>4</sub> PCR | P3 <sub>3</sub> PCR | P3 <sub>2</sub> PCR | P3 <sub>1</sub> PCR | P3 <sub>0</sub> PCR |
| Initial value | 0                   | 0                   | 0                   | 0                   | 0                   | 0                   | 0                   | 0                   |
| Read/Write    | R/W                 | R/W                 | R/W                 | R/W                 | R/W                 | R/W                 | R/W                 | R/W                 |

P3PCR is an 8-bit readable/writable register that controls the input pull-up transistors in port 3. If a P3DDR bit is cleared to 0 (designating input) and the corresponding P3PCR bit is set to 1, the input pull-up transistor is turned on.


P3PCR is initialized to H'00 by a reset and in hardware standby mode. In software standby mode it retains its existing values.

The input pull-ups cannot be used in slave mode (when the host interface is enabled).

### 7.4.3 Pin Functions in Each Mode

Port 3 has different pin functions in different modes. A separate description for each mode is given below.


**Pin Functions in Modes 1 and 2:** In mode 1 (expanded mode with on-chip ROM disabled) and mode 2 (expanded mode with on-chip ROM enabled), port 3 is automatically used for the input/output pins of the data bus ( $D_7$  to  $D_0$ ). Figure 7-10 shows the pin functions in modes 1 and 2.

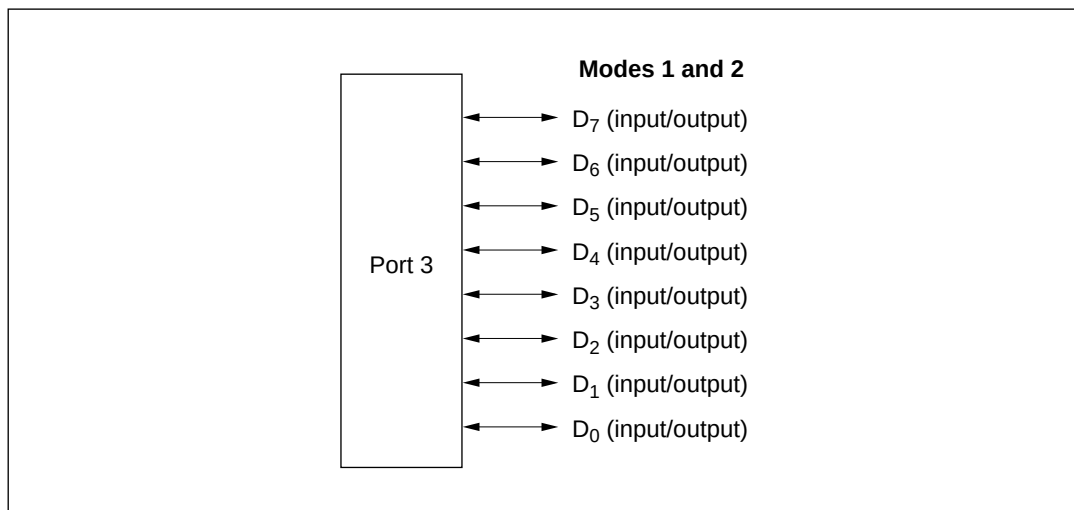

**Figure 7-10 Pin Functions in Modes 1 and 2 (Port 3)**

**Mode 3:** In mode 3 (single-chip mode), the input or output direction of each pin can be selected individually. A pin becomes a general input pin when its P3DDR bit is cleared to 0, and a general output pin when this bit is set to 1.

Figure 7-11 shows the pin functions in mode 3.

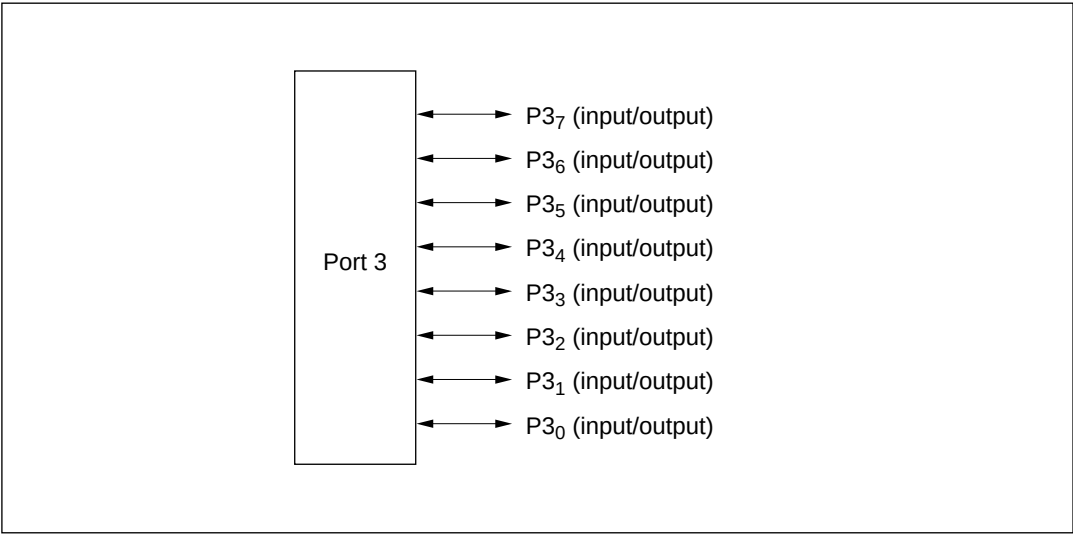

**Figure 7-11 Pin Functions in Mode 3 (Port 3)**

**7.4.4 Input Pull-Up Transistors**

Port 3 has built-in programmable input pull-up transistors that are available in mode 3. The pull-up for each bit can be turned on and off individually. To turn on an input pull-up in mode 3, set the corresponding P3PCR bit to 1 and clear the corresponding P3DDR bit to 0. P3PCR is cleared to H'00 by a reset and in hardware standby mode, turning all input pull-ups off. In software standby mode, the previous state is maintained.

Table 7-7 indicates the states of the input pull-up transistors in each operating mode.

**Table 7-7 States of Input Pull-Up Transistors (Port 3)**

| Mode | Reset | Hardware Standby | Software Standby | Other Operating Modes |
|------|-------|------------------|------------------|-----------------------|
| 1    | Off   | Off              | Off              | Off                   |
| 2    | Off   | Off              | Off              | Off                   |
| 3    | Off   | Off              | On/off           | On/off                |


Notes: Off: The input pull-up transistor is always off.  
On/off: The input pull-up transistor is on if P3PCR = 1 and P3DDR = 0, but off otherwise.

## 7.5 Port 4

### 7.5.1 Overview

Port 4 is an 8-bit input/output port that is multiplexed with interrupt input pins ( $\overline{\text{IRQ}}_0$  to  $\overline{\text{IRQ}}_2$ ), input/output pins for bus control signals ( $\overline{\text{RD}}$ ,  $\overline{\text{WR}}$ ,  $\overline{\text{AS}}$ ,  $\overline{\text{WAIT}}$ ), an input pin ( $\overline{\text{ADTRG}}$ ) for the A/D converter, and an output pin ( $\emptyset$ ) for the system clock. Figure 7-12 shows the pin configuration of port 4.

Pins in port 4 can drive one TTL load and a 90-pF capacitive load.

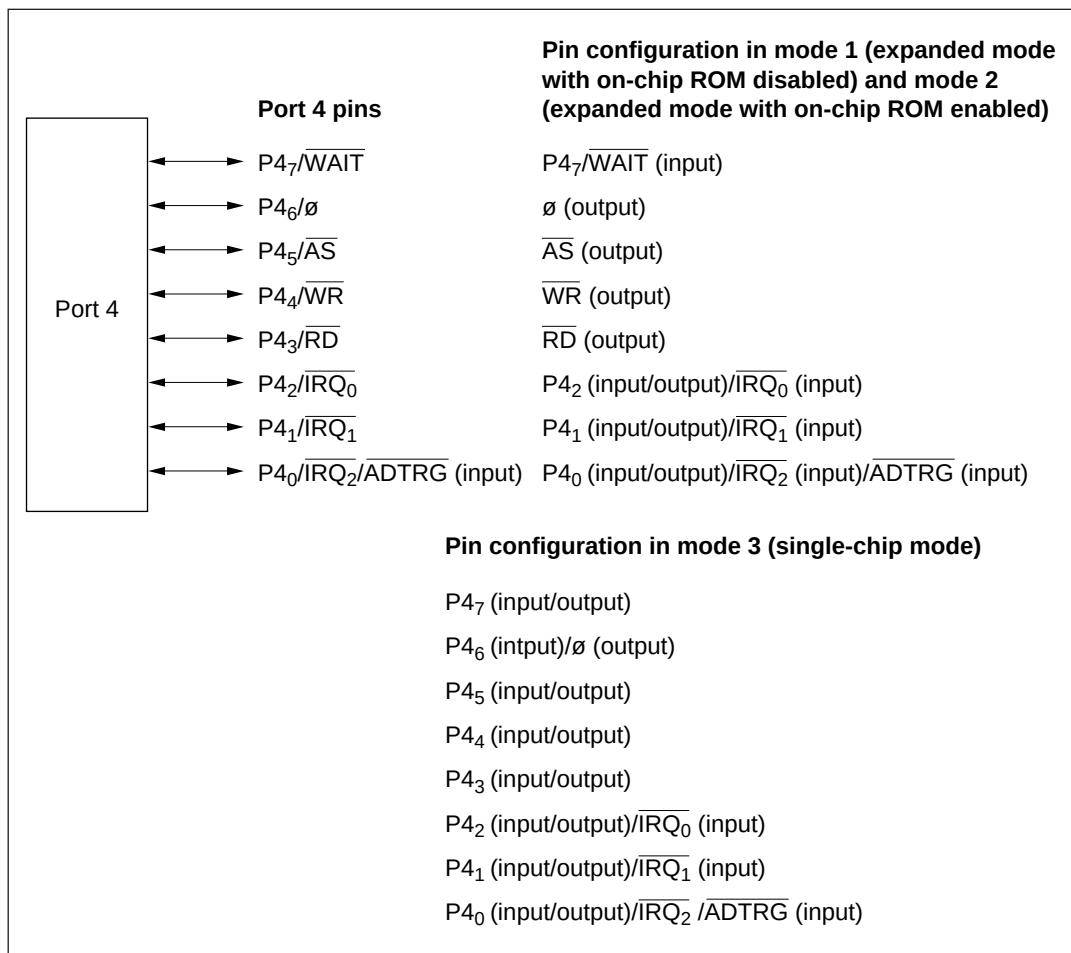

**Figure 7-12 Port 4 Pin Configuration**

7.5.2 Register Configuration and Descriptions

Table 7-8 summarizes the port 4 registers.

Table 7-8 Port 4 Registers

| Name                           | Abbreviation | Read/Write | Initial Value                         | Address |
|--------------------------------|--------------|------------|---------------------------------------|---------|
| Port 4 data direction register | P4DDR        | W          | H'40 (modes 1 and 2)<br>H'00 (mode 3) | H'FFB5  |
| Port 4 data register           | P4DR         | R/W*1      | Undetermined*2                        | H'FFB7  |

Notes: 1. Bit 6 is read-only.  
2. Bit 6 is undetermined. Other bits are initially 0.

Port 4 Data Direction Register (P4DDR)

|               | 7                   | 6                   | 5                   | 4                   | 3                   | 2                   | 1                   | 0                   |
|---------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|
| Bit           | P4 <sub>7</sub> DDR | P4 <sub>6</sub> DDR | P4 <sub>5</sub> DDR | P4 <sub>4</sub> DDR | P4 <sub>3</sub> DDR | P4 <sub>2</sub> DDR | P4 <sub>1</sub> DDR | P4 <sub>0</sub> DDR |
| Modes 1, 2    |                     |                     |                     |                     |                     |                     |                     |                     |
| Initial value | 0                   | 1                   | 0                   | 0                   | 0                   | 0                   | 0                   | 0                   |
| Read/Write    | W                   | —                   | W                   | W                   | W                   | W                   | W                   | W                   |
| Mode 3        |                     |                     |                     |                     |                     |                     |                     |                     |
| Initial value | 0                   | 0                   | 0                   | 0                   | 0                   | 0                   | 0                   | 0                   |
| Read/Write    | W                   | W                   | W                   | W                   | W                   | W                   | W                   | W                   |

P4DDR is an 8-bit readable/writable register that controls the input/output direction of each pin in port 4. A pin functions as an output pin if the corresponding P4DDR bit is set to 1, and as an input pin if this bit is cleared to 0. In modes 1 and 2, P4<sub>6</sub>DDR is fixed at 1 and cannot be modified.

P4DDR is a write-only register. Read data is invalid. If read, all bits always read 1.

P4DDR is initialized by a reset and in hardware standby mode. The initial value is H'40 in modes 1 and 2, and H'00 in mode 3. In software standby mode P4DDR retains its existing values, so if a transition to software standby mode occurs while a P4DDR bit is set to 1, the corresponding pin remains in the output state.

## Port 4 Data Register (P4DR)

| Bit           | 7               | 6               | 5               | 4               | 3               | 2               | 1               | 0               |
|---------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
|               | P4 <sub>7</sub> | P4 <sub>6</sub> | P4 <sub>5</sub> | P4 <sub>4</sub> | P4 <sub>3</sub> | P4 <sub>2</sub> | P4 <sub>1</sub> | P4 <sub>0</sub> |
| Initial value | 0               | *               | 0               | 0               | 0               | 0               | 0               | 0               |
| Read/Write    | R/W             | R               | R/W             | R/W             | R/W             | R/W             | R/W             | R/W             |

Note: \* Determined by the level at pin P4<sub>6</sub>.

P4DR is an 8-bit register that stores data for pins P4<sub>6</sub> to P4<sub>0</sub>. When a P4DDR bit is set to 1, if port 4 is read, the value in P4DR is obtained directly, regardless of the actual pin state, except for P4<sub>6</sub>. When a P4DDR bit is cleared to 0, if port 4 is read the pin state is obtained. This also applies to pins used by on-chip supporting modules and for bus control signals. P4<sub>6</sub> always returns the pin state.

P4DR is initialized to H'00 by a reset and in hardware standby mode. In software standby mode it retains its existing values.

### 7.5.3 Pin Functions

Port 4 has one set of pin functions in modes 1 and 2, and a different set of pin functions in mode 3. The pins are multiplexed with  $\overline{\text{IRQ}}_0$  to  $\overline{\text{IRQ}}_2$  input, bus control signal input/output, A/D converter input, and system clock ( $\emptyset$ ) output. Table 7-9 indicates the pin functions of port 4.

**Table 7-9 Port 4 Pin Functions**

| Pin                                        | Pin Functions and Selection Method                                                                                   |                                |                                                       |                        |                       |                        |
|--------------------------------------------|----------------------------------------------------------------------------------------------------------------------|--------------------------------|-------------------------------------------------------|------------------------|-----------------------|------------------------|
| P4 <sub>7</sub> / $\overline{\text{WAIT}}$ | Bit P4 <sub>7</sub> DDR, the operating mode, and the wait mode determined by WSCR select the pin function as follows |                                |                                                       |                        |                       |                        |
|                                            | Operating mode                                                                                                       | Modes 1 and 2                  |                                                       |                        | Mode 3                |                        |
|                                            | Wait mode                                                                                                            | $\overline{\text{WAIT}}$ used  | $\overline{\text{WAIT}}$ not used<br>(WMS1=0, WMS0=1) |                        | —                     |                        |
|                                            | P4 <sub>7</sub> DDR                                                                                                  | —                              | 0                                                     | 1                      | 0                     | 1                      |
|                                            | Pin function                                                                                                         | $\overline{\text{WAIT}}$ input | P4 <sub>7</sub> input                                 | P4 <sub>7</sub> output | P4 <sub>7</sub> input | P4 <sub>7</sub> output |
| P4 <sub>6</sub> / $\emptyset$              | Bit P4 <sub>6</sub> DDR and the operating mode select the pin function as follows                                    |                                |                                                       |                        |                       |                        |
|                                            | Operating mode                                                                                                       | Modes 1 and 2                  |                                                       | Mode 3                 |                       |                        |
|                                            | P4 <sub>6</sub> DDR                                                                                                  | Always 1                       |                                                       | 0                      | 1                     |                        |
|                                            | Pin function                                                                                                         | $\emptyset$ output             |                                                       | P4 <sub>6</sub> input  | $\emptyset$ output    |                        |



**Table 7-19 Port 4 Pin Functions (cont)****Pin Pin Functions and Selection Method**

**P4<sub>5</sub>/AS** Bit P4<sub>5</sub>DDR and the operating mode select the pin function as follows

| Operating mode      | Modes 1 and 2 | Mode 3                |                        |
|---------------------|---------------|-----------------------|------------------------|
| P4 <sub>5</sub> DDR | —             | 0                     | 1                      |
| Pin function        | AS output     | P4 <sub>5</sub> input | P4 <sub>5</sub> output |

**P4<sub>4</sub>/WR** Bit P4<sub>4</sub>DDR and the operating mode select the pin function as follows

| Operating mode      | Modes 1 and 2 | Mode 3                |                        |
|---------------------|---------------|-----------------------|------------------------|
| P4 <sub>4</sub> DDR | —             | 0                     | 1                      |
| Pin function        | WR output     | P4 <sub>4</sub> input | P4 <sub>4</sub> output |

**P4<sub>3</sub>/RD** Bit P4<sub>3</sub>DDR and the operating mode select the pin function as follows

| Operating mode      | Modes 1 and 2 | Mode 3                |                        |
|---------------------|---------------|-----------------------|------------------------|
| P4 <sub>3</sub> DDR | —             | 0                     | 1                      |
| Pin function        | RD output     | P4 <sub>3</sub> input | P4 <sub>3</sub> output |

**P4<sub>2</sub>/IRQ<sub>0</sub>**

|                     |                        |                        |
|---------------------|------------------------|------------------------|
| P4 <sub>2</sub> DDR | 0                      | 1                      |
| Pin function        | P4 <sub>2</sub> input  | P4 <sub>2</sub> output |
|                     | IRQ <sub>0</sub> input |                        |

IRQ<sub>0</sub> input can be used when bit IRQ0E is set to 1 in IER

**P4<sub>1</sub>/IRQ<sub>1</sub>**

|                     |                        |                        |
|---------------------|------------------------|------------------------|
| P4 <sub>1</sub> DDR | 0                      | 1                      |
| Pin function        | P4 <sub>1</sub> input  | P4 <sub>1</sub> output |
|                     | IRQ <sub>1</sub> input |                        |

IRQ<sub>1</sub> input can be used when bit IRQ1E is set to 1 in IER

**P4<sub>0</sub>/IRQ<sub>2</sub>/ADTRG**

|                     |                                        |                        |
|---------------------|----------------------------------------|------------------------|
| P4 <sub>0</sub> DDR | 0                                      | 1                      |
| Pin function        | P4 <sub>0</sub> input                  | P4 <sub>0</sub> output |
|                     | IRQ <sub>2</sub> input and ADTRG input |                        |

IRQ<sub>2</sub> input can be used when bit IRQ2E is set to 1 in IER

ADTRG input can be used when bit TRGE is set to 1 in ADCR

# 7.6 Port 5

## 7.6.1 Overview

Port 5 is a 3-bit input/output port that is multiplexed with input/output pins (TxD, RxD, SCK) of serial communication interface. The port 5 pin functions are the same in all operating modes. Figure 7-13 shows the pin configuration of port 5.

Pins in port 5 can drive one TTL load and a 30-pF capacitive load. They can also drive a darlington pair.

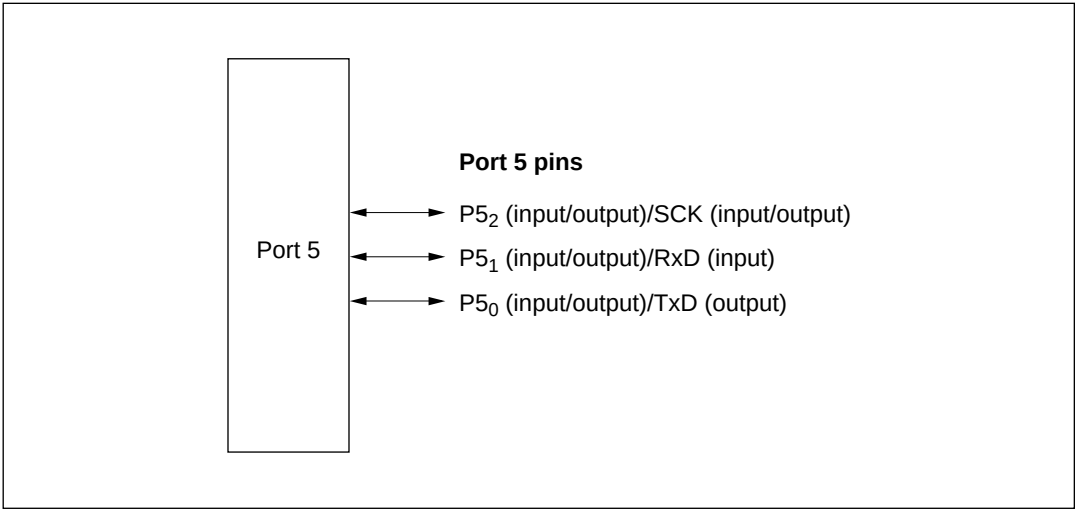


Figure 7-13 Port 5 Pin Configuration

## 7.6.2 Register Configuration and Descriptions

Table 7-10 summarizes the port 5 registers.

Table 7-10 Port 5 Registers

| Name                           | Abbreviation | Read/Write | Initial Value | Address |
|--------------------------------|--------------|------------|---------------|---------|
| Port 5 data direction register | P5DDR        | W          | H'F8          | H'FFB8  |
| Port 5 data register           | P5DR         | R/W        | H'F8          | H'FFBA  |

## Port 5 Data Direction Register (P5DDR)

| Bit           | 7 | 6 | 5 | 4 | 3 | 2                   | 1                   | 0                   |
|---------------|---|---|---|---|---|---------------------|---------------------|---------------------|
|               | — | — | — | — | — | P5 <sub>2</sub> DDR | P5 <sub>1</sub> DDR | P5 <sub>0</sub> DDR |
| Initial value | 1 | 1 | 1 | 1 | 1 | 0                   | 0                   | 0                   |
| Read/Write    | — | — | — | — | — | W                   | W                   | W                   |

P5DDR is an 8-bit register that controls the input/output direction of each pin in port 5. A pin functions as an output pin if the corresponding P5DDR bit is set to 1, and as an input pin if this bit is cleared to 0.

P5DDR is a write-only register. Read data is invalid. If read, all bits always read 1.

P5DDR is initialized to H'F8 by a reset and in hardware standby mode. In software standby mode it retains its existing values, so if a transition to software standby mode occurs while a P5DDR bit is set to 1, the corresponding pin remains in the output state.

If a transition to software standby mode occurs while port 5 is being used by the SCI, the SCI will be initialized, so the pin will revert to general-purpose input/output, controlled by P5DDR and P5DR.

## Port 5 Data Register (P5DR)

| Bit           | 7 | 6 | 5 | 4 | 3 | 2               | 1               | 0               |
|---------------|---|---|---|---|---|-----------------|-----------------|-----------------|
|               | — | — | — | — | — | P5 <sub>2</sub> | P5 <sub>1</sub> | P5 <sub>0</sub> |
| Initial value | 1 | 1 | 1 | 1 | 1 | 0               | 0               | 0               |
| Read/Write    | — | — | — | — | — | R/W             | R/W             | R/W             |

P5DR is an 8-bit register that stores data for pins P5<sub>2</sub> to P5<sub>0</sub>. Bits 7 to 3 are reserved. They cannot be modified, and are always read as 1.

When a P5DDR bit is set to 1, if port 5 is read, the value in P5DR is obtained directly, regardless of the actual pin state. When a P5DDR bit is cleared to 0, if port 5 is read the pin state is obtained. This also applies to pins used as SCI pins.

P5DR is initialized to H'F8 by a reset and in hardware standby mode. In software standby mode it retains its existing values.

### 7.6.3 Pin Functions

Port 5 has the same pin functions in each operating mode. All pins can also be used as SCI input/output pins. Table 7-11 indicates the pin functions of port 5.

**Table 7-11 Port 5 Pin Functions**


| Pin                  | Pin Functions and Selection Method                                                                                               |                       |                        |                        |            |
|----------------------|----------------------------------------------------------------------------------------------------------------------------------|-----------------------|------------------------|------------------------|------------|
| P5 <sub>2</sub> /SCK | Bit C/ $\bar{A}$ in SMR of SCI, bits CKE0 and CKE1 in SCR of SCI, and bit P5 <sub>2</sub> DDR select the pin function as follows |                       |                        |                        |            |
|                      | CKE1                                                                                                                             | 0                     |                        |                        | 1          |
|                      | C/ $\bar{A}$                                                                                                                     | 0                     |                        | 1                      | —          |
|                      | CKE0                                                                                                                             | 0                     |                        | 1                      | —          |
|                      | P5 <sub>2</sub> DDR                                                                                                              | 0                     | 1                      | —                      | —          |
|                      | Pin function                                                                                                                     | P5 <sub>2</sub> input | P5 <sub>2</sub> output | SCK output             | SCK input  |
| P5 <sub>1</sub> /RxD | Bit RE in SCR of SCI and bit P5 <sub>1</sub> DDR select the pin function as follows                                              |                       |                        |                        |            |
|                      | RE                                                                                                                               | 0                     |                        |                        | 1          |
|                      | P5 <sub>1</sub> DDR                                                                                                              | 0                     |                        | 1                      | —          |
|                      | Pin function                                                                                                                     | P5 <sub>1</sub> input |                        | P5 <sub>1</sub> output | RxD input  |
| P5 <sub>0</sub> /TxD | Bit TE in SCR of SCI and bit P5 <sub>0</sub> DDR select the pin function as follows                                              |                       |                        |                        |            |
|                      | TE                                                                                                                               | 0                     |                        |                        | 1          |
|                      | P5 <sub>0</sub> DDR                                                                                                              | 0                     |                        | 1                      | —          |
|                      | Pin function                                                                                                                     | P5 <sub>0</sub> input |                        | P5 <sub>0</sub> output | TxD output |

## 7.7 Port 6

### 7.7.1 Overview

Port 6 is an 8-bit input/output port that is multiplexed with input/output pins (FTOA, FTOB, FTIA to FTID, FTCL) of the 16-bit free-running timer (FRT) and with input/output pins (TMRI<sub>0</sub>, TMRI<sub>1</sub>, TMCI<sub>0</sub>, TMCI<sub>1</sub>, TMO<sub>0</sub>, TMO<sub>1</sub>) of 8-bit timers 0 and 1. The port 6 pin functions are the same in all operating modes. Figure 7-14 shows the pin configuration of port 6.

Pins in port 6 can drive one TTL load and a 90-pF capacitive load. They can also drive a darlington pair.

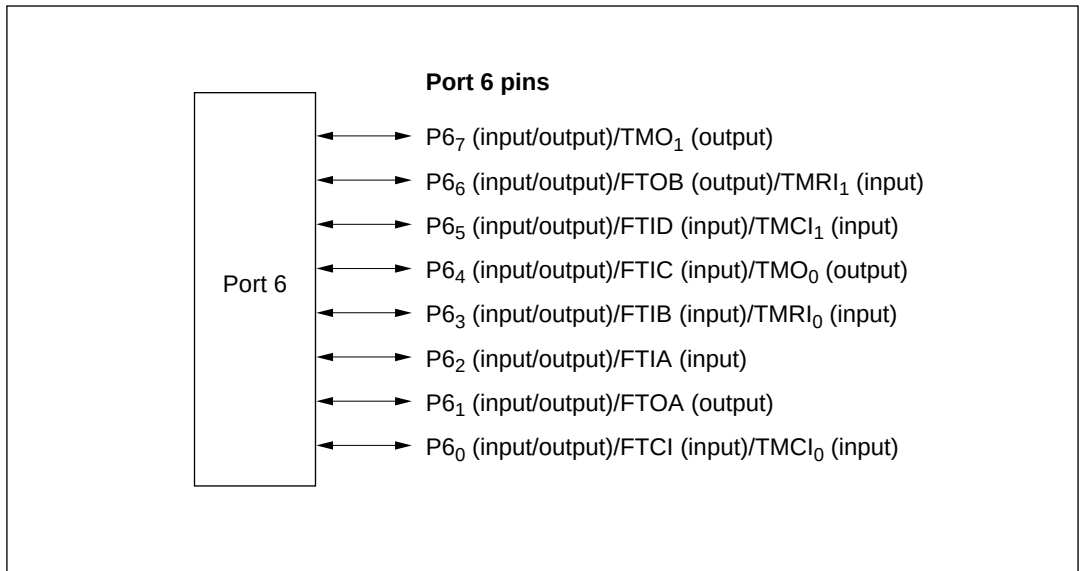

**Figure 7-14 Port 6 Pin Configuration**

7.7.2 Register Configuration and Descriptions

Table 7-12 summarizes the port 6 registers.

Table 7-12 Port 6 Registers

| Name                           | Abbreviation | Read/Write | Initial Value | Address |
|--------------------------------|--------------|------------|---------------|---------|
| Port 6 data direction register | P6DDR        | W          | H'00          | H'FFB9  |
| Port 6 data register           | P6DR         | R/W        | H'00          | H'FFBB  |

Port 6 Data Direction Register (P6DDR)

|               |                     |                     |                     |                     |                     |                     |                     |                     |
|---------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|
| Bit           | 7                   | 6                   | 5                   | 4                   | 3                   | 2                   | 1                   | 0                   |
|               | P6 <sub>7</sub> DDR | P6 <sub>6</sub> DDR | P6 <sub>5</sub> DDR | P6 <sub>4</sub> DDR | P6 <sub>3</sub> DDR | P6 <sub>2</sub> DDR | P6 <sub>1</sub> DDR | P6 <sub>0</sub> DDR |
| Initial value | 0                   | 0                   | 0                   | 0                   | 0                   | 0                   | 0                   | 0                   |
| Read/Write    | W                   | W                   | W                   | W                   | W                   | W                   | W                   | W                   |

P6DDR is an 8-bit readable/writable register that controls the input/output direction of each pin in port 6. A pin functions as an output pin if the corresponding P6DDR bit is set to 1, and as an input pin if this bit is cleared to 0.

P6DDR is a write-only register. Read data is invalid. If read, all bits always read 1.

P6DDR is initialized to H'00 by a reset and in hardware standby mode. In software standby mode it retains its existing values, so if a transition to software standby mode occurs while a P6DDR bit is set to 1, the corresponding pin remains in the output state.

If a transition to software standby mode occurs while port 6 is being used by an on-chip supporting module (for example, for 8-bit timer output), the on-chip supporting module will be initialized, so the pin will revert to general-purpose input/output, controlled by P6DDR and P6DR.

**Port 6 Data Register (P6DR)**

|               |                 |                 |                 |                 |                 |                 |                 |                 |
|---------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| Bit           | 7               | 6               | 5               | 4               | 3               | 2               | 1               | 0               |
|               | P6 <sub>7</sub> | P6 <sub>6</sub> | P6 <sub>5</sub> | P6 <sub>4</sub> | P6 <sub>3</sub> | P6 <sub>2</sub> | P6 <sub>1</sub> | P6 <sub>0</sub> |
| Initial value | 0               | 0               | 0               | 0               | 0               | 0               | 0               | 0               |
| Read/Write    | R/W             | R/W             | R/W             | R/W             | R/W             | R/W             | R/W             | R/W             |

P6DR is an 8-bit register that stores data for pins P6<sub>7</sub> to P6<sub>0</sub>. When a P6DDR bit is set to 1, if port 6 is read, the value in P6DR is obtained directly, regardless of the actual pin state. When a P6DDR bit is cleared to 0, if port 6 is read the pin state is obtained. This also applies to pins used by on-chip supporting modules.

P6DR is initialized to H'00 by a reset and in hardware standby mode. In software standby mode it retains its existing values.

### 7.7.3 Pin Functions

Port 6 has the same pin functions all operating modes. The pins are multiplexed with FRT input/output, and 8-bit timer input/output. Table 7-13 indicates the pin functions of port 6.

**Table 7-13 Port 6 Pin Functions**

Pin

Pin Functions and Selection Method

P6<sub>7</sub>/TMO<sub>1</sub>

Bits OS3 to OS0 in TCSR of 8-bit timer 1, and bit P6<sub>7</sub>DDR, select the pin function as follows

|                     |                       |   |                         |   |
|---------------------|-----------------------|---|-------------------------|---|
| OS3 to 0            | All 0                 |   | Not all 0               |   |
| P6 <sub>7</sub> DDR | 0                     | 1 |                         | — |
| Pin function        | P6 <sub>7</sub> input |   | P6 <sub>7</sub> output  |   |
|                     |                       |   | TMO <sub>1</sub> output |   |

P6<sub>6</sub>/FTOB/  
TMRI<sub>1</sub>

Bit OEB in TOCR of the FRT and bit P6<sub>6</sub>DDR select the pin function as follows

|                     |                         |                        |             |   |
|---------------------|-------------------------|------------------------|-------------|---|
| OEB                 | 0                       |                        | 1           |   |
| P6 <sub>6</sub> DDR | 0                       | 1                      | 0           | 1 |
| Pin function        | P6 <sub>6</sub> input   | P6 <sub>6</sub> output | FTOB output |   |
|                     | TMRI <sub>1</sub> input |                        |             |   |

TMRI<sub>1</sub> input is usable when bits CCLR1 and CCLR0 are both set to 1 in TCR of 8-bit timer 1

P6<sub>5</sub>/FTID/  
TMCI<sub>1</sub>

|                     |                                       |  |                        |  |
|---------------------|---------------------------------------|--|------------------------|--|
| P6 <sub>5</sub> DDR | 0                                     |  | 1                      |  |
| Pin function        | P6 <sub>5</sub> input                 |  | P6 <sub>5</sub> output |  |
|                     | FTID input or TMCI <sub>1</sub> input |  |                        |  |

TMCI<sub>1</sub> input is usable when bits CKS2 to CKS0 in TCR of 8-bit timer 1 select an external clock source

P6<sub>4</sub>/FTIC/  
TMO<sub>0</sub>

Bits OS3 to OS0 in TCSR of 8-bit timer 0 and bit P6<sub>4</sub>DDR select the pin function as follows

|                     |                       |                        |                         |   |
|---------------------|-----------------------|------------------------|-------------------------|---|
| OS3 to 0            | All 0                 |                        | Not all 0               |   |
| P6 <sub>4</sub> DDR | 0                     | 1                      | 0                       | 1 |
| Pin function        | P6 <sub>4</sub> input | P6 <sub>4</sub> output | TMO <sub>0</sub> output |   |
|                     | FTIC input            |                        |                         |   |



**Table 7-13 Port 6 Pin Functions (cont)****Pin Pin Functions and Selection Method****P6<sub>3</sub>/FTIB/  
TMR<sub>I0</sub>**

|                     |                                       |                        |
|---------------------|---------------------------------------|------------------------|
| P6 <sub>3</sub> DDR | 0                                     | 1                      |
| Pin function        | P6 <sub>3</sub> input                 | P6 <sub>3</sub> output |
|                     | FTIB input or TMR <sub>I0</sub> input |                        |

TMR<sub>I0</sub> input is usable when bits CCLR1 and CCLR0 are both set to 1 in TCR of 8-bit timer 0

**P6<sub>2</sub>/FTIA**

|                     |                       |                        |
|---------------------|-----------------------|------------------------|
| P6 <sub>2</sub> DDR | 0                     | 1                      |
| Pin function        | P6 <sub>2</sub> input | P6 <sub>2</sub> output |
|                     | FTIA input            |                        |

**P6<sub>1</sub>/FTOA**

Bit OEA in TOCR of the FRT and bit P6<sub>1</sub>DDR select the pin function as follows

|                     |                       |                        |             |   |
|---------------------|-----------------------|------------------------|-------------|---|
| OEA                 | 0                     |                        | 1           |   |
| P6 <sub>1</sub> DDR | 0                     | 1                      | 0           | 1 |
| Pin function        | P6 <sub>1</sub> input | P6 <sub>1</sub> output | FTOA output |   |

**P6<sub>0</sub>/FTCI/  
TMC<sub>I0</sub>**

|                     |                                       |                        |
|---------------------|---------------------------------------|------------------------|
| P6 <sub>0</sub> DDR | 0                                     | 1                      |
| Pin function        | P6 <sub>0</sub> input                 | P6 <sub>0</sub> output |
|                     | FTCI input or TMC <sub>I0</sub> input |                        |


FTCI input is usable when bits CKS1 and CKS0 in TCR of the FRT select an external clock source

TMC<sub>I0</sub> input is usable when bits CKS2 to CKS0 in TCR of 8-bit timer 0 select an external clock source

## 7.8 Port 7

### 7.8.1 Overview

Port 7 is an 8-bit input port that also provides the analog input pins for the A/D converter. The pin functions are the same in all modes. Figure 7-15 shows the pin configuration of port 7.

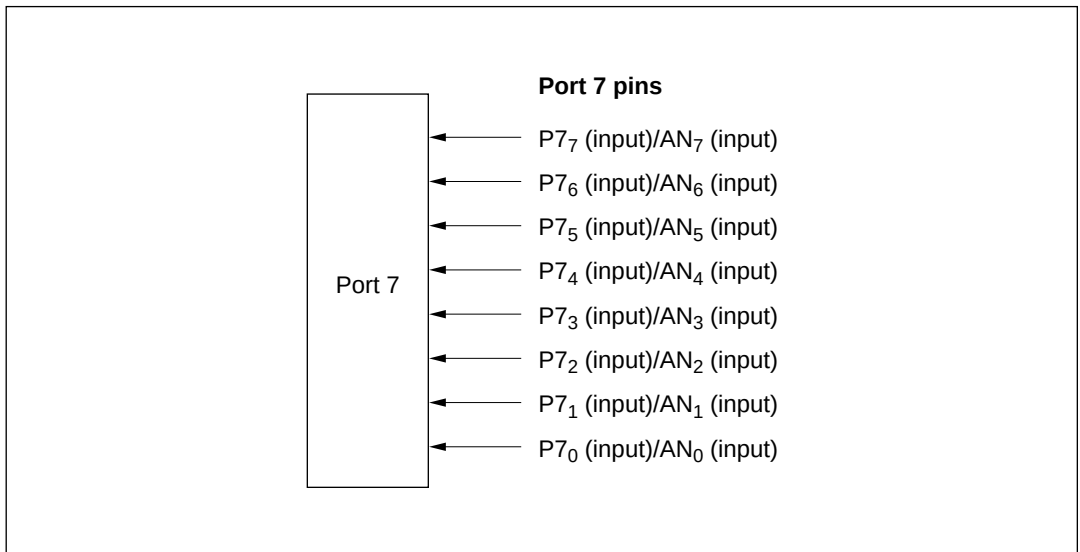

**Figure 7-15 Port 7 Pin Configuration**

7.8.2 Register Configuration and Descriptions

Table 7-14 summarizes the port 7 registers. Port 7 is an input port, so there is no data direction register.

Table 7-14 Port 7 Register

| Name                  | Abbreviation | Read/Write | Initial Value | Address |
|-----------------------|--------------|------------|---------------|---------|
| Port 7 input register | P7PIN        | R          | Undetermined  | H'FFBE  |

Port 7 Input Register (P7PIN)

|               |                 |                 |                 |                 |                 |                 |                 |                 |
|---------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| Bit           | 7               | 6               | 5               | 4               | 3               | 2               | 1               | 0               |
|               | P7 <sub>7</sub> | P7 <sub>6</sub> | P7 <sub>5</sub> | P7 <sub>4</sub> | P7 <sub>3</sub> | P7 <sub>2</sub> | P7 <sub>1</sub> | P7 <sub>0</sub> |
| Initial value | —*              | —*              | —*              | —*              | —*              | —*              | —*              | —*              |
| Read/Write    | R               | R               | R               | R               | R               | R               | R               | R               |

Note: \* Depends on the levels of pins P7<sub>7</sub> to P7<sub>0</sub>.

When P7PIN is read, the pin states are always read. P7PIN is a read-only register and cannot be written to.

## Section 8 16-Bit Free-Running Timer

### 8.1 Overview

The H8/3297 Series has an on-chip 16-bit free-running timer (FRT) module that uses a 16-bit free-running counter as a time base. Applications of the FRT module include rectangular-wave output (up to two independent waveforms), input pulse width measurement, and measurement of external clock periods.

#### 8.1.1 Features

The features of the free-running timer module are listed below.

- Selection of four clock sources

The free-running counter can be driven by an internal clock source ( $\phi_P/2$ ,  $\phi_P/8$ , or  $\phi_P/32$ ), or an external clock input (enabling use as an external event counter).

- Two independent comparators

Each comparator can generate an independent waveform.

- Four input capture channels

The current count can be captured on the rising or falling edge (selectable) of an input signal. The four input capture registers can be used separately, or in a buffer mode.

- Counter can be cleared under program control


The free-running counters can be cleared on compare-match A.

- Seven independent interrupts

Compare-match A and B, input capture A to D, and overflow interrupts are requested independently.

## 8.1.2 Block Diagram

Figure 8-1 shows a block diagram of the free-running timer.

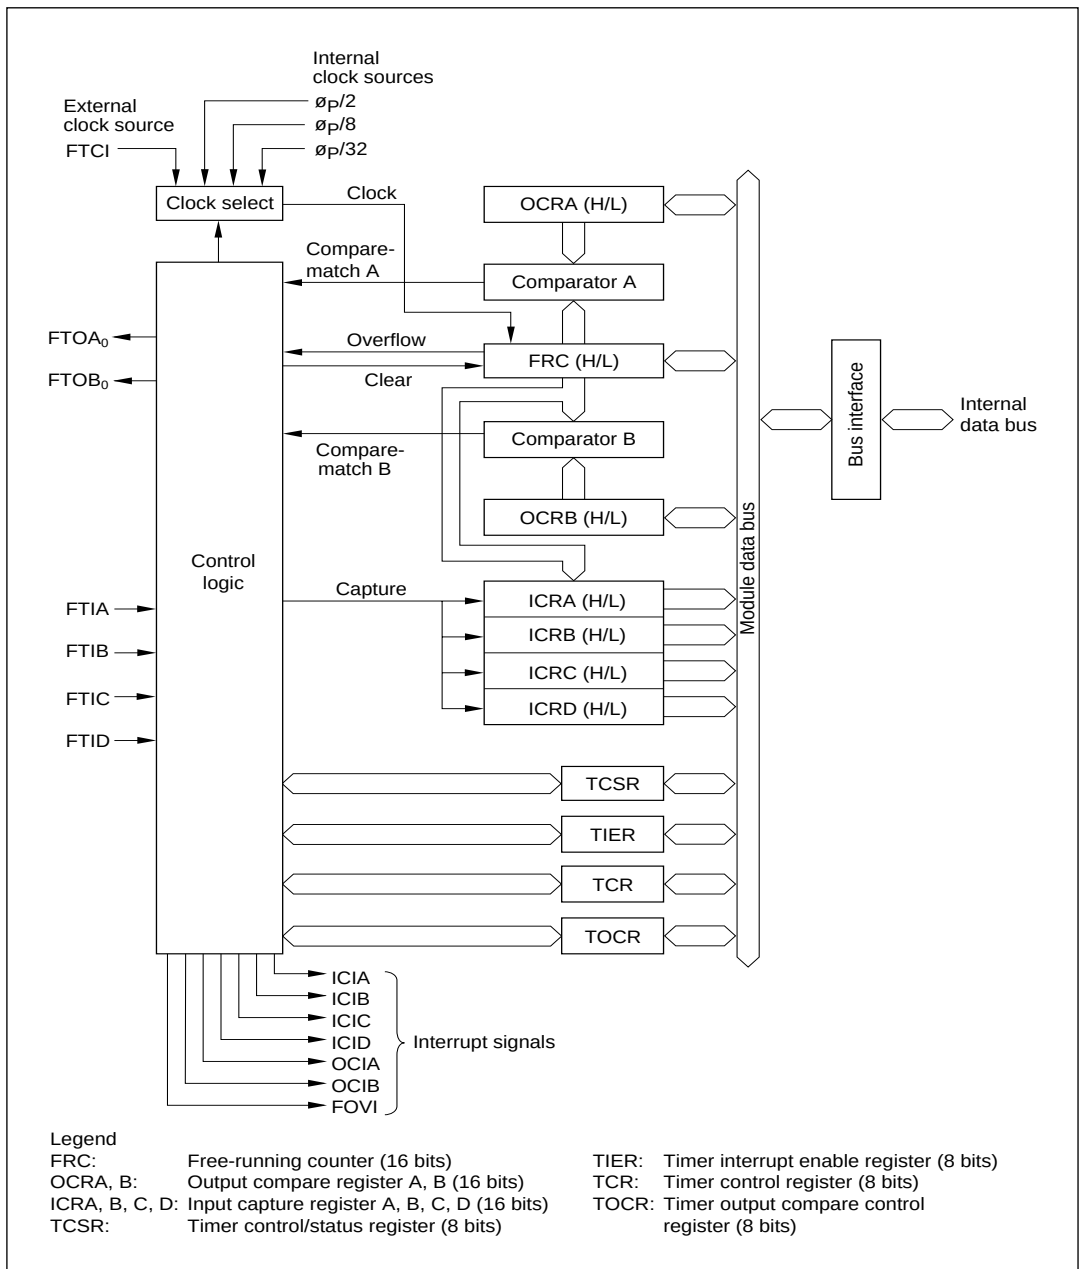

**Figure 8-1 Block Diagram of 16-Bit Free-Running Timer**

### 8.1.3 Input and Output Pins

Table 8-1 lists the input and output pins of the free-running timer module.

**Table 8-1 Input and Output Pins of Free-Running Timer Module**

| Name                | Abbreviation | I/O    | Function                                                          |
|---------------------|--------------|--------|-------------------------------------------------------------------|
| Counter clock input | FTCI         | Input  | Input of external free-running counter clock signal               |
| Output compare A    | FTOA         | Output | Output controlled by comparator A                                 |
| Output compare B    | FTOB         | Output | Output controlled by comparator B                                 |
| Input capture A     | FTIA         | Input  | Trigger for capturing current count into input capture register A |
| Input capture B     | FTIB         | Input  | Trigger for capturing current count into input capture register B |
| Input capture C     | FTIC         | Input  | Trigger for capturing current count into input capture register C |
| Input capture D     | FTID         | Input  | Trigger for capturing current count into input capture register D |

### 8.1.4 Register Configuration

Table 8-2 lists the registers of the free-running timer module.

**Table 8-2 Register Configuration**

| Name                                             | Abbreviation | R/W                 | Initial Value | Address              |
|--------------------------------------------------|--------------|---------------------|---------------|----------------------|
| Timer interrupt enable register                  | TIER         | R/W                 | H'01          | H'FF90               |
| Timer control/status register                    | TCSR         | R/(W)* <sup>1</sup> | H'00          | H'FF91               |
| Free-running counter (high)                      | FRC (H)      | R/W                 | H'00          | H'FF92               |
| Free-running counter (low)                       | FRC (L)      | R/W                 | H'00          | H'FF93               |
| Output compare register A/B (high)* <sup>2</sup> | OCRA/B (H)   | R/W                 | H'FF          | H'FF94* <sup>2</sup> |
| Output compare register A/B (low)* <sup>2</sup>  | OCRA/B (L)   | R/W                 | H'FF          | H'FF95* <sup>2</sup> |
| Timer control register                           | TCR          | R/W                 | H'00          | H'FF96               |
| Timer output compare control register            | TOCR         | R/W                 | H'E0          | H'FF97               |
| Input capture register A (high)                  | ICRA (H)     | R                   | H'00          | H'FF98               |
| Input capture register A (low)                   | ICRA (L)     | R                   | H'00          | H'FF99               |

Notes: 1. Software can write a 0 to clear bits 7 to 1, but cannot write a 1 in these bits.  
2. OCRA and OCRB share the same addresses. Access is controlled by the OCRS bit in TOCR.

**Table 8-2 Register Configuration (cont.)**

| Name                            | Abbreviation | R/W | Initial Value | Address |
|---------------------------------|--------------|-----|---------------|---------|
| Input capture register B (high) | ICRB (H)     | R   | H'00          | H'FF9A  |
| Input capture register B (low)  | ICRB (L)     | R   | H'00          | H'FF9B  |
| Input capture register C (high) | ICRC (H)     | R   | H'00          | H'FF9C  |
| Input capture register C (low)  | ICRC (L)     | R   | H'00          | H'FF9D  |
| Input capture register D (high) | ICRD (H)     | R   | H'00          | H'FF9E  |
| Input capture register D (low)  | ICRD (L)     | R   | H'00          | H'FF9F  |

8.2 Register Descriptions

8.2.1 Free-Running Counter (FRC)

|               |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
|---------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Bit           | 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|               |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| Initial value | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| Read/Write    | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

FRC is a 16-bit readable/writable up-counter that increments on an internal pulse generated from a clock source. The clock source is selected by the clock select 1 and 0 bits (CKS1 and CKS0) of the timer control register (TCR).

When FRC overflows from H'FFFF to H'0000, the overflow flag (OVF) in the timer control/status register (TCSR) is set to 1.

Because FRC is a 16-bit register, a temporary register (TEMP) is used when FRC is written or read. See section 8.3, CPU Interface, for details.

FRC is initialized to H'0000 at a reset and in the standby modes. It can also be cleared by compare-match A.

## 8.2.2 Output Compare Registers A and B (OCRA and OCRB)

|               |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
|---------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Bit           | 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|               |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| Initial value | 1   | 1   | 1   | 1   | 1   | 1   | 1   | 1   | 1   | 1   | 1   | 1   | 1   | 1   | 1   | 1   |
| Read/Write    | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

OCRA and OCRB are 16-bit readable/writable registers, the contents of which are continually compared with the value in the FRC. When a match is detected, the corresponding output compare flag (OCFA or OCFB) is set in the timer control/status register (TCSR).

In addition, if the output enable bit (OEA or OEB) in the timer output compare control register (TOCR) is set to 1, when the output compare register and FRC values match, the logic level selected by the output level bit (OLVLA or OLVLB) in TOCR is output at the output compare pin (FTOA or FTOB). Following a reset, the FTOA and FTOB output levels are 0 until the first compare-match.

OCRA and OCRB share the same address. They are differentiated by the OCRS bit in TOCR. A temporary register (TEMP) is used for write access, as explained in section 8.3, CPU Interface.

OCRA and OCRB are initialized to H'FFFF at a reset and in the standby modes.

## 8.2.3 Input Capture Registers A to D (ICRA to ICRD)

|               |    |    |    |    |    |    |   |   |   |   |   |   |   |   |   |   |
|---------------|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| Bit           | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|               |    |    |    |    |    |    |   |   |   |   |   |   |   |   |   |   |
| Initial value | 0  | 0  | 0  | 0  | 0  | 0  | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Read/Write    | R  | R  | R  | R  | R  | R  | R | R | R | R | R | R | R | R | R | R |


There are four input capture registers A to D, each of which is a 16-bit read-only register.

When the rising or falling edge of the signal at an input capture pin (FTIA to FTID) is detected, the current FRC value is copied to the corresponding input capture register (ICRA to ICRD).<sup>\*</sup> At the same time, the corresponding input capture flag (ICFA to ICFD) in the timer control/status register (TCSR) is set to 1. The input capture edge is selected by the input edge select bits (IEDGA to IEDGD) in the timer control register (TCR).

Note: <sup>\*</sup> The FRC contents are transferred to the input capture register regardless of the value of the input capture flag (ICFA/B/C/D).

Input capture can be buffered by using the input capture registers in pairs. When the BUFEA bit in TCR is set to 1, ICRC is used as a buffer register for ICRA as shown in figure 8-2. When an FTIA input is received, the old ICRA contents are moved into ICRC, and the new FRC count is copied into ICRA.



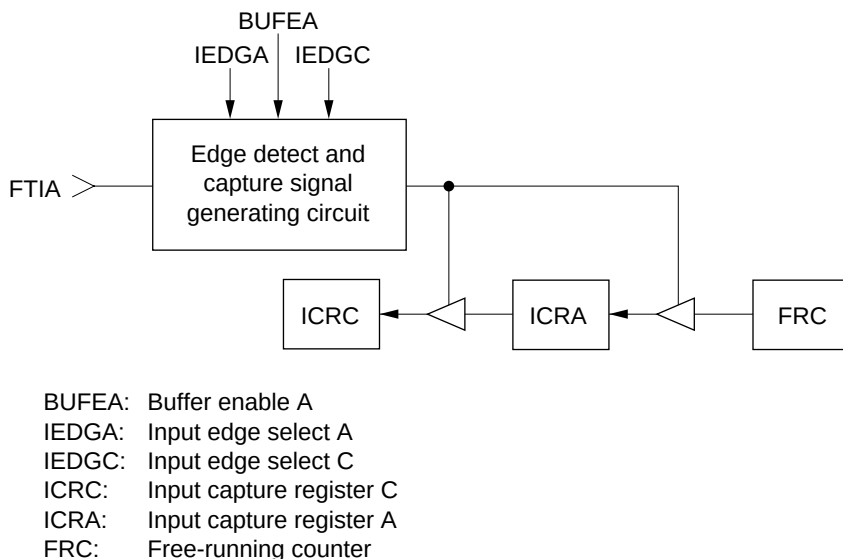

**Figure 8-2 Input Capture Buffering**

Similarly, when the BUFEB bit in TCR is set to 1, ICRD is used as a buffer register for ICRB.

When input capture is buffered, if the two input edge bits are set to different values (IEDGA  $\neq$  IEDGC or IEDGB  $\neq$  IEDGD), then input capture is triggered on both the rising and falling edges of the FTIA or FTIB input signal. If the two input edge bits are set to the same value (IEDGA = IEDGC or IEDGB = IEDGD), then input capture is triggered on only one edge. See table 8-3.

**Table 8-3 Buffered Input Capture Edge Selection (Example)**

| IEDGA | IEDGC | Input Capture Edge                                                  |
|-------|-------|---------------------------------------------------------------------|
| 0     | 0     | Captured on falling edge of input capture A (FTIA) (Initial value)  |
| 0     | 1     | Captured on both rising and falling edges of input capture A (FTIA) |
| 1     | 0     |                                                                     |
| 1     | 1     | Captured on rising edge of input capture A (FTIA)                   |

Because the input capture registers are 16-bit registers, a temporary register (TEMP) is used when they are read. See section 8.3, CPU Interface, for details.

To ensure input capture, the width of the input capture pulse should be at least 1.5 system clock periods ( $1.5 \cdot \phi$ ). When triggering is enabled on both edges, the input capture pulse width should be at least 2.5 system clock periods.

The input capture registers are initialized to H'0000 at a reset and in the standby modes.

## 8.2.4 Timer Interrupt Enable Register (TIER)

| Bit           | 7     | 6     | 5     | 4     | 3     | 2     | 1    | 0 |
|---------------|-------|-------|-------|-------|-------|-------|------|---|
|               | ICIAE | ICIBE | ICICE | ICIDE | OCIAE | OCIBE | OVIE | — |
| Initial value | 0     | 0     | 0     | 0     | 0     | 0     | 0    | 1 |
| Read/Write    | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W  | — |

The TIER is an 8-bit readable/writable register that enables and disables interrupts.

The TIER is initialized to H'01 at a reset and in the standby modes.

**Bit 7—Input Capture Interrupt A Enable (ICIAE):** This bit selects whether to request input capture interrupt A (ICIA) when input capture flag A (ICFA) in the timer status/control register (TCSR) is set to 1.

### Bit 7

| ICIAE | Description                                                           |
|-------|-----------------------------------------------------------------------|
| 0     | Input capture interrupt request A (ICIA) is disabled. (Initial value) |
| 1     | Input capture interrupt request A (ICIA) is enabled.                  |

**Bit 6—Input Capture Interrupt B Enable (ICIBE):** This bit selects whether to request input capture interrupt B (ICIB) when input capture flag B (ICFB) in TCSR is set to 1.

### Bit 6

| ICIBE | Description                                                           |
|-------|-----------------------------------------------------------------------|
| 0     | Input capture interrupt request B (ICIB) is disabled. (Initial value) |
| 1     | Input capture interrupt request B (ICIB) is enabled.                  |

**Bit 5—Input Capture Interrupt C Enable (ICICE):** This bit selects whether to request input capture interrupt C (ICIC) when input capture flag C (ICFC) in TCSR is set to 1.

### Bit 5

| ICICE | Description                                                           |
|-------|-----------------------------------------------------------------------|
| 0     | Input capture interrupt request C (ICIC) is disabled. (Initial value) |
| 1     | Input capture interrupt request C (ICIC) is enabled.                  |

**Bit 4—Input Capture Interrupt D Enable (ICIDE):** This bit selects whether to request input capture interrupt D (ICID) when input capture flag D (ICFD) in TCSR is set to 1.

| Bit 4 |                                                                       |
|-------|-----------------------------------------------------------------------|
| ICIDE | Description                                                           |
| 0     | Input capture interrupt request D (ICID) is disabled. (Initial value) |
| 1     | Input capture interrupt request D (ICID) is enabled.                  |

**Bit 3—Output Compare Interrupt A Enable (OCIAE):** This bit selects whether to request output compare interrupt A (OCIA) when output compare flag A (OCFA) in TCSR is set to 1.

| Bit 3 |                                                                        |
|-------|------------------------------------------------------------------------|
| OCIAE | Description                                                            |
| 0     | Output compare interrupt request A (OCIA) is disabled. (Initial value) |
| 1     | Output compare interrupt request A (OCIA) is enabled.                  |

**Bit 2—Output Compare Interrupt B Enable (OCIBE):** This bit selects whether to request output compare interrupt B (OCIB) when output compare flag B (OCFB) in TCSR is set to 1.

| Bit 2 |                                                                        |
|-------|------------------------------------------------------------------------|
| OCIBE | Description                                                            |
| 0     | Output compare interrupt request B (OCIB) is disabled. (Initial value) |
| 1     | Output compare interrupt request B (OCIB) is enabled.                  |

**Bit 1—Timer Overflow Interrupt Enable (OVIE):** This bit selects whether to request a free-running timer overflow interrupt (FOVI) when the timer overflow flag (OVF) in TCSR is set to 1.

| Bit 1 |                                                                      |
|-------|----------------------------------------------------------------------|
| OVIE  | Description                                                          |
| 0     | Timer overflow interrupt request (FOVI) is disabled. (Initial value) |
| 1     | Timer overflow interrupt request (FOVI) is enabled.                  |

**Bit 0—Reserved:** This bit cannot be modified and is always read as 1.

### 8.2.5 Timer Control/Status Register (TCSR)

| Bit           | 7      | 6      | 5      | 4      | 3      | 2      | 1      | 0     |
|---------------|--------|--------|--------|--------|--------|--------|--------|-------|
|               | ICFA   | ICFB   | ICFC   | ICFD   | OCFA   | OCFB   | OVF    | OCLRA |
| Initial value | 0      | 0      | 0      | 0      | 0      | 0      | 0      | 0     |
| Read/Write    | R/(W)* | R/(W)* | R/(W)* | R/(W)* | R/(W)* | R/(W)* | R/(W)* | R/W   |

Note: \* Software can write a 0 in bits 7 to 1 to clear the flags, but cannot write a 1 in these bits.

TCSR is an 8-bit readable and partially writable\* register that contains the seven interrupt flags and specifies whether to clear the counter on compare-match A (when the FRC and OCRA values match).

TCSR is initialized to H'00 at a reset and in the standby modes.

Timing is described in section 8.4, Operation.

**Bit 7—Input Capture Flag A (ICFA):** This status bit is set to 1 to flag an input capture A event. If BUFEA = 0, ICFA indicates that the FRC value has been copied to ICRA. If BUFEA = 1, ICFA indicates that the old ICRA value has been moved into ICRC and the new FRC value has been copied to ICRA.

ICFA must be cleared by software. It is set by hardware, however, and cannot be set by software.

| Bit 7<br>ICFA | Description                                                                                                   |
|---------------|---------------------------------------------------------------------------------------------------------------|
| 0             | To clear ICFA, the CPU must read ICFA after it has been set to 1, (Initial value) then write a 0 in this bit. |
| 1             | This bit is set to 1 when an FTIA input signal causes the FRC value to be copied to ICRA.                     |

**Bit 6—Input Capture Flag B (ICFB):** This status bit is set to 1 to flag an input capture B event. If BUFEb = 0, ICFB indicates that the FRC value has been copied to ICRB. If BUFEb = 1, ICFB indicates that the old ICRB value has been moved into ICRD and the new FRC value has been copied to ICRB.

ICFB must be cleared by software. It is set by hardware, however, and cannot be set by software.

| Bit 6<br>ICFB | Description                                                                                                   |
|---------------|---------------------------------------------------------------------------------------------------------------|
| 0             | To clear ICFB, the CPU must read ICFB after it has been set to 1, (Initial value) then write a 0 in this bit. |
| 1             | This bit is set to 1 when an FTIB input signal causes the FRC value to be copied to ICRB.                     |

**Bit 5—Input Capture Flag C (ICFC):** This status bit is set to 1 to flag input of a rising or falling edge of FTIC as selected by the IEDGC bit. When BUFEA = 0, this indicates capture of the FRC count in ICRC. When BUFEA = 1, however, the FRC count is not captured, so ICFC becomes simply an external interrupt flag. In other words, the buffer mode frees FTIC for use as a general-purpose interrupt signal (which can be enabled or disabled by the ICICE bit).

ICFC must be cleared by software. It is set by hardware, however, and cannot be set by software.

| Bit 5<br>ICFC | Description                                                                                                   |
|---------------|---------------------------------------------------------------------------------------------------------------|
| 0             | To clear ICFC, the CPU must read ICFC after it has been set to 1, then write a 0 in this bit. (Initial value) |
| 1             | This bit is set to 1 when an FTIC input signal is received.                                                   |

**Bit 4—Input Capture Flag D (ICFD):** This status bit is set to 1 to flag input of a rising or falling edge of FTID as selected by the IEDGD bit. When BUFEA = 0, this indicates capture of the FRC count in ICRD. When BUFEA = 1, however, the FRC count is not captured, so ICFD becomes simply an external interrupt flag. In other words, the buffer mode frees FTID for use as a general-purpose interrupt signal (which can be enabled or disabled by the ICIDE bit).

ICFD must be cleared by software. It is set by hardware, however, and cannot be set by software.

| Bit 4<br>ICFD | Description                                                                                                   |
|---------------|---------------------------------------------------------------------------------------------------------------|
| 0             | To clear ICFD, the CPU must read ICFD after it has been set to 1, then write a 0 in this bit. (Initial value) |
| 1             | This bit is set to 1 when an FTID input signal is received.                                                   |

**Bit 3—Output Compare Flag A (OCFA):** This status flag is set to 1 when the FRC value matches the OCRA value. This flag must be cleared by software. It is set by hardware, however, and cannot be set by software.

| Bit 3<br>OCFA | Description                                                                                                   |
|---------------|---------------------------------------------------------------------------------------------------------------|
| 0             | To clear OCFA, the CPU must read OCFA after it has been set to 1, then write a 0 in this bit. (Initial value) |
| 1             | This bit is set to 1 when FRC = OCRA.                                                                         |

**Bit 2—Output Compare Flag B (OCFB):** This status flag is set to 1 when the FRC value matches the OCRB value. This flag must be cleared by software. It is set by hardware, however, and cannot be set by software.

| Bit 2<br>OCFB | Description                                                                                                      |
|---------------|------------------------------------------------------------------------------------------------------------------|
| 0             | To clear OCFB, the CPU must read OCFB after it has been set to 1, (Initial value)<br>then write a 0 in this bit. |
| 1             | This bit is set to 1 when FRC = OCRB.                                                                            |

**Bit 1—Timer Overflow Flag (OVF):** This status flag is set to 1 when the FRC overflows (changes from H'FFFF to H'0000). This flag must be cleared by software. It is set by hardware, however, and cannot be set by software.

| Bit 1<br>OVF | Description                                                                                                    |
|--------------|----------------------------------------------------------------------------------------------------------------|
| 0            | To clear OVF, the CPU must read OVF after it has been set to 1, (Initial value)<br>then write a 0 in this bit. |
| 1            | This bit is set to 1 when FRC changes from H'FFFF to H'0000.                                                   |

**Bit 0—Counter Clear A (CCLRA):** This bit selects whether to clear the FRC at compare-match A (when the FRC and OCRA values match).

| Bit 0<br>CCLRA | Description                             |
|----------------|-----------------------------------------|
| 0              | The FRC is not cleared. (Initial value) |
| 1              | The FRC is cleared at compare-match A.  |

8.2.6 Timer Control Register (TCR)

| Bit           | 7     | 6     | 5     | 4     | 3     | 2     | 1    | 0    |
|---------------|-------|-------|-------|-------|-------|-------|------|------|
|               | IEDGA | IEDGB | IEDGC | IEDGD | BUFEA | BUFEB | CKS1 | CKS0 |
| Initial value | 0     | 0     | 0     | 0     | 0     | 0     | 0    | 0    |
| Read/Write    | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W  | R/W  |

TCR is an 8-bit readable/writable register that selects the rising or falling edge of the input capture signals, enables the input capture buffer mode, and selects the FRC clock source.

TCR is initialized to H'00 at a reset and in the standby modes.

**Bit 7—Input Edge Select A (IEDGA):** This bit selects the rising or falling edge of the input capture A signal (FTIA).

| Bit 7<br>IEDGA | Description                                                                        |
|----------------|------------------------------------------------------------------------------------|
| 0              | Input capture A events are recognized on the falling edge of FTIA. (Initial value) |
| 1              | Input capture A events are recognized on the rising edge of FTIA.                  |

**Bit 6—Input Edge Select B (IEDGB):** This bit selects the rising or falling edge of the input capture B signal (FTIB).

| Bit 6<br>IEDGB | Description                                                                        |
|----------------|------------------------------------------------------------------------------------|
| 0              | Input capture B events are recognized on the falling edge of FTIB. (Initial value) |
| 1              | Input capture B events are recognized on the rising edge of FTIB.                  |

**Bit 5—Input Edge Select C (IEDGC):** This bit selects the rising or falling edge of the input capture C signal (FTIC).

| Bit 5<br>IEDGC | Description                                                                        |
|----------------|------------------------------------------------------------------------------------|
| 0              | Input capture C events are recognized on the falling edge of FTIC. (Initial value) |
| 1              | Input capture C events are recognized on the rising edge of FTIC.                  |

**Bit 4—Input Edge Select D (IEDGD):** This bit selects the rising or falling edge of the input capture D signal (FTID).

| Bit 4<br>IEDGD | Description                                                                        |
|----------------|------------------------------------------------------------------------------------|
| 0              | Input capture D events are recognized on the falling edge of FTID. (Initial value) |
| 1              | Input capture D events are recognized on the rising edge of FTID.                  |

**Bit 3—Buffer Enable A (BUFEA):** This bit selects whether to use ICRC as a buffer register for ICRA.

| Bit 3<br>BUFEA | Description                                            |
|----------------|--------------------------------------------------------|
| 0              | ICRC is used for input capture C. (Initial value)      |
| 1              | ICRC is used as a buffer register for input capture A. |

**Bit 2—Buffer Enable B (BUFEB):** This bit selects whether to use ICRD as a buffer register for ICRB.

**Bit 2**

| BUFEB | Description                                            |
|-------|--------------------------------------------------------|
| 0     | ICRD is used for input capture D. (Initial value)      |
| 1     | ICRD is used as a buffer register for input capture B. |

**Bits 1 and 0—Clock Select (CKS1 and CKS0):** These bits select external clock input or one of three internal clock sources for FRC. External clock pulses are counted on the rising edge of signals input to pin FTCL.

**Bit 1**

**Bit 0**

| CKS1 | CKS0 | Description                                      |
|------|------|--------------------------------------------------|
| 0    | 0    | $\phi_P/2$ internal clock source (Initial value) |
| 0    | 1    | $\phi_P/8$ internal clock source                 |
| 1    | 0    | $\phi_P/32$ internal clock source                |
| 1    | 1    | External clock source (rising edge)              |

## 8.2.7 Timer Output Compare Control Register (TOCR)

| Bit           | 7 | 6 | 5 | 4    | 3   | 2   | 1     | 0     |
|---------------|---|---|---|------|-----|-----|-------|-------|
|               | — | — | — | OCRS | OEA | OEB | OLVLA | OLVLB |
| Initial value | 1 | 1 | 1 | 0    | 0   | 0   | 0     | 0     |
| Read/Write    | — | — | — | R/W  | R/W | R/W | R/W   | R/W   |

TOCR is an 8-bit readable/writable register that enables output from the output compare pins, selects the output levels, and switches access between output compare registers A and B.

TOCR is initialized to H'E0 at a reset and in the standby modes.

**Bits 7 to 5—Reserved:** These bits cannot be modified and are always read as 1.

**Bit 4—Output Compare Register Select (OCRS):** OCRA and OCRB share the same address. When this address is accessed, the OCRS bit selects which register is accessed. This bit does not affect the operation of OCRA or OCRB.

**Bit 4**

| OCRS | Description                       |
|------|-----------------------------------|
| 0    | OCRA is selected. (Initial value) |
| 1    | OCRB is selected.                 |



**Bit 3—Output Enable A (OEA):** This bit enables or disables output of the output compare A signal (FTOA).

| Bit 3<br>OEA | Description                                          |
|--------------|------------------------------------------------------|
| 0            | Output compare A output is disabled. (Initial value) |
| 1            | Output compare A output is enabled.                  |

**Bit 2—Output Enable B (OEB):** This bit enables or disables output of the output compare B signal (FTOB).

| Bit 2<br>OEB | Description                                          |
|--------------|------------------------------------------------------|
| 0            | Output compare B output is disabled. (Initial value) |
| 1            | Output compare B output is enabled.                  |

**Bit 1—Output Level A (OLVLA):** This bit selects the logic level to be output at the FTOA pin when the FRC and OCRA values match.

| Bit 1<br>OLVLA | Description                                                    |
|----------------|----------------------------------------------------------------|
| 0              | A 0 logic level is output for compare-match A. (Initial value) |
| 1              | A 1 logic level is output for compare-match A.                 |

**Bit 0—Output Level B (OLVLB):** This bit selects the logic level to be output at the FTOB pin when the FRC and OCRB values match.

| Bit 0<br>OLVLB | Description                                                    |
|----------------|----------------------------------------------------------------|
| 0              | A 0 logic level is output for compare-match B. (Initial value) |
| 1              | A 1 logic level is output for compare-match B.                 |

## 8.3 CPU Interface

The free-running counter (FRC), output compare registers (OCRA and OCRB), and input capture registers (ICRA to ICRD) are 16-bit registers, but they are connected to an 8-bit data bus. When the CPU accesses these registers, to ensure that both bytes are written or read simultaneously, the access is performed using an 8-bit temporary register (TEMP).

These registers are written and read as follows:

- **Register Write**

When the CPU writes to the upper byte, the byte of write data is placed in TEMP. Next, when the CPU writes to the lower byte, this byte of data is combined with the byte in TEMP and all 16 bits are written in the register simultaneously.

- **Register Read**

When the CPU reads the upper byte, the upper byte of data is sent to the CPU and the lower byte is placed in TEMP. When the CPU reads the lower byte, it receives the value in TEMP.


Programs that access these registers should normally use word access. Equivalently, they may access first the upper byte, then the lower byte by two consecutive byte accesses. Data will not be transferred correctly if the bytes are accessed in reverse order, or if only one byte is accessed.

Figure 8-3 shows the data flow when FRC is accessed. The other registers are accessed in the same way. As an exception, when the CPU reads OCRA or OCRB, it reads both the upper and lower bytes directly, without using TEMP.

### Coding Examples


To write the contents of general register R0 to OCRA:    `MOV.W    R0, @OCRA`

To transfer the contents of ICRA to general register R0:    `MOV.W    @ICRA, R0`

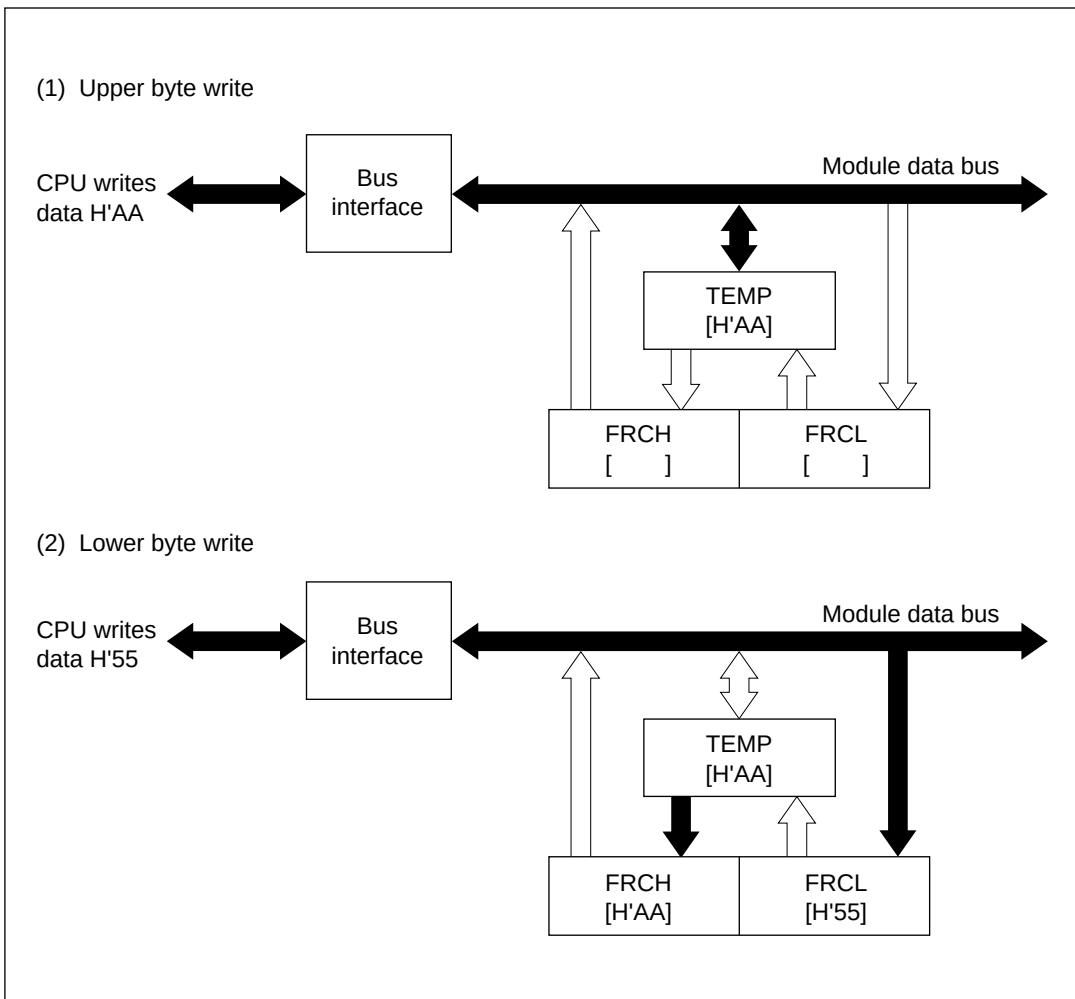


**Figure 8-3 (a) Write Access to FRC (when CPU Writes H'AA55)**

(1) Upper byte read

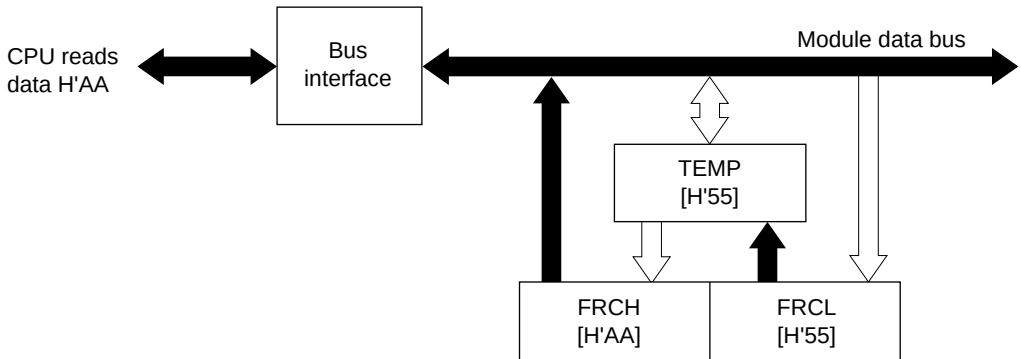

(2) Lower byte read

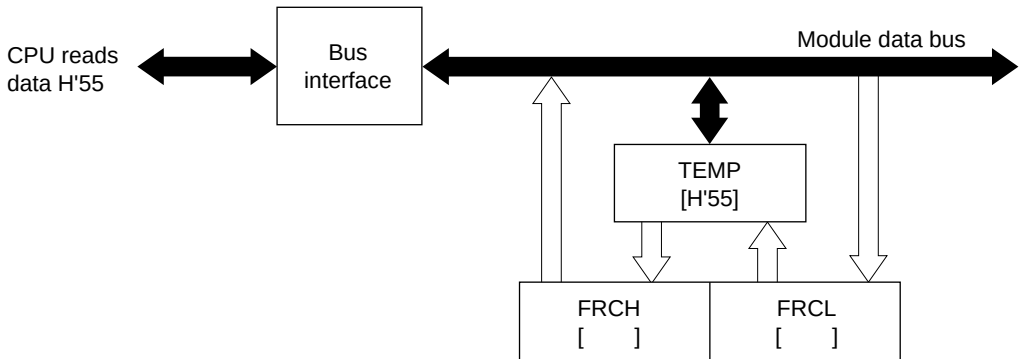


**Figure 8-3 (b) Read Access to FRC (when FRC Contains H'AA55)**

## 8.4 Operation

### 8.4.1 FRC Incrementation Timing

FRC increments on a pulse generated once for each period of the selected (internal or external) clock source. The clock source is selected by bits CKS0 and CKS1 in the TCR.


**Internal Clock:** The internal clock sources ( $\phi_P/2$ ,  $\phi_P/8$ ,  $\phi_P/32$ ) are created from the system clock ( $\phi$ ) by a prescaler. FRC increments on a pulse generated from the falling edge of the prescaler output. See figure 8-4.

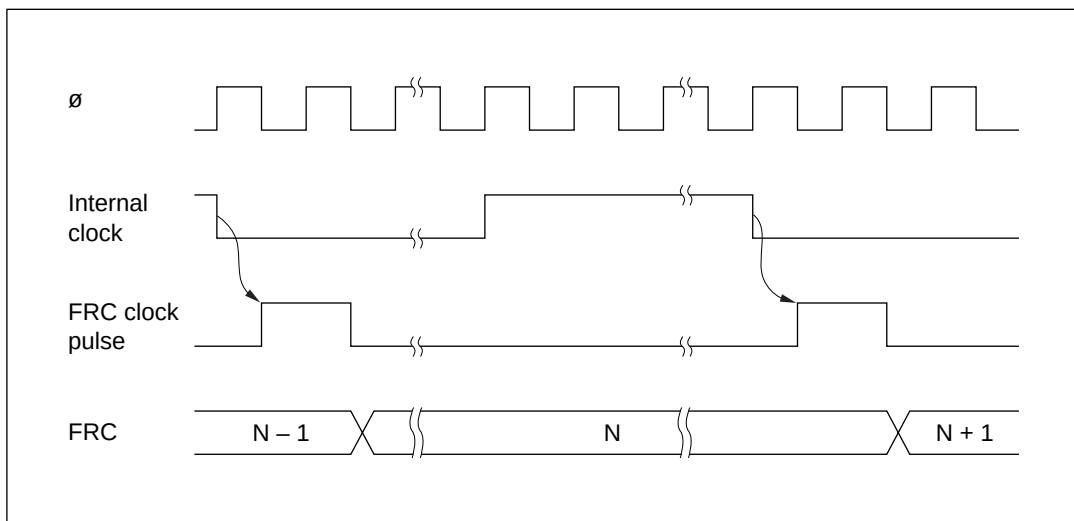

**Figure 8-4 Increment Timing for Internal Clock Source**

**External Clock:** If external clock input is selected, FRC increments on the rising edge of the FTCl clock signal. Figure 8-5 shows the increment timing.

The pulse width of the external clock signal must be at least 1.5 system clock ( $\phi$ ) periods. The counter will not increment correctly if the pulse width is shorter than 1.5 system clock periods.

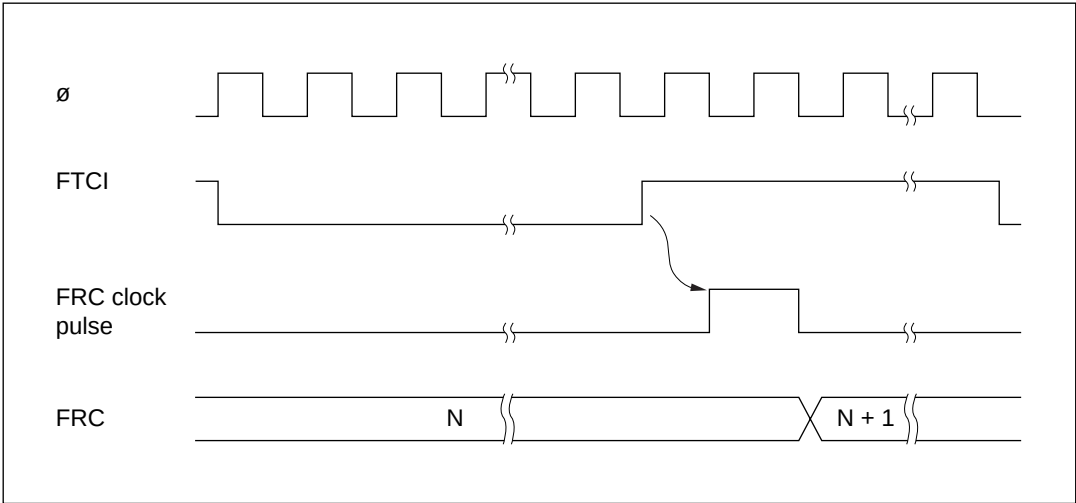

**Figure 8-5 Increment Timing for External Clock Source**

8.4.2 Output Compare Timing

When a compare-match occurs, the logic level selected by the output level bit (OLVLA or OLVLB) in TOCR is output at the output compare pin (FTOA or FTOB). Figure 8-6 shows the timing of this operation for compare-match A.

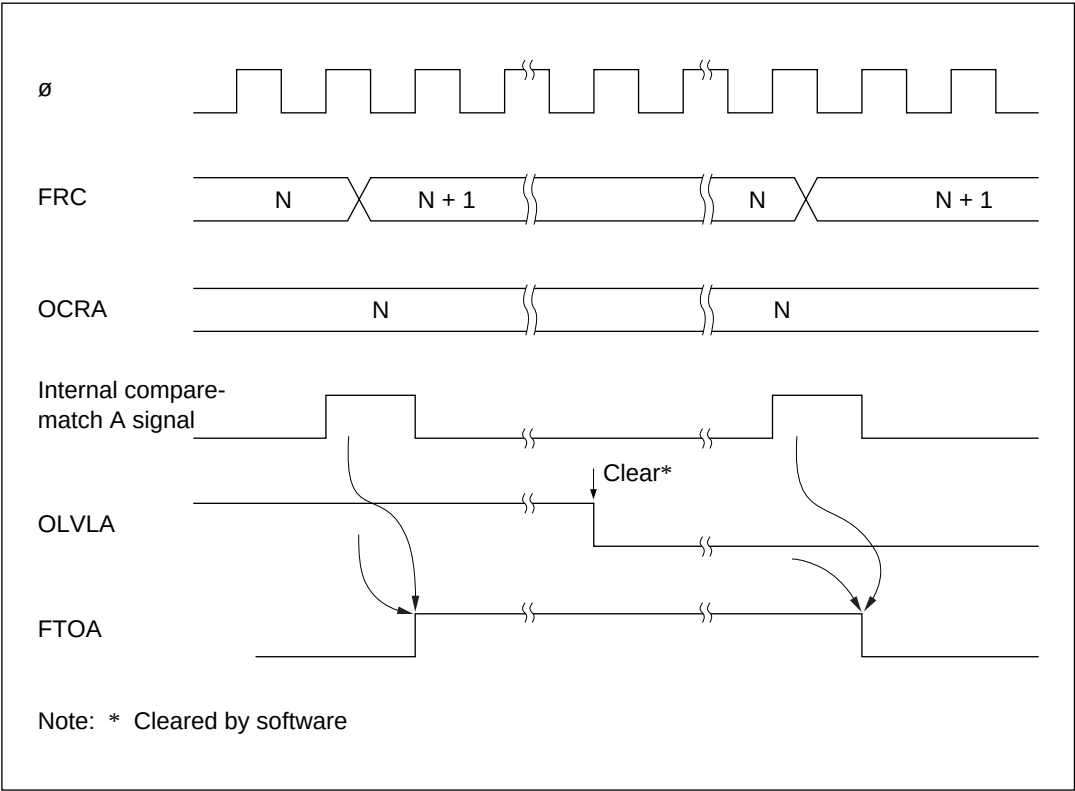


Figure 8-6 Timing of Output Compare A

8.4.3 FRC Clear Timing

If the CCLRA bit in TCSR is set to 1, the FRC is cleared when compare-match A occurs. Figure 8-7 shows the timing of this operation.

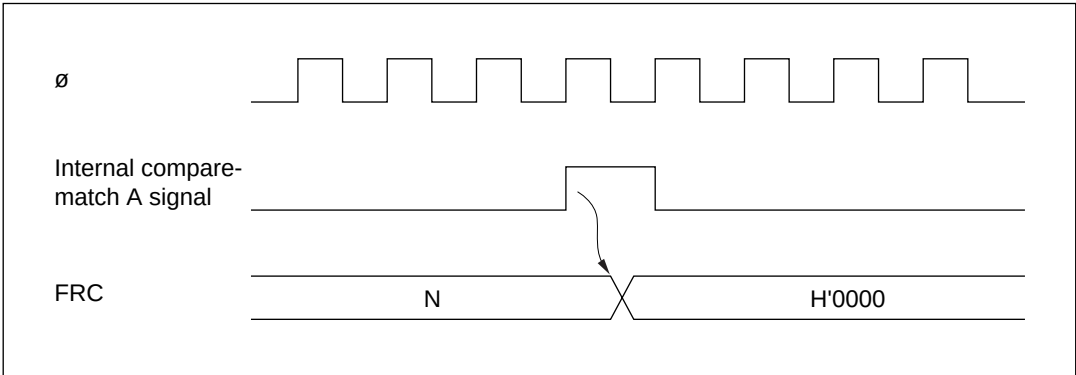


Figure 8-7 Clearing of FRC by Compare-Match A



8.4.4 Input Capture Timing

**(1) Input Capture Timing:** An internal input capture signal is generated from the rising or falling edge of the signal at the input capture pin FTIx (x = A, B, C, D), as selected by the corresponding IEDGx bit in TCR. Figure 8-8 shows the usual input capture timing when the rising edge is selected (IEDGx = 1).

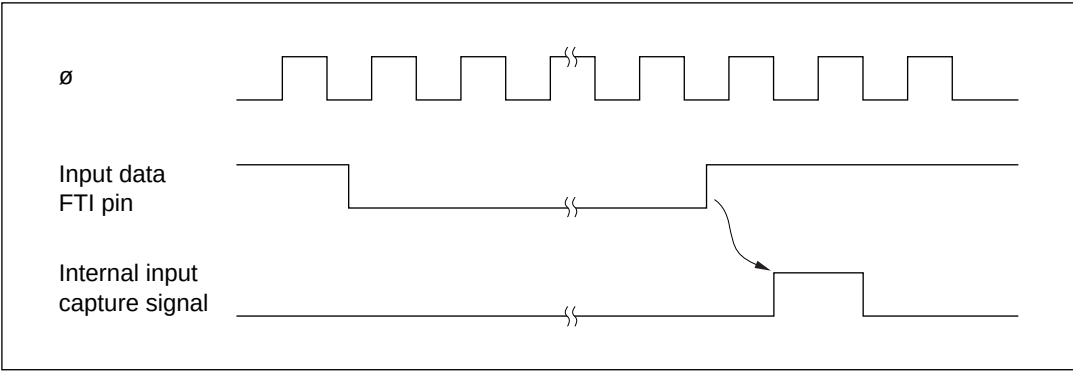


Figure 8-8 Input Capture Timing (Usual Case)

If the upper byte of ICRA/B/C/D is being read when the corresponding input capture signal arrives, the internal input capture signal is delayed by one state. Figure 8-9 shows the timing for this case.


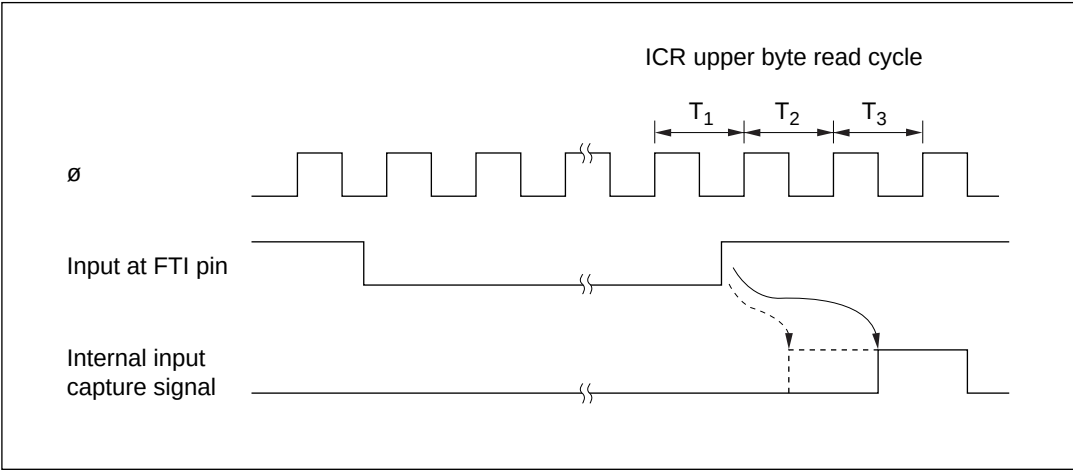


Figure 8-9 Input Capture Timing (1-State Delay Due to ICRA/B/C/D Read)

**(2) Buffered Input Capture Timing:** ICRC and ICRD can operate as buffers for ICRA and ICRB.


Figure 8-10 shows how input capture operates when ICRA and ICRC are used in buffer mode and IEDGA and IEDGC are set to different values (IEDGA = 0 and IEDGC = 1, or IEDG A = 1 and IEDGC = 0), so that input capture is performed on both the rising and falling edges of FTIA.

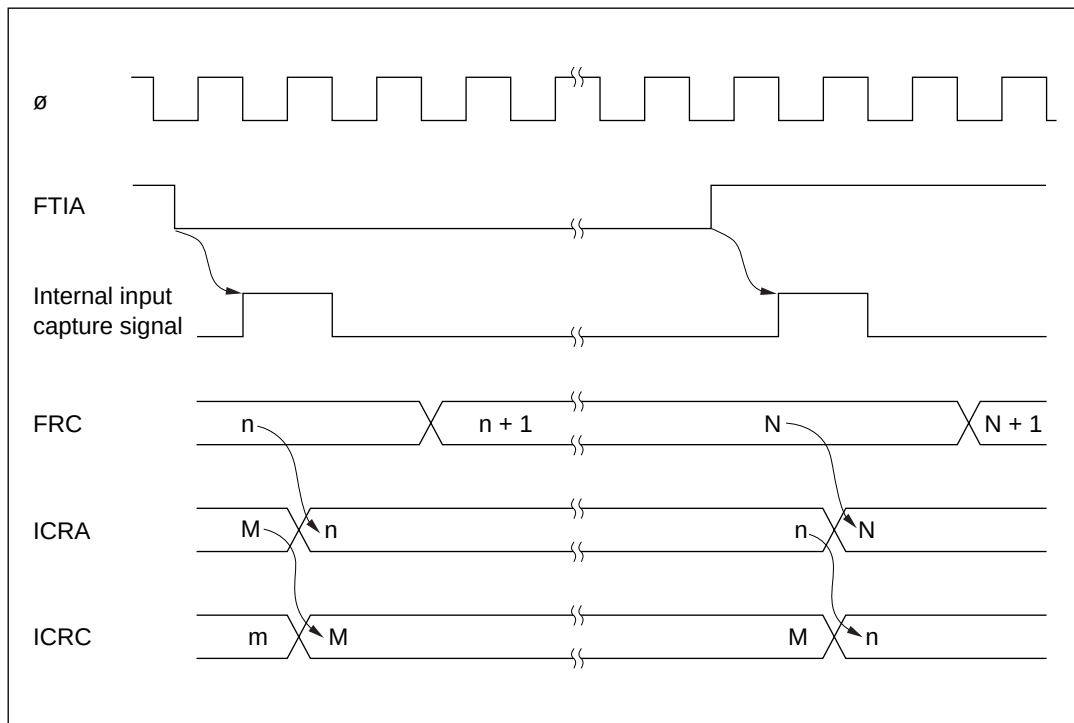

**Figure 8-10 Buffered Input Capture with Both Edges Selected**

When ICRC or ICRD is used as a buffer register, its input capture flag is set by the selected transition of its input capture signal. For example, if ICRC is used to buffer ICRA, when the edge transition selected by the IEDGC bit occurs on the FTIC input capture line, ICFC will be set, and if the ICIEC bit is set, an interrupt will be requested. The FRC value will not be transferred to ICRC, however.


In buffered input capture, if the upper byte of either of the two registers to which data will be transferred (ICRA and ICRC, or ICRB and ICRD) is being read when the input signal arrives, input capture is delayed by one system clock ( $\phi$ ). Figure 8-11 shows the timing when BUFEA = 1.

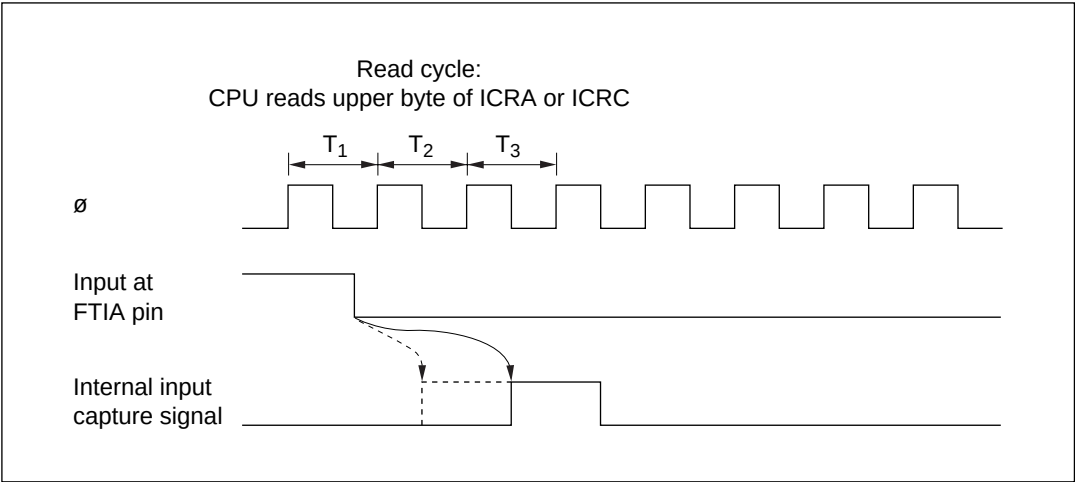

**Figure 8-11 Input Capture Timing (1-State Delay, Buffer Mode)**

#### 8.4.5 Timing of Input Capture Flag (ICF) Setting

The input capture flag ICF<sub>x</sub> (x = A, B, C, D) is set to 1 by the internal input capture signal. Figure 8-12 shows the timing of this operation.

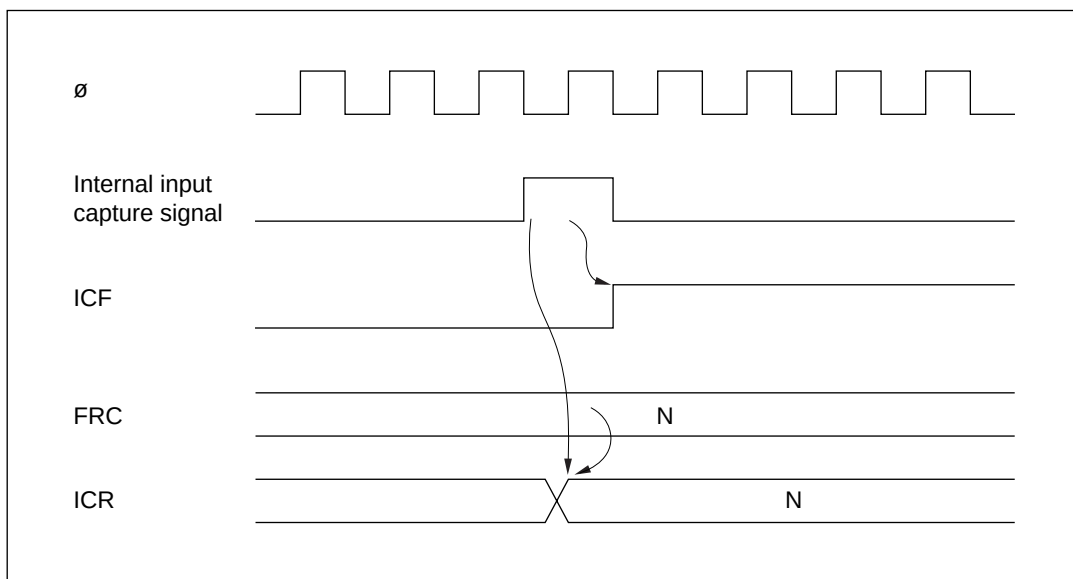

**Figure 8-12 Setting of Input Capture Flag**

8.4.6 Setting of Output Compare Flags A and B (OCFA and OCFB)

The output compare flags are set to 1 by an internal compare-match signal generated when the FRC value matches the OCRA or OCRB value. This compare-match signal is generated at the last state in which the two values match, just before FRC increments to a new value.

Accordingly, when the FRC and OCR values match, the compare-match signal is not generated until the next period of the clock source. Figure 8-13 shows the timing of the setting of the output compare flags.

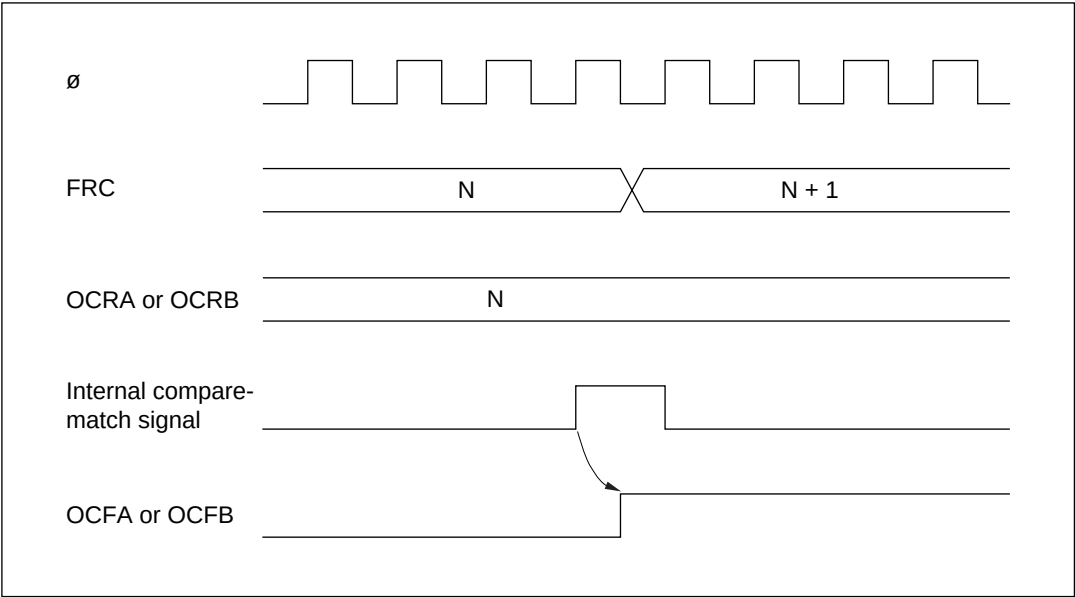


Figure 8-13 Setting of Output Compare Flags

8.4.7 Setting of FRC Overflow Flag (OVF)

The FRC overflow flag (OVF) is set to 1 when FRC overflows (changes from H'FFFF to H'0000). Figure 8-14 shows the timing of this operation.

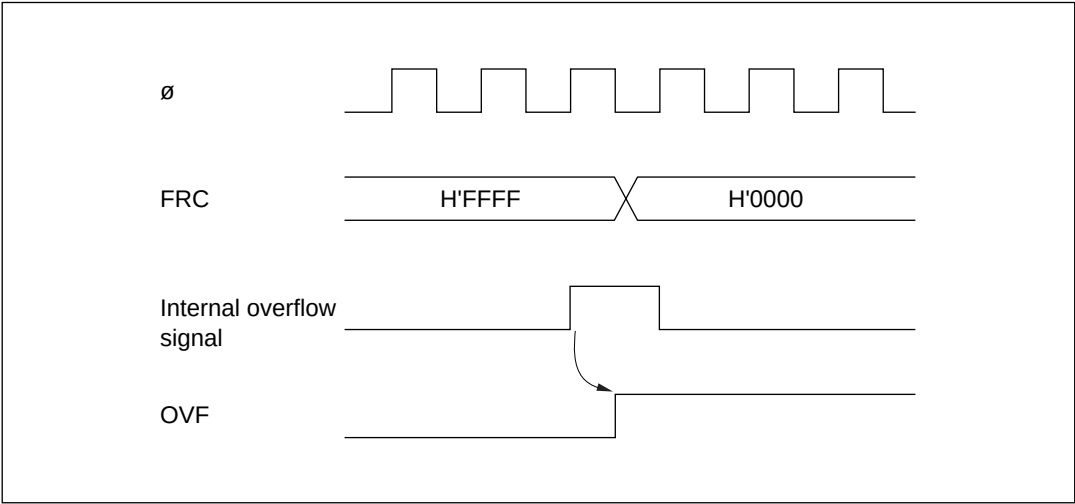


Figure 8-14 Setting of Overflow Flag (OVF)

8.5 Interrupts

The free-running timer can request seven interrupts (three types): input capture A to D (ICIA, ICIB, ICIC, ICID), output compare A and B (OCIA and OCIB), and overflow (FOVI). Each interrupt can be enabled or disabled by an enable bit in TIER. Independent signals are sent to the interrupt controller for each interrupt. Table 8-4 lists information about these interrupts.


Table 8-4 Free-Running Timer Interrupts

| Interrupt | Description       | Priority              |
|-----------|-------------------|-----------------------|
| ICIA      | Requested by ICFA | High<br>↑<br>↓<br>Low |
| ICIB      | Requested by ICFB |                       |
| ICIC      | Requested by ICFC |                       |
| ICID      | Requested by ICFD |                       |
| OCIA      | Requested by OCFA |                       |
| OCIB      | Requested by OCFB |                       |
| FOVI      | Requested by OVF  |                       |

## 8.6 Sample Application

In the example below, the free-running timer is used to generate two square-wave outputs with a 50% duty cycle and arbitrary phase relationship. The programming is as follows:

- (1) The CCLRA bit in TCSR is set to 1.
- (2) Each time a compare-match interrupt occurs, software inverts the corresponding output level bit in TOCR (OLVLA or OLVLB).

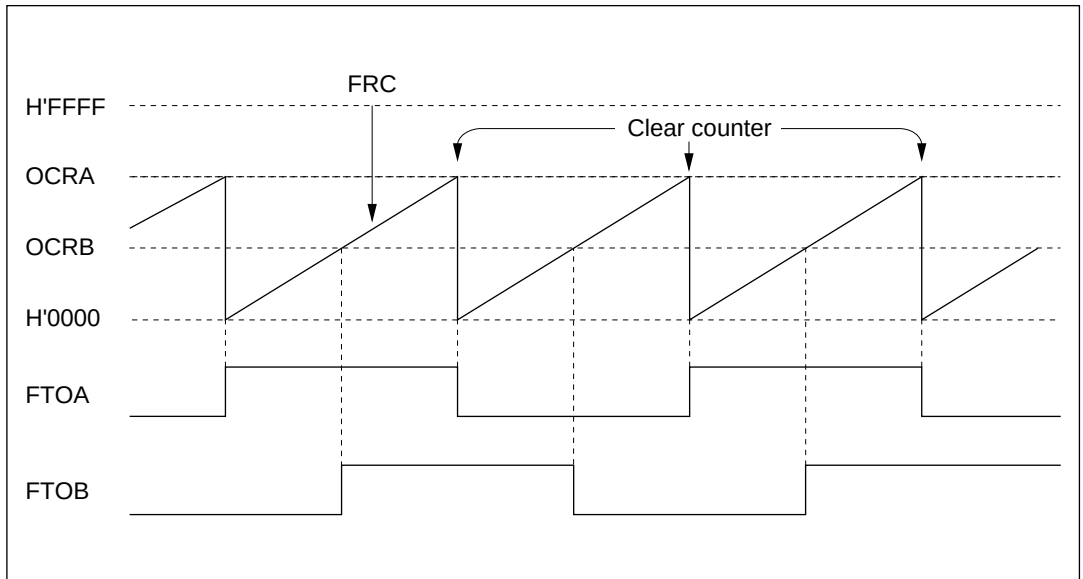


**Figure 8-15 Square-Wave Output (Example)**

## 8.7 Usage Notes

Application programmers should note that the following types of contention can occur in the free-running timer.

**(1) Contention between FRC Write and Clear:** If an internal counter clear signal is generated during the  $T_3$  state of a write cycle to the lower byte of the free-running counter, the clear signal takes priority and the write is not performed.

Figure 8-16 shows this type of contention.

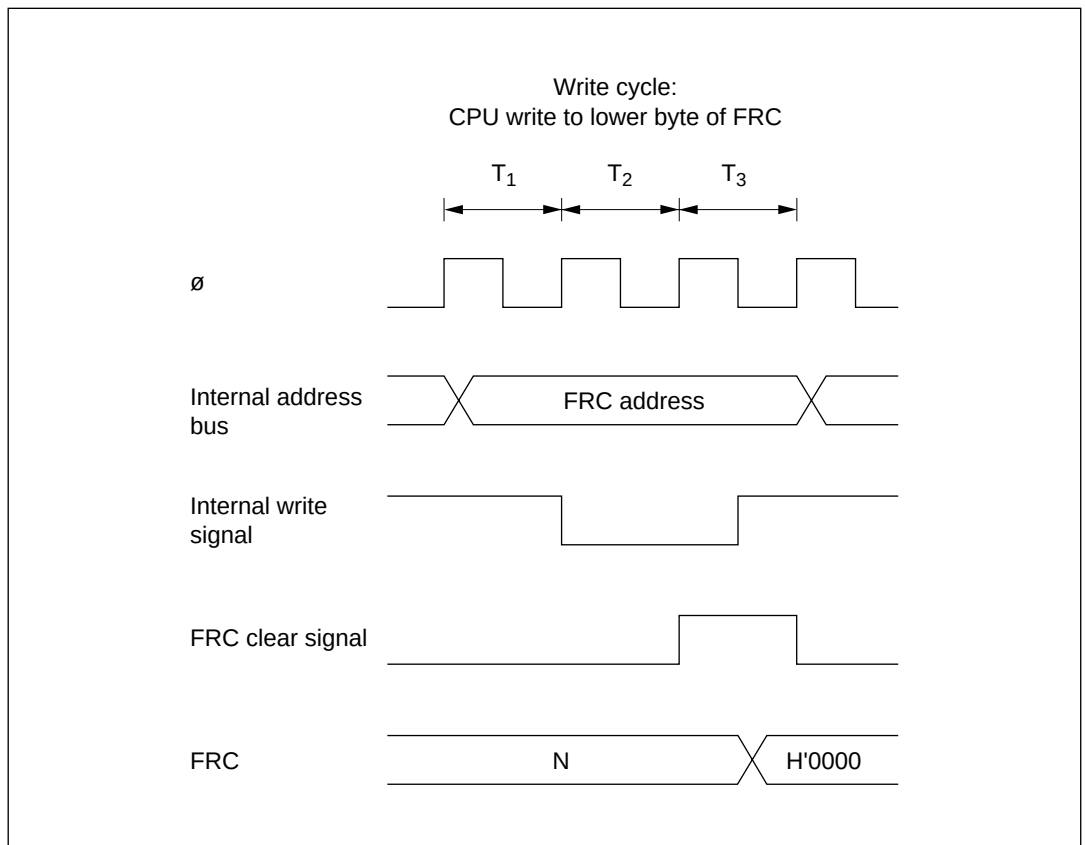


**Figure 8-16 FRC Write-Clear Contention**



**(2) Contention between FRC Write and Increment:** If an FRC increment pulse is generated during the  $T_3$  state of a write cycle to the lower byte of the free-running counter, the write takes priority and FRC is not incremented.


Figure 8-17 shows this type of contention.

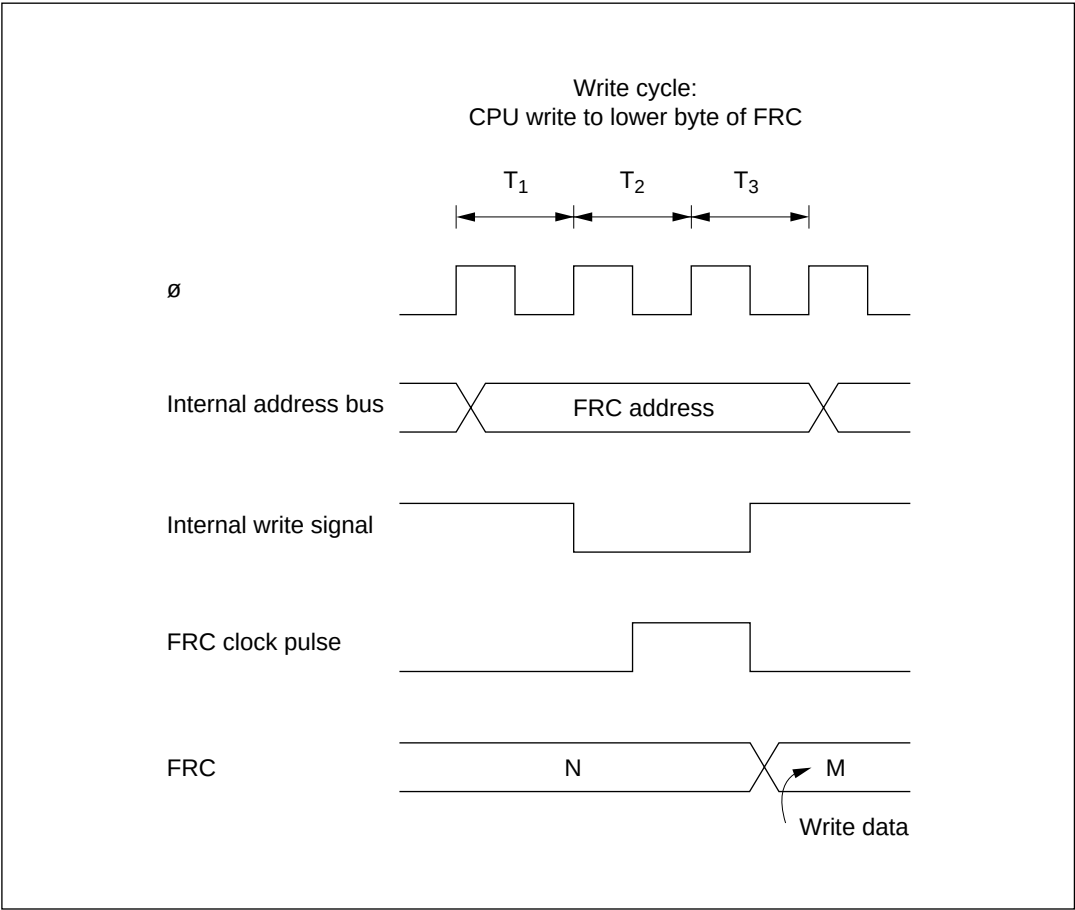

**Figure 8-17 FRC Write-Increment Contention**

**(3) Contention between OCR Write and Compare-Match:** If a compare-match occurs during the  $T_3$  state of a write cycle to the lower byte of OCRA or OCRB, the write takes priority and the compare-match signal is inhibited.

Figure 8-18 shows this type of contention.

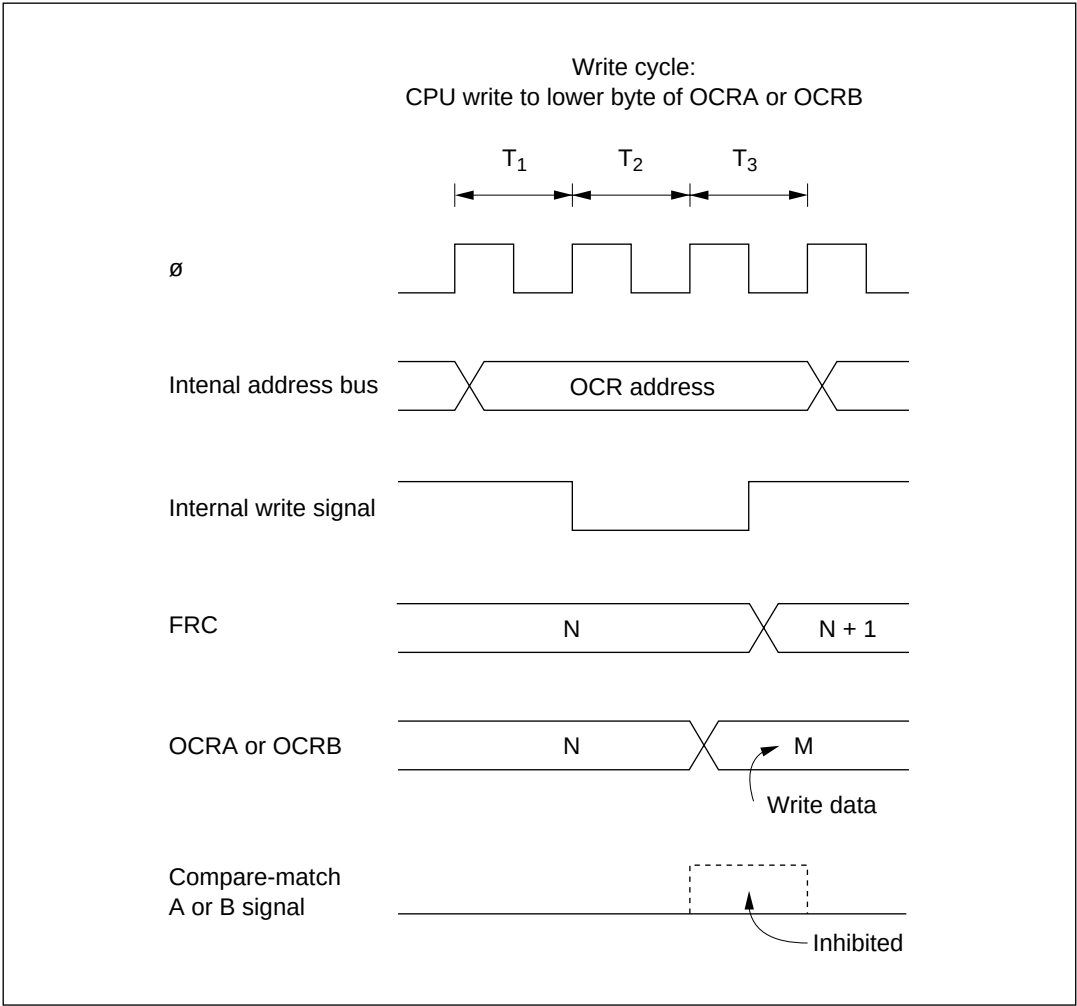



**Figure 8-18 Contention between OCR Write and Compare-Match**

**(4) Incrementation Caused by Changing of Internal Clock Source:** When an internal clock source is changed, the changeover may cause FRC to increment. This depends on the time at which the clock select bits (CKS1 and CKS0) are rewritten, as shown in table 8-5.



The pulse that increments FRC is generated at the falling edge of the internal clock source. If clock sources are changed when the old source is high and the new source is low, as in case no. 3 in table 8-5, the changeover generates a falling edge that triggers the FRC increment clock pulse.

Switching between an internal and external clock source can also cause FRC to increment.

**Table 8-5 Effect of Changing Internal Clock Sources**
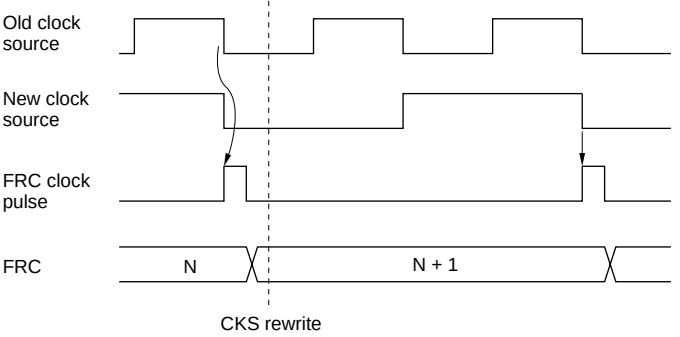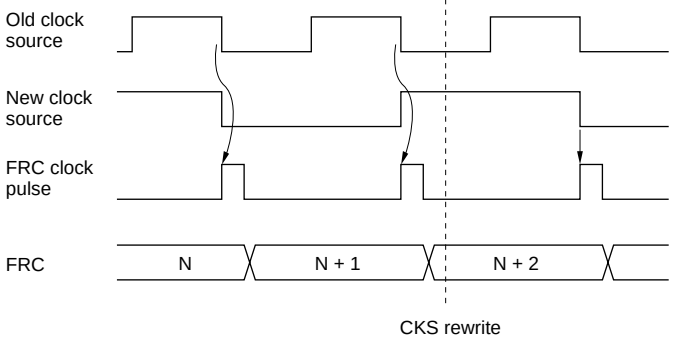
| No. | Description                                                                                            | Timing                                                                              |
|-----|--------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 1   | Low → low:<br>CKS1 and CKS0 are rewritten while both clock sources are low.                            |   |
| 2   | Low → high:<br>CKS1 and CKS0 are rewritten while old clock source is low and new clock source is high. |  |

**Table 8-5 Effect of Changing Internal Clock Sources (cont)**
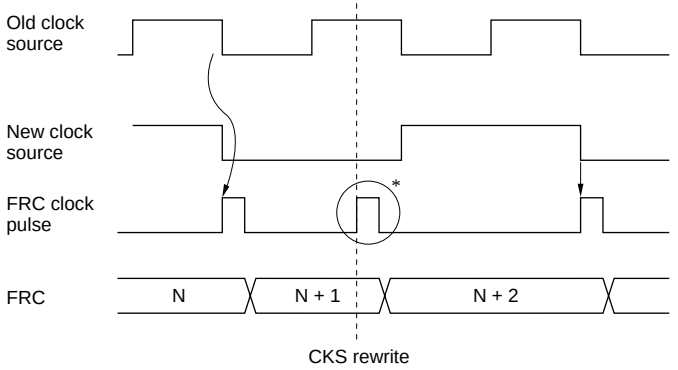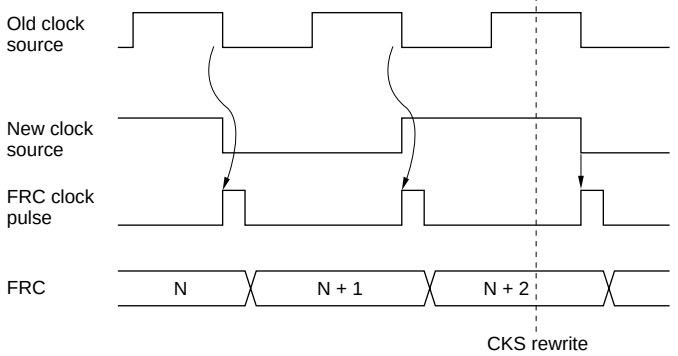
| No. | Description                                                                                            | Timing                                                                             |
|-----|--------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
| 3   | High → low:<br>CKS1 and CKS0 are rewritten while old clock source is high and new clock source is low. |  |
| 4   | High → high:<br>CKS1 and CKS0 are rewritten while both clock sources are high.                         |  |

Note: \* The switching of clock sources is regarded as a falling edge that increments FRC.



# Section 9 8-Bit Timers

## 9.1 Overview

The H8/3297 Series includes an 8-bit timer module with two channels (numbered 0 and 1). Each channel has an 8-bit counter (TCNT) and two time constant registers (TCORA and TCORB) that are constantly compared with the TCNT value to detect compare-match events. One of the many applications of the 8-bit timer module is to generate a rectangular-wave output with an arbitrary duty cycle.

### 9.1.1 Features

The features of the 8-bit timer module are listed below.

- Selection of seven clock sources

The counters can be driven by one of six internal clock signals or an external clock input (enabling use as an external event counter).

- Selection of three ways to clear the counters

The counters can be cleared on compare-match A or B, or by an external reset signal.

- Timer output controlled by two time constants


The timer output signal in each channel is controlled by two independent time constants, enabling the timer to generate output waveforms with an arbitrary duty cycle, or PWM waveforms.

- Three independent interrupts

Compare-match A and B and overflow interrupts can be requested independently.

## 9.1.2 Block Diagram

Figure 9-1 shows a block diagram of one channel in the 8-bit timer module.

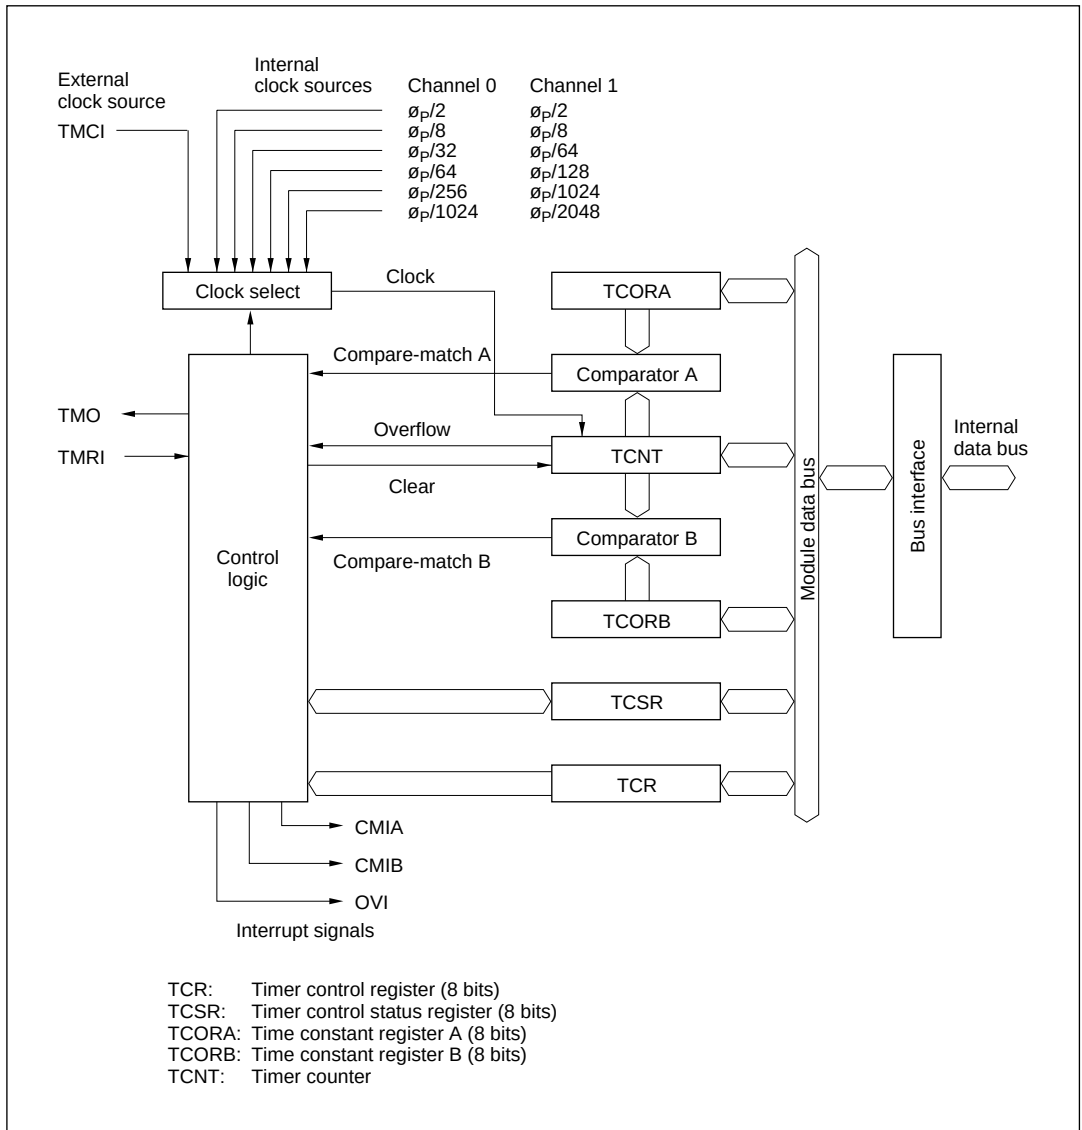

**Figure 9-1 Block Diagram of 8-Bit Timer (1 Channel)**

### 9.1.3 Input and Output Pins

Table 9-1 lists the input and output pins of the 8-bit timer.

**Table 9-1 Input and Output Pins of 8-Bit Timer**

| Name              | Abbreviation*     |                   | I/O    | Function                              |
|-------------------|-------------------|-------------------|--------|---------------------------------------|
|                   | Channel 0         | Channel 1         |        |                                       |
| Timer output      | TMO <sub>0</sub>  | TMO <sub>1</sub>  | Output | Output controlled by compare-match    |
| Timer clock input | TMCI <sub>0</sub> | TMCI <sub>1</sub> | Input  | External clock source for the counter |
| Timer reset input | TMRI <sub>0</sub> | TMRI <sub>1</sub> | Input  | External reset signal for the counter |

Note: \* In this manual, the channel subscript has been deleted, and only TMO TMCI, and TMRI are used.

### 9.1.4 Register Configuration

Table 9-2 lists the registers of the 8-bit timer module. Each channel has an independent set of registers.

**Table 9-2 8-Bit Timer Registers**

| Channel | Name                          | Abbreviation | R/W    | Initial Value | Address |
|---------|-------------------------------|--------------|--------|---------------|---------|
| 0       | Timer control register        | TCR          | R/W    | H'00          | H'FFC8  |
|         | Timer control/status register | TCSR         | R/(W)* | H'10          | H'FFC9  |
|         | Time constant register A      | TCORA        | R/W    | H'FF          | H'FFCA  |
|         | Time constant register B      | TCORB        | R/W    | H'FF          | H'FFCB  |
|         | Timer counter                 | TCNT         | R/W    | H'00          | H'FFCC  |
| 1       | Timer control register        | TCR          | R/W    | H'00          | H'FFD0  |
|         | Timer control/status register | TCSR         | R/(W)* | H'10          | H'FFD1  |
|         | Time constant register A      | TCORA        | R/W    | H'FF          | H'FFD2  |
|         | Time constant register B      | TCORB        | R/W    | H'FF          | H'FFD3  |
|         | Timer counter                 | TCNT         | R/W    | H'00          | H'FFD4  |
| 0, 1    | Serial/timer control register | STCR         | R/W    | H'F8          | H'FFC3  |

Note: \* Software can write a 0 to clear bits 7 to 5, but cannot write a 1 in these bits.



## 9.2 Register Descriptions

### 9.2.1 Timer Counter (TCNT)

|               |     |     |     |     |     |     |     |     |
|---------------|-----|-----|-----|-----|-----|-----|-----|-----|
| Bit           | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|               |     |     |     |     |     |     |     |     |
| Initial value | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| Read/Write    | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

Each timer counter (TCNT) is an 8-bit up-counter that increments on a pulse generated from an internal or external clock source selected by clock select bits 2 to 0 (CKS2 to CKS0) of the timer control register (TCR). The CPU can always read or write the timer counter.

The timer counter can be cleared by an external reset input or by an internal compare-match signal generated at a compare-match event. Clock clear bits 1 and 0 (CCLR1 and CCLR0) of the timer control register select the method of clearing.

When a timer counter overflows from H'FF to H'00, the overflow flag (OVF) in the timer control/status register (TCSR) is set to 1.

The timer counters are initialized to H'00 at a reset and in the standby modes.

### 9.2.2 Time Constant Registers A and B (TCORA and TCORB)

|               |     |     |     |     |     |     |     |     |
|---------------|-----|-----|-----|-----|-----|-----|-----|-----|
| Bit           | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|               |     |     |     |     |     |     |     |     |
| Initial value | 1   | 1   | 1   | 1   | 1   | 1   | 1   | 1   |
| Read/Write    | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

TCORA and TCORB are 8-bit readable/writable registers. The timer count is continually compared with the constants written in these registers (except during the T<sub>3</sub> state of a write cycle to TCORA or TCORB). When a match is detected, the corresponding compare-match flag (CMFA or CMFB) is set in the timer control/status register (TCSR).

The timer output signal is controlled by these compare-match signals as specified by output select bits 3 to 0 (OS3 to OS0) in the timer control/status register (TCSR).

TCORA and TCORB are initialized to H'FF at a reset and in the standby modes.

9.2.3 Timer Control Register (TCR)

|               |       |       |      |       |       |      |      |      |
|---------------|-------|-------|------|-------|-------|------|------|------|
| Bit           | 7     | 6     | 5    | 4     | 3     | 2    | 1    | 0    |
|               | CMIEB | CMIEA | OVIE | CCLR1 | CCLR0 | CKS2 | CKS1 | CKS0 |
| Initial value | 0     | 0     | 0    | 0     | 0     | 0    | 0    | 0    |
| Read/Write    | R/W   | R/W   | R/W  | R/W   | R/W   | R/W  | R/W  | R/W  |

TCR is an 8-bit readable/writable register that selects the clock source and the time at which the timer counter is cleared, and enables interrupts.

TCR is initialized to H'00 at a reset and in the standby modes.

For timing diagrams, see section 9.3, Operation.

**Bit 7—Compare-match Interrupt Enable B (CMIEB):** This bit selects whether to request compare-match interrupt B (CMIB) when compare-match flag B (CMFB) in the timer control/status register (TCSR) is set to 1.

Bit 7

| CMIEB | Description                                                           |
|-------|-----------------------------------------------------------------------|
| 0     | Compare-match interrupt request B (CMIB) is disabled. (Initial value) |
| 1     | Compare-match interrupt request B (CMIB) is enabled.                  |

**Bit 6—Compare-match Interrupt Enable A (CMIEA):** This bit selects whether to request compare-match interrupt A (CMIA) when compare-match flag A (CMFA) in TCSR is set to 1.

Bit 6

| CMIEA | Description                                                           |
|-------|-----------------------------------------------------------------------|
| 0     | Compare-match interrupt request A (CMIA) is disabled. (Initial value) |
| 1     | Compare-match interrupt request A (CMIA) is enabled.                  |

**Bit 5—Timer Overflow Interrupt Enable (OVIE):** This bit selects whether to request a timer overflow interrupt (OVI) when the overflow flag (OVF) in TCSR is set to 1.

| Bit 5<br>OVIE | Description                                                             |
|---------------|-------------------------------------------------------------------------|
| 0             | The timer overflow interrupt request (OVI) is disabled. (Initial value) |
| 1             | The timer overflow interrupt request (OVI) is enabled.                  |

**Bits 4 and 3—Counter Clear 1 and 0 (CCLR1 and CCLR0):** These bits select how the timer counter is cleared: by compare-match A or B or by an external reset input (TMRI).

| Bit 4<br>CCLR1 | Bit 3<br>CCLR0 | Description                                            |
|----------------|----------------|--------------------------------------------------------|
| 0              | 0              | Not cleared. (Initial value)                           |
| 0              | 1              | Cleared on compare-match A.                            |
| 1              | 0              | Cleared on compare-match B.                            |
| 1              | 1              | Cleared on rising edge of external reset input signal. |

**Bits 2, 1, and 0—Clock Select (CKS2, CKS1, and CKS0):** These bits and bits ICKS1 and ICKS0 in the serial/timer control register (STCR) select the internal or external clock source for the timer counter. Six internal clock sources, derived by prescaling the system clock, are available for each timer channel. For internal clock sources the counter is incremented on the falling edge of the internal clock. For an external clock source, these bits can select whether to increment the counter on the rising or falling edge of the clock input (TMCI), or on both edges.

| Channel | TCR           |               |               | STCR           |                | Description                                                     |
|---------|---------------|---------------|---------------|----------------|----------------|-----------------------------------------------------------------|
|         | Bit 2<br>CKS2 | Bit 1<br>CKS1 | Bit 0<br>CKS0 | Bit 1<br>ICKS1 | Bit 0<br>ICKS0 |                                                                 |
| 0       | 0             | 0             | 0             | —              | —              | No clock source (timer stopped) (Initial value)                 |
|         | 0             | 0             | 1             | —              | 0              | $\varnothing_P/8$ internal clock, counted on falling edge       |
|         | 0             | 0             | 1             | —              | 1              | $\varnothing_P/2$ internal clock, counted on falling edge       |
|         | 0             | 1             | 0             | —              | 0              | $\varnothing_P/64$ internal clock, counted on falling edge      |
|         | 0             | 1             | 0             | —              | 1              | $\varnothing_P/32$ internal clock, counted on falling edge      |
|         | 0             | 1             | 1             | —              | 0              | $\varnothing_P/1024$ internal clock, counted on falling edge    |
|         | 0             | 1             | 1             | —              | 1              | $\varnothing_P/256$ internal clock, counted on falling edge     |
|         | 1             | 0             | 0             | —              | —              | No clock source (timer stopped)                                 |
|         | 1             | 0             | 1             | —              | —              | External clock source, counted on rising edge                   |
|         | 1             | 1             | 0             | —              | —              | External clock source, counted on falling edge                  |
|         | 1             | 1             | 1             | —              | —              | External clock source, counted on both rising and falling edges |
| 1       | 0             | 0             | 0             | —              | —              | No clock source (timer stopped) (Initial value)                 |
|         | 0             | 0             | 1             | 0              | —              | $\varnothing_P/8$ internal clock, counted on falling edge       |
|         | 0             | 0             | 1             | 1              | —              | $\varnothing_P/2$ internal clock, counted on falling edge       |
|         | 0             | 1             | 0             | 0              | —              | $\varnothing_P/64$ internal clock, counted on falling edge      |
|         | 0             | 1             | 0             | 1              | —              | $\varnothing_P/128$ internal clock, counted on falling edge     |
|         | 0             | 1             | 1             | 0              | —              | $\varnothing_P/1024$ internal clock, counted on falling edge    |
|         | 0             | 1             | 1             | 1              | —              | $\varnothing_P/2048$ internal clock, counted on falling edge    |
|         | 1             | 0             | 0             | —              | —              | No clock source (timer stopped)                                 |
|         | 1             | 0             | 1             | —              | —              | External clock source, counted on rising edge                   |
|         | 1             | 1             | 0             | —              | —              | External clock source, counted on falling edge                  |
|         | 1             | 1             | 1             | —              | —              | External clock source, counted on both rising and falling edges |

9.2.4 Timer Control/Status Register (TCSR)

| Bit           | 7      | 6      | 5      | 4 | 3   | 2   | 1   | 0   |
|---------------|--------|--------|--------|---|-----|-----|-----|-----|
|               | CMFB   | CMFA   | OVF    | — | OS3 | OS2 | OS1 | OS0 |
| Initial value | 0      | 0      | 0      | 1 | 0   | 0   | 0   | 0   |
| Read/Write    | R/(W)* | R/(W)* | R/(W)* | — | R/W | R/W | R/W | R/W |

Note: \* Software can write a 0 in bits 7 to 5 to clear the flags, but cannot write a 1 in these bits.

TCSR is an 8-bit readable and partially writable register that indicates compare-match and overflow status and selects the effect of compare-match events on the timer output signal.

TCSR is initialized to H'10 at a reset and in the standby modes.

**Bit 7—Compare-Match Flag B (CMFB):** This status flag is set to 1 when the timer count matches the time constant set in TCORB. CMFB must be cleared by software. It is set by hardware, however, and cannot be set by software.

| Bit 7<br>CMFB | Description                                                                                                  |
|---------------|--------------------------------------------------------------------------------------------------------------|
| 0             | To clear CMFB, the CPU must read CMFB after it has been set to 1 (Initial value) then write a 0 in this bit. |
| 1             | This bit is set to 1 when TCNT = TCORB.                                                                      |

**Bit 6—Compare-Match Flag A (CMFA):** This status flag is set to 1 when the timer count matches the time constant set in TCORA. CMFA must be cleared by software. It is set by hardware, however, and cannot be set by software.

| Bit 6<br>CMFA | Description                                                                                                   |
|---------------|---------------------------------------------------------------------------------------------------------------|
| 0             | To clear CMFA, the CPU must read CMFA after it has been set to 1, (Initial value) then write a 0 in this bit. |
| 1             | This bit is set to 1 when TCNT = TCORA.                                                                       |

**Bit 5—Timer Overflow Flag (OVF):** This status flag is set to 1 when the timer count overflows (changes from H'FF to H'00). OVF must be cleared by software. It is set by hardware, however, and cannot be set by software.

**Bit 5**

| OVF | Description                                                                                                 |
|-----|-------------------------------------------------------------------------------------------------------------|
| 0   | To clear OVF, the CPU must read OVF after it has been set to 1, then write a 0 in this bit. (Initial value) |
| 1   | This bit is set to 1 when TCNT changes from H'FF to H'00.                                                   |

**Bit 4—Reserved:** This bit is always read as 1. It cannot be written.

**Bits 3 to 0—Output Select 3 to 0 (OS3 to OS0):** These bits specify the effect of TCOR–TCNT compare-match events on the timer output signal (TMO). Bits OS3 and OS2 control the effect of compare-match B on the output level. Bits OS1 and OS0 control the effect of compare-match A on the output level.

If compare-match A and B occur simultaneously, any conflict is resolved according to the following priority order: toggle > 1 output > 0 output.

When all four output select bits are cleared to 0 the timer output signal is disabled.

After a reset, the timer output is 0 until the first compare-match event.

| Bit 3<br>OS3 | Bit 2<br>OS2 | Description                                            |
|--------------|--------------|--------------------------------------------------------|
| 0            | 0            | No change when compare-match B occurs. (Initial value) |
| 0            | 1            | Output changes to 0 when compare-match B occurs.       |
| 1            | 0            | Output changes to 1 when compare-match B occurs.       |
| 1            | 1            | Output inverts (toggles) when compare-match B occurs.  |

| Bit 1<br>OS1 | Bit 0<br>OS0 | Description                                            |
|--------------|--------------|--------------------------------------------------------|
| 0            | 0            | No change when compare-match A occurs. (Initial value) |
| 0            | 1            | Output changes to 0 when compare-match A occurs.       |
| 1            | 0            | Output changes to 1 when compare-match A occurs.       |
| 1            | 1            | Output inverts (toggles) when compare-match A occurs.  |

9.2.5 Serial/Timer Control Register (STCR)

|               |   |   |   |   |   |     |       |       |
|---------------|---|---|---|---|---|-----|-------|-------|
| Bit           | 7 | 6 | 5 | 4 | 3 | 2   | 1     | 0     |
|               | — | — | — | — | — | MPE | ICKS1 | ICKS0 |
| Initial value | 1 | 1 | 1 | 1 | 1 | 0   | 0     | 0     |
| Read/Write    | — | — | — | — | — | R/W | R/W   | R/W   |

STCR is an 8-bit readable/writable register that controls the operating mode of the serial communication interface, and selects internal clock sources for the timer counters.

STCR is initialized to H'F8 at a reset.

**Bits 7 to 3—Reserved:** These bits cannot be modified and are always read as 1.

**Bit 2—Multiprocessor Enable (MPE):** Controls the operating mode of serial communication interfaces 0 and 1. For details, see section 11, Serial Communication Interface.


**Bits 1 and 0—Internal Clock Source Select 1 and 0 (ICKS1 and ICKS0):** These bits and bits CKS2 to CKS0 in the TCR select clock sources for the timer counters. For details, see section 9.2.3, Timer Control Register.

## 9.3 Operation

### 9.3.1 TCNT Incrementation Timing

The timer counter increments on a pulse generated once for each period of the selected (internal or external) clock source.

**Internal Clock:** Internal clock sources are created from the system clock by a prescaler. The counter increments on an internal TCNT clock pulse generated from the falling edge of the prescaler output, as shown in figure 9-2. Bits CKS2 to CKS0 of TCR and bits ICKS1 and ICKS0 of STCR can select one of the six internal clocks.

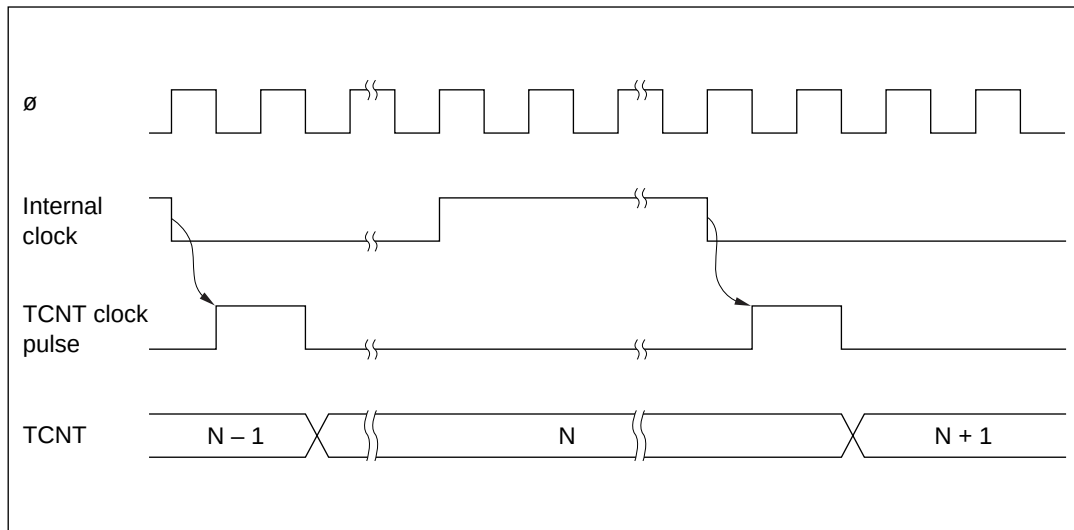


**Figure 9-2 Count Timing for Internal Clock Input**



**External Clock:** If external clock input (TMCI) is selected, the timer counter can increment on the rising edge, the falling edge, or both edges of the external clock signal. Figure 9-3 shows incrementation on both edges of the external clock signal.

The external clock pulse width must be at least 1.5 system clock ( $\phi$ ) periods for incrementation on a single edge, and at least 2.5 system clock periods for incrementation on both edges. The counter will not increment correctly if the pulse width is shorter than these values.

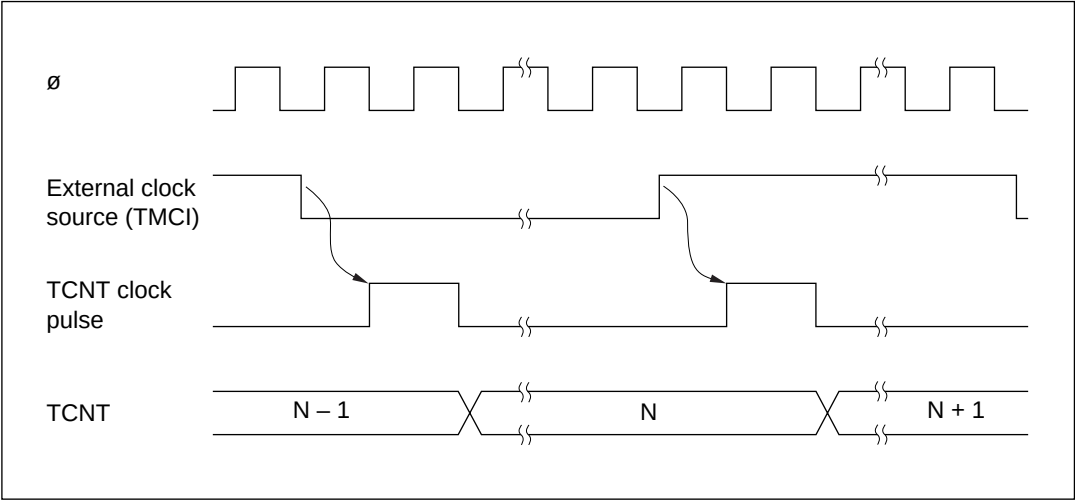

**Figure 9-3 Count Timing for External Clock Input**

9.3.2 Compare Match Timing

**(1) Setting of Compare-Match Flags A and B (CMFA and CMFB):** The compare-match flags are set to 1 by an internal compare-match signal generated when the timer count matches the time constant in TCORA or TCORB. The compare-match signal is generated at the last state in which the match is true, just before the timer counter increments to a new value.

Accordingly, when the timer count matches one of the time constants, the compare-match signal is not generated until the next period of the clock source. Figure 9-4 shows the timing of the setting of the compare-match flags.


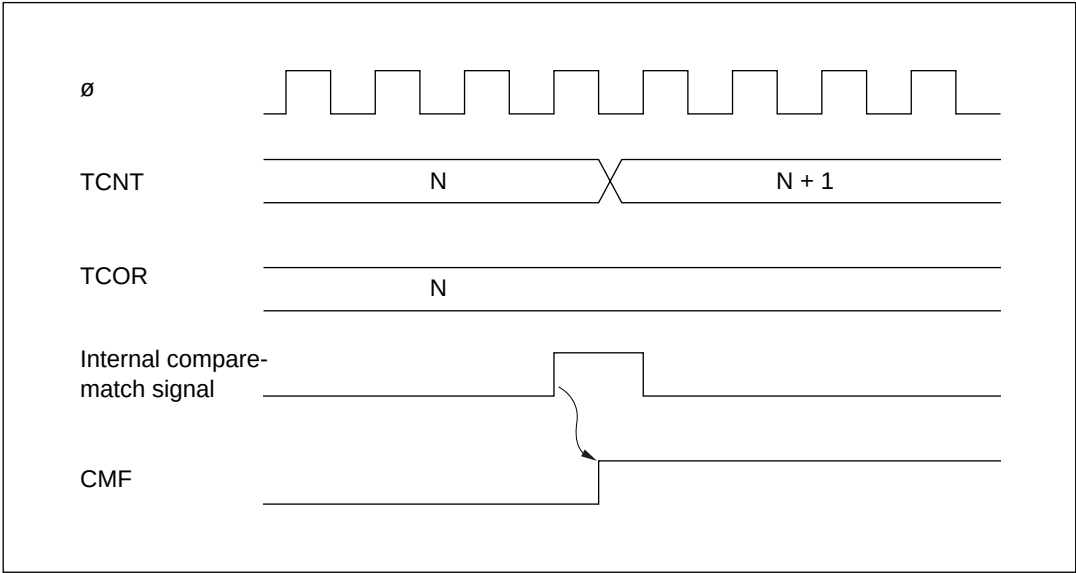


Figure 9-4 Setting of Compare-Match Flags


**(2) Output Timing:** When a compare-match event occurs, the timer output changes as specified by the output select bits (OS3 to OS0) in the TCSR. Depending on these bits, the output can remain the same, change to 0, change to 1, or toggle.

Figure 9-5 shows the timing when the output is set to toggle on compare-match A.

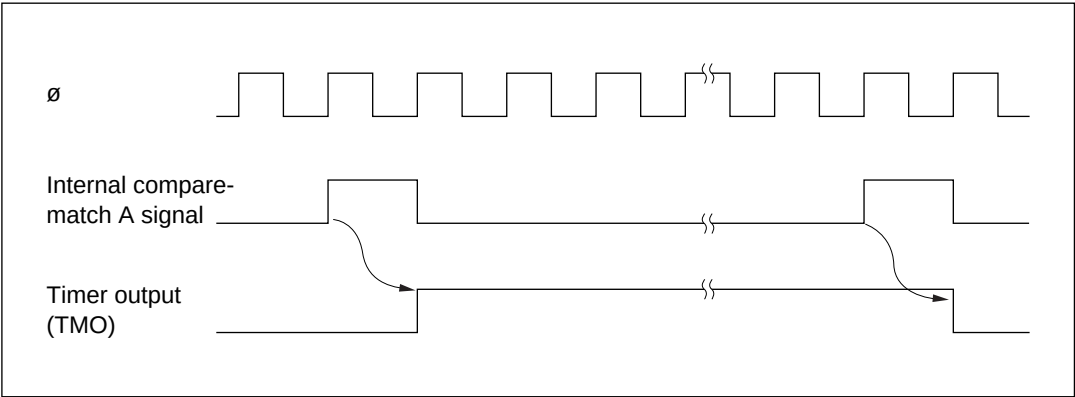

**Figure 9-5 Timing of Timer Output**

**(3) Timing of Compare-Match Clear:** Depending on the CCLR1 and CCLR0 bits in TCR, the timer counter can be cleared when compare-match A or B occurs. Figure 9-6 shows the timing of this operation.

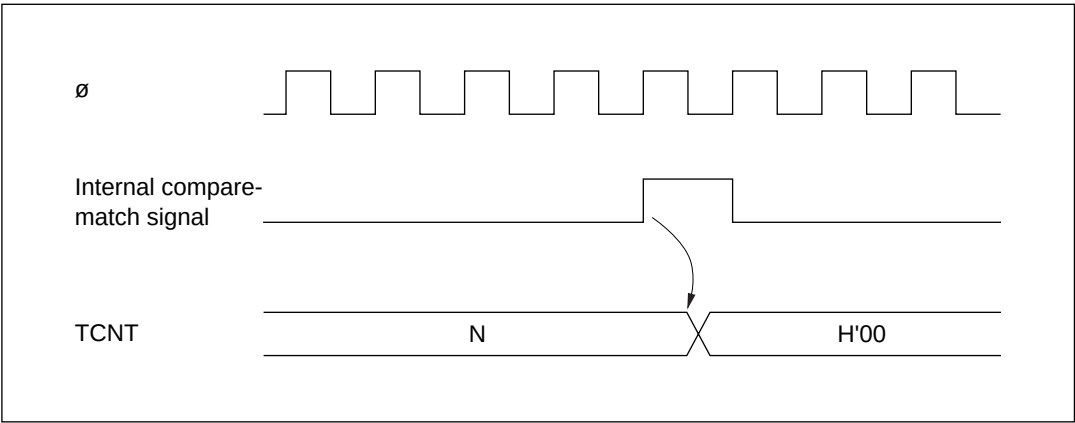

**Figure 9-6 Timing of Compare-Match Clear**

9.3.3 External Reset of TCNT

When the CCLR1 and CCLR0 bits in TCR are both set to 1, the timer counter is cleared on the rising edge of an external reset input. Figure 9-7 shows the timing of this operation. The timer reset pulse width must be at least 1.5 system clock ( $\emptyset$ ) periods.

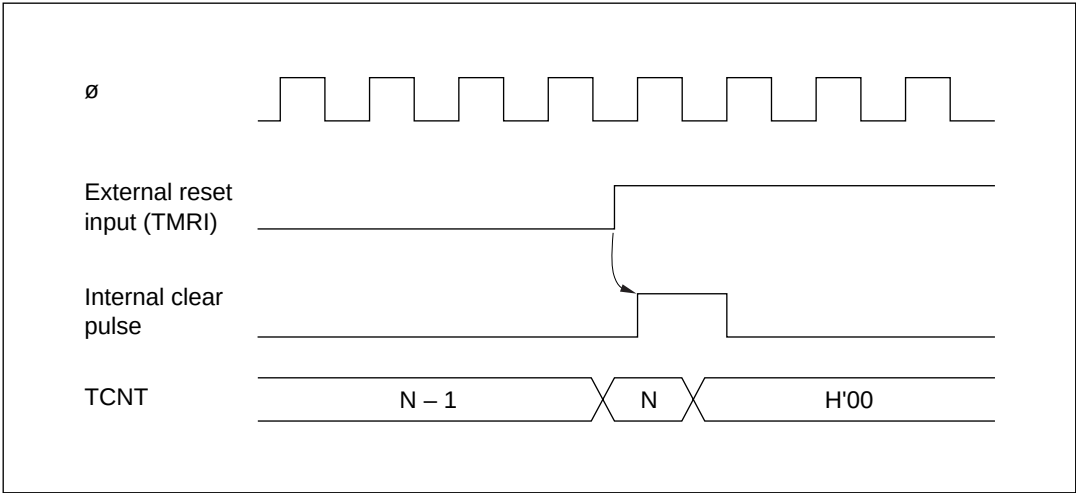


Figure 9-7 Timing of External Reset

9.3.4 Setting of TCSR Overflow Flag (OVF)

The overflow flag (OVF) is set to 1 when the timer count overflows (changes from  $H'FF$  to  $H'00$ ). Figure 9-8 shows the timing of this operation.

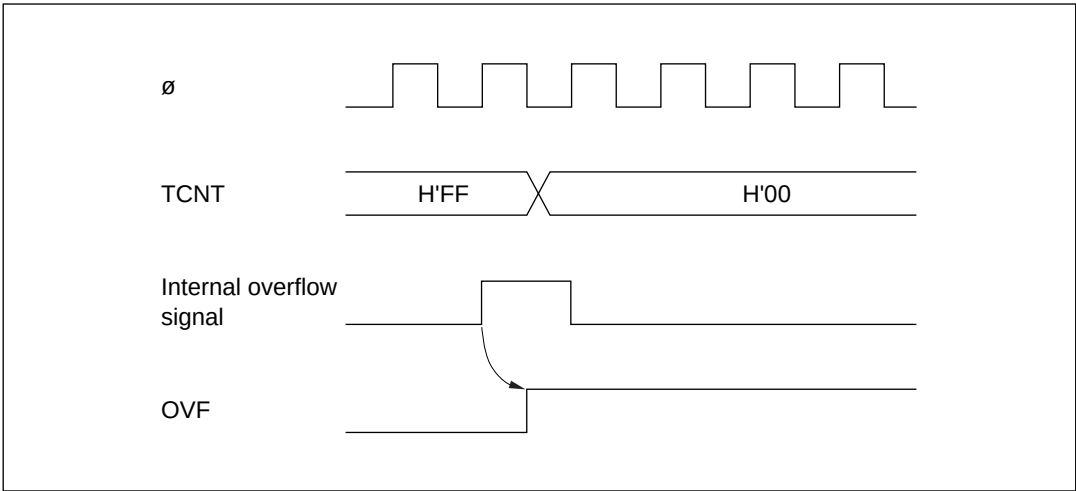


Figure 9-8 Setting of Overflow Flag (OVF)

## 9.4 Interrupts

Each channel in the 8-bit timer can generate three types of interrupts: compare-match A and B (CMIA and CMIB), and overflow (OVI). Each interrupt can be enabled or disabled by an enable bit in TCR. Independent signals are sent to the interrupt controller for each interrupt. Table 9-3 lists information about these interrupts.

**Table 9-3 8-Bit Timer Interrupts**


| Interrupt | Description       | Priority         |
|-----------|-------------------|------------------|
| CMIA      | Requested by CMFA | High<br>↕<br>Low |
| CMIB      | Requested by CMFB |                  |
| OVI       | Requested by OVF  |                  |

## 9.5 Sample Application

In the example below, the 8-bit timer is used to generate a pulse output with a selected duty cycle. The control bits are set as follows:

- (1) In TCR, CCLR1 is cleared to 0 and CCLR0 is set to 1 so that the timer counter is cleared when its value matches the constant in TCORA.
- (2) In TCSR, bits OS3 to OS0 are set to 0110, causing the output to change to 1 on compare-match A and to 0 on compare-match B.

With these settings, the 8-bit timer provides output of pulses at a rate determined by TCORA with a pulse width determined by TCORB. No software intervention is required.

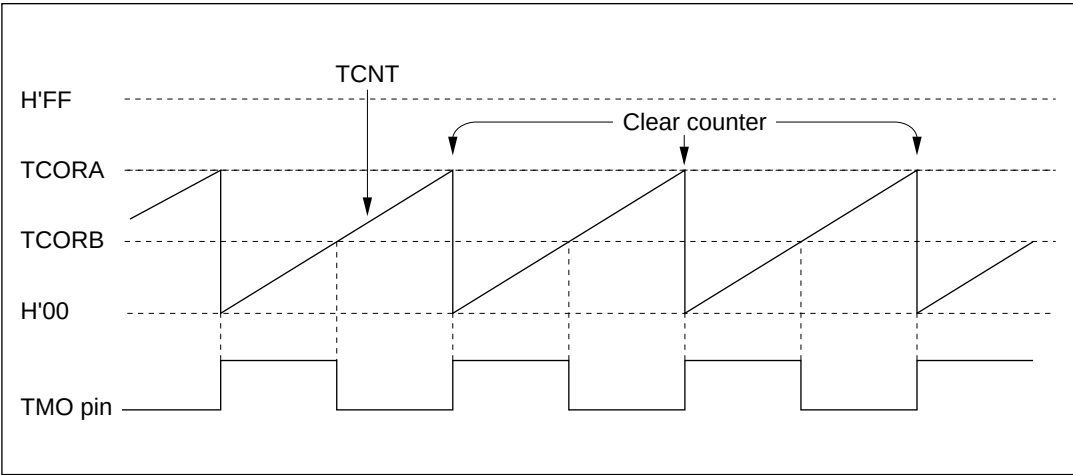

**Figure 9-9 Example of Pulse Output**


# 9.6 Usage Notes

Application programmers should note that the following types of contention can occur in the 8-bit timer.

## 9.6.1 Contention between TCNT Write and Clear

If an internal counter clear signal is generated during the T<sub>3</sub> state of a write cycle to the timer counter, the clear signal takes priority and the write is not performed.

Figure 9-10 shows this type of contention.

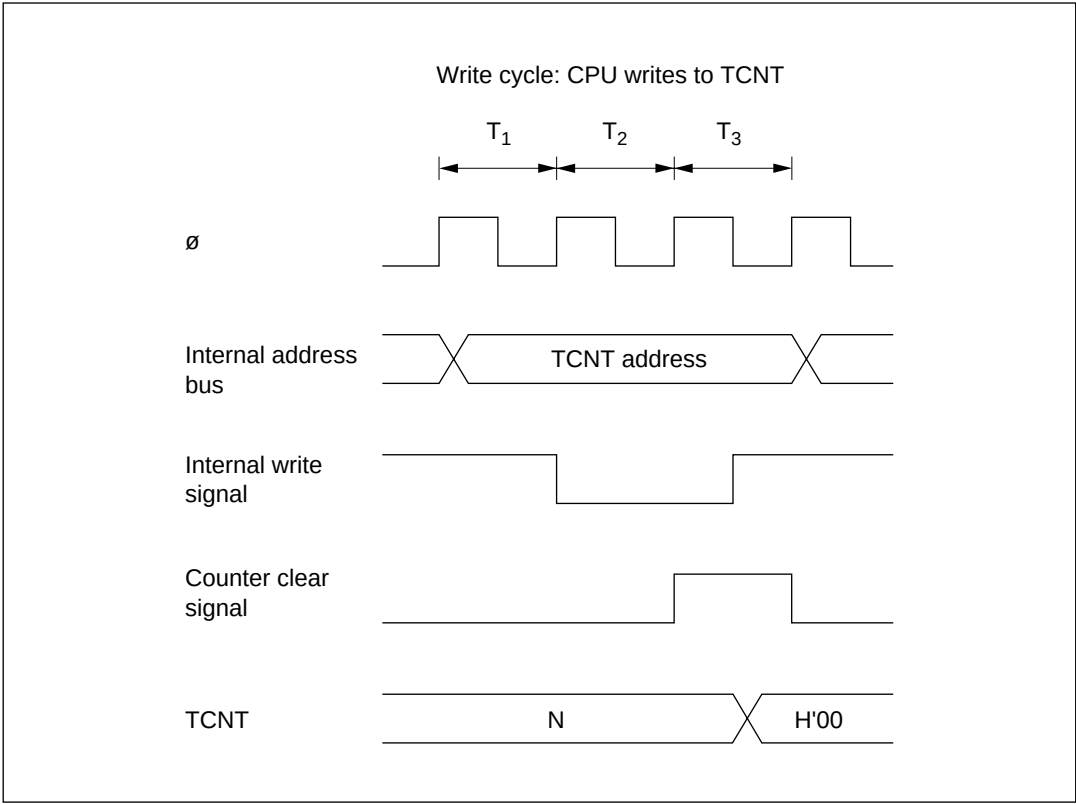

**Figure 9-10 TCNT Write-Clear Contention**

9.6.2 Contention between TCNT Write and Increment

If a timer counter increment pulse is generated during the T<sub>3</sub> state of a write cycle to the timer counter, the write takes priority and the timer counter is not incremented.

Figure 9-11 shows this type of contention.

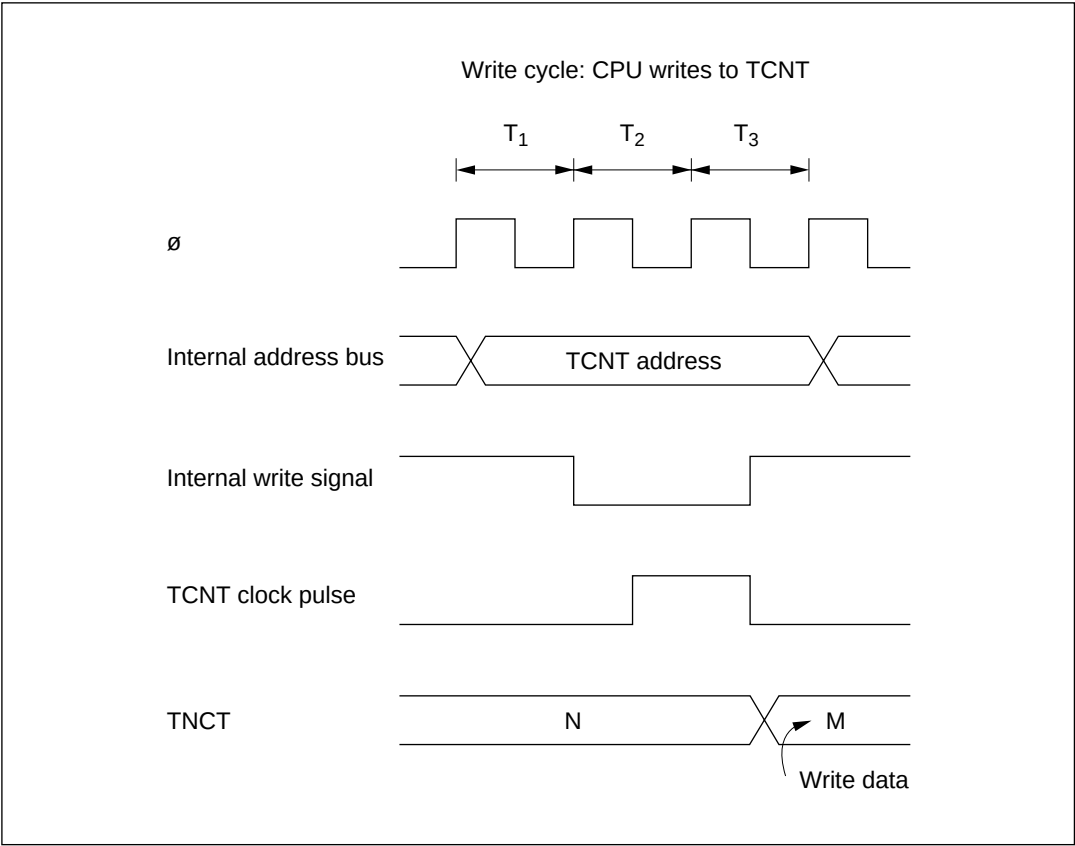


Figure 9-11 TCNT Write-Increment Contention

9.6.3 Contention between TCOR Write and Compare-Match

If a compare-match occurs during the  $T_3$  state of a write cycle to TCOR, the write takes precedence and the compare-match signal is inhibited.

Figure 9-12 shows this type of contention.

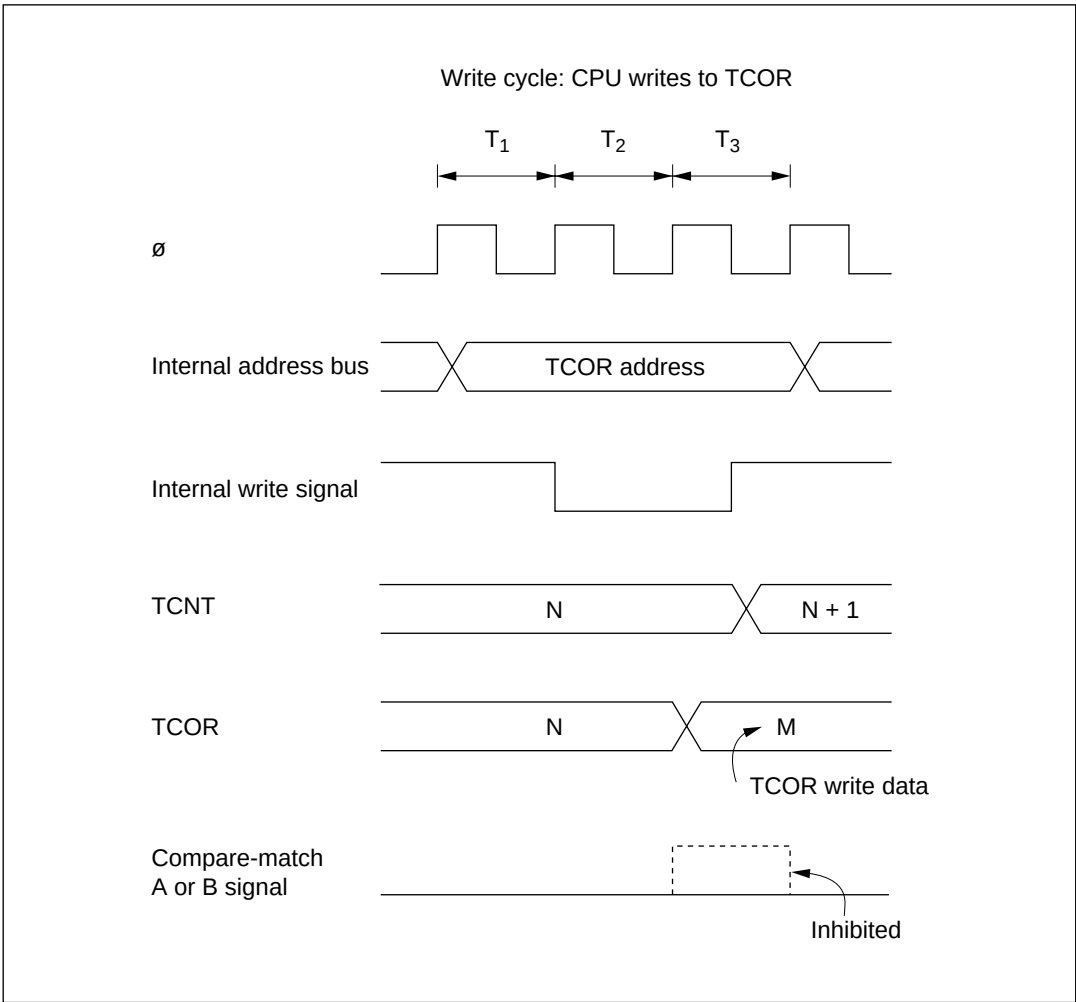


Figure 9-12 Contention between TCOR Write and Compare-Match



9.6.4 Contention between Compare-Match A and Compare-Match B

If identical time constants are written in TCORA and TCORB, causing compare-match A and B to occur simultaneously, any conflict between the output selections for compare-match A and B is resolved by following the priority order in table 9-4.

Table 9-4 Priority of Timer Output

| Output Selection | Priority                                                                          |
|------------------|-----------------------------------------------------------------------------------|
| Toggle           | High                                                                              |
| 1 output         |  |
| 0 output         |                                                                                   |
| No change        |                                                                                   |
|                  | Low                                                                               |



9.6.5 Incrementation Caused by Changing of Internal Clock Source

When an internal clock source is changed, the changeover may cause the timer counter to increment. This depends on the time at which the clock select bits (CKS1, CKS0) are rewritten, as shown in table 9-5.

The pulse that increments the timer counter is generated at the falling edge of the internal clock source signal. If clock sources are changed when the old source is high and the new source is low, as in case no. 3 in table 9-5, the changeover generates a falling edge that triggers the TCNT clock pulse and increments the timer counter.


Switching between an internal and external clock source can also cause the timer counter to increment.

**Table 9-5 Effect of Changing Internal Clock Sources**
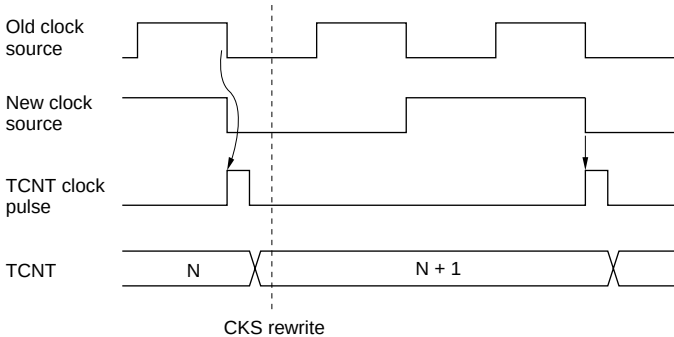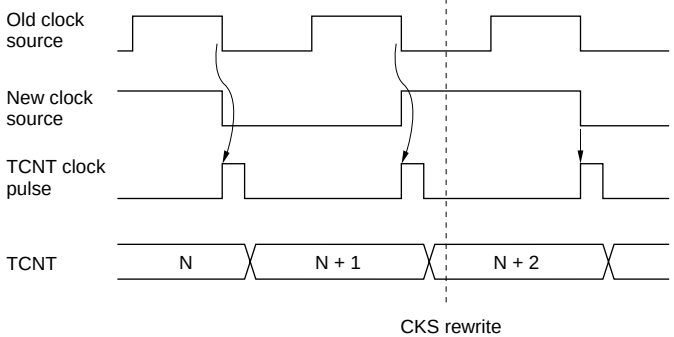
| No. | Description  | Timing                                                                                                                                                                                                                       |
|-----|--------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1   | Low → low*1  |  <p>Old clock source</p> <p>New clock source</p> <p>TCNT clock pulse</p> <p>TCNT</p> <p>N</p> <p>N + 1</p> <p>CKS rewrite</p>              |
| 2   | Low → high*2 |  <p>Old clock source</p> <p>New clock source</p> <p>TCNT clock pulse</p> <p>TCNT</p> <p>N</p> <p>N + 1</p> <p>N + 2</p> <p>CKS rewrite</p> |

Notes: 1. Including a transition from low to the stopped state (CKS1 = 0, CKS0 = 0), or a transition from the stopped state to low.  
2. Including a transition from the stopped state to high.

Table 9-5 Effect of Changing Internal Clock Sources (cont)

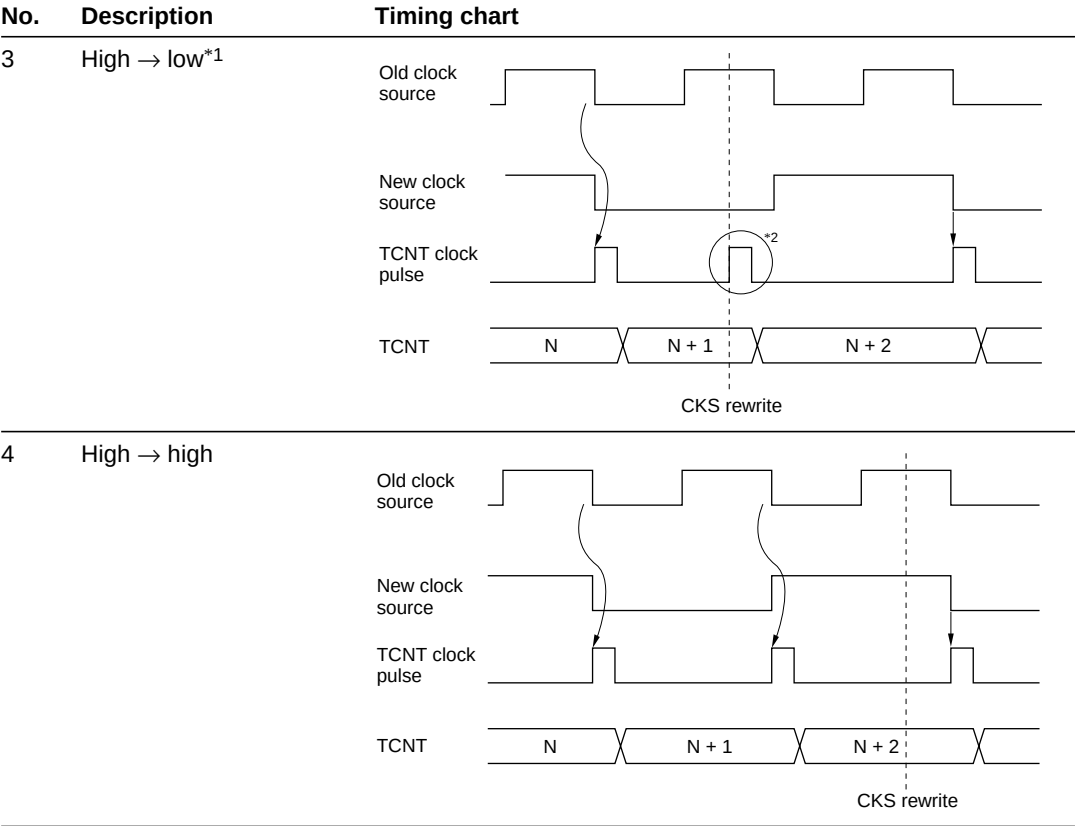

Notes: 1. Including a transition from high to the stopped state.  
2. The switching of clock sources is regarded as a falling edge that increments TCNT.

## Section 10 Watchdog Timer

### 10.1 Overview

The H8/3297 Series has an on-chip watchdog timer (WDT) that can monitor system operation by resetting the CPU or generating a nonmaskable interrupt if a system crash allows the timer count to overflow.


When this watchdog function is not needed, the watchdog timer module can be used as an interval timer. In interval timer mode, it requests an OVF interrupt at each counter overflow.

#### 10.1.1 Features

- Selection of eight clock sources
- Selection of two modes:
  - Watchdog timer mode
  - Interval timer mode
- Counter overflow generates an interrupt request or reset:
  - Reset or NMI request in watchdog timer mode
  - OVF interrupt request in interval timer mode

### 10.1.2 Block Diagram

Figure 10-1 is a block diagram of the watchdog timer.

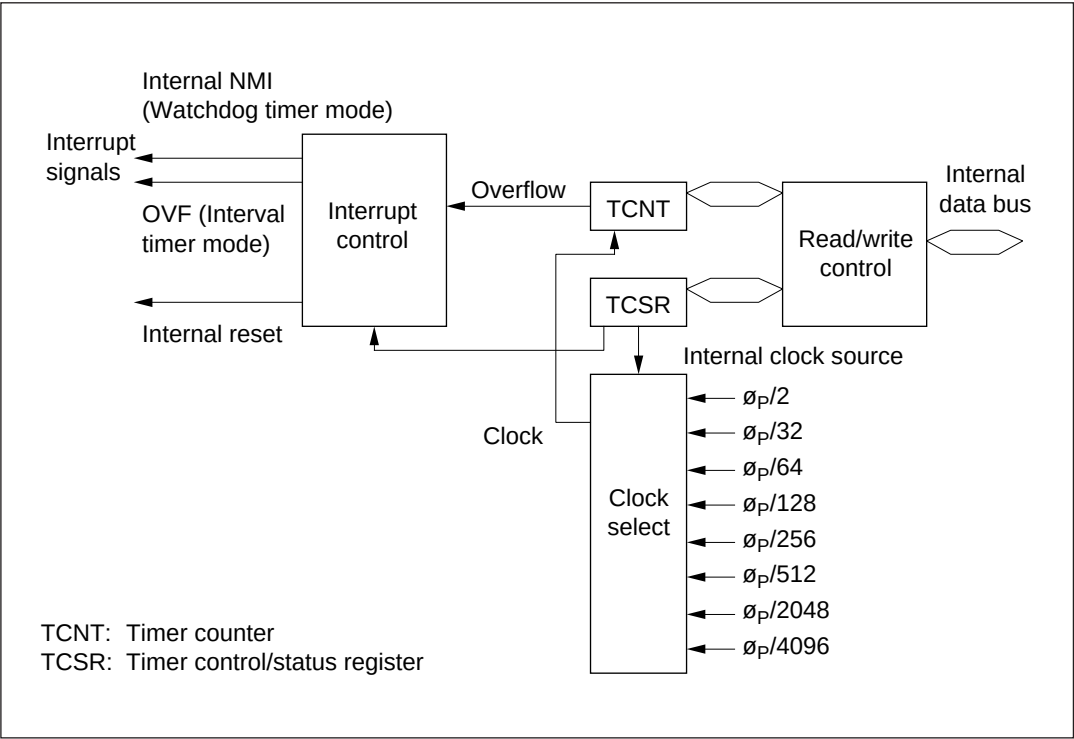

**Figure 10-1 Block Diagram of Watchdog Timer**

### 10.1.3 Register Configuration

Table 10-1 lists information on the watchdog timer registers.

**Table 10-1 Register Configuration**

| Name                          | Abbreviation | R/W    | Initial Value | Addresses |        |
|-------------------------------|--------------|--------|---------------|-----------|--------|
|                               |              |        |               | Write     | Read   |
| Timer control/status register | TCSR         | R/(W)* | H'18          | H'FFA8    | H'FFA8 |
| Timer counter                 | TCNT         | R/W    | H'00          | H'FFA8    | H'FFA9 |

Note: \* Software can write a 0 to clear the status flag bits, but cannot write 1.

## 10.2 Register Descriptions

### 10.2.1 Timer Counter (TCNT)

| Bit           | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|---------------|-----|-----|-----|-----|-----|-----|-----|-----|
|               |     |     |     |     |     |     |     |     |
| Initial value | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| Read/Write    | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

TCNT is an 8-bit readable/writable up-counter. When the timer enable bit (TME) in the timer control/status register (TCSR) is set to 1, the timer counter starts counting pulses of an internal clock source selected by clock select bits 2 to 0 (CKS2 to CKS0) in TCSR. When the count overflows (changes from H'FF to H'00), an overflow flag (OVF) in TCSR is set to 1.

TCNT is initialized to H'00 at a reset and when the TME bit is cleared to 0.

Note: TCNT is more difficult to write to than other registers. See Section 10.2.3, Register Access, for details.

### 10.2.2 Timer Control/Status Register (TCSR)

| Bit           | 7      | 6                   | 5   | 4 | 3                     | 2    | 1    | 0    |
|---------------|--------|---------------------|-----|---|-----------------------|------|------|------|
|               | OVF    | WT/ $\overline{IT}$ | TME | — | RST/ $\overline{NMI}$ | CKS2 | CKS1 | CKS0 |
| Initial value | 0      | 0                   | 0   | 1 | 0                     | 0    | 0    | 0    |
| Read/Write    | R/(W*) | R/W                 | R/W | — | R/W                   | R/W  | R/W  | R/W  |

Note: \* Software can write a 0 in bit 7 to clear the flag, but cannot write a 1 in this bit. TCSR is more difficult to write to than other registers. See Section 12.2.3, Register Access, for details.

TCSR is an 8-bit readable/writable register that selects the timer mode and clock source and performs other functions. (TCSR is write-protected by a password. See section 10.2.3, Register Access, for details.)

Bits 7 to 5 and bit 3 are initialized to 0 at a reset and in the standby modes. Bits 2 to 0 are initialized to 0 at a reset, but retain their values in the standby modes.

**Bit 7—Overflow Flag (OVF):** Indicates that the watchdog timer count has overflowed.

| Bit 7<br>OVF | Description                                                                                                                                                                                  |
|--------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0            | To clear OVF, the CPU must read OVF when it is 1, then write 0 in this bit (Initial value)                                                                                                   |
| 1            | <ul style="list-style-type: none"><li>• Set to 1 when TENT changes from H'FF to H'00</li><li>• In interval timer mode or when the NMI interrupt is selected in watchdog timer mode</li></ul> |

**Bit 6—Timer Mode Select (WT/ $\overline{\text{IT}}$ ):** Selects whether to operate in watchdog timer mode or interval timer mode. When TCNT overflows, an OVF interrupt request is sent to the CPU in interval timer mode. For watchdog timer mode, a reset or NMI interrupt is requested.

| Bit 6<br>WT/ $\overline{\text{IT}}$ | Description                                                           |
|-------------------------------------|-----------------------------------------------------------------------|
| 0                                   | Interval timer mode (OVF request in case of overflow) (Initial value) |
| 1                                   | Watchdog timer mode (reset or NMI request in case of overflow)        |

**Bit 5—Timer Enable (TME):** Enables or disables the timer.

| Bit 5<br>TME | Description                                                      |
|--------------|------------------------------------------------------------------|
| 0            | TCNT is initialized to H'00 and stopped (Initial value)          |
| 1            | TCNT runs and requests a reset or an interrupt when it overflows |

**Bit 4—Reserved:** This bit cannot be modified and is always read as 1.

**Bit 3: Reset or NMI Select (RST/ $\overline{\text{NMI}}$ ):** Selects either an internal reset or the NMI function at watchdog timer overflow.

| Bit 3<br>RST/ $\overline{\text{NMI}}$ | Description                          |
|---------------------------------------|--------------------------------------|
| 0                                     | NMI function enabled (Initial value) |
| 1                                     | Reset function enabled               |

**Bits 2—0: Clock Select (CKS2–CKS0):** These bits select one of eight clock sources obtained by dividing the system clock ( $\emptyset$ ).

The overflow interval is the time from when the watchdog timer counter begins counting from H'00 until an overflow occurs. In interval timer mode, OVF interrupts are requested at this interval.

| Bit 2<br>CKS2 | Bit 1<br>CKS1 | Bit 0<br>CKS0 | Clock Source       | Overflow Interval ( $\emptyset_P = 10\text{ MHz}$ ) |
|---------------|---------------|---------------|--------------------|-----------------------------------------------------|
| 0             | 0             | 0             | $\emptyset_P/2$    | 51.2 $\mu\text{s}$ (Initial value)                  |
| 0             | 0             | 1             | $\emptyset_P/32$   | 819.2 $\mu\text{s}$                                 |
| 0             | 1             | 0             | $\emptyset_P/64$   | 1.6 ms                                              |
| 0             | 1             | 1             | $\emptyset_P/128$  | 3.3 ms                                              |
| 1             | 0             | 0             | $\emptyset_P/256$  | 6.6 ms                                              |
| 1             | 0             | 1             | $\emptyset_P/512$  | 13.1 ms                                             |
| 1             | 1             | 0             | $\emptyset_P/2048$ | 52.4 ms                                             |
| 1             | 1             | 1             | $\emptyset_P/4096$ | 104.9 ms                                            |

10.2.3 Register Access

The watchdog timer’s TCNT and TCSR registers are more difficult to write than other registers. The procedures for writing and reading these registers are given below.

**Writing to TCNT and TCSR:** Word access is required. Byte data transfer instructions cannot be used for write access.

The TCNT and TCSR registers have the same write address. The write data must be contained in the lower byte of a word written at this address. The upper byte must contain H'5A (password for TCNT) or H'A5 (password for TCSR). See figure 10-2. The result of the access depicted in figure 10-2 is to transfer the write data from the lower byte to TCNT or TCSR.

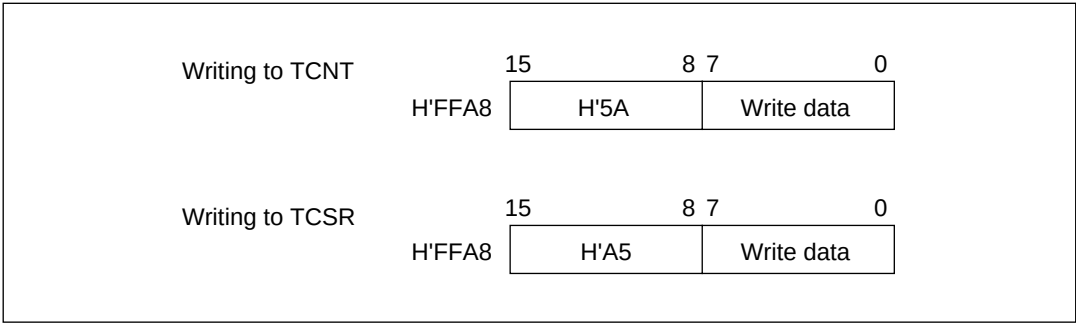


Figure 10-2 Writing to TCNT and TCSR



**Reading TCNT and TCSR:** The read addresses are H'FFA8 for TCSR and H'FFA9 for TCNT, as indicated in table 10-2.

These two registers are read like other registers. Byte access instructions can be used.

**Table 10-2 Read Addresses of TCNT and TCSR**

| Read Address | Register |
|--------------|----------|
| H'FFA8       | TCSR     |
| H'FFA9       | TCNT     |


### 10.3 Operation

#### 10.3.1 Watchdog Timer Mode

The watchdog timer function begins operating when software sets the  $WT/\overline{IT}$  and TME bits to 1 in TCSR. Thereafter, software should periodically rewrite the contents of the timer counter (normally by writing H'00) to prevent the count from overflowing. If a program crash allows the timer count to overflow, the entire chip is reset for 518 system clocks (518  $\phi$ ), or an NMI interrupt is requested. Figure 10-3 shows the operation.

NMI requests from the watchdog timer have the same vector as NMI requests from the  $\overline{NMI}$  pin. Avoid simultaneous handling of watchdog timer NMI requests and NMI requests from pin  $\overline{NMI}$ .

A reset from the watchdog timer has the same vector as an external reset from the RES pin. The reset source can be determined by the XRST bit in SYSCR.

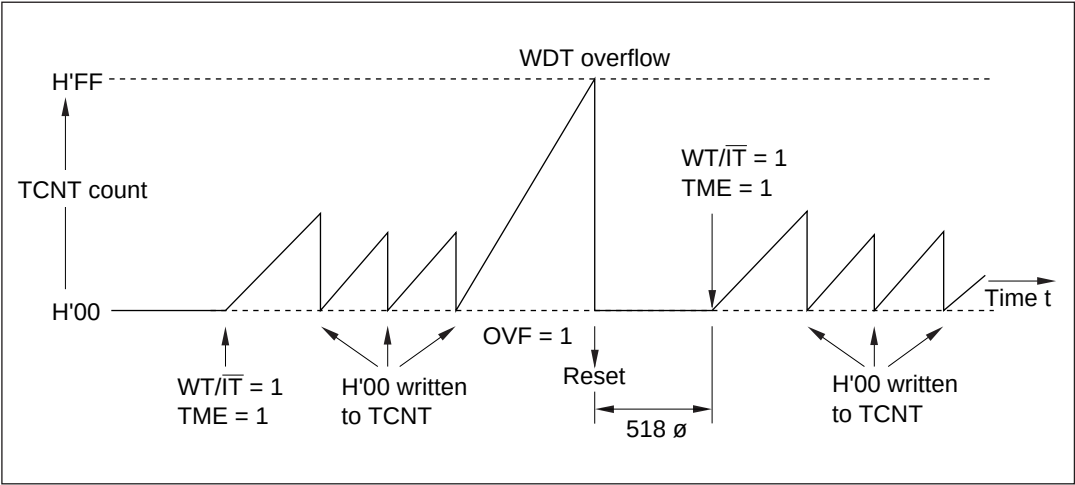


**Figure 10-3 Operation in Watchdog Timer Mode**

### 10.3.2 Interval Timer Mode

Interval timer operation begins when the  $WT/\overline{IT}$  bit is cleared to 0 and the TME bit is set to 1.


In interval timer mode, an OVF request is generated each time the timer count overflows. This function can be used to generate OVF requests at regular intervals. See figure 10-4.

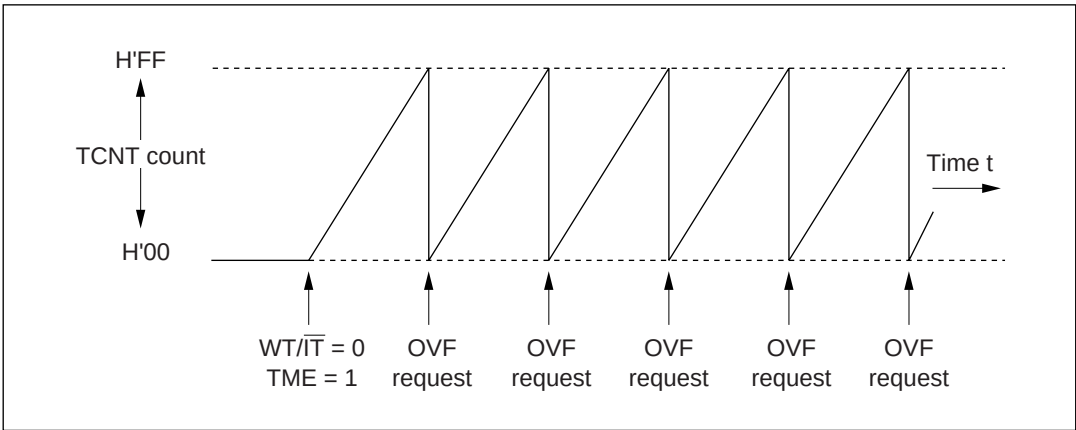

**Figure 10-4 Operation in Interval Timer Mode**

#### 10.3.3 Setting the Overflow Flag

The OVF bit is set to 1 when the timer count overflows. Simultaneously, the WDT module requests an internal reset, NMI, or OVF interrupt. The timing is shown in figure 10-5.

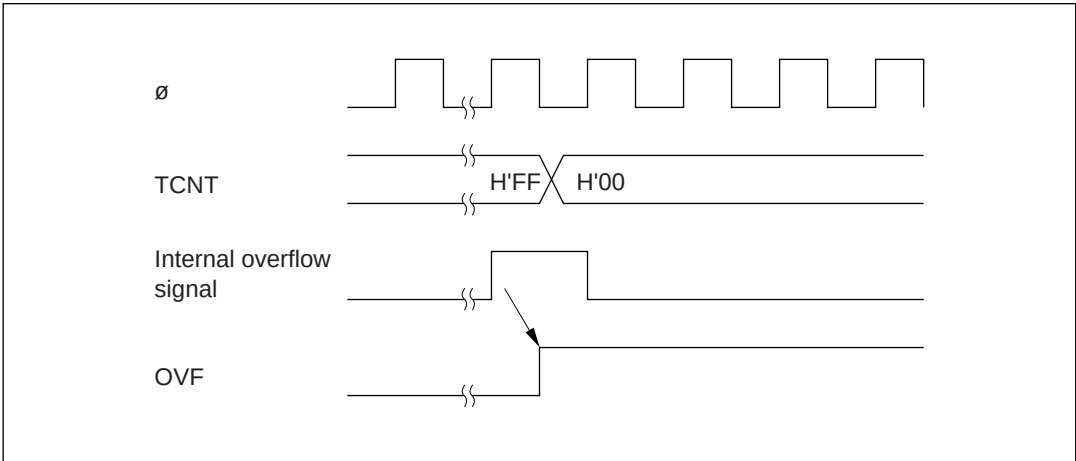

**Figure 10-5 Setting the OVF Bit**

# 10.4 Usage Notes

## 10.4.1 Contention between TCNT Write and Increment

If a timer counter clock pulse is generated during the  $T_3$  state of a write cycle to the timer counter, the write takes priority and the timer counter is not incremented. See figure 10-6.

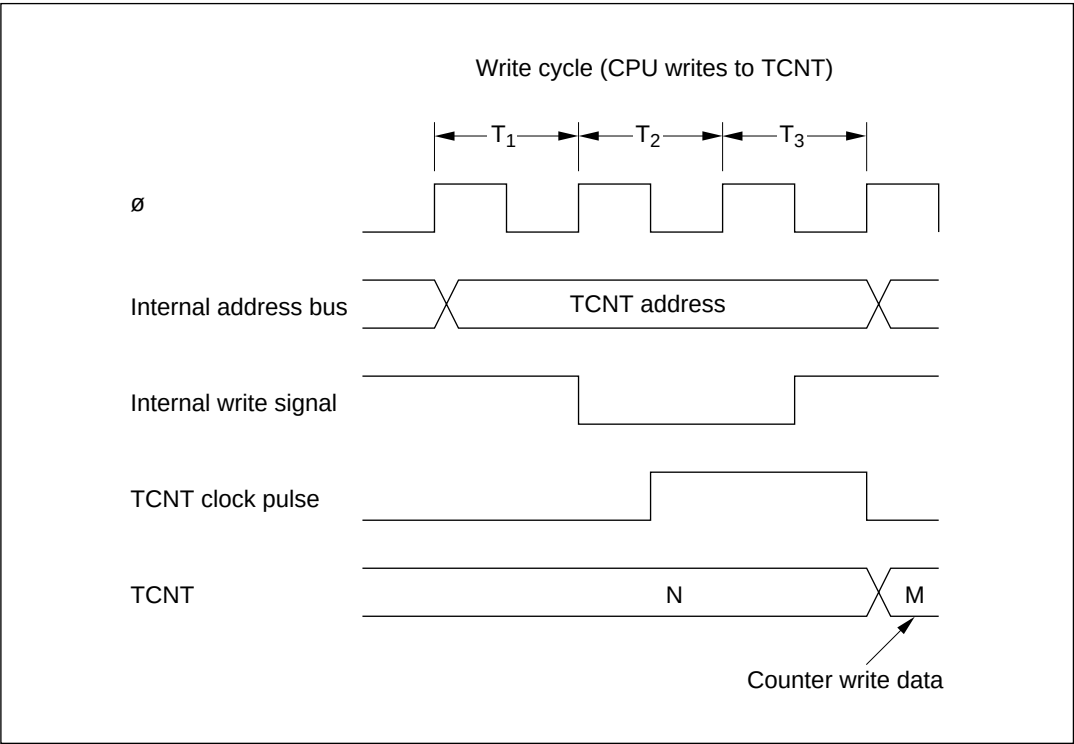


Figure 10-6 TCNT Write-Increment Contention

## 10.4.2 Changing the Clock Select Bits (CKS2 to CKS0)

Software should stop the watchdog timer (by clearing the TME bit to 0) before changing the value of the clock select bits. If the clock select bits are modified while the watchdog timer is running, the timer count may be incremented incorrectly.

## 10.4.3 Recovery from Software Standby Mode

TCSR bits, except bits 0–2, and the TCNT counter are reset when the chip recovers from software standby mode. Re-initialize the watchdog timer as necessary to resume normal operation.

# Section 11 Serial Communication Interface

## 11.1 Overview

The H8/3297 Series includes a serial communication interface (SCI) for transferring serial data to and from other chips. Either synchronous or asynchronous communication can be selected.

### 11.1.1 Features

The features of the on-chip serial communication interface are:

- Asynchronous mode

The H8/3297 Series can communicate with a UART (Universal Asynchronous Receiver/Transmitter), ACIA (Asynchronous Communication Interface Adapter), or other chip that employs standard asynchronous serial communication. It also has a multiprocessor communication function for communication with other processors. Twelve data formats are available.

- Data length: 7 or 8 bits
- Stop bit length: 1 or 2 bits
- Parity: Even, odd, or none
- Multiprocessor bit: 1 or 0
- Error detection: Parity, overrun, and framing errors
- Break detection: When a framing error occurs, the break condition can be detected by reading the level of the RxD line directly.

- Synchronous mode

The SCI can communicate with chips able to perform clocked synchronous data transfer.

- Data length: 8 bits
- Error detection: Overrun errors

- Full duplex communication

The transmitting and receiving sections are independent, so each channel can transmit and receive simultaneously. Both the transmit and receive sections use double buffering, so continuous data transfer is possible in either direction.

- Built-in baud rate generator

Any specified baud rate can be generated.

- Internal or external clock source


The SCI can operate on an internal clock signal from the baud rate generator, or an external clock signal input at the SCK pin.

- Four interrupts

TDR-empty, TSR-empty, receive-end, and receive-error interrupts are requested independently.

### 11.1.2 Block Diagram

Figure 11-1 shows a block diagram of the serial communication interface.

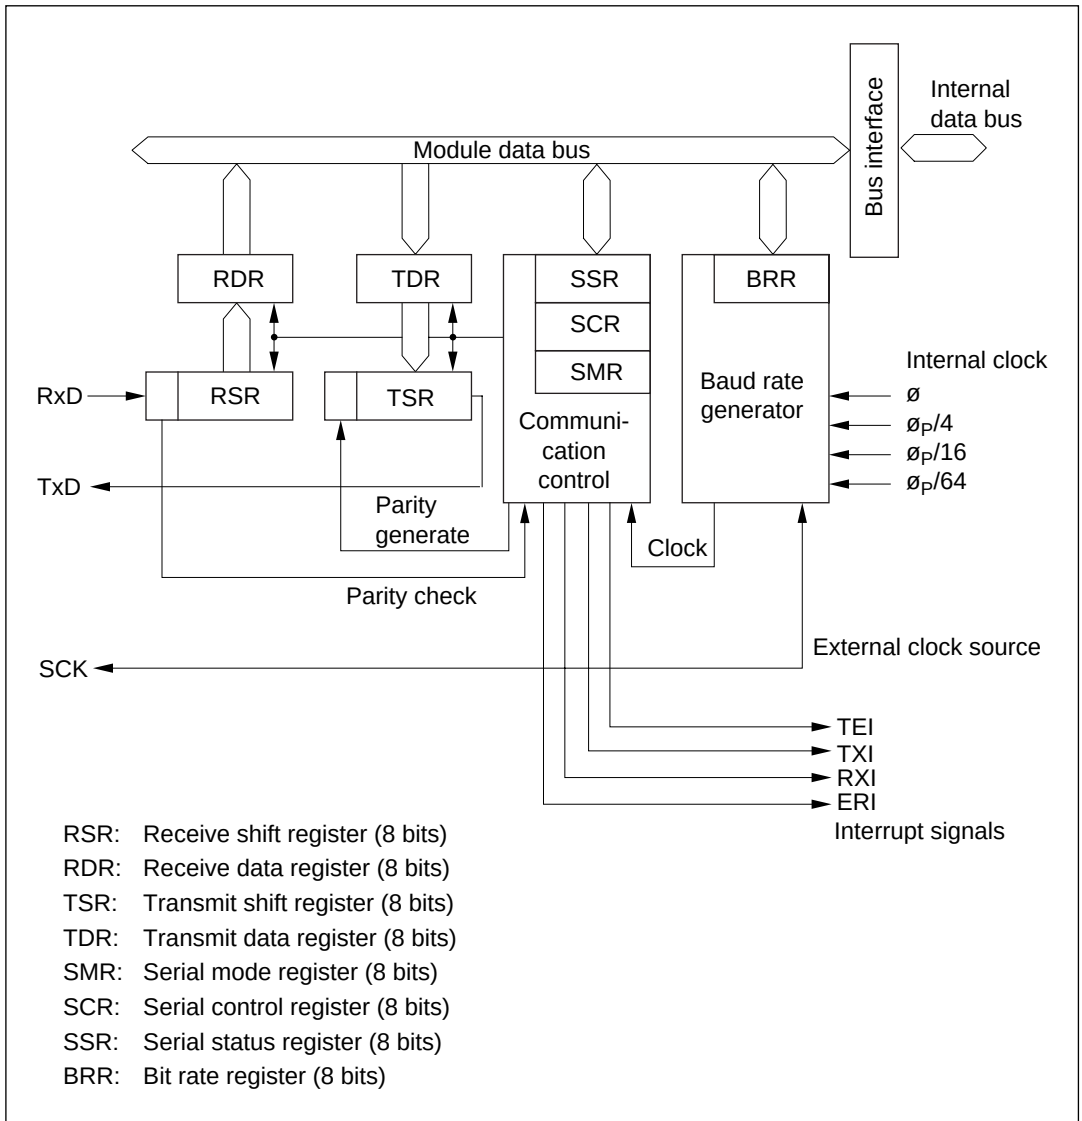

### Figure 11-1 Block Diagram of Serial Communication Interface

### 11.1.3 Input and Output Pins

Table 11-1 lists the input and output pins used by the SCI module.

**Table 11-1 SCI Input/Output Pins**

| Name                      | Abbr. | I/O          | Function                   |
|---------------------------|-------|--------------|----------------------------|
| Serial clock input/output | SCK   | Input/output | SCI clock input and output |
| Receive data input        | RxD   | Input        | SCI receive data inp       |
| Transmit data output      | TxD   | Output       | SCI transmit data output   |

### 11.1.4 Register Configuration

Table 11-2 lists the SCI registers. These registers specify the operating mode (synchronous or asynchronous), data format and bit rate, and control the transmit and receive sections.

**Table 11-2 SCI Registers**

| Name                          | Abbr. | R/W    | Value | Addres |
|-------------------------------|-------|--------|-------|--------|
| Receive shift register        | RSR   | —      | —     | —      |
| Receive data register         | RDR   | R      | H'00  | H'FFDD |
| Transmit shift register       | TSR   | —      | —     | —      |
| Transmit data register        | TDR   | R/W    | H'FF  | H'FFDB |
| Serial mode register          | SMR   | R/W    | H'00  | H'FFD8 |
| Serial control register       | SCR   | R/W    | H'00  | H'FFDA |
| Serial status register        | SSR   | R/(W)* | H'84  | H'FFDC |
| Bit rate register             | BRR   | R/W    | H'FF  | H'FFD9 |
| Serial/timer control register | STCR  | R/W    | H'F8  | H'FFC3 |

Note: \* Software can write a 0 to clear the flags in bits 7 to 3, but cannot write 1 in these bits.

# 11.2 Register Descriptions

## 11.2.1 Receive Shift Register (RSR)

|            |   |   |   |   |   |   |   |   |
|------------|---|---|---|---|---|---|---|---|
| Bit        | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|            |   |   |   |   |   |   |   |   |
| Read/Write | — | — | — | — | — | — | — | — |

RSR is a shift register that converts incoming serial data to parallel data. When one data character has been received, it is transferred to the receive data register (RDR).

The CPU cannot read or write RSR directly.

## 11.2.2 Receive Data Register (RDR)

|               |   |   |   |   |   |   |   |   |
|---------------|---|---|---|---|---|---|---|---|
| Bit           | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|               |   |   |   |   |   |   |   |   |
| Initial value | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Read/Write    | R | R | R | R | R | R | R | R |

RDR stores received data. As each character is received, it is transferred from RSR to RDR, enabling RSR to receive the next character. This double-buffering allows the SCI to receive data continuously.

RDR is a read-only register. RDR is initialized to H'00 at a reset and in the standby modes.

## 11.2.3 Transmit Shift Register (TSR)

|            |   |   |   |   |   |   |   |   |
|------------|---|---|---|---|---|---|---|---|
| Bit        | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|            |   |   |   |   |   |   |   |   |
| Read/Write | — | — | — | — | — | — | — | — |

TSR is a shift register that converts parallel data to serial transmit data. When transmission of one character is completed, the next character is moved from the transmit data register (TDR) to TSR and transmission of that character begins. If the TDRE bit is still set to 1, however, nothing is transferred to TSR.

The CPU cannot read or write TSR directly.

11.2.4 Transmit Data Register (TDR)

|               |     |     |     |     |     |     |     |     |
|---------------|-----|-----|-----|-----|-----|-----|-----|-----|
| Bit           | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|               |     |     |     |     |     |     |     |     |
| Initial value | 1   | 1   | 1   | 1   | 1   | 1   | 1   | 1   |
| Read/Write    | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

TDR is an 8-bit readable/writable register that holds the next data to be transmitted. When TSR becomes empty, the data written in TDR is transferred to TSR. Continuous data transmission is possible by writing the next data in TDR while the current data is being transmitted from TSR.

TDR is initialized to H'FF at a reset and in the standby modes.

11.2.5 Serial Mode Register (SMR)

|               |              |     |     |              |      |     |      |      |
|---------------|--------------|-----|-----|--------------|------|-----|------|------|
| Bit           | 7            | 6   | 5   | 4            | 3    | 2   | 1    | 0    |
|               | C/ $\bar{A}$ | CHR | PE  | O/ $\bar{E}$ | STOP | MP  | CKS1 | CKS0 |
| Initial value | 0            | 0   | 0   | 0            | 0    | 0   | 0    | 0    |
| Read/Write    | R/W          | R/W | R/W | R/W          | R/W  | R/W | R/W  | R/W  |

SMR is an 8-bit readable/writable register that controls the communication format and selects the clock source of the on-chip baud rate generator. It is initialized to H'00 at a reset and in the standby modes. For further information on the SMR settings and communication formats, see tables 11-5 and 11-7 in section 11.3, Operation.

**Bit 7—Communication Mode (C/ $\bar{A}$ ):** This bit selects asynchronous or synchronous communication mode.

| Bit 7<br>C/ $\bar{A}$ | Description                                |
|-----------------------|--------------------------------------------|
| 0                     | Asynchronous communication (Initial value) |
| 1                     | Synchronous communication                  |



**Bit 6—Character Length (CHR):** This bit selects the character length in asynchronous mode. It is ignored in synchronous mode.

| Bit 6<br>CHR | Description                                                                                              |
|--------------|----------------------------------------------------------------------------------------------------------|
| 0            | 8 bits per character (Initial value)                                                                     |
| 1            | 7 bits per character (Bits 0 to 6 of TDR and RDR are used for transmitting and receiving, respectively.) |

**Bit 5—Parity Enable (PE):** This bit selects whether to add a parity bit in asynchronous mode. It is ignored in synchronous mode, and when a multiprocessor format is used.

| Bit 5<br>PE | Description                                                                          |
|-------------|--------------------------------------------------------------------------------------|
| 0           | Transmit: No parity bit is added. (Initial value)<br>Receive: Parity is not checked. |
| 1           | Transmit: A parity bit is added.<br>Receive: Parity is checked.                      |

**Bit 4—Parity Mode ( $O/\overline{E}$ ):** In asynchronous mode, when parity is enabled ( $PE = 1$ ), this bit selects even or odd parity.

Even parity means that a parity bit is added to the data bits for each character to make the total number of 1's even. Odd parity means that the total number of 1's is made odd.

This bit is ignored when  $PE = 0$ , or when a multiprocessor format is used. It is also ignored in synchronous mode.

| Bit 4<br>$O/\overline{E}$ | Description                 |
|---------------------------|-----------------------------|
| 0                         | Even parity (Initial value) |
| 1                         | Odd parity                  |

**Bit 3—Stop Bit Length (STOP):** This bit selects the number of stop bits. It is ignored in synchronous mode.

| Bit 3<br>STOP | Description                                                                                                                                                                                          |                 |
|---------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| 0             | One stop bit<br>Transmit: One stop bit is added.<br>Receive: One stop bit is checked to detect framing errors.                                                                                       | (Initial value) |
| 1             | Two stop bits<br>Transmit: Two stop bits are added.<br>Receive: The first stop bit is checked to detect framing errors. If the second stop bit is a space (0), it is regarded as the next start bit. |                 |

**Bit 2—Multiprocessor Mode (MP):** This bit selects the multiprocessor format in asynchronous communication. When multiprocessor format is selected, the parity settings of the parity enable bit (PE) and parity mode bit (O/E) are ignored. The MP bit is ignored in synchronous communication.

The MP bit is valid only when the MPE bit in the serial/timer control register (STCR) is set to 1. When the MPE bit is cleared to 0, the multiprocessor communication function is disabled regardless of the setting of the MP bit.

| Bit 2<br>MP | Description                                        |                 |
|-------------|----------------------------------------------------|-----------------|
| 0           | Multiprocessor communication function is disabled. | (Initial value) |
| 1           | Multiprocessor communication function is enabled.  |                 |

**Bits 1 and 0—Clock Select 1 and 0 (CKS1 and CKS0):** These bits select the clock source of the on-chip baud rate generator.

| Bit 1<br>CKS1 | Bit 0<br>CKS0 | Description            |                 |
|---------------|---------------|------------------------|-----------------|
| 0             | 0             | $\emptyset$ clock      | (Initial value) |
| 0             | 1             | $\emptyset_P/4$ clock  |                 |
| 1             | 0             | $\emptyset_P/16$ clock |                 |
| 1             | 1             | $\emptyset_P/64$ clock |                 |

## 11.2.6 Serial Control Register (SCR)

|               |     |     |     |     |      |      |      |      |
|---------------|-----|-----|-----|-----|------|------|------|------|
| Bit           | 7   | 6   | 5   | 4   | 3    | 2    | 1    | 0    |
|               | TIE | RIE | TE  | RE  | MPIE | TEIE | CKE1 | CKE0 |
| Initial value | 0   | 0   | 0   | 0   | 0    | 0    | 0    | 0    |
| Read/Write    | R/W | R/W | R/W | R/W | R/W  | R/W  | R/W  | R/W  |

SCR is an 8-bit readable/writable register that enables or disables various SCI functions. It is initialized to H'00 at a reset and in the standby modes.

**Bit 7—Transmit Interrupt Enable (TIE):** This bit enables or disables the TDR-empty interrupt (TXI) requested when the transmit data register empty (TDRE) bit in the serial status register (SSR) is set to 1.

| Bit 7<br>TIE | Description                                                        |
|--------------|--------------------------------------------------------------------|
| 0            | The TDR-empty interrupt request (TxI) is disabled. (Initial value) |
| 1            | The TDR-empty interrupt request (TxI) is enabled.                  |

**Bit 6—Receive Interrupt Enable (RIE):** This bit enables or disables the receive-end interrupt (RXI) requested when the receive data register full (RDRF) bit in the serial status register (SSR) is set to 1, and the receive error interrupt (ERI) requested when the overrun error (ORER), framing error (FER), or parity error (PER) bit in the serial status register (SSR) is set to 1.

| Bit 6<br>RIE | Description                                                                                    |
|--------------|------------------------------------------------------------------------------------------------|
| 0            | The receive-end interrupt (RXI) and receive-error (ERI) requests are disabled. (Initial value) |
| 1            | The receive-end interrupt (RXI) and receive-error (ERI) requests are enabled.                  |

**Bit 5—Transmit Enable (TE):** This bit enables or disables the transmit function. When the transmit function is enabled, the TxD pin is automatically used for output. When the transmit function is disabled, the TxD pin can be used as a general-purpose I/O port.

| Bit 5<br>TE | Description                                                                                            |
|-------------|--------------------------------------------------------------------------------------------------------|
| 0           | The transmit function is disabled. (Initial value)<br>The TxD pin can be used for general-purpose I/O. |
| 1           | The transmit function is enabled. The TxD pin is used for output.                                      |

**Bit 4—Receive Enable (RE):** This bit enables or disables the receive function. When the receive function is enabled, the RxD pin is automatically used for input. When the receive function is disabled, the RxD pin is available as a general-purpose I/O port.

| Bit 4<br>RE | Description                                                                                        |
|-------------|----------------------------------------------------------------------------------------------------|
| 0           | The receive function is disabled. The RxD pin can be used for general-purpose I/O. (Initial value) |
| 1           | The receive function is enabled. The RxD pin is used for input.                                    |

**Bit 3—Multiprocessor Interrupt Enable (MPIE):** When serial data is received in a multiprocessor format, this bit enables or disables the receive-end interrupt (RXI) and receive-error interrupt (ERI) until data with the multiprocessor bit set to 1 is received. It also enables or disables the transfer of received data from RSR to RDR, and enables or disables setting of the RDRF, FER, PER, and ORER bits in the serial status register (SSR).

The MPIE bit is ignored when the MP bit is cleared to 0, and in synchronous mode.

Clearing the MPIE bit to 0 disables the multiprocessor receive interrupt function. In this condition data is received regardless of the value of the multiprocessor bit in the receive data.

Setting the MPIE bit to 1 enables the multiprocessor receive interrupt function. In this condition, if the multiprocessor bit in the receive data is 0, the receive-end interrupt (RXI) and receive-error interrupt (ERI) are disabled, the receive data is not transferred from RSR to RDR, and the RDRF, FER, PER, and ORER bits in the serial status register (SSR) are not set. If the multiprocessor bit is 1, however, the MPB bit in SSR is set to 1, the MPIE bit is cleared to 0, the receive data is transferred from RSR to RDR, the FER, PER, and ORER bits can be set, and the receive-end and receive-error interrupts are enabled.

| Bit 3<br>MPIE | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0             | The multiprocessor receive interrupt function is disabled. (Normal receive operation) (Initial value)                                                                                                                                                                                                                                                                                                                                                                                                                               |
| 1             | The multiprocessor receive interrupt function is enabled. During the interval before data with the multiprocessor bit set to 1 is received, the receive interrupt request (RxI) and receive-error interrupt request (ERI) are disabled, the RDRF, FER, PER, and ORER bits are not set in the serial status register (SSR), and no data is transferred from the RSR to the RDR. The MPIE bit is cleared at the following times:<br>(1) When 0 is written in MPIE.<br>(2) When data with the multiprocessor bit set to 1 is received. |

**Bit 2—Transmit-End Interrupt Enable (TEIE):** This bit enables or disables the TSR-empty interrupt (TEI) requested when the transmit-end bit (TEND) in the serial status register (SSR) is set to 1.

| Bit 2<br>TEIE | Description                                                        |
|---------------|--------------------------------------------------------------------|
| 0             | The TSR-empty interrupt request (TEI) is disabled. (Initial value) |
| 1             | The TSR-empty interrupt request (TEI) is enabled.                  |

**Bit 1—Clock Enable 1 (CKE1):** This bit selects the internal or external clock source for the baud rate generator. When the external clock source is selected, the SCK pin is automatically used for input of the external clock signal.

| Bit 1<br>CKE1 | Description                                                                                                                                                                           |
|---------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0             | Internal clock source (Initial value)<br>When $C/\overline{A} = 1$ , the serial clock signal is output at the SCK pin.<br>When $C/\overline{A} = 0$ , output depends on the CKE0 bit. |
| 1             | External clock source. The SCK pin is used for input.                                                                                                                                 |

**Bit 0—Clock Enable 0 (CKE0):** When an internal clock source is used in asynchronous mode, this bit enables or disables serial clock output at the SCK pin.

This bit is ignored when the external clock is selected, or when synchronous mode is selected.

For further information on the communication format and clock source selection, see table 11-6 in section 11.3, Operation.

| Bit 0<br>CKE0 | Description                                                                                          |
|---------------|------------------------------------------------------------------------------------------------------|
| 0             | The SCK pin is not used by the SCI (and is available as a general-purpose I/O port). (Initial value) |
| 1             | The SCK pin is used for serial clock output.                                                         |

### 11.2.7 Serial Status Register (SSR)

| Bit           | 7      | 6      | 5      | 4      | 3      | 2    | 1   | 0    |
|---------------|--------|--------|--------|--------|--------|------|-----|------|
|               | TDRE   | RDRF   | ORER   | FER    | PER    | TEND | MPB | MPBT |
| Initial value | 1      | 0      | 0      | 0      | 0      | 1    | 0   | 0    |
| Read/Write    | R/(W)* | R/(W)* | R/(W)* | R/(W)* | R/(W)* | R    | R   | R/W  |

Note: \* Software can write a 0 to clear the flags, but cannot write a 1 in these bits.

SSR is an 8-bit register that indicates transmit and receive status. It is initialized to H'84 at a reset and in the standby modes.

**Bit 7—Transmit Data Register Empty (TDRE):** This bit indicates when transmit data can safely be written in TDR.

#### Bit 7

| TDRE | Description                                                                                                                                                  |
|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0    | To clear TDRE, the CPU must read TDRE after it has been set to 1, then write a 0 in this bit.                                                                |
| 1    | This bit is set to 1 at the following times:<br>(1) When TDR contents are transferred to TSR.<br>(2) When the TE bit in SCR is cleared to 0. (Initial value) |

**Bit 6—Receive Data Register Full (RDRF):** This bit indicates when one character has been received and transferred to the RDR.

#### Bit 6

| RDRF | Description                                                                                                   |
|------|---------------------------------------------------------------------------------------------------------------|
| 0    | To clear RDRF, the CPU must read RDRF after it has been set to 1, then write a 0 in this bit. (Initial value) |
| 1    | This bit is set to 1 when one character is received without error and transferred from RSR to RDR.            |

**Bit 5—Overrun Error (ORER):** This bit indicates an overrun error during reception.

**Bit 5**

| ORER | Description                                                                                                               |
|------|---------------------------------------------------------------------------------------------------------------------------|
| 0    | To clear ORER, the CPU must read ORER after it has been set to 1, (Initial value)<br>then write a 0 in this bit.          |
| 1    | This bit is set to 1 if reception of the next character ends while<br>the receive data register is still full (RDRF = 1). |

**Bit 4—Framing Error (FER):** This bit indicates a framing error during data reception in asynchronous mode. It has no meaning in synchronous mode.

**Bit 4**

| FER | Description                                                                                                    |
|-----|----------------------------------------------------------------------------------------------------------------|
| 0   | To clear FER, the CPU must read FER after it has been set to 1, (Initial value)<br>then write a 0 in this bit. |
| 1   | This bit is set to 1 if a framing error occurs (stop bit = 0).                                                 |

**Bit 3—Parity Error (PER):** This bit indicates a parity error during data reception in the asynchronous mode, when a communication format with parity bits is used.

This bit has no meaning in the synchronous mode, or when a communication format without parity bits is used.

**Bit 3**

| PER | Description                                                                                                                                    |
|-----|------------------------------------------------------------------------------------------------------------------------------------------------|
| 0   | To clear PER, the CPU must read PER after it has been set to 1, (Initial value)<br>then write a 0 in this bit.                                 |
| 1   | This bit is set to 1 when a parity error occurs (the parity of the received data does not<br>match the parity selected by the O/E bit in SMR). |

**Bit 2—Transmit End (TEND):** This bit indicates that the serial communication interface has stopped transmitting because there was no valid data in the TDR when the last bit of the current character was transmitted. The TEND bit is also set to 1 when the TE bit in the serial control register (SCR) is cleared to 0.

The TEND bit is a read-only bit and cannot be modified directly. To use the TEI interrupt, first start transmitting data, which clears TEND to 0, then set TEIE to 1.

| Bit 2 |                                                                                                            |
|-------|------------------------------------------------------------------------------------------------------------|
| TEND  | Description                                                                                                |
| 0     | To clear TEND, the CPU must read TDRE after TDRE has been set to 1, then write a 0 in TDRE (Initial value) |
| 1     | This bit is set to 1 when:<br>(1) TE = 0<br>(2) TDRE = 1 at the end of transmission of a character         |

**Bit 1—Multiprocessor Bit (MPB):** Stores the value of the multiprocessor bit in data received in a multiprocessor format in asynchronous communication mode. This bit retains its previous value in synchronous mode, when a multiprocessor format is not used, or when the RE bit is cleared to 0 even if a multiprocessor format is used.

MPB can be read but not written.

| Bit 1 |                                                         |
|-------|---------------------------------------------------------|
| MPB   | Description                                             |
| 0     | Multiprocessor bit = 0 in receive data. (Initial value) |
| 1     | Multiprocessor bit = 1 in receive data.                 |

**Bit 0—Multiprocessor Bit Transfer (MPBT):** Stores the value of the multiprocessor bit inserted in transmit data when a multiprocessor format is used in asynchronous communication mode. The MPBT bit is double-buffered in the same way as TSR and TDR. The MPBT bit has no effect in synchronous mode, or when a multiprocessor format is not used.

| Bit 0 |                                                          |
|-------|----------------------------------------------------------|
| MPBT  | Description                                              |
| 0     | Multiprocessor bit = 0 in transmit data. (Initial value) |
| 1     | Multiprocessor bit = 1 in transmit data.                 |



11.2.8 Bit Rate Register (BRR)

|               |     |     |     |     |     |     |     |     |
|---------------|-----|-----|-----|-----|-----|-----|-----|-----|
| Bit           | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|               |     |     |     |     |     |     |     |     |
| Initial value | 1   | 1   | 1   | 1   | 1   | 1   | 1   | 1   |
| Read/Write    | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

BRR is an 8-bit register that, together with the CKS1 and CKS0 bits in SMR, determines the baud rate output by the baud rate generator.

BRR is initialized to H'FF by a reset and in the standby modes.

Tables 11-3 and 11-4 show examples of BRR settings.

Table 11-3 Examples of BRR Settings in Asynchronous Mode (When  $\varnothing_P = \varnothing$ )

| $\varnothing$ Frequency (MHz) |   |     |           |          |     |           |
|-------------------------------|---|-----|-----------|----------|-----|-----------|
| 2                             |   |     |           | 2.097152 |     |           |
| Bit Rate                      | n | N   | Error (%) | n        | N   | Error (%) |
| 110                           | 1 | 141 | +0.03     | 1        | 148 | −0.04     |
| 150                           | 1 | 103 | +0.16     | 1        | 108 | +0.21     |
| 300                           | 0 | 207 | +0.16     | 0        | 217 | +0.21     |
| 600                           | 0 | 103 | +0.16     | 0        | 108 | +0.21     |
| 1200                          | 0 | 51  | +0.16     | 0        | 54  | −0.70     |
| 2400                          | 0 | 25  | +0.16     | 0        | 26  | +1.14     |
| 4800                          | 0 | 12  | +0.16     | 0        | 13  | −2.48     |
| 9600                          | — | —   | —         | 0        | 6   | −2.48     |
| 19200                         | — | —   | —         | —        | —   | —         |
| 31250                         | 0 | 1   | 0         | —        | —   | —         |
| 38400                         | — | —   | —         | —        | —   | —         |

Note: If possible, the error should be within 1%.

**Table 11-3 Examples of BRR Settings in Asynchronous Mode (When  $\sigma_p = \sigma$ ) (cont)**

| Bit Rate | $\sigma$ Frequency (MHz) |     |           |   |     |           |        |     |           |   |     |           |
|----------|--------------------------|-----|-----------|---|-----|-----------|--------|-----|-----------|---|-----|-----------|
|          | 2.4576                   |     |           | 3 |     |           | 3.6864 |     |           | 4 |     |           |
|          | n                        | N   | Error (%) | n | N   | Error (%) | n      | N   | Error (%) | n | N   | Error (%) |
| 110      | 1                        | 174 | -0.26     | 2 | 52  | +0.50     | 2      | 64  | +0.70     | 2 | 70  | +0.03     |
| 150      | 1                        | 127 | 0         | 1 | 155 | +0.16     | 1      | 191 | 0         | 1 | 207 | +0.16     |
| 300      | 0                        | 255 | 0         | 1 | 77  | +0.16     | 1      | 95  | 0         | 1 | 103 | +0.16     |
| 600      | 0                        | 127 | 0         | 0 | 155 | +0.16     | 0      | 191 | 0         | 0 | 207 | +0.16     |
| 1200     | 0                        | 63  | 0         | 0 | 77  | +0.16     | 0      | 95  | 0         | 0 | 103 | +0.16     |
| 2400     | 0                        | 31  | 0         | 0 | 38  | +0.16     | 0      | 47  | 0         | 0 | 51  | +0.16     |
| 4800     | 0                        | 15  | 0         | 0 | 19  | -2.34     | 0      | 23  | 0         | 0 | 25  | +0.16     |
| 9600     | 0                        | 7   | 0         | 0 | 9   | -2.34     | 0      | 11  | 0         | 0 | 12  | +0.16     |
| 19200    | 0                        | 3   | 0         | 0 | 4   | -2.34     | 0      | 5   | 0         | — | —   | —         |
| 31250    | —                        | —   | —         | 0 | 2   | 0         | —      | —   | —         | 0 | 3   | 0         |
| 38400    | 0                        | 1   | 0         | — | —   | —         | 0      | 2   | 0         | — | —   | —         |

**Table 11-3 Examples of BRR Settings in Asynchronous Mode (When  $\sigma_p = \sigma$ ) (cont)**

| Bit Rate | $\sigma$ Frequency (MHz) |     |           |   |     |           |   |     |           |       |     |           |
|----------|--------------------------|-----|-----------|---|-----|-----------|---|-----|-----------|-------|-----|-----------|
|          | 4.9152                   |     |           | 5 |     |           | 6 |     |           | 6.144 |     |           |
|          | n                        | N   | Error (%) | n | N   | Error (%) | n | N   | Error (%) | n     | N   | Error (%) |
| 110      | 2                        | 86  | +0.31     | 2 | 88  | -0.25     | 2 | 106 | -0.44     | 2     | 108 | +0.08     |
| 150      | 1                        | 255 | 0         | 2 | 64  | +0.16     | 2 | 77  | 0         | 2     | 79  | 0         |
| 300      | 1                        | 127 | 0         | 1 | 129 | +0.16     | 1 | 155 | 0         | 1     | 159 | 0         |
| 600      | 0                        | 255 | 0         | 1 | 64  | +0.16     | 1 | 77  | 0         | 1     | 79  | 0         |
| 1200     | 0                        | 127 | 0         | 0 | 129 | +0.16     | 0 | 155 | +0.16     | 0     | 159 | 0         |
| 2400     | 0                        | 63  | 0         | 0 | 64  | +0.16     | 0 | 77  | +0.16     | 0     | 79  | 0         |
| 4800     | 0                        | 31  | 0         | 0 | 32  | -1.36     | 0 | 38  | +0.16     | 0     | 39  | 0         |
| 9600     | 0                        | 15  | 0         | 0 | 15  | +1.73     | 0 | 19  | -2.34     | 0     | 19  | 0         |
| 19200    | 0                        | 7   | 0         | 0 | 7   | +1.73     | 0 | 9   | -2.34     | 0     | 4   | 0         |
| 31250    | 0                        | 4   | -1.70     | 0 | 4   | 0         | 0 | 5   | 0         | 0     | 5   | +2.40     |
| 38400    | 0                        | 3   | 0         | 0 | 3   | +1.73     | 0 | 4   | -2.34     | 0     | 4   | 0         |

Note: If possible, the error should be within 1%.

**Table 11-3 Examples of BRR Settings in Asynchronous Mode (When  $\sigma_p = \sigma$ ) (cont)**

| Bit Rate | $\sigma$ Frequency (MHz) |     |           |   |     |           |        |     |           |    |     |           |
|----------|--------------------------|-----|-----------|---|-----|-----------|--------|-----|-----------|----|-----|-----------|
|          | 7.3728                   |     |           | 8 |     |           | 9.8304 |     |           | 10 |     |           |
|          | n                        | N   | Error (%) | n | N   | Error (%) | n      | N   | Error (%) | n  | N   | Error (%) |
| 110      | 2                        | 130 | -0.07     | 2 | 141 | +0.03     | 2      | 174 | -0.26     | 3  | 43  | +0.88     |
| 150      | 2                        | 95  | 0         | 2 | 103 | +0.16     | 2      | 127 | 0         | 2  | 129 | +0.16     |
| 300      | 1                        | 191 | 0         | 1 | 207 | +0.16     | 1      | 255 | 0         | 2  | 64  | +0.16     |
| 600      | 1                        | 95  | 0         | 1 | 103 | +0.16     | 1      | 127 | 0         | 1  | 129 | +0.16     |
| 1200     | 0                        | 191 | 0         | 0 | 207 | +0.16     | 0      | 255 | 0         | 1  | 64  | +0.16     |
| 2400     | 0                        | 95  | 0         | 0 | 103 | +0.16     | 0      | 127 | 0         | 0  | 129 | +0.16     |
| 4800     | 0                        | 47  | 0         | 0 | 51  | +0.16     | 0      | 63  | 0         | 0  | 64  | +0.16     |
| 9600     | 0                        | 23  | 0         | 0 | 25  | +0.16     | 0      | 31  | 0         | 0  | 32  | -1.36     |
| 19200    | 0                        | 11  | 0         | 0 | 12  | +0.16     | 0      | 15  | 0         | 0  | 15  | +1.73     |
| 31250    | —                        | —   | —         | 0 | 7   | 0         | 0      | 9   | -1.70     | 0  | 9   | 0         |
| 38400    | 0                        | 5   | 0         | — | —   | —         | 0      | 7   | 0         | 0  | 7   | +1.73     |

**Table 11-3 Examples of BRR Settings in Asynchronous Mode (When  $\sigma_p = \sigma$ ) (cont)**

| Bit Rate | $\sigma$ Frequency (MHz) |     |           |        |     |           |         |     |           |    |     |           |
|----------|--------------------------|-----|-----------|--------|-----|-----------|---------|-----|-----------|----|-----|-----------|
|          | 12                       |     |           | 12.288 |     |           | 14.7456 |     |           | 16 |     |           |
|          | n                        | N   | Error (%) | n      | N   | Error (%) | n       | N   | Error (%) | n  | N   | Error (%) |
| 110      | 2                        | 212 | +0.03     | 2      | 217 | +0.08     | 3       | 64  | +0.76     | 3  | 70  | +0.03     |
| 150      | 2                        | 155 | +0.16     | 2      | 159 | 0         | 2       | 191 | 0         | 2  | 207 | +0.16     |
| 300      | 2                        | 77  | +0.16     | 2      | 79  | 0         | 2       | 95  | 0         | 2  | 103 | +0.16     |
| 600      | 1                        | 155 | +0.16     | 1      | 159 | 0         | 1       | 191 | 0         | 1  | 207 | +0.16     |
| 1200     | 1                        | 77  | +0.16     | 1      | 79  | 0         | 1       | 95  | 0         | 1  | 103 | +0.16     |
| 2400     | 0                        | 155 | +0.16     | 0      | 159 | 0         | 0       | 191 | 0         | 0  | 207 | +0.16     |
| 4800     | 0                        | 77  | +0.16     | 0      | 79  | 0         | 0       | 95  | 0         | 0  | 103 | +0.16     |
| 9600     | 0                        | 38  | +0.16     | 0      | 39  | 0         | 0       | 47  | 0         | 0  | 51  | +0.16     |
| 19200    | 0                        | 19  | -2.34     | 0      | 19  | 0         | 0       | 23  | 0         | 0  | 25  | +0.16     |
| 31250    | 0                        | 11  | 0         | 0      | 11  | +2.4      | 0       | 14  | -1.7      | 0  | 15  | 0         |
| 38400    | 0                        | 9   | -2.34     | 0      | 9   | 0         | 0       | 11  | 0         | 0  | 12  | +0.16     |

Note: If possible, the error should be within 1%.

$$B = F \times 10^6 / [64 \times 2^{2n-1} \times (N + 1)] \rightarrow N = F \times 10^6 / [64 \times 2^{2n-1} \times B] - 1$$

B: Baud rate (bits/second)

N: BRR value ( $0 \leq N \leq 255$ )

F:  $\varnothing_p$  (MHz) when  $n \neq 0$ , or  $\varnothing$  (MHz) when  $n = 0$

n: Internal clock source (0, 1, 2, or 3)

The meaning of n is given by the table below:

| n | CKS1 | CKS0 | Clock              |
|---|------|------|--------------------|
| 0 | 0    | 0    | $\varnothing$      |
| 1 | 0    | 1    | $\varnothing_p/4$  |
| 2 | 1    | 0    | $\varnothing_p/16$ |
| 3 | 1    | 1    | $\varnothing_p/64$ |

Bit rate error can be calculated with the formula below.

$$\text{Error (\%)} = \left\{ \frac{F \times 10^6}{(N + 1) \times B \times 64 \times 2^{2n-1}} - 1 \right\} \times 100$$

**Table 11-4 Examples of BRR Settings in Synchronous Mode (When  $\varnothing_p = \varnothing$ )**

| Bit Rate | $\varnothing$ Frequency (MHz) |     |   |     |   |     |   |     |    |     |    |     |
|----------|-------------------------------|-----|---|-----|---|-----|---|-----|----|-----|----|-----|
|          | 2                             |     | 4 |     | 5 |     | 8 |     | 10 |     | 16 |     |
|          | n                             | N   | n | N   | n | N   | n | N   | n  | N   | n  | N   |
| 100      | —                             | —   | — | —   | — | —   | — | —   | —  | —   | —  | —   |
| 250      | 2                             | 124 | 2 | 249 | — | —   | 3 | 124 | —  | —   | 3  | 249 |
| 500      | 1                             | 249 | 2 | 124 | — | —   | 2 | 249 | —  | —   | 3  | 124 |
| 1 k      | 1                             | 124 | 1 | 249 | — | —   | 2 | 124 | —  | —   | 2  | 249 |
| 2.5 k    | 0                             | 199 | 1 | 99  | 1 | 124 | 1 | 199 | 1  | 249 | 2  | 99  |
| 5 k      | 0                             | 99  | 0 | 199 | 0 | 249 | 1 | 99  | 1  | 124 | 1  | 199 |
| 10 k     | 0                             | 49  | 0 | 99  | 0 | 124 | 0 | 199 | 0  | 249 | 1  | 99  |
| 25 k     | 0                             | 19  | 0 | 39  | 0 | 49  | 0 | 79  | 0  | 99  | 0  | 159 |
| 50 k     | 0                             | 9   | 0 | 19  | 0 | 24  | 0 | 39  | 0  | 49  | 0  | 79  |
| 100 k    | 0                             | 4   | 0 | 9   | — | —   | 0 | 19  | 0  | 24  | 0  | 39  |
| 250 k    | 0                             | 1   | 0 | 3   | 0 | 4   | 0 | 7   | 0  | 9   | 0  | 15  |
| 500 k    | 0                             | 0*  | 0 | 1   | — | —   | 0 | 3   | 0  | 4   | 0  | 7   |
| 1 M      |                               |     | 0 | 0*  | — | —   | 0 | 1   | —  | —   | 0  | 3   |
| 2.5 M    |                               |     |   |     |   |     |   |     | 0  | 0*  | —  | —   |
| 4 M      |                               |     |   |     |   |     |   |     |    |     | 0  | 0*  |

Blank: No setting is available.  
—: A setting is available, but the bit rate is inaccurate.  
\*: Continuous transfer is not possible.

$$B = F \times 10^6 / [8 \times 2^{2n} \times (N + 1)] \rightarrow N = F \times 10^6 / [8 \times 2^{2n-1} \times B] - 1$$

B: Baud rate (bits per second)  
N: BRR value ( $0 \leq N \leq 255$ )  
F:  $\varnothing_p$  (MHz) when  $n \neq 0$ , or  $\varnothing$  (MHz) when  $n = 0$   
n: Internal clock source (0, 1, 2, or 3)

The meaning of n is given by the table below:

| n | CKS1 | CKS0 | Clock              |
|---|------|------|--------------------|
| 0 | 0    | 0    | $\varnothing$      |
| 1 | 0    | 1    | $\varnothing_p/4$  |
| 2 | 1    | 0    | $\varnothing_p/16$ |
| 3 | 1    | 1    | $\varnothing_p/64$ |

11.2.9 Serial/Timer Control Register (STCR)

|               |   |   |   |   |   |     |       |       |
|---------------|---|---|---|---|---|-----|-------|-------|
| Bit           | 7 | 6 | 5 | 4 | 3 | 2   | 1     | 0     |
|               | — | — | — | — | — | MPE | ICKS1 | ICKS0 |
| Initial value | 1 | 1 | 1 | 1 | 1 | 0   | 0     | 0     |
| Read/Write    | — | — | — | — | — | R/W | R/W   | R/W   |

STCR is an 8-bit readable/writable register that controls the SCI operating mode and selects the TCNT clock source in the 8-bit timers. STCR is initialized to H'F8 by a reset.

**Bits 7 to 3—Reserved:** These bits cannot be modified, and are always read as 1.

**Bit 2—Multiprocessor Enable (MPE):** Enables or disables the multiprocessor communication function on channels SCI0 and SCI1.

Bit 2

| MPE | Description                                                                                                                            |
|-----|----------------------------------------------------------------------------------------------------------------------------------------|
| 0   | The multiprocessor communication function is disabled, (Initial value)<br>regardless of the setting of the MP bit in SMR.              |
| 1   | The multiprocessor communication function is enabled. The multi-processor format can<br>be selected by setting the MP bit in SMR to 1. |

**Bits 1 and 0—Internal Clock Source Select 1 and 0 (ICKS1, ICKS0):** These bits select the clock input to the timer counters (TCNT) in the 8-bit timers. For details, see section 9, 8-Bit Timers.

## 11.3 Operation

### 11.3.1 Overview

The SCI supports serial data transfer in two modes. In asynchronous mode each character is synchronized individually. In synchronous mode communication is synchronized with a clock signal.

The selection of asynchronous or synchronous mode and the communication format depend on SMR settings as indicated in table 11-5. The clock source depends on the settings of the C/A bit in the SMR and the CKE1 and CKE0 bits in SCR as indicated in table 11-6.

#### Asynchronous Mode

- Data length: 7 or 8 bits can be selected.
- A parity bit or multiprocessor bit can be added, and stop bit lengths of 1 or 2 bits can be selected. (These selections determine the communication format and character length.)
- Framing errors (FER), parity errors (PER), and overrun errors (ORER) can be detected in receive data, and the line-break condition can be detected.
- SCI clock source: an internal or external clock source can be selected.
- Internal clock: The SCI is clocked by the on-chip baud rate generator and can output a clock signal at the bit-rate frequency.
- External clock: The external clock frequency must be 16 times the bit rate. (The on-chip baud rate generator is not used.)

#### Synchronous Mode

- Communication format: The data length is 8 bits.
- Overrun errors (ORER) can be detected in receive data.
- SCI clock source: an internal or external clock source can be selected.
- Internal clock: The SCI is clocked by the on-chip baud rate generator and outputs a serial clock signal to external devices.
- External clock: The on-chip baud rate generator is not used. The SCI operates on the input serial clock.

**Table 11-5 Communication Formats Used by SCI**

| SMR Settings |              |             |             |                     |                      | Communication Format                                 |                            |               |                        |       |        |
|--------------|--------------|-------------|-------------|---------------------|----------------------|------------------------------------------------------|----------------------------|---------------|------------------------|-------|--------|
| Bit 7<br>C/A | Bit 6<br>CHR | Bit 2<br>MP | Bit 5<br>PE | Bit 3<br>STOP       | Mode                 | Data<br>Length                                       | Multi-<br>processor<br>Bit | Parity<br>Bit | Stop-<br>Bit<br>Length |       |        |
| 0            | 0            | 0           | 0           | 0                   | Asynchronous<br>mode | 8 bits                                               | None                       | None          | 1 bit                  |       |        |
|              |              |             |             | 1                   |                      |                                                      |                            |               | 2 bits                 |       |        |
|              |              |             |             | 1                   |                      |                                                      |                            | 0             | Present                | 1 bit |        |
|              |              |             |             | 1                   |                      |                                                      |                            | 2 bits        |                        |       |        |
|              |              |             |             | 1                   |                      | 0                                                    |                            | 7 bits        |                        | None  | 1 bit  |
|              |              |             |             |                     |                      |                                                      |                            |               |                        |       | 1      |
|              | 1            | 0           | Present     |                     |                      |                                                      |                            |               |                        | 1 bit |        |
|              |              |             |             |                     |                      |                                                      |                            |               |                        | 1     | 2 bits |
|              | 0            | 1           | —           | 0                   |                      | Asynchronous<br>mode (multi-<br>processor<br>format) |                            | 8 bits        | Present                | None  | 1 bit  |
|              |              |             |             |                     |                      |                                                      |                            |               |                        |       | 1      |
| 1            |              |             |             |                     | 7 bits               |                                                      | 1 bit                      |               |                        |       |        |
|              |              |             |             |                     |                      |                                                      | 1                          | 2 bits        |                        |       |        |
| 1            | —            | —           | —           | Synchronous<br>mode | 8 bits               |                                                      | None                       |               | None                   |       |        |

**Table 11-6 SCI Clock Source Selection**

| SMR          | SCR           |               | Serial Transmit/Receive Clock |              |                                     |
|--------------|---------------|---------------|-------------------------------|--------------|-------------------------------------|
| Bit 7<br>C/A | Bit 1<br>CKE1 | Bit 0<br>CKE0 | Mode                          | Clock Source | SCK Pin Function                    |
| 0            | 0             | 0             | Async                         | Internal     | Input/output port (not used by SCI) |
|              |               | 1             |                               |              | Serial clock output at bit rate     |
|              | 1             | 0             |                               | External     | Serial clock input at 16 × bit rate |
|              |               | 1             |                               |              |                                     |
| 1            | 0             | 0             | Sync                          | Internal     | Serial clock output                 |
|              |               | 1             |                               |              |                                     |
|              | 1             | 0             |                               | External     | Serial clock input                  |
|              |               | 1             |                               |              |                                     |



11.3.2 Asynchronous Mode


In asynchronous mode, each transmitted or received character is individually synchronized by framing it with a start bit and stop bit.

Full duplex data transfer is possible because the SCI has independent transmit and receive sections. Double buffering in both sections enables the SCI to be programmed for continuous data transfer.

Figure 11-2 shows the general format of one character sent or received in asynchronous mode. The communication channel is normally held in the mark state (high). Character transmission or reception starts with a transition to the space state (low).

The first bit transmitted or received is the start bit (low). It is followed by the data bits, in which the least significant bit (LSB) comes first. The data bits are followed by the parity or multiprocessor bit, if present, then the stop bit or bits (high) confirming the end of the frame.

In receiving, the SCI synchronizes on the falling edge of the start bit, and samples each bit at the center of the bit (at the 8th cycle of the internal serial clock, which runs at 16 times the bit rate).

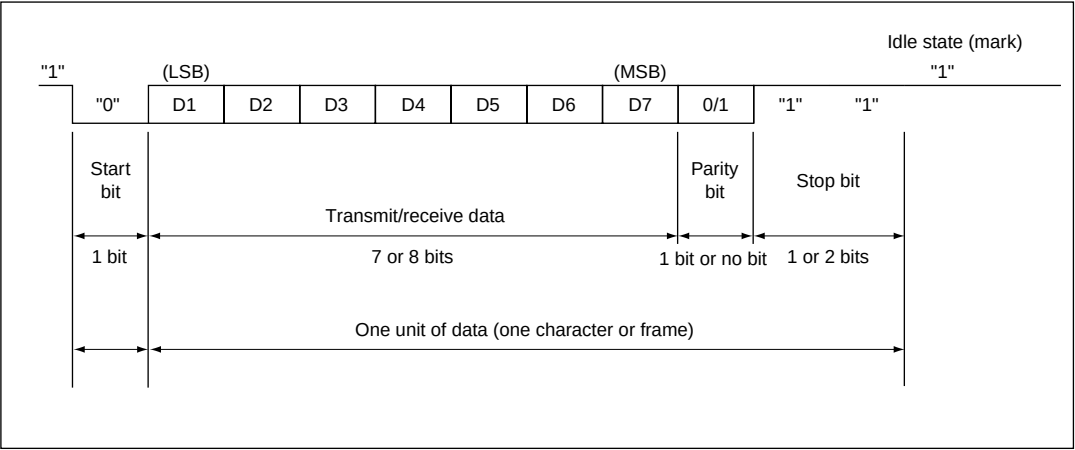

**Figure 11-2 Data Format in Asynchronous Mode**  
**(Example of 8-Bit Data with Parity Bit and Two Stop Bits)**

**(1) Data Format:** Table 11-7 lists the data formats that can be sent and received in asynchronous mode. Twelve formats can be selected by bits in the serial mode register (SMR).

**Table 11-7 Data Formats in Asynchronous Mode**


| SMR Bits |    |    |      | 1 | 2          | 3 | 4 | 5 | 6 | 7 | 8 | 9    | 10   | 11   | 12   |
|----------|----|----|------|---|------------|---|---|---|---|---|---|------|------|------|------|
| CHR      | PE | MP | STOP |   |            |   |   |   |   |   |   |      |      |      |      |
| 0        | 0  | 0  | 0    | S | 8-bit data |   |   |   |   |   |   |      | STOP |      |      |
| 0        | 0  | 0  | 1    | S | 8-bit data |   |   |   |   |   |   |      | STOP | STOP |      |
| 0        | 1  | 0  | 0    | S | 8-bit data |   |   |   |   |   |   |      | P    | STOP |      |
| 0        | 1  | 0  | 1    | S | 8-bit data |   |   |   |   |   |   |      | P    | STOP | STOP |
| 1        | 0  | 0  | 0    | S | 7-bit data |   |   |   |   |   |   | STOP |      |      |      |
| 1        | 0  | 0  | 1    | S | 7-bit data |   |   |   |   |   |   | STOP | STOP |      |      |
| 1        | 1  | 0  | 0    | S | 7-bit data |   |   |   |   |   |   | P    | STOP |      |      |
| 1        | 1  | 0  | 1    | S | 7-bit data |   |   |   |   |   |   | P    | STOP | STOP |      |
| 0        | —  | 1  | 0    | S | 8-bit data |   |   |   |   |   |   |      | MPB  | STOP |      |
| 0        | —  | 1  | 1    | S | 8-bit data |   |   |   |   |   |   |      | MPB  | STOP | STOP |
| 1        | —  | 1  | 0    | S | 7-bit data |   |   |   |   |   |   | MPB  | STOP |      |      |
| 1        | —  | 1  | 1    | S | 7-bit data |   |   |   |   |   |   | MPB  | STOP | STOP |      |

Notes: SMR: Serial mode register  
S: Start bit  
STOP: Stop bit  
P: Parity bit  
MPB: Multiprocessor bit

**(2) Clock:** In asynchronous mode it is possible to select either an internal clock created by the on-chip baud rate generator, or an external clock input at the SCK pin. The selection is made by the C/A bit in the serial mode register (SMR) and the CKE1 and CKE0 bits in the serial control register (SCR). Refer to table 11-6.

If an external clock is input at the SCK pin, its frequency should be 16 times the desired bit rate.

If the internal clock provided by the on-chip baud rate generator is selected and the SCK pin is used for clock output, the output clock frequency is equal to the bit rate, and the clock pulse rises at the center of the transmit data bits. Figure 11-3 shows the phase relationship between the output clock and transmit data.

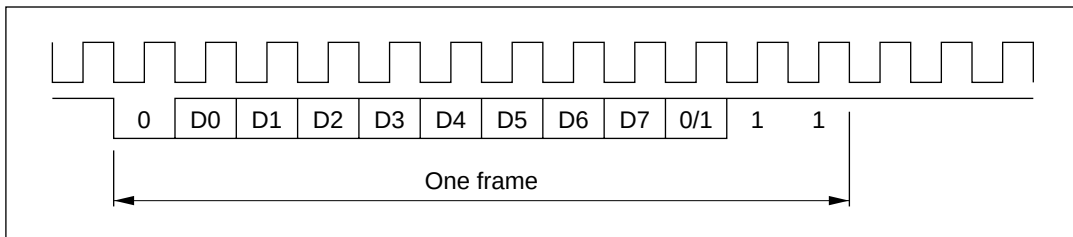


**Figure 11-3 Phase Relationship between Clock Output and Transmit Data (Asynchronous Mode)**

### (3) Transmitting and Receiving Data

- **SCI Initialization:** Before transmitting or receiving, software must clear the TE and RE bits to 0 in the serial control register (SCR), then initialize the SCI following the procedure in figure 11-4.


Note: When changing the communication mode or format, always clear the TE and RE bits to 0 before following the procedure given below. Clearing TE to 0 sets TDRE to 1 and initializes the transmit shift register (TSR). Clearing RE to 0, however, does not initialize the RDRF, PER, FER, and ORER flags and receive data register (RDR), which retain their previous contents.

When an external clock is used, the clock should not be stopped during initialization or subsequent operation. SCI operation becomes unreliable if the clock is stopped.

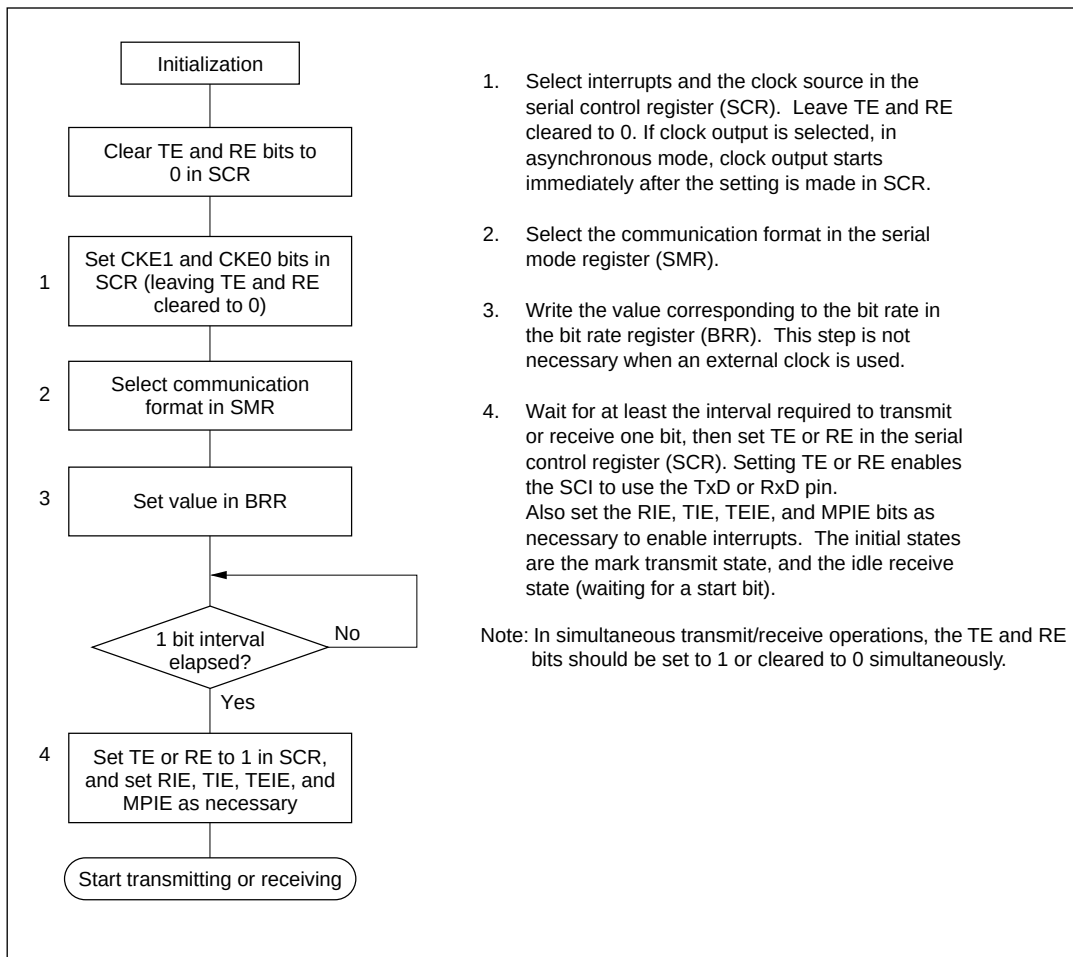

**Figure 11-4 Sample Flowchart for SCI Initialization**

- **Transmitting Serial Data:** Follow the procedure in figure 11-5 for transmitting serial data.

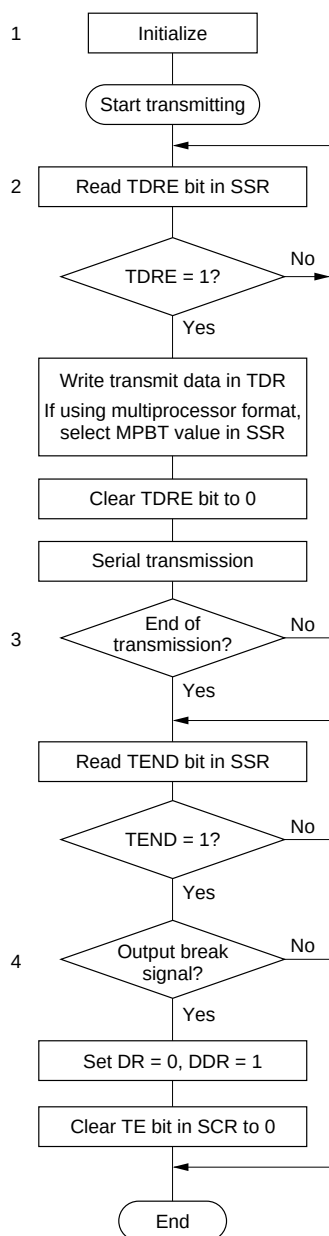

1. SCI initialization: the transmit data output function of the TxD pin is selected automatically.
2. SCI status check and transmit data write: read the serial status register (SSR), check that the TDRE bit is 1, then write transmit data in the transmit data register (TDR) and clear TDRE to 0. If a multiprocessor format is selected, after writing the transmit data write 0 or 1 in the multiprocessor bit transfer (MPBT) in SSR. Transition of the TDRE bit from 0 to 1 can be reported by an interrupt.
3. (a) To continue transmitting serial data: read the TDRE bit to check whether it is safe to write; if TDRE = 1, write data in TDR, then clear TDRE to 0.  
(b) To end serial transmission: end of transmission can be confirmed by checking transition of the TEND bit from 0 to 1. This can be reported by a TEI interrupt.
4. To output a break signal at the end of serial transmission: set the DDR bit to 1 and clear the DR bit to 0 (DDR and DR are I/O port registers), then clear TE to 0 in SCR.

**Figure 11-5 Sample Flowchart for Transmitting Serial Data**


In transmitting serial data, the SCI operates as follows.

1. The SCI monitors the TDRE bit in SSR. When TDRE is cleared to 0 the SCI recognizes that the transmit data register (TDR) contains new data, and loads this data from TDR into the transmit shift register (TSR).
2. After loading the data from TDR into TSR, the SCI sets the TDRE bit to 1 and starts transmitting. If the TIE bit (TDR-empty interrupt enable) is set to 1 in SCR, the SCI requests a TXI interrupt (TDR-empty interrupt) at this time.

Serial transmit data are transmitted in the following order from the TxD pin:


- (a) Start bit: one 0 bit is output.
  - (b) Transmit data: seven or eight bits are output, LSB first.
  - (c) Parity bit or multiprocessor bit: one parity bit (even or odd parity) or one multiprocessor bit is output. Formats in which neither a parity bit nor a multiprocessor bit is output can also be selected.
  - (d) Stop bit: one or two 1 bits (stop bits) are output.
  - (e) Mark state: output of 1 bits continues until the start bit of the next transmit data.
3. The SCI checks the TDRE bit when it outputs the stop bit. If TDRE is 0, after loading new data from TDR into TSR and transmitting the stop bit, the SCI begins serial transmission of the next frame. If TDRE is 1, after setting the TEND bit to 1 in SSR and transmitting the stop bit, the SCI continues 1-level output in the mark state, and if the TEIE bit (TSR-empty interrupt enable) in SCR is set to 1, the SCI generates a TEI interrupt request (TSR-empty interrupt).

Figure 11-6 shows an example of SCI transmit operation in asynchronous mode.

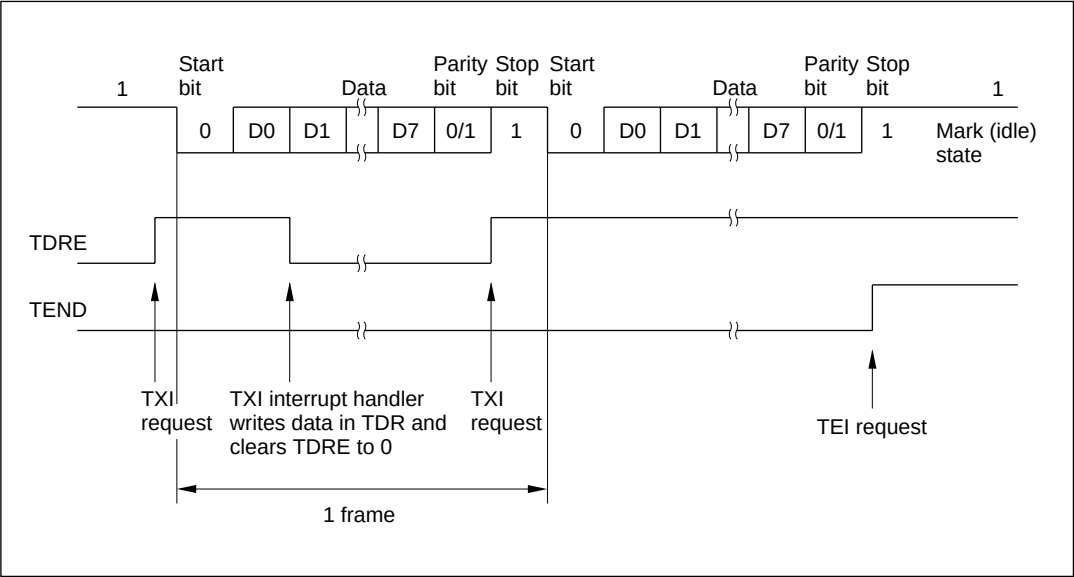

**Figure 11-6 Example of SCI Transmit Operation  
(8-Bit Data with Parity and One Stop Bit)**

- **Receiving Serial Data:** Follow the procedure in figure 11-7 for receiving serial data.

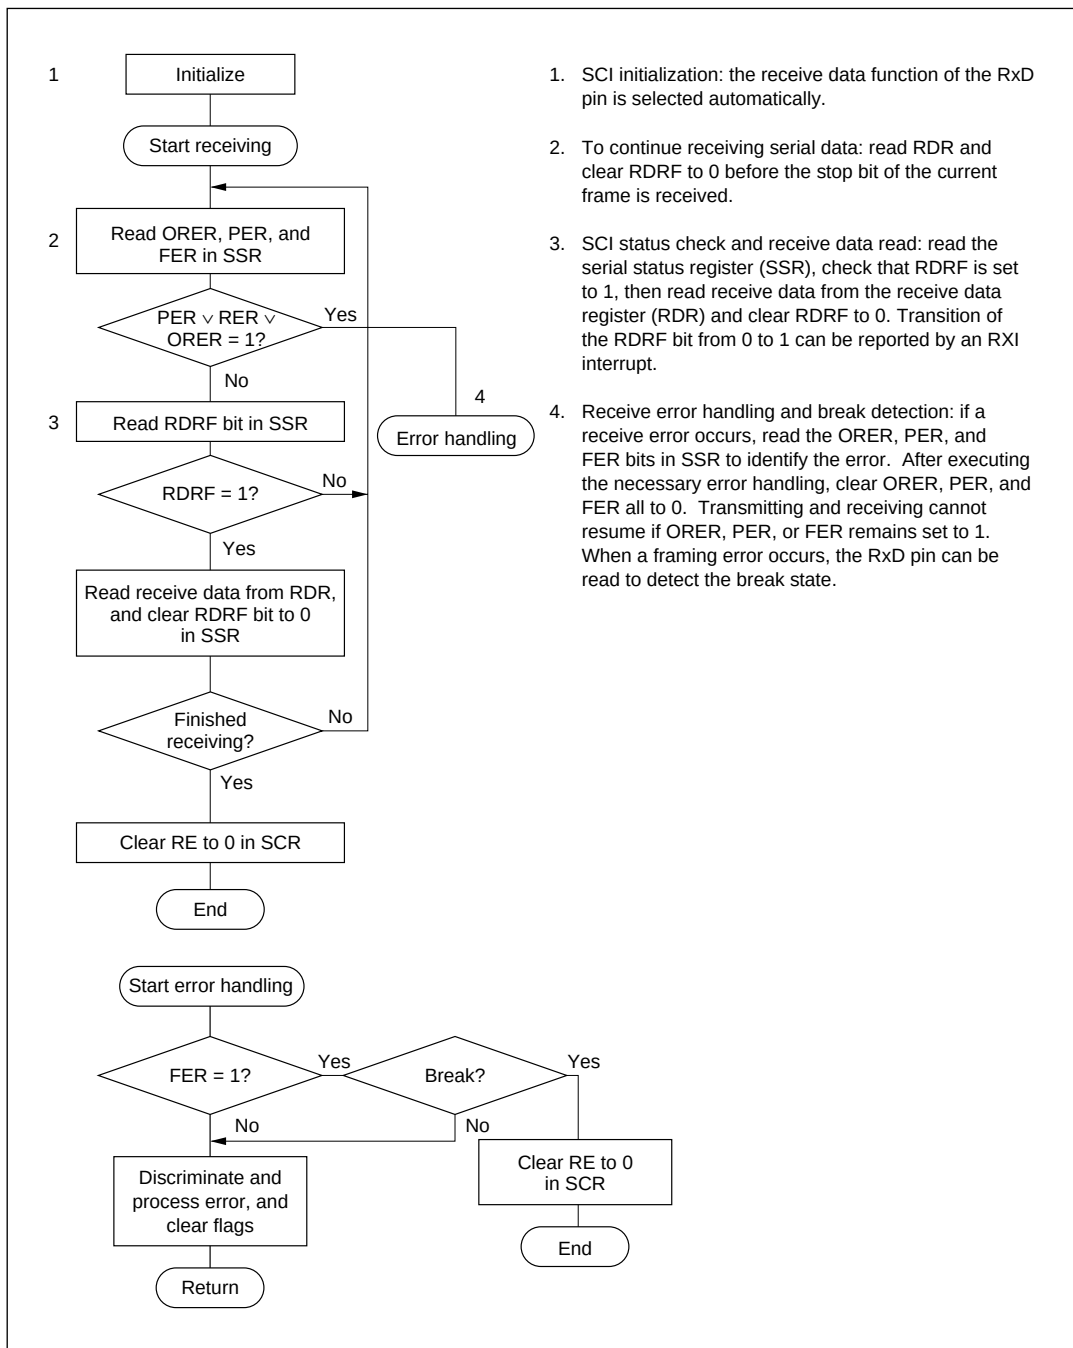

**Figure 11-7 Sample Flowchart for Receiving Serial Data**



In receiving, the SCI operates as follows.

1. The SCI monitors the receive data line and synchronizes internally when it detects a start bit.
2. Receive data is shifted into RSR in order from LSB to MSB.
3. The parity bit and stop bit are received.

After receiving these bits, the SCI makes the following checks:

- (a) Parity check: the number of 1s in the receive data must match the even or odd parity setting of the O/E bit in SMR.
- (b) Stop bit check: the stop bit value must be 1. If there are two stop bits, only the first stop bit is checked.
- (c) Status check: RDRF must be 0 so that receive data can be loaded from RSR into RDR.

If these checks all pass, the SCI sets RDRF to 1 and stores the received data in RDR. If one of the checks fails (receive error), the SCI operates as indicated in table 11-8.


Note: When a receive error flag is set, further receiving is disabled. The RDRF bit is not set to 1. Be sure to clear the error flags.

4. After setting RDRF to 1, if the RIE bit (receive-end interrupt enable) is set to 1 in SCR, the SCI requests an RXI (receive-end) interrupt. If one of the error flags (ORER, PER, or FER) is set to 1 and the RIE bit in SCR is also set to 1, the SCI requests an ERI (receive-error) interrupt.

Figure 11-8 shows an example of SCI receive operation in asynchronous mode.

**Table 11-8 Receive Error Conditions and SCI Operation**

| Receive error | Abbreviation | Condition                                                          | Data Transfer                             |
|---------------|--------------|--------------------------------------------------------------------|-------------------------------------------|
| Overrun error | ORER         | Receiving of next data ends while RDRF is still set to 1 in SSR    | Receive data not loaded from RSR into RDR |
| Framing error | FER          | Stop bit is 0                                                      | Receive data loaded from RSR into RDR     |
| Parity error  | PER          | Parity of receive data differs from even/odd parity setting in SMR | Receive data loaded from RSR into RDR     |

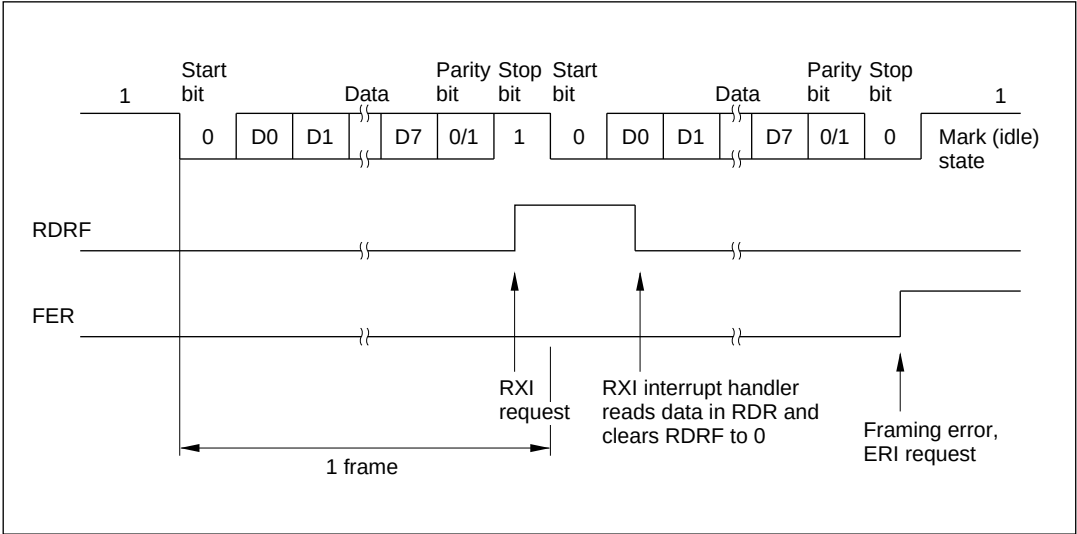

**Figure 11-8 Example of SCI Receive Operation (8-Bit Data with Parity and One Stop Bit)**

#### **(4) Multiprocessor Communication**

The multiprocessor communication function enables several processors to share a single serial communication line. The processors communicate in asynchronous mode using a format with an additional multiprocessor bit (multiprocessor format).

In multiprocessor communication, each receiving processor is addressed by an ID.


A serial communication cycle consists of two cycles: an ID-sending cycle that identifies the receiving processor, and a data-sending cycle. The multiprocessor bit distinguishes ID-sending cycles from data-sending cycles.

The transmitting processor starts by sending the ID of the receiving processor with which it wants to communicate as data with the multiprocessor bit set to 1. Next the transmitting processor sends transmit data with the multiprocessor bit cleared to 0.

Receiving processors skip incoming data until they receive data with the multiprocessor bit set to 1.


After receiving data with the multiprocessor bit set to 1, the receiving processor with an ID matching the received data continues to receive further incoming data. Multiple processors can send and receive data in this way.

Four formats are available. Parity-bit settings are ignored when a multiprocessor format is selected. For details see table 11-7.

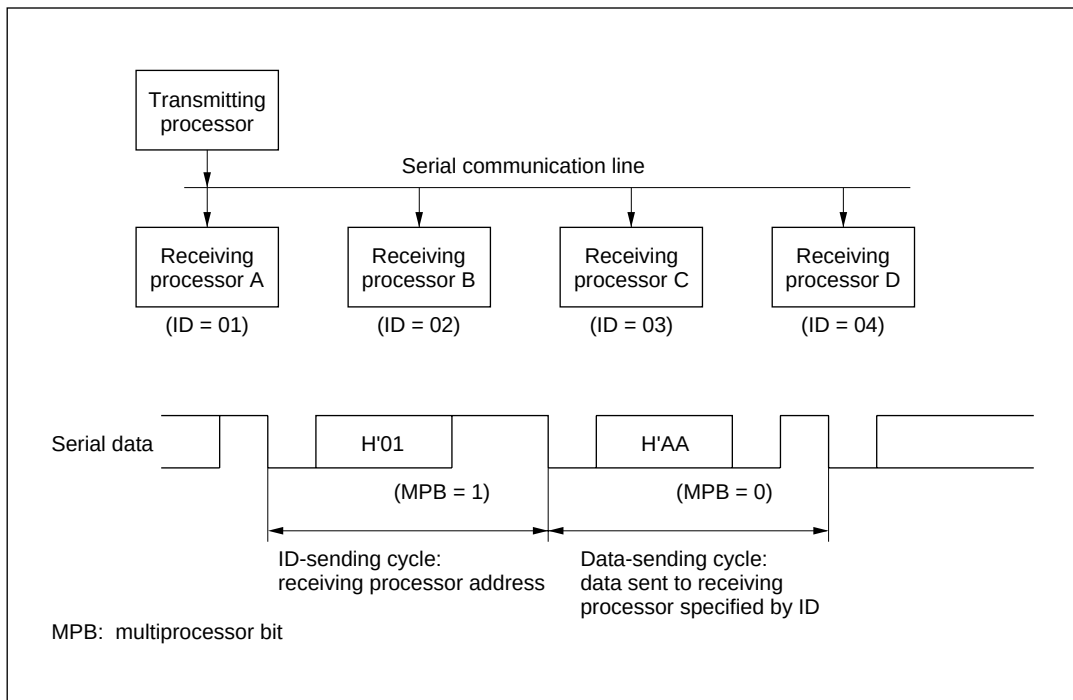


**Figure 11-9 Example of Communication among Processors using Multiprocessor Format (Sending Data H'AA to Receiving Processor A)**

- **Transmitting Multiprocessor Serial Data:** See figures 11-5 and 11-6.
- **Receiving Multiprocessor Serial Data:** Follow the procedure in figure 11-10 for receiving multiprocessor serial data.

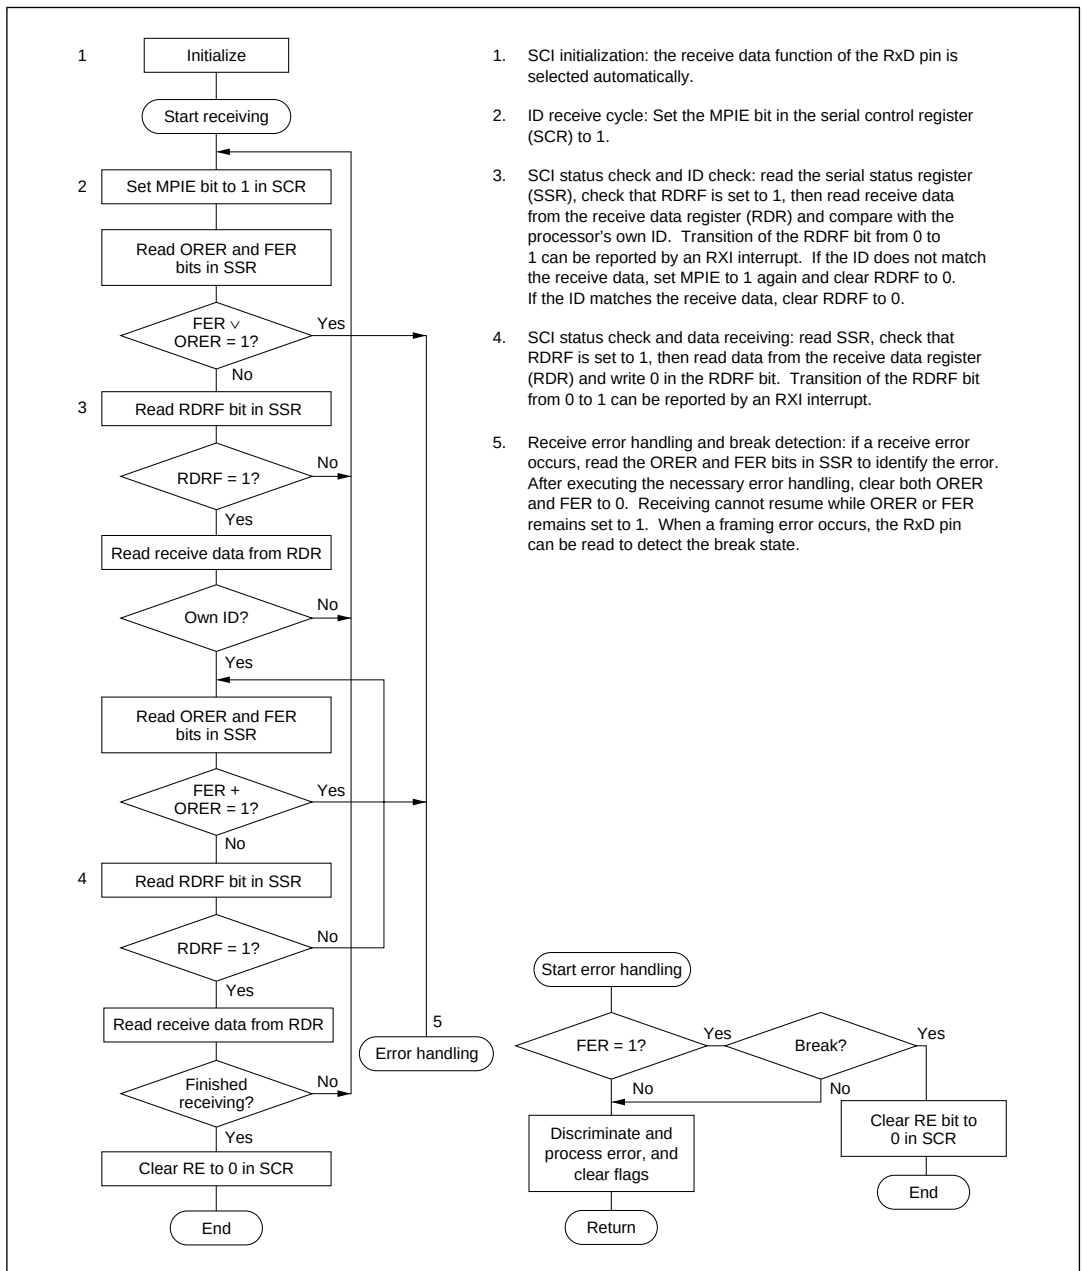

**Figure 11-10 Sample Flowchart for Receiving Multiprocessor Serial Data**

Figure 11-11 shows an example of an SCI receive operation using a multiprocessor format (8-bit data with multiprocessor bit and one stop bit).

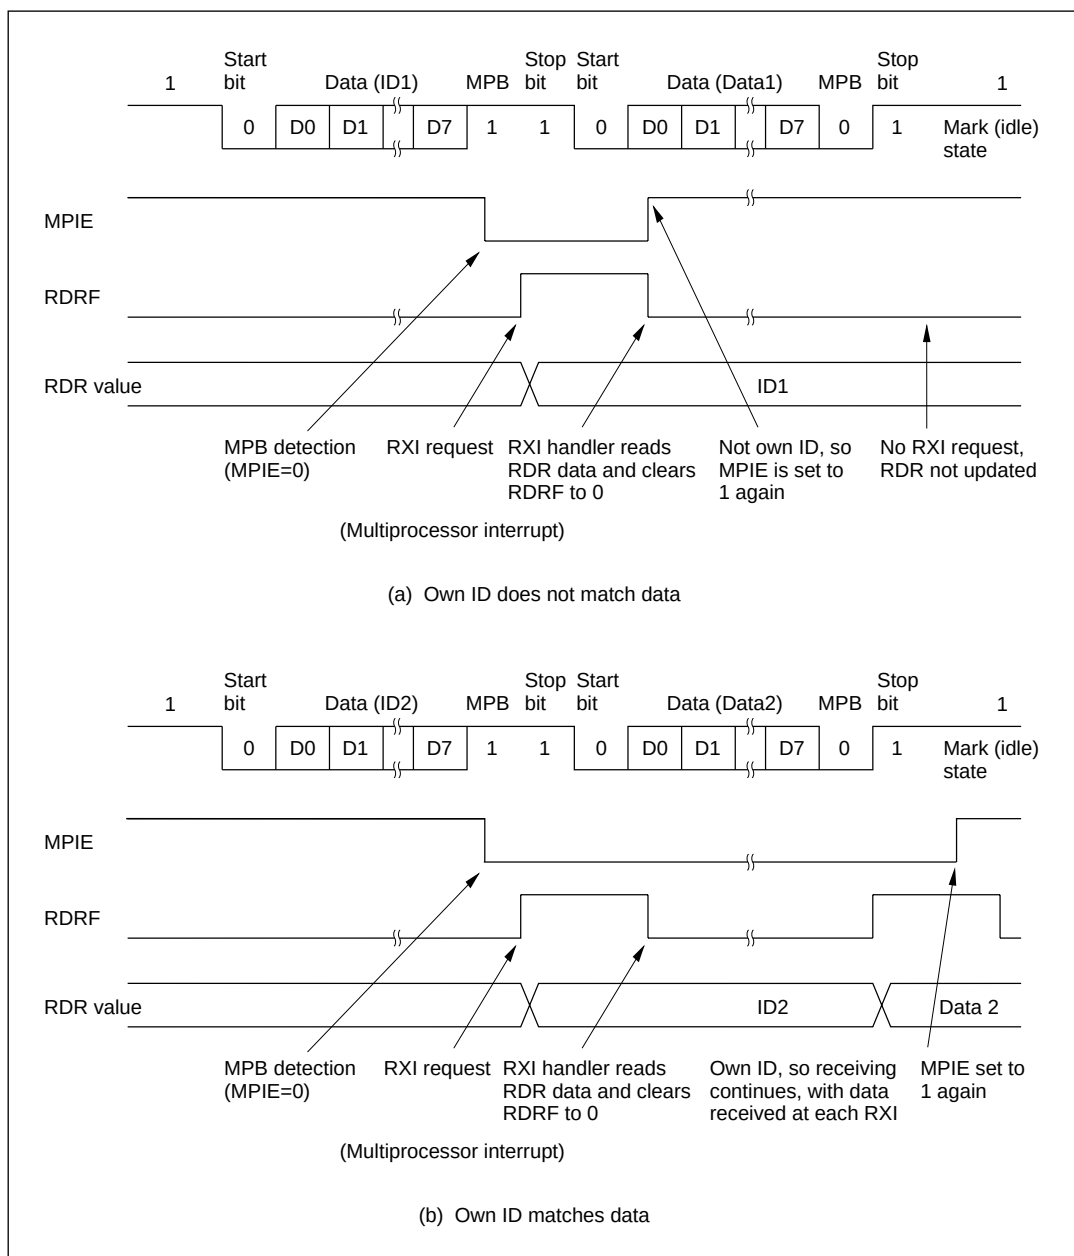


**Figure 11-11 Example of SCI Receive Operation  
(8-Bit Data with Multiprocessor Bit and One Stop Bit)**

### 11.3.3 Synchronous Mode

**(1) Overview:** In synchronous mode, the SCI transmits and receives data in synchronization with clock pulses. This mode is suitable for high-speed serial communication.

The SCI transmitter and receiver share the same clock but are otherwise independent, so full duplex communication is possible. The transmitter and receiver are also double buffered, so continuous transmitting or receiving is possible by reading or writing data while transmitting or receiving is in progress.

Figure 11-12 shows the general format in synchronous serial communication.

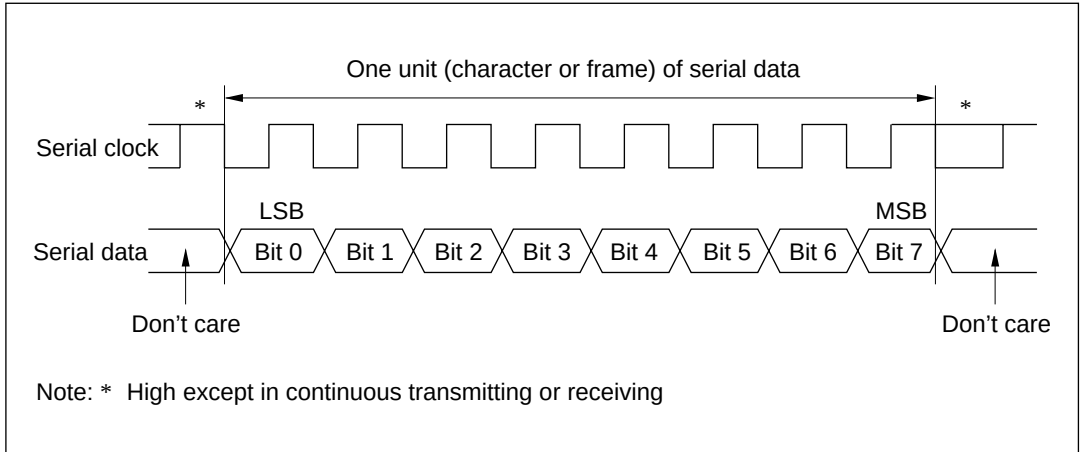

**Figure 11-12 Data Format in Synchronous Communication**

In synchronous serial communication, each data bit is sent on the communication line from one falling edge of the serial clock to the next. Data is received in synchronization with the rising edge of the serial clock.

In each character, the serial data bits are transmitted in order from LSB (first) to MSB (last). After output of the MSB, the communication line remains in the state of the MSB.

- **Communication Format:** The data length is fixed at eight bits. No parity bit or multiprocessor bit can be added.
- **Clock:** An internal clock generated by the on-chip baud rate generator or an external clock input from the SCK pin can be selected by clearing or setting the CKE1 bit in the serial control register (SCR). See table 11-6.


When the SCI operates on an internal clock, it outputs the clock signal at the SCK pin. Eight clock pulses are output per transmitted or received character. When the SCI is not transmitting or receiving, the clock signal remains at the high level.

## **(2) Transmitting and Receiving Data**

- **SCI Initialization:** The SCI must be initialized in the same way as in asynchronous mode. See figure 11-4. When switching from asynchronous mode to synchronous mode, check that the ORER, FER, and PER bits are cleared to 0. Transmitting and receiving cannot begin if ORER, FER, or PER is set to 1.



- **Transmitting Serial Data:** Follow the procedure in figure 11-13 for transmitting serial data.

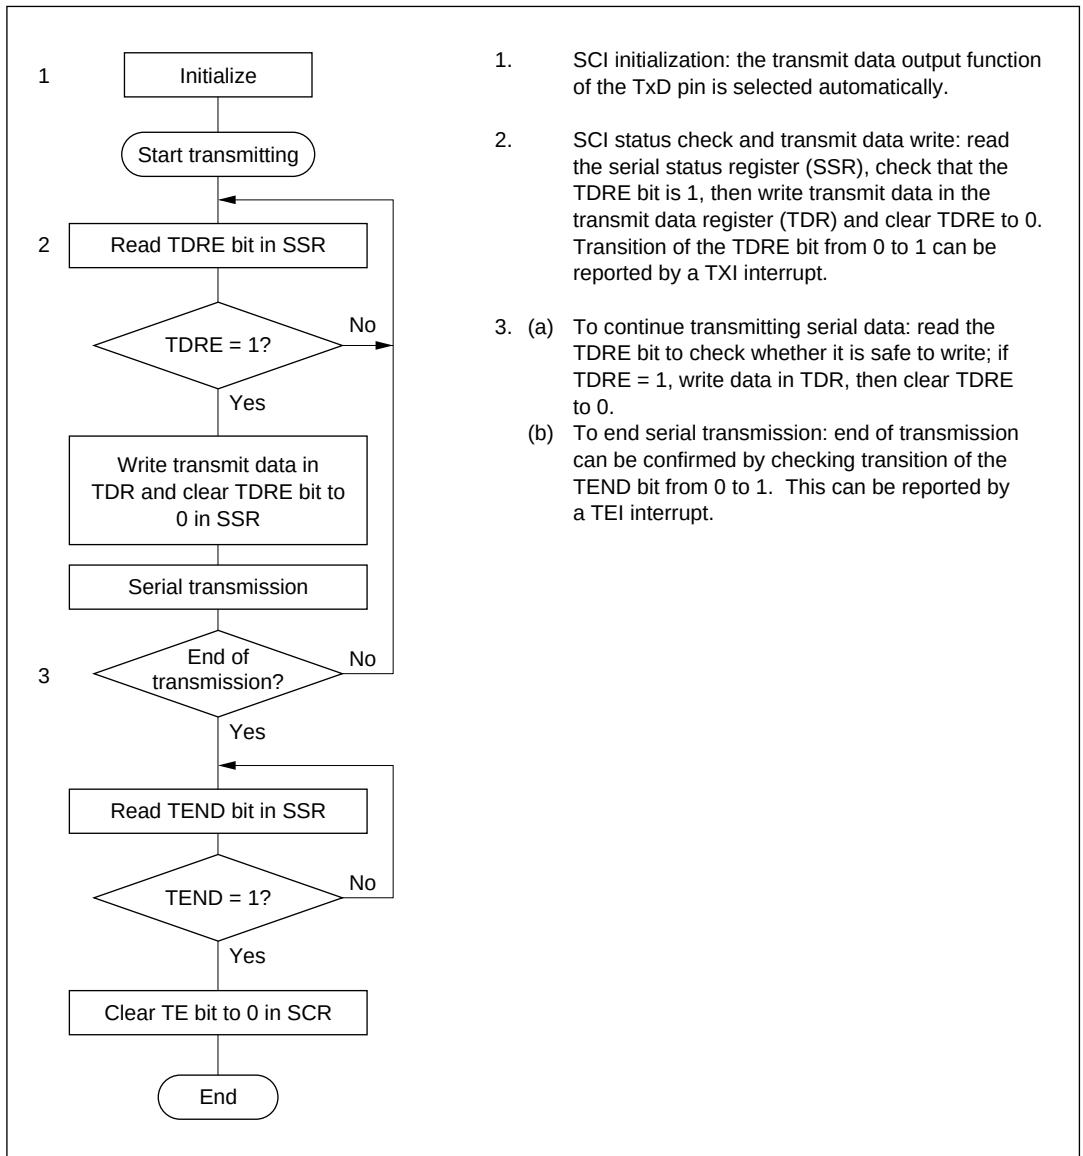

**Figure 11-13 Sample Flowchart for Serial Transmitting**

In transmitting serial data, the SCI operates as follows.


1. The SCI monitors the TDRE bit in SSR. When TDRE is cleared to 0 the SCI recognizes that the transmit data register (TDR) contains new data, and loads this data from TDR into the transmit shift register (TSR).
2. After loading the data from TDR into TSR, the SCI sets the TDRE bit to 1 and starts transmitting. If the TIE bit (TDR-empty interrupt enable) in SCR is set to 1, the SCI requests a TXI interrupt (TDR-empty interrupt) at this time.

If clock output is selected the SCI outputs eight serial clock pulses, triggered by the clearing of the TDRE bit to 0. If an external clock source is selected, the SCI outputs data in synchronization with the input clock.

Data is output from the TxD pin in order from LSB (bit 0) to MSB (bit 7).


3. The SCI checks the TDRE bit when it outputs the MSB (bit 7). If TDRE is 0, the SCI loads data from TDR into TSR, then begins serial transmission of the next frame. If TDRE is 1, the SCI sets the TEND bit in SSR to 1, transmits the MSB, then holds the output in the MSB state. If the TEIE bit (transmit-end interrupt enable) in SCR is set to 1, a TEI interrupt (TSR-empty interrupt) is requested at this time.
4. After the end of serial transmission, the SCK pin is held at the high level.

Figure 11-14 shows an example of SCI transmit operation.

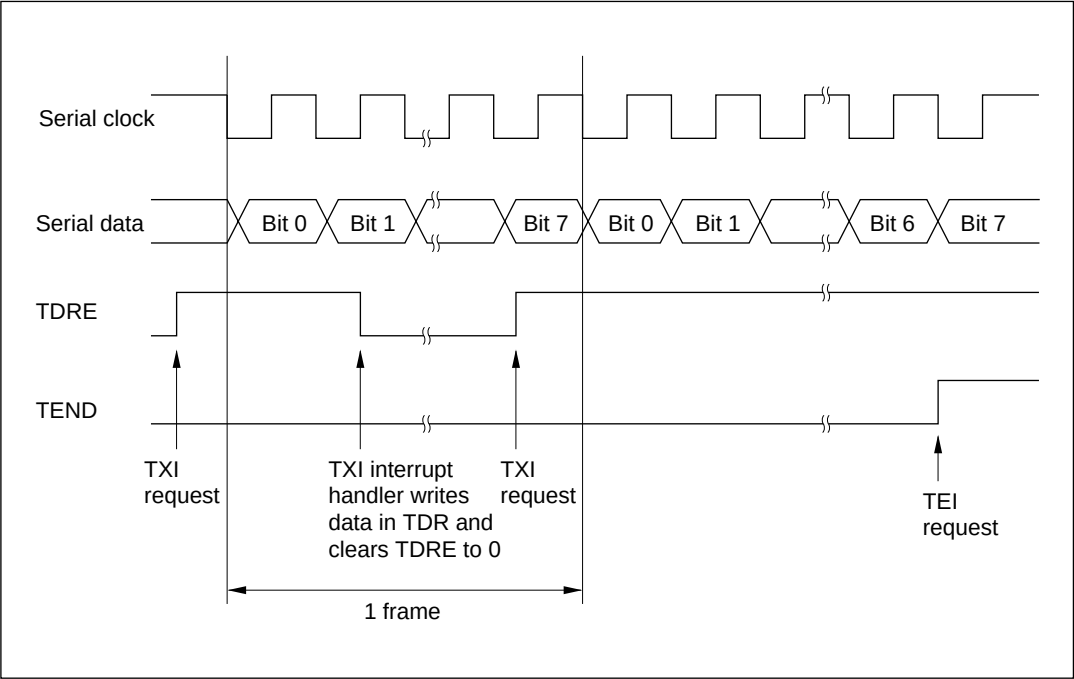

**Figure 11-14 Example of SCI Transmit Operation**

- **Receiving Serial Data:** Follow the procedure in figure 11-15 for receiving serial data. When switching from asynchronous mode to synchronous mode, be sure to check that PER and FER are cleared to 0. If PER or FER is set to 1 the RDRF bit will not be set and both transmitting and receiving will be disabled.

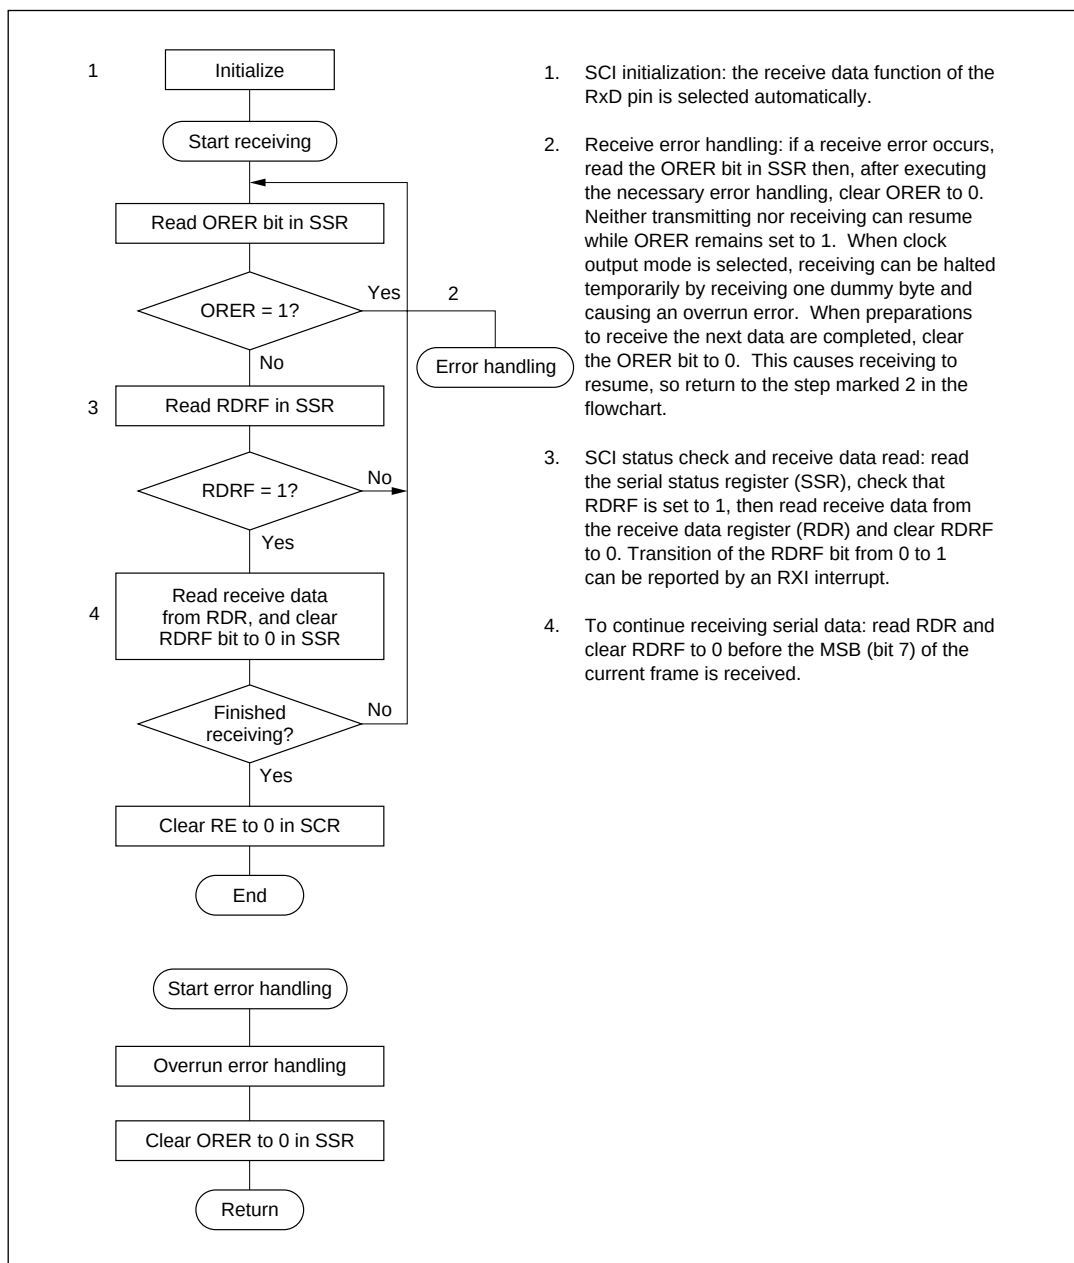

**Figure 11-15 Sample Flowchart for Serial Receiving**

In receiving, the SCI operates as follows.

1. If an external clock is selected, data is input in synchronization with the input clock. If clock output is selected, as soon as the RE bit is set to 1 the SCI begins outputting the serial clock and inputting data. If clock output is stopped because the ORER bit is set to 1, output of the serial clock and input of data resume as soon as the ORER bit is cleared to 0.
2. Receive data is shifted into RSR in order from LSB to MSB.


After receiving the data, the SCI checks that RDRF is 0 so that receive data can be loaded from RSR into RDR. If this check passes, the SCI sets RDRF to 1 and stores the received data in RDR. If the check does not pass (receive error), the SCI operates as indicated in table 11-8.

Note: Both transmitting and receiving are disabled while a receive error flag is set. The RDRF bit is not set to 1. Be sure to clear the error flag.

3. After setting RDRF to 1, if the RIE bit (receive-end interrupt enable) is set to 1 in SCR, the SCI requests an RXI (receive-end) interrupt. If the ORER bit is set to 1 and the RIE bit in SCR is set to 1, the SCI requests an ERI (receive-error) interrupt.


When clock output mode is selected, clock output stops when the RE bit is cleared to 0 or the ORER bit is set to 1. To prevent clock count errors, it is safest to receive one dummy byte and generate an overrun error.

Figure 11-16 shows an example of SCI receive operation.

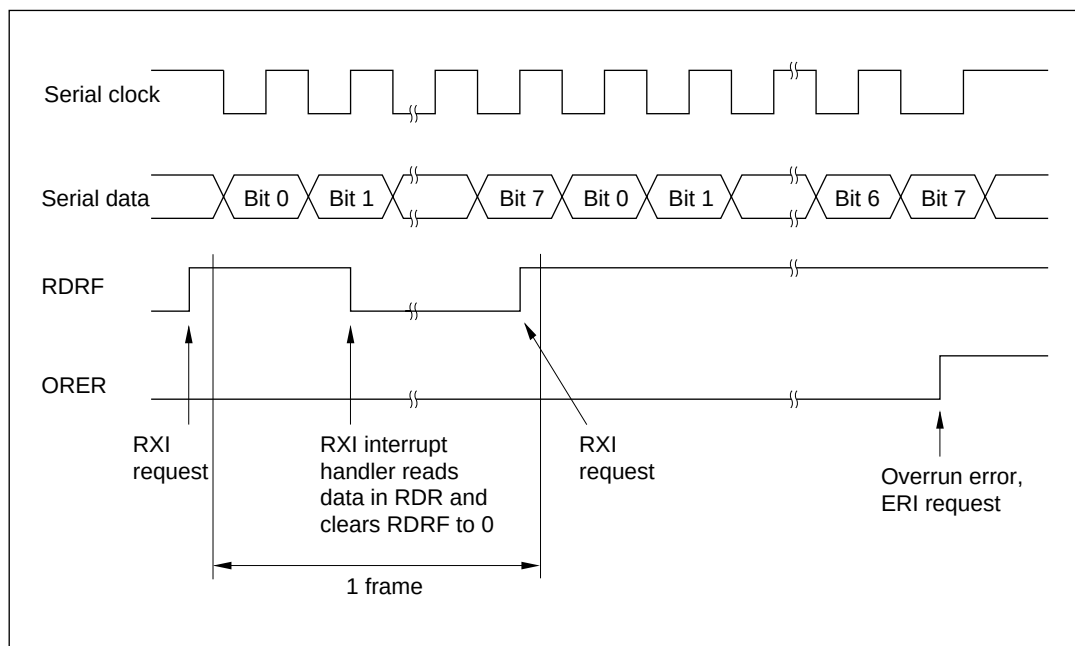

**Figure 11-16 Example of SCI Receive Operation**

- **Transmitting and Receiving Serial Data Simultaneously:** Follow the procedure in figure 11-17 for transmitting and receiving serial data simultaneously. If clock output mode is selected, output of the serial clock begins simultaneously with serial transmission.

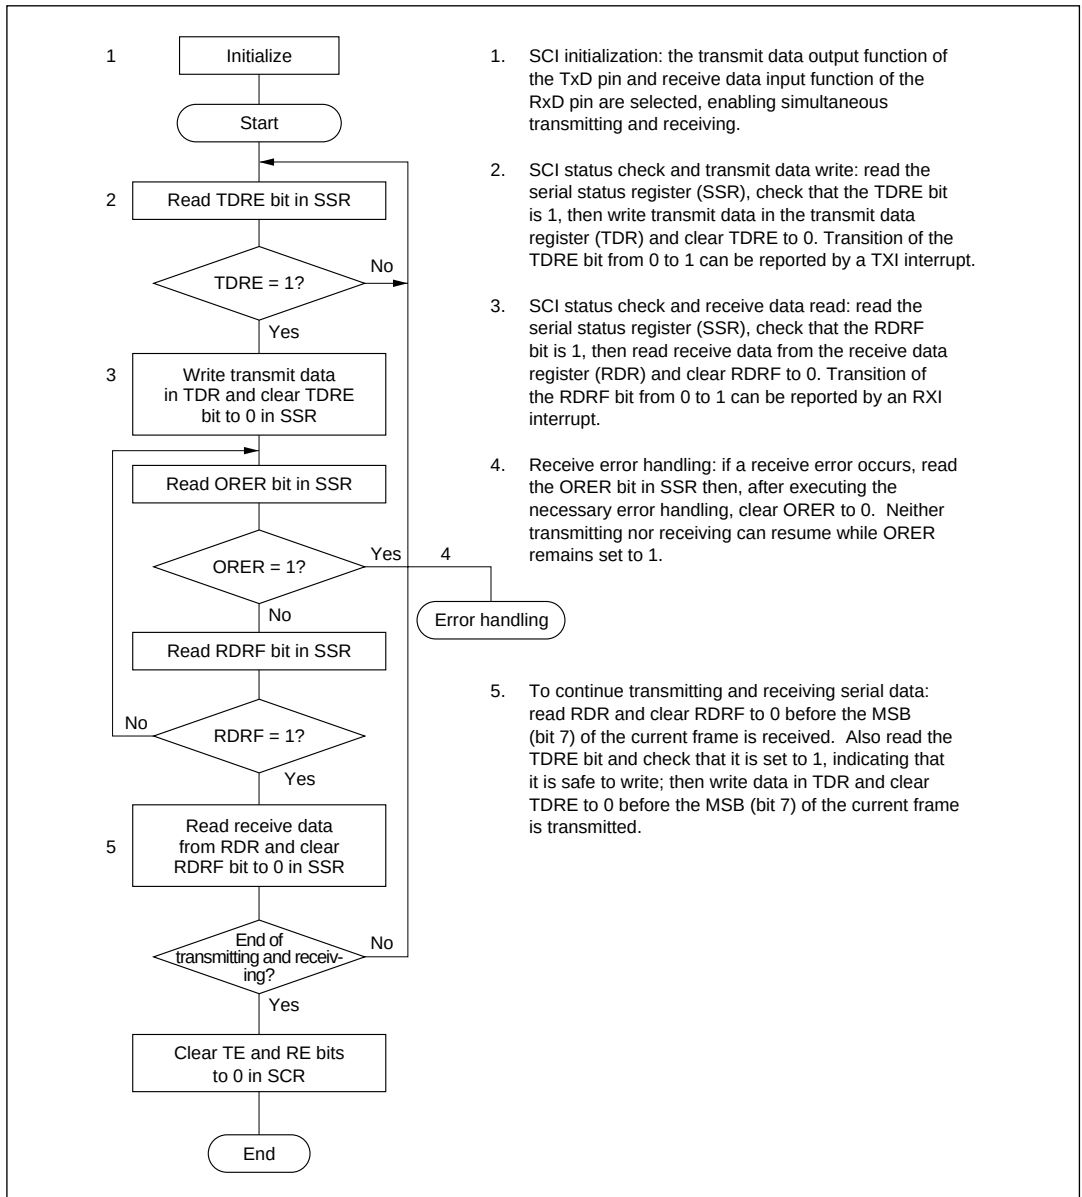

**Figure 11-17 Sample Flowchart for Serial Transmitting and Receiving**

Note: In switching from transmitting or receiving to simultaneous transmitting and receiving, clear both TE and RE to 0, then set both TE and RE to 1 at the same time.

## 11.4 Interrupts

The SCI can request four types of interrupts: ERI, RXI, TXI, and TEI. Table 11-9 indicates the source and priority of these interrupts. The interrupt sources can be enabled or disabled by the TIE, RIE, and TEIE bits in the SCR. Independent signals are sent to the interrupt controller for each interrupt source, except that the receive-error interrupt (ERI) is the logical OR of three sources: overrun error, framing error, and parity error.

The TXI interrupt indicates that the next transmit data can be written. The TEI interrupt indicates that the SCI has stopped transmitting data.

**Table 11-9   SCI Interrupt Sources**

| Interrupt | Description                                 | Priority                                                                          |
|-----------|---------------------------------------------|-----------------------------------------------------------------------------------|
| ERI       | Receive-error interrupt (ORER, FER, or PER) | High                                                                              |
| RxI       | Receive-end interrupt (RDRF)                |  |
| TxI       | TDR-empty interrupt (TDRE)                  |                                                                                   |
| TEI       | TSR-empty interrupt (TEND)                  | Low                                                                               |

## 11.5 Usage Notes

Application programmers should note the following features of the SCI.

- (1) TDR Write:** The TDRE bit in SSR is simply a flag that indicates that the TDR contents have been transferred to TSR. The TDR contents can be rewritten regardless of the TDRE value. If a new byte is written in TDR while the TDRE bit is 0, before the old TDR contents have been moved into TSR, the old byte will be lost. Software should check that the TDRE bit is set to 1 before writing to TDR.
- (2) Multiple Receive Errors:** Table 11-10 lists the values of flag bits in the SSR when multiple receive errors occur, and indicates whether the RSR contents are transferred to RDR.



**Table 11-10 SSR Bit States and Data Transfer when Multiple Receive Errors Occur**

| Receive error                        | SSR Bits |      |     |     | RSR →<br>RDR*2 |
|--------------------------------------|----------|------|-----|-----|----------------|
|                                      | RDRF     | ORER | FER | PER |                |
| Overflow error                       | 1*1      | 1    | 0   | 0   | No             |
| Framing error                        | 0        | 0    | 1   | 0   | Yes            |
| Parity error                         | 0        | 0    | 0   | 1   | Yes            |
| Overflow and framing errors          | 1*1      | 1    | 1   | 0   | No             |
| Overflow and parity errors           | 1*1      | 1    | 0   | 1   | No             |
| Framing and parity errors            | 0        | 0    | 1   | 1   | Yes            |
| Overflow, framing, and parity errors | 1*1      | 1    | 1   | 1   | No             |

Notes: 1. Set to 1 before the overflow error occurs.

2. Yes: The RSR contents are transferred to RDR.

No: The RSR contents are not transferred to RDR.


**(3) Line Break Detection:** When the RxD pin receives a continuous stream of 0's in asynchronous mode (line-break state), a framing error occurs because the SCI detects a 0 stop bit. The value H'00 is transferred from RSR to RDR. Software can detect the line-break state as a framing error accompanied by H'00 data in RDR.

The SCI continues to receive data, so if the FER bit is cleared to 0 another framing error will occur.

**(4) Sampling Timing and Receive Margin in Asynchronous Mode:** The serial clock used by the SCI in asynchronous mode runs at 16 times the baud rate. The falling edge of the start bit is detected by sampling the RxD input on the falling edge of this clock. After the start bit is detected, each bit of receive data in the frame (including the start bit, parity bit, and stop bit or bits) is sampled on the rising edge of the serial clock pulse at the center of the bit. See figure 11-18.

It follows that the receive margin can be calculated as in equation (1).

When the absolute frequency deviation of the clock signal is 0 and the clock duty cycle is 0.5, data can theoretically be received with distortion up to the margin given by equation (2). This is a theoretical limit, however. In practice, system designers should allow a margin of 20% to 30%.

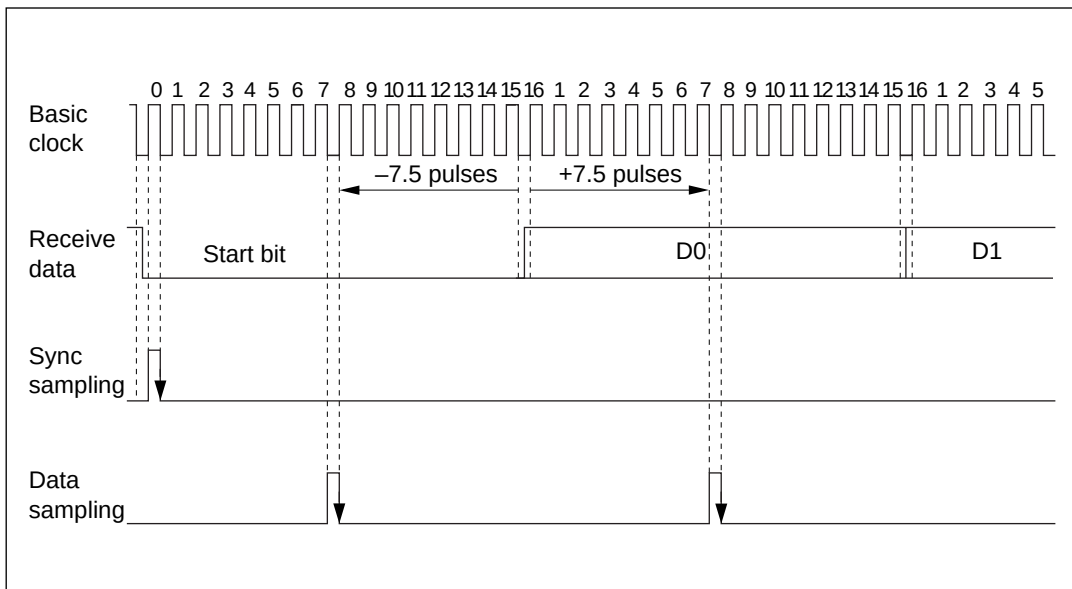

**Figure 11-18 Sampling Timing (Asynchronous Mode)**

$$M = \{ (0.5 - 1/2N) - (D - 0.5)/N - (L - 0.5)F \} \times 100 \text{ [\%]} \quad (1)$$

M: Receive margin

N: Ratio of basic clock to baud rate (N=16)

D: Duty factor of clock—ratio of high pulse width to low width (0.5 to 1.0)

L: Frame length (9 to 12)

F: Absolute clock frequency deviation

When D = 0.5 and F = 0

$$M = (0.5 - 1/2 \times 16) \times 100 \text{ [\%]} = 46.875\% \quad (2)$$



## Section 12 A/D Converter

### 12.1 Overview

The H8/3297 includes a 10-bit successive-approximations A/D converter with a selection of up to eight analog input channels.

#### 12.1.1 Features

A/D converter features are listed below.

- 10-bit resolution
- Eight input channels
- High-speed conversion

Conversion time: minimum 8.4  $\mu$ s per channel (with 16-MHz system clock)

- Two conversion modes

Single mode: A/D conversion of one channel

Scan mode: continuous conversion on one to four channels

- Four 16-bit data registers

A/D conversion results are transferred for storage into data registers corresponding to the channels.

- Sample-and-hold function
- A/D conversion can be externally triggered
- A/D interrupt requested at end of conversion

At the end of A/D conversion, an A/D end interrupt (ADI) can be requested.

### 12.1.2 Block Diagram

Figure 12-1 shows a block diagram of the A/D converter.

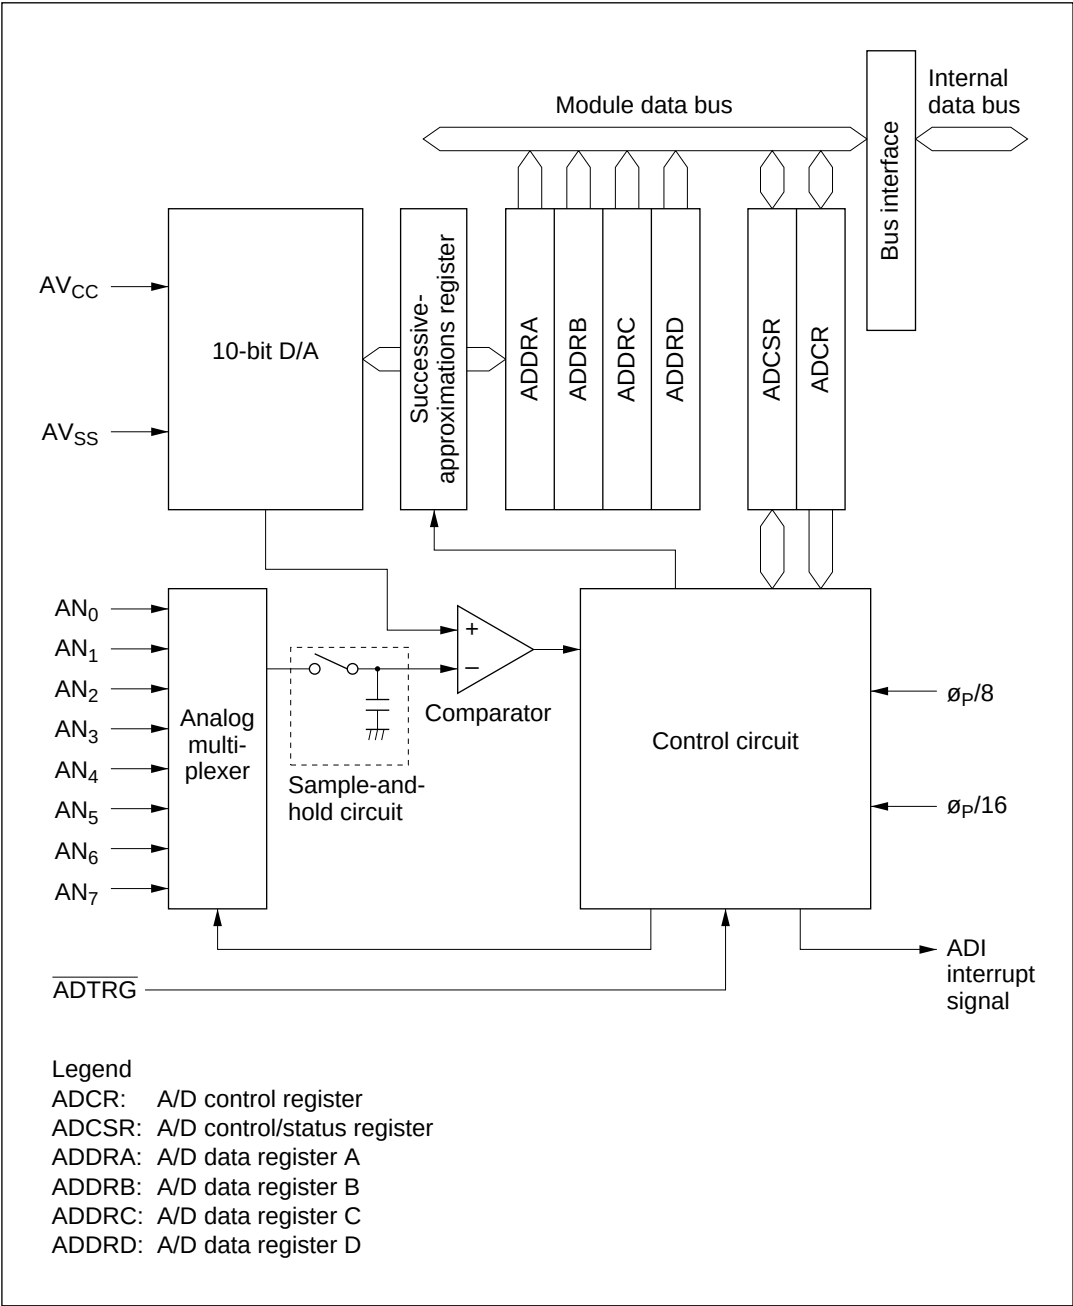


Figure 12-1 A/D Converter Block Diagram

### 12.1.3 Input Pins

Table 12-1 lists the A/D converter’s input pins. The eight analog input pins are divided into two groups: group 0 (AN<sub>0</sub> to AN<sub>3</sub>), and group 1 (AN<sub>4</sub> to AN<sub>7</sub>). AV<sub>CC</sub> and AV<sub>SS</sub> are the power supply for the analog circuits in the A/D converter.

**Table 12-1 A/D Converter Pins**

| Pin Name                       | Abbreviation              | I/O   | Function                                           |
|--------------------------------|---------------------------|-------|----------------------------------------------------|
| Analog power supply pin        | AV <sub>CC</sub>          | Input | Analog power supply                                |
| Analog ground pin              | AV <sub>SS</sub>          | Input | Analog ground and reference voltage                |
| Analog input pin 0             | AN <sub>0</sub>           | Input | Group 0 analog inputs                              |
| Analog input pin 1             | AN <sub>1</sub>           | Input |                                                    |
| Analog input pin 2             | AN <sub>2</sub>           | Input |                                                    |
| Analog input pin 3             | AN <sub>3</sub>           | Input |                                                    |
| Analog input pin 4             | AN <sub>4</sub>           | Input | Group 1 analog inputs                              |
| Analog input pin 5             | AN <sub>5</sub>           | Input |                                                    |
| Analog input pin 6             | AN <sub>6</sub>           | Input |                                                    |
| Analog input pin 7             | AN <sub>7</sub>           | Input |                                                    |
| A/D external trigger input pin | $\overline{\text{ADTRG}}$ | Input | External trigger input for starting A/D conversion |

### 12.1.4 Register Configuration

Table 12-2 summarizes the A/D converter's registers.

**Table 12-2 A/D Converter Registers**

| Name                        | Abbreviation | R/W  | Initial Value | Address |
|-----------------------------|--------------|------|---------------|---------|
| A/D data register A (high)  | ADDRAH       | R    | H'00          | H'FFE0  |
| A/D data register A (low)   | ADDRAL       | R    | H'00          | H'FFE1  |
| A/D data register B (high)  | ADDRBH       | R    | H'00          | H'FFE2  |
| A/D data register B (low)   | ADDRBL       | R    | H'00          | H'FFE3  |
| A/D data register C (high)  | ADDRCH       | R    | H'00          | H'FFE4  |
| A/D data register C (low)   | ADDRCL       | R    | H'00          | H'FFE5  |
| A/D data register D (high)  | ADDRDH       | R    | H'00          | H'FFE6  |
| A/D data register D (low)   | ADDRDL       | R    | H'00          | H'FFE7  |
| A/D control/status register | ADCSR        | R/W* | H'00          | H'FFE8  |
| A/D control register        | ADCR         | R/W  | H'7F          | H'FFE9  |

Note: \* Only 0 can be written in bit 7, to clear the flag.

# 12.2 Register Descriptions

## 12.2.1 A/D Data Registers A to D (ADDRA to ADDR D)

|               |     |     |     |     |     |     |     |     |     |     |   |   |   |   |   |   |
|---------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|---|---|---|---|---|---|
| Bit           | 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   | 7   | 6   | 5 | 4 | 3 | 2 | 1 | 0 |
|               | AD9 | AD8 | AD7 | AD6 | AD5 | AD4 | AD3 | AD2 | AD1 | AD0 | — | — | — | — | — | — |
| Initial value | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0 | 0 | 0 | 0 | 0 | 0 |
| Read/Write    | R   | R   | R   | R   | R   | R   | R   | R   | R   | R   | R | R | R | R | R | R |

**Bits 15 to 6—A/D Conversion Data (AD9 to AD0):** 10-bit data giving an A/D conversion result.

**Bits 5 to 0—Reserved:** These bits cannot be modified and are always read as 0.

The four A/D data registers (ADDRA to ADDR D) are 16-bit read-only registers that store the results of A/D conversion.

An A/D conversion produces 10-bit data, which is transferred for storage into the A/D data register corresponding to the selected channel. The upper 8 bits of the result are stored in the upper byte of the A/D data register. The lower 2 bits are stored in the lower byte. Bits 5 to 0 of an A/D data register are reserved bits that always read 0. Table 12-3 indicates the pairings of analog input channels and A/D data registers.

The CPU can always read and write the A/D data registers. The upper byte can be read directly, but the lower byte is read through a temporary register (TEMP). For details see section 12.3, CPU Interface.

The A/D data registers are initialized to H'0000 by a reset and in standby mode.

**Table 12-3 Analog Input Channels and A/D Data Registers**

| Analog Input Channel |                 | A/D Data Register |
|----------------------|-----------------|-------------------|
| Group 0              | Group 1         |                   |
| AN <sub>0</sub>      | AN <sub>4</sub> | ADDRA             |
| AN <sub>1</sub>      | AN <sub>5</sub> | ADDRB             |
| AN <sub>2</sub>      | AN <sub>6</sub> | ADDRC             |
| AN <sub>3</sub>      | AN <sub>7</sub> | ADDRD             |



### 12.2.2 A/D Control/Status Register (ADCSR)

| Bit           | 7      | 6    | 5    | 4    | 3   | 2   | 1   | 0   |
|---------------|--------|------|------|------|-----|-----|-----|-----|
|               | ADF    | ADIE | ADST | SCAN | CKS | CH2 | CH1 | CH0 |
| Initial value | 0      | 0    | 0    | 0    | 0   | 0   | 0   | 0   |
| Read/Write    | R/(W)* | R/W  | R/W  | R/W  | R/W | R/W | R/W | R/W |

Note: \* Only 0 can be written, to clear the flag.

ADCSR is an 8-bit readable/writable register that selects the mode and controls the A/D converter. ADCSR is initialized to H'00 by a reset and in standby mode.

**Bit 7—A/D End Flag (ADF):** Indicates the end of A/D conversion.

| Bit 7<br>ADF | Description                                                                                                               |
|--------------|---------------------------------------------------------------------------------------------------------------------------|
| 0            | [Clearing condition]<br>Cleared by reading ADF while ADF = 1, then writing 0 in ADF (Initial value)                       |
| 1            | [Setting conditions]<br>1. Single mode: A/D conversion ends<br>2. Scan mode: A/D conversion ends in all selected channels |

**Bit 6—A/D Interrupt Enable (ADIE):** Enables or disables the interrupt (ADI) requested at the end of A/D conversion.

| Bit 6<br>ADIE | Description                                                 |
|---------------|-------------------------------------------------------------|
| 0             | A/D end interrupt request (ADI) is disabled (Initial value) |
| 1             | A/D end interrupt request (ADI) is enabled                  |

**Bit 5—A/D Start (ADST):** Starts or stops A/D conversion. The ADST bit remains set to 1 during A/D conversion. It can also be set to 1 by external trigger input at the ADTRG pin.

| Bit 5<br>ADST | Description                                                                                                                                                                                                                                                                      |
|---------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0             | A/D conversion is stopped (Initial value)                                                                                                                                                                                                                                        |
| 1             | 1. Single mode: A/D conversion starts; ADST is automatically cleared to 0 when conversion ends<br>2. Scan mode: A/D conversion starts and continues, cycling among the selected channels, until ADST is cleared to 0 by software, by a reset, or by a transition to standby mode |

**Bit 4—Scan Mode (SCAN):** Selects single mode or scan mode. For further information on operation in these modes, see section 12.4, Operation. Clear the ADST bit to 0 before switching the conversion mode.

**Bit 4**

| SCAN | Description                 |
|------|-----------------------------|
| 0    | Single mode (Initial value) |
| 1    | Scan mode                   |

**Bit 3—Clock Select (CKS):** Selects the A/D conversion time. When  $\varnothing_P = \varnothing/2$ , the conversion time doubles. Clear the ADST bit to 0 before switching the conversion time.

**Bit 3**

| CKS | Description                                                                                  |
|-----|----------------------------------------------------------------------------------------------|
| 0   | Conversion time = 266 states (maximum) (when $\varnothing_P = \varnothing$ ) (Initial value) |
| 1   | Conversion time = 134 states (maximum) (when $\varnothing_P = \varnothing$ )                 |

**Bits 2 to 0—Channel Select 2 to 0 (CH2 to CH0):** These bits and the SCAN bit select the analog input channels. Clear the ADST bit to 0 before changing the channel selection.

| Group Selection | Channel Selection |     | Description                     |                                    |
|-----------------|-------------------|-----|---------------------------------|------------------------------------|
| CH2             | CH1               | CH0 | Single Mode                     | Scan Mode                          |
| 0               | 0                 | 0   | AN <sub>0</sub> (initial value) | AN <sub>0</sub>                    |
|                 | 0                 | 1   | AN <sub>1</sub>                 | AN <sub>0</sub> , AN <sub>1</sub>  |
|                 | 1                 | 0   | AN <sub>2</sub>                 | AN <sub>0</sub> to AN <sub>2</sub> |
|                 | 1                 | 1   | AN <sub>3</sub>                 | AN <sub>0</sub> to AN <sub>3</sub> |
| 1               | 0                 | 0   | AN <sub>4</sub>                 | AN <sub>4</sub>                    |
|                 | 0                 | 1   | AN <sub>5</sub>                 | AN <sub>4</sub> , AN <sub>5</sub>  |
|                 | 1                 | 0   | AN <sub>6</sub>                 | AN <sub>4</sub> to AN <sub>6</sub> |
|                 | 1                 | 1   | AN <sub>7</sub>                 | AN <sub>4</sub> to AN <sub>7</sub> |

12.2.3 A/D Control Register (ADCR)

|               |      |   |   |   |   |   |   |   |
|---------------|------|---|---|---|---|---|---|---|
| Bit           | 7    | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|               | TRGE | — | — | — | — | — | — | — |
| Initial value | 0    | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| Read/Write    | R/W  | — | — | — | — | — | — | — |

ADCR is an 8-bit readable/writable register that enables or disables external triggering of A/D conversion. ADCR is initialized to H'7F by a reset and in standby mode.

**Bit 7—Trigger Enable (TRGE):** Enables or disables external triggering of A/D conversion.

| Bit 7<br>TRGE | Description                                                                                                                                             |
|---------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0             | A/D conversion cannot be externally triggered (Initial value)                                                                                           |
| 1             | Enables start of A/D conversion by the external trigger signal (ADTRG)<br>(A/D conversion can be started either by an external trigger or by software.) |

**Bits 6 to 0—Reserved:** These bits cannot be modified, and are always read as 1.


# 12.3 CPU Interface

ADDRA to ADDR D are 16-bit registers, but they are connected to the CPU by an 8-bit data bus. Therefore, although the upper byte can be accessed directly by the CPU, the lower byte is read through an 8-bit temporary register (TEMP).

An A/D data register is read as follows. When the upper byte is read, the upper-byte value is transferred directly to the CPU and the lower-byte value is transferred into TEMP. Next, when the lower byte is read, the TEMP contents are transferred to the CPU.

When reading an A/D data register, always read the upper byte before the lower byte. It is possible to read only the upper byte, but if only the lower byte is read, incorrect data may be obtained.

Figure 12-2 shows the data flow for access to an A/D data register.

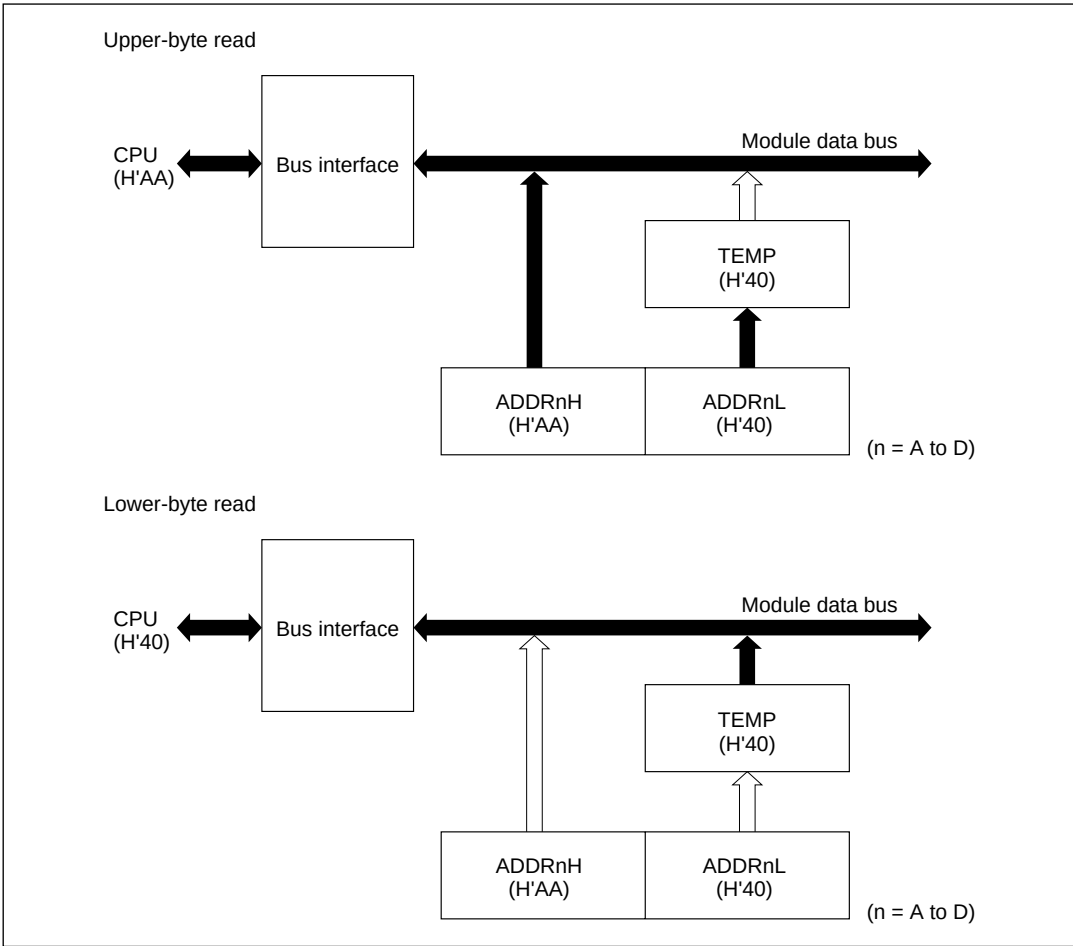

**Figure 12-2 A/D Data Register Access Operation (Reading H'AA40)**

## 12.4 Operation

The A/D converter operates by successive approximations with 10-bit resolution. It has two operating modes: single mode and scan mode.

### 12.4.1 Single Mode (SCAN = 0)

Single mode should be selected when only one A/D conversion on one channel is required. A/D conversion starts when the ADST bit is set to 1 by software, or by external trigger input. The ADST bit remains set to 1 during A/D conversion and is automatically cleared to 0 when conversion ends.


When conversion ends the ADF bit is set to 1. If the ADIE bit is also set to 1, an ADI interrupt is requested at this time. To clear the ADF flag to 0, first read ADCSR, then write 0 in ADF.

When the mode or analog input channel must be switched during analog conversion, to prevent incorrect operation, first clear the ADST bit to 0 in ADCSR to halt A/D conversion. After making the necessary changes, set the ADST bit to 1 to start A/D conversion again. The ADST bit can be set at the same time as the mode or channel is changed.

Typical operations when channel 1 (AN<sub>1</sub>) is selected in single mode are described next. Figure 12-3 shows a timing diagram for this example.

1. Single mode is selected (SCAN = 0), input channel AN<sub>1</sub> is selected (CH2 = CH1 = 0, CH0 = 1), the A/D interrupt is enabled (ADIE = 1), and A/D conversion is started (ADST = 1).
2. When A/D conversion is completed, the result is transferred into ADDR<sub>B</sub>. At the same time the ADF flag is set to 1, the ADST bit is cleared to 0, and the A/D converter becomes idle.
3. Since ADF = 1 and ADIE = 1, an ADI interrupt is requested.
4. The A/D interrupt handling routine starts.
5. The routine reads ADCSR, then writes 0 in the ADF flag.
6. The routine reads and processes the conversion result (ADDR<sub>B</sub>).
7. Execution of the A/D interrupt handling routine ends.

After that, if the ADST bit is set to 1, A/D conversion starts again and steps 2 to 7 are repeated.

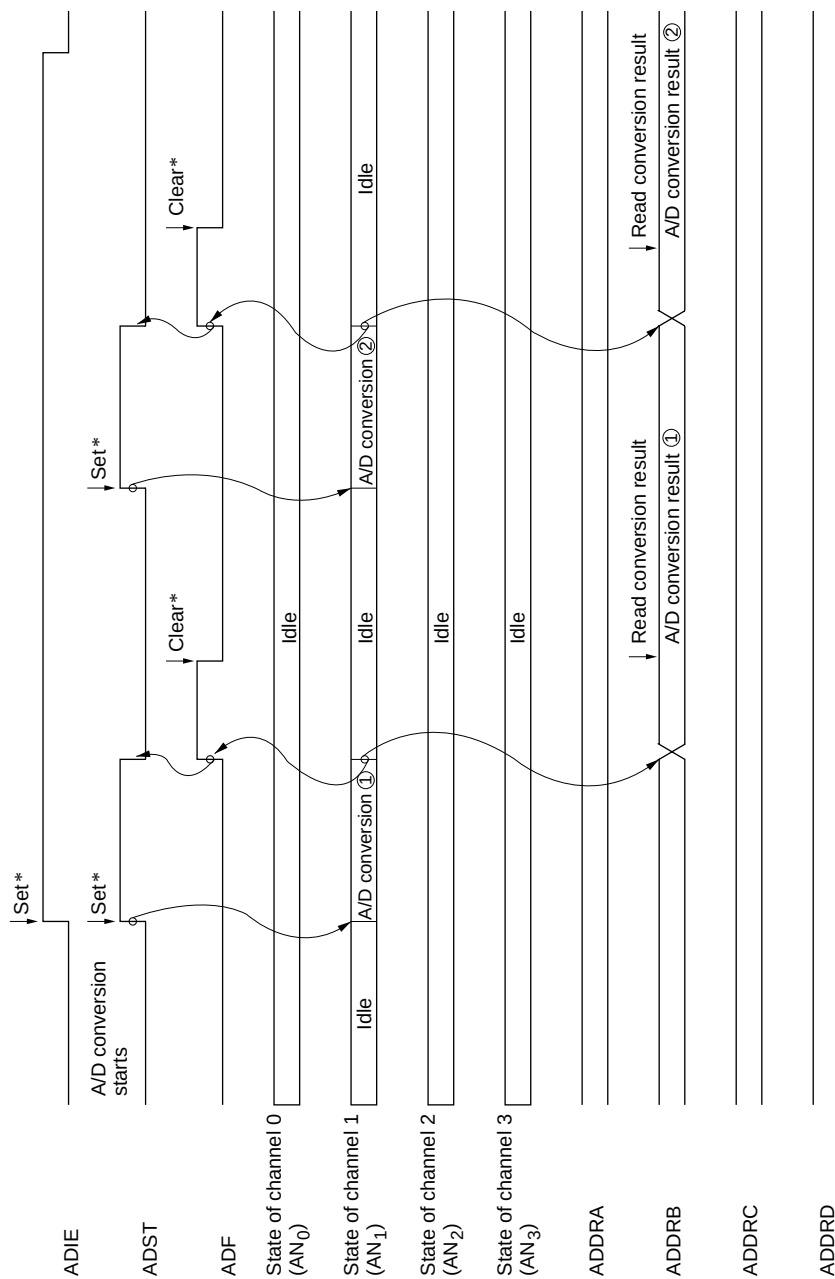

Note: \*Vertical arrows (↓) indicate instructions executed by software.

**Figure 12-3 Example of A/D Converter Operation (Single Mode, Channel 1 Selected)**


### 12.4.2 Scan Mode (SCAN = 1)

Scan mode is useful for monitoring analog inputs in a group of one or more channels. When the ADST bit is set to 1 by software or external trigger input, A/D conversion starts on the first channel in the group ( $AN_0$  when  $CH2 = 0$ ,  $AN_4$  when  $CH2 = 1$ ). When two or more channels are selected, after conversion of the first channel ends, conversion of the second channel ( $AN_1$  or  $AN_5$ ) starts immediately. A/D conversion continues cyclically on the selected channels until the ADST bit is cleared to 0. The conversion results are transferred for storage into the A/D data registers corresponding to the channels.

When the mode or analog input channel selection must be changed during analog conversion, to prevent incorrect operation, first clear the ADST bit to 0 in ADCSR to halt A/D conversion. After making the necessary changes, set the ADST bit to 1. A/D conversion will start again from the first channel in the group. The ADST bit can be set at the same time as the mode or channel selection is changed.

Typical operations when three channels in group 0 ( $AN_0$  to  $AN_2$ ) are selected in scan mode are described next. Figure 12-4 shows a timing diagram for this example.

1. Scan mode is selected ( $SCAN = 1$ ), scan group 0 is selected ( $CH2 = 0$ ), analog input channels  $AN_0$  to  $AN_2$  are selected ( $CH1 = 1$ ,  $CH0 = 0$ ), and A/D conversion is started ( $ADST = 1$ ).
2. When A/D conversion of the first channel ( $AN_0$ ) is completed, the result is transferred into ADDRA. Next, conversion of the second channel ( $AN_1$ ) starts automatically.
3. Conversion proceeds in the same way through the third channel ( $AN_2$ ).
4. When conversion of all selected channels ( $AN_0$  to  $AN_2$ ) is completed, the ADF flag is set to 1 and conversion of the first channel ( $AN_0$ ) starts again. If the ADIE bit is set to 1, an ADI interrupt is requested at this time.
5. Steps 2 to 4 are repeated as long as the ADST bit remains set to 1. When the ADST bit is cleared to 0, A/D conversion stops. After that, if the ADST bit is set to 1, A/D conversion starts again from the first channel ( $AN_0$ ).

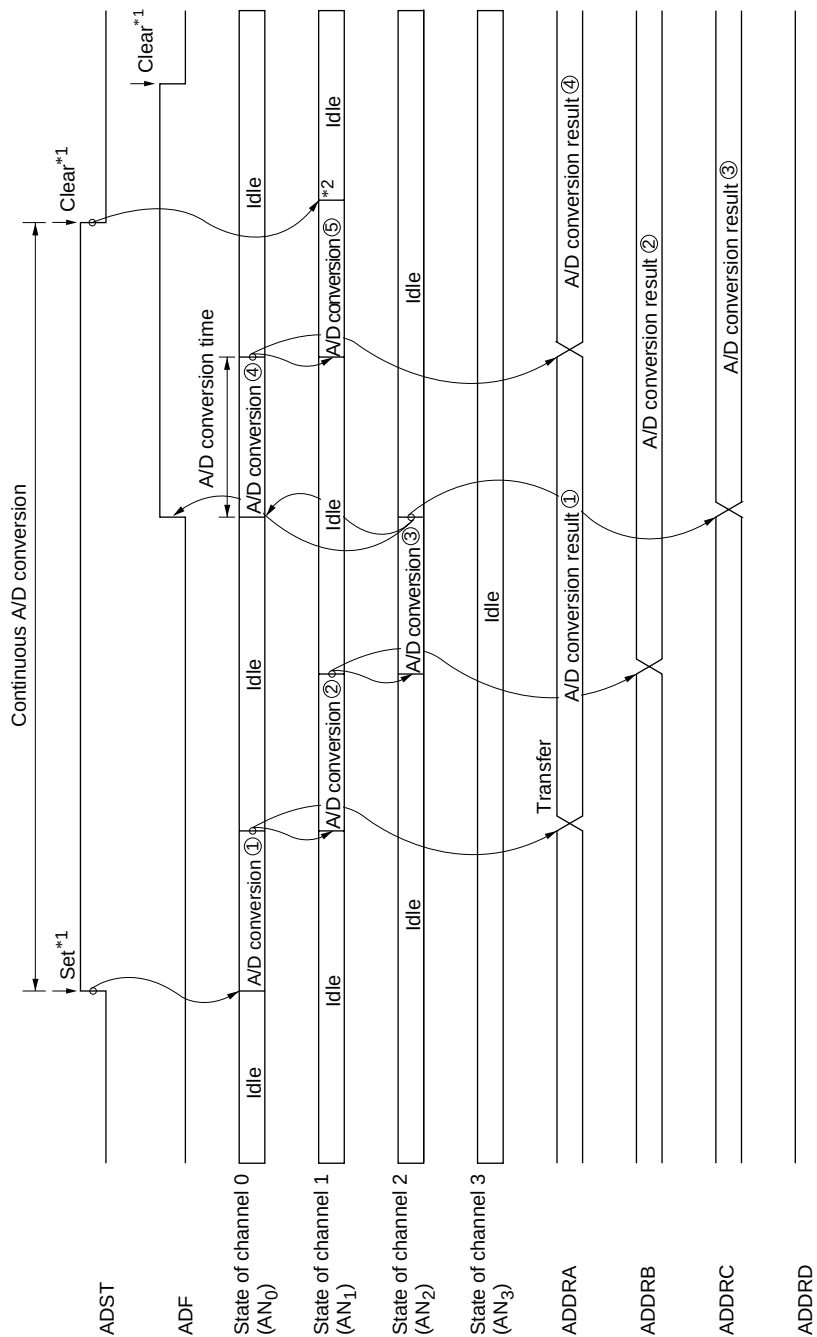

- Notes:
1. Vertical arrows (↓) indicate instructions executed by software.
  2. Data currently being converted is ignored.

**Figure 12-4 Example of A/D Converter Operation (Scan Mode, Channels AN<sub>0</sub> to AN<sub>2</sub> Selected)**



### 12.4.3 Input Sampling and A/D Conversion Time

The A/D converter has a built-in sample-and-hold circuit. The A/D converter samples the analog input at a time  $t_D$  after the ADST bit is set to 1, then starts conversion. Figure 12-5 shows the A/D conversion timing. Table 12-4 indicates the A/D conversion time.

As indicated in figure 12-5, the A/D conversion time includes  $t_D$  and the input sampling time. The length of  $t_D$  varies depending on the timing of the write access to ADCSR. The total conversion time therefore varies within the ranges indicated in table 12-4.

In scan mode, the values given in table 12-4 apply to the first conversion. In the second and subsequent conversions the conversion time is fixed at 256 states when  $CKS = 0$  or 128 states when  $CKS = 1$  (when  $\phi_P = \emptyset$ ).

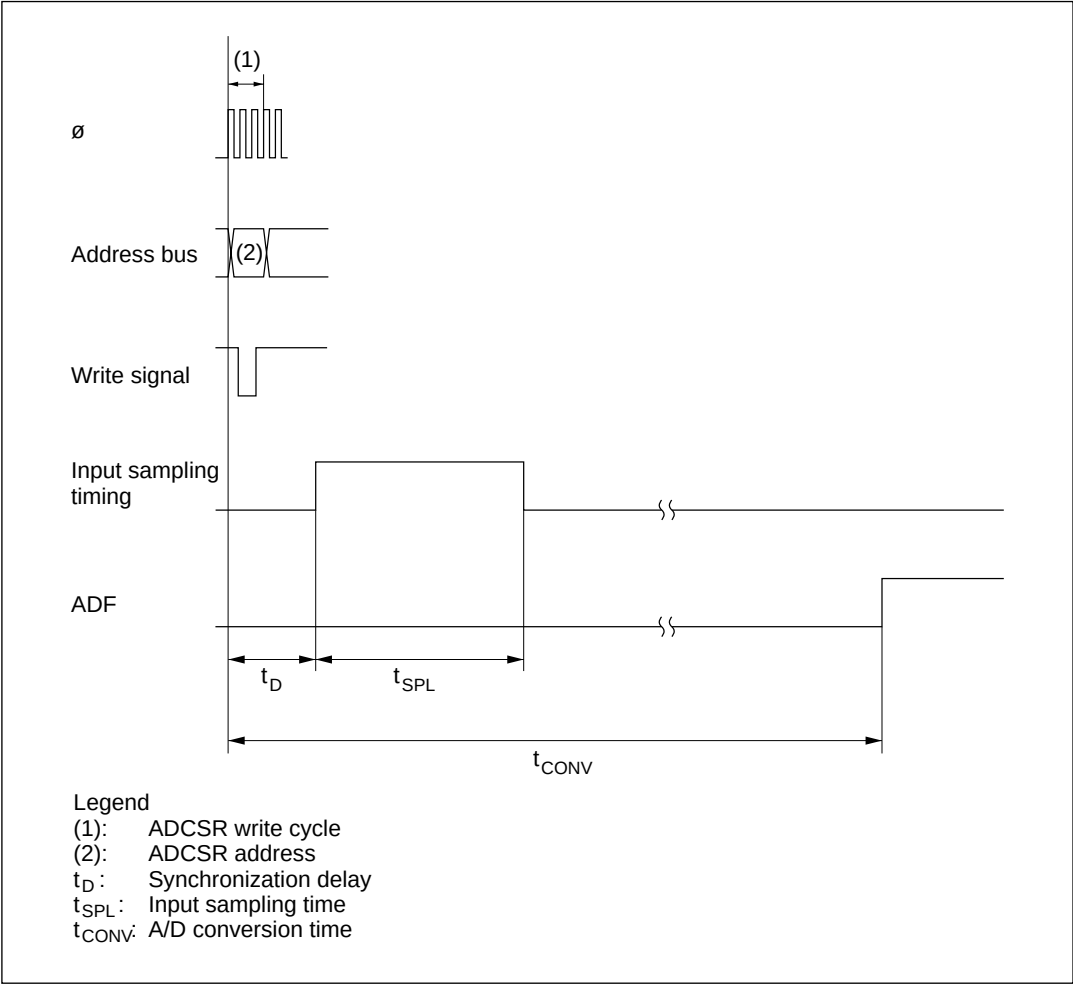


Figure 12-5 A/D Conversion Timing

**Table 12-4 A/D Conversion Time (Single Mode)**


|                       | Symbol     | CKS = 0 |     |     | CKS = 1 |     |     |
|-----------------------|------------|---------|-----|-----|---------|-----|-----|
|                       |            | Min     | Typ | Max | Min     | Typ | Max |
| Synchronization delay | $t_D$      | 10      | —   | 17  | 6       | —   | 9   |
| Input sampling time*  | $t_{SPL}$  | —       | 80  | —   | —       | 40  | —   |
| A/D conversion time*  | $t_{CONV}$ | 259     | —   | 266 | 131     | —   | 134 |

Note: Values in the table are numbers of states.

\* Values for when  $\varnothing_P = \varnothing$ . When  $\varnothing_P = \varnothing/2$ , values are double those given in the table.

**12.4.4 External Trigger Input Timing**

A/D conversion can be externally triggered. When the TRGE bit is set to 1 in ADCR, external trigger input is enabled at the  $\overline{ADTRG}$  pin. A high-to-low transition at the  $\overline{ADTRG}$  pin sets the ADST bit to 1 in ADCSR, starting A/D conversion. Other operations, in both single and scan modes, are the same as if the ADST bit had been set to 1 by software. Figure 12-6 shows the timing.

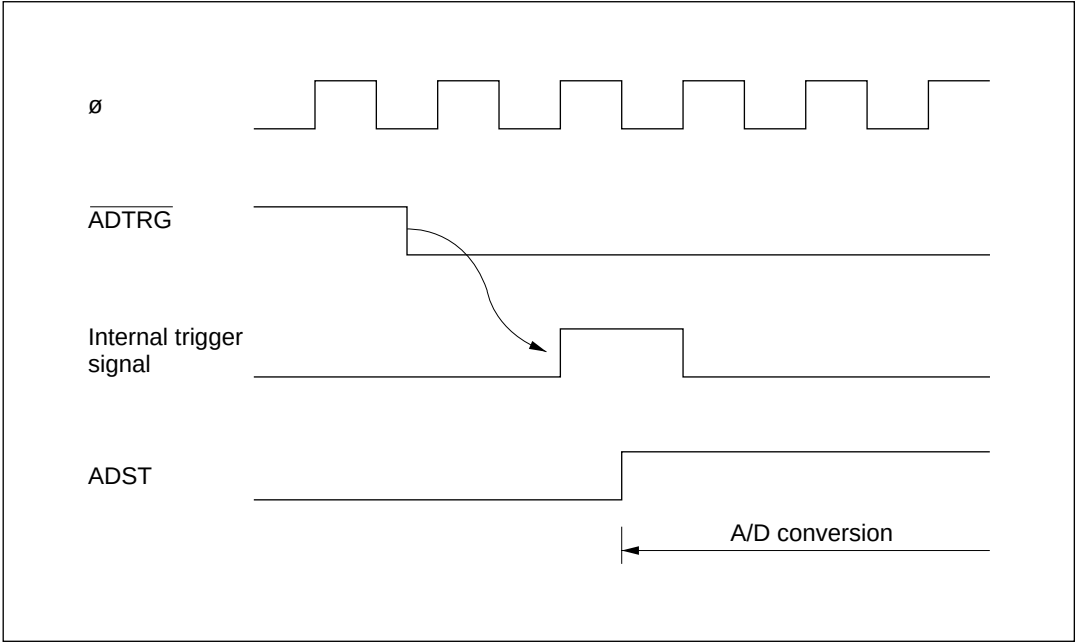

**Figure 12-6 External Trigger Input Timing**

**12.5 Interrupts**

The A/D converter generates an interrupt (ADI) at the end of A/D conversion. The ADI interrupt request can be enabled or disabled by the ADIE bit in ADCSR.

## 12.6 Usage Notes

The following points should be noted when using the A/D converter.

1. Analog input voltage range

Ensure that the voltage applied to analog input pin  $AN_n$  (where  $n = 0$  to  $7$ ) during A/D conversion is in the range  $AV_{SS} \leq AN_n \leq AV_{CC}$ .

2.  $AV_{CC}$  and  $AV_{SS}$  input voltages

For the  $AV_{CC}$  input voltage, set  $AV_{SS} = V_{SS}$ . When the A/D converter is not used, set  $AV_{CC} = V_{CC}$  and  $AV_{SS} = V_{SS}$ .


## 13.1 Overview

The H8/3297 and H8/3296 have 2 kbytes of on-chip static RAM. The H8/3294 has 1 kbyte. The H8/3292 has 512 bytes. The RAM is connected to the CPU by a 16-bit data bus. Both byte and word access to the on-chip RAM are performed in two states, enabling rapid data transfer and instruction execution.

The on-chip RAM is assigned to addresses H'F780 to H'FF7F in the address space of the H8/3297 and H8/3296, addresses H'FB80 to H'FF7F in the address space of the H8/3294, and addresses H'FD80 to H'FF7F in the address space of the H8/3292. The RAME bit in the system control register (SYSCR) can enable or disable the on-chip RAM.

### 13.1.1 Block Diagram

Figure 13-1 is a block diagram of the on-chip RAM.

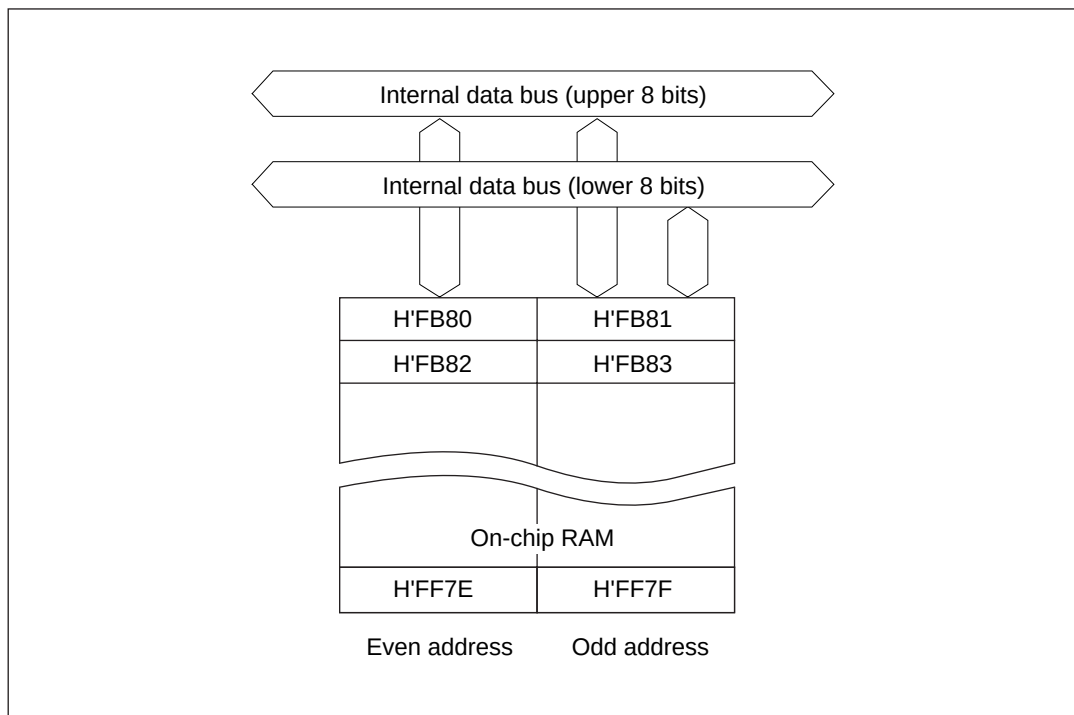

**Figure 13-1 Block Diagram of On-Chip RAM (H8/3297)**

13.1.2 RAM Enable Bit (RAME) in System Control Register (SYSCR)

|               |      |      |      |      |      |       |   |      |
|---------------|------|------|------|------|------|-------|---|------|
| Bit           | 7    | 6    | 5    | 4    | 3    | 2     | 1 | 0    |
|               | SSBY | STS2 | STS1 | STS0 | XRST | NMIEG | — | RAME |
| Initial value | 0    | 0    | 0    | 0    | 1    | 0     | 1 | 1    |
| Read/Write    | R/W  | R/W  | R/W  | R/W  | R    | R/W   | — | R/W  |

The on-chip RAM is enabled or disabled by the RAME bit in SYSCR. See section 3.2, System Control Register, for the other SYSCR bits.

**Bit 0—RAM Enable (RAME):** This bit enables or disables the on-chip RAM. The RAME bit is initialized to 1 on the rising edge of the RES signal. The RAME bit is not initialized in software standby mode.

| Bit 0<br>RAME | Description                             |
|---------------|-----------------------------------------|
| 0             | On-chip RAM is disabled.                |
| 1             | On-chip RAM is enabled. (Initial value) |

13.2 Operation

13.2.1 Expanded Modes (Modes 1 and 2)

If the RAME bit is set to 1, accesses to addresses H'F780 to H'FF7F in the H8/3297 and H8/3296, addresses H'FB80 to H'FF7F in the H8/3294, and addresses H'FD80 to H'FF7F in the H8/3292 are directed to the on-chip RAM. If the RAME bit is cleared to 0, accesses to these addresses are directed to the external data bus.

13.2.2 Single-Chip Mode (Mode 3)

If the RAME bit is set to 1, accesses to addresses H'F780 to H'FF7F in the H8/3297 and H8/3296, addresses H'FB80 to H'FF7F in the H8/3294, and addresses H'FD80 to H'FF7F in the H8/3292 are directed to the on-chip RAM.

If the RAME bit is cleared to 0, the on-chip RAM data cannot be accessed. Attempted write access has no effect. Attempted read access always results in H'FF data being read.

Note: RAM initial values are undefined. Therefore initialization must be carried out before use.

## 14.1 Overview

The size of the on-chip ROM (mask ROM, or PROM) is 60 kbytes in the H8/3297, 48 kbytes in the H8/3296, 32 kbytes in the H8/3294, and 16kbytes in the H8/3292. The on-chip ROM is connected to the CPU via a 16-bit data bus. Both byte data and word data are accessed in two states, enabling rapid data transfer.

The on-chip ROM is enabled or disabled depending on the inputs at the mode pins (MD<sub>1</sub> and MD<sub>0</sub>). See table 14-1.

**Table 14-1 On-Chip ROM Usage in Each MCU Mode**

| Mode                      | Mode Pins       |                 | On-chip ROM                   |
|---------------------------|-----------------|-----------------|-------------------------------|
|                           | MD <sub>1</sub> | MD <sub>0</sub> |                               |
| Mode 1 (expanded mode)    | 0               | 1               | Disabled (external addresses) |
| Mode 2 (expanded mode)    | 1               | 0               | Enabled                       |
| Mode 3 (single-chip mode) | 1               | 1               | Enabled                       |

The PROM versions (H8/3297 ZTAT and H8/3294 ZTAT) can be set to PROM mode and programmed with a general-purpose PROM programmer. In the H8/3297, the accessible ROM addresses are H'0000 to H'EF7F (61,312 bytes) in mode 2, and H'0000 to H'F77F (63,360 bytes) in mode 3. For details, see section 3, MCU Operating Modes and Address Space.

14.1.1 Block Diagram

Figure 14-1 is a block diagram of the on-chip ROM.

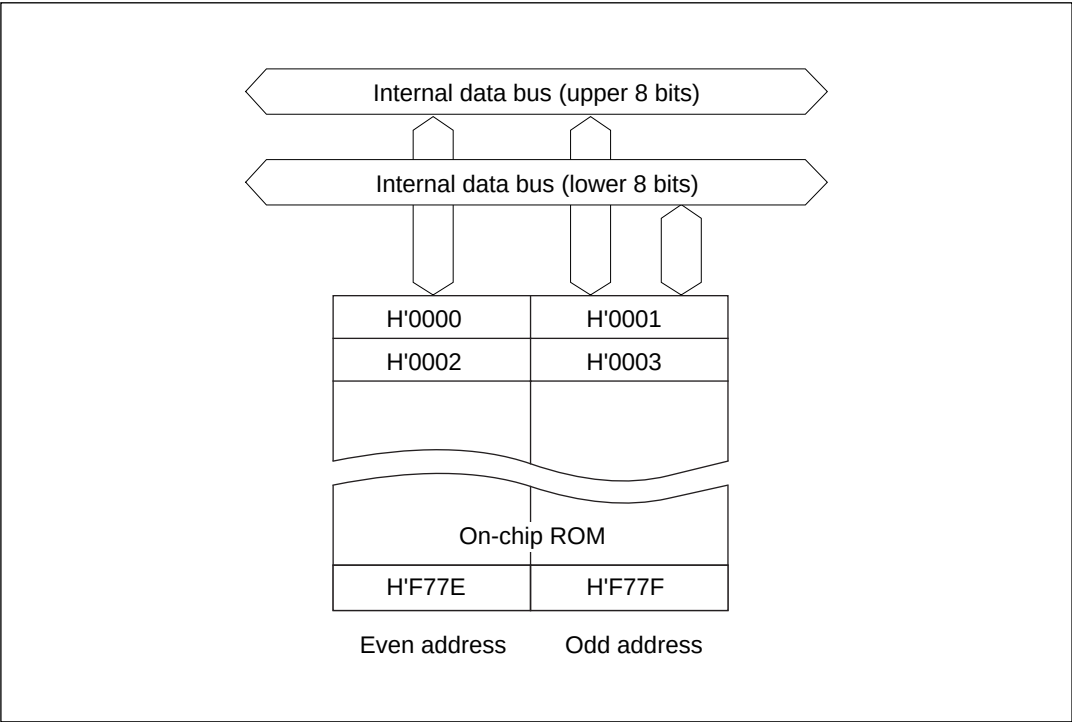


Figure 14-1 Block Diagram of On-Chip ROM (H8/3297 Single-Chip Mode)

# 14.2 PROM Mode (H8/3297, H8/3294)

## 14.2.1 PROM Mode Setup

In PROM mode the PROM versions of the H8/3297 and H8/3294 suspend, the usual microcomputer functions to allow the on-chip PROM to be programmed. The programming method is the same as for the HN27C101.

To select PROM mode, apply the signal inputs listed in table 14-2.

**Table 14-2 Selection of PROM Mode**

| Pin                                      | Input |
|------------------------------------------|-------|
| Mode pin MD <sub>1</sub>                 | Low   |
| Mode pin MD <sub>0</sub>                 | Low   |
| STBY pin                                 | Low   |
| Pins P6 <sub>3</sub> and P6 <sub>4</sub> | High  |

## 14.2.2 Socket Adapter Pin Assignments and Memory Map

The H8/3297 and H8/3294 can be programmed with a general-purpose PROM programmer by using a socket adapter to change the pin-out to 32 pins. See table 14-3. The same socket adapter can be used for both the H8/3297 and H8/3294. Figure 14-2 shows the socket adapter pin assignments.

**Table 14-3 Socket Adapter**

| Package                    | Socket Adapter |
|----------------------------|----------------|
| 64-pin QFP                 | HS3297ESHS1H   |
| 80-pin TQFP                | HS3297ESNS1H   |
| 64-pin windowed shrink DIP | HS3297ESSS1H   |
| 64-pin shrink DIP          | HS3297ESSS1H   |

The PROM size is 60 kbytes for the H8/3297 and 32 kbytes for the H8/3294. Figures 14-3 and 14-4 show memory maps of the H8/3297 and H8/3294 in PROM mode. H'FF data should be specified for unused address areas in the on-chip PROM.

When programming with a PROM programmer, limit the program address range to H'0000 to H'777F for the H8/3297 and H'0000 to H'7FFF for the H8/3294. Specify H'FF data for addresses H'F780 and above (H8/3297) or H'8000 and above (H8/3294). If these addresses are programmed by mistake, it may become impossible to program or verify the PROM data. The same problem may occur if an attempt is made to program the chip in page programming mode. With a windowed package, it is possible to erase the data and reprogram, but this cannot be done with a plastic package, so particular care is required.




| H8/3297, H83294  |        |                                                                           |                          |
|------------------|--------|---------------------------------------------------------------------------|--------------------------|
| DC-64S<br>DP-64S | FP-64A | TFP-80C                                                                   | Pin                      |
| 12               | 4      | 4                                                                         | $\overline{\text{RES}}$  |
| 13               | 5      | 5                                                                         | NMI                      |
| 57               | 49     | 61                                                                        | P3 <sub>0</sub>          |
| 58               | 50     | 62                                                                        | P3 <sub>1</sub>          |
| 59               | 51     | 63                                                                        | P3 <sub>2</sub>          |
| 60               | 52     | 64                                                                        | P3 <sub>3</sub>          |
| 61               | 53     | 65                                                                        | P3 <sub>4</sub>          |
| 62               | 54     | 67                                                                        | P3 <sub>5</sub>          |
| 63               | 55     | 68                                                                        | P3 <sub>6</sub>          |
| 64               | 56     | 69                                                                        | P3 <sub>7</sub>          |
| 56               | 48     | 60                                                                        | P1 <sub>0</sub>          |
| 55               | 47     | 59                                                                        | P1 <sub>1</sub>          |
| 54               | 46     | 58                                                                        | P1 <sub>2</sub>          |
| 53               | 45     | 57                                                                        | P1 <sub>3</sub>          |
| 52               | 44     | 56                                                                        | P1 <sub>4</sub>          |
| 51               | 43     | 54                                                                        | P1 <sub>5</sub>          |
| 50               | 42     | 53                                                                        | P1 <sub>6</sub>          |
| 49               | 41     | 52                                                                        | P1 <sub>7</sub>          |
| 47               | 39     | 48                                                                        | P2 <sub>0</sub>          |
| 46               | 38     | 47                                                                        | P2 <sub>1</sub>          |
| 45               | 37     | 45                                                                        | P2 <sub>2</sub>          |
| 44               | 36     | 44                                                                        | P2 <sub>3</sub>          |
| 43               | 35     | 43                                                                        | P2 <sub>4</sub>          |
| 42               | 34     | 42                                                                        | P2 <sub>5</sub>          |
| 41               | 33     | 41                                                                        | P2 <sub>6</sub>          |
| 40               | 32     | 40                                                                        | P2 <sub>7</sub>          |
| 1                | 57     | 71                                                                        | P4 <sub>0</sub>          |
| 2                | 58     | 72                                                                        | P4 <sub>1</sub>          |
| 3                | 59     | 74                                                                        | P4 <sub>2</sub>          |
| 34               | 26     | 33                                                                        | P6 <sub>3</sub>          |
| 35               | 27     | 35                                                                        | P6 <sub>4</sub>          |
| 30               | 22     | 27                                                                        | AV <sub>CC</sub>         |
| 14, 39           | 6, 31  | 6, 39                                                                     | V <sub>CC</sub>          |
| 20               | 12     | 16                                                                        | MD <sub>0</sub>          |
| 19               | 11     | 14                                                                        | MD <sub>1</sub>          |
| 15               | 7      | 7                                                                         | $\overline{\text{STBY}}$ |
| 21               | 13     | 17                                                                        | AV <sub>SS</sub>         |
| 16, 48           | 8, 40  | 8, 9, 10,<br>12,15,24,<br>29,31,34,<br>45,49,50,<br>51,55,66,<br>70,73,76 | V <sub>CC</sub>          |


| EP ROM Socket           |                        |
|-------------------------|------------------------|
| Pin                     | HN27C 101<br>(32 pins) |
| V <sub>PP</sub>         | 1                      |
| EA <sub>9</sub>         | 26                     |
| EO <sub>0</sub>         | 13                     |
| EO <sub>1</sub>         | 14                     |
| EO <sub>2</sub>         | 15                     |
| EO <sub>3</sub>         | 17                     |
| EO <sub>4</sub>         | 18                     |
| EO <sub>5</sub>         | 19                     |
| EO <sub>6</sub>         | 20                     |
| EO <sub>7</sub>         | 21                     |
| EA <sub>0</sub>         | 12                     |
| EA <sub>1</sub>         | 11                     |
| EA <sub>2</sub>         | 10                     |
| EA <sub>3</sub>         | 9                      |
| EA <sub>4</sub>         | 8                      |
| EA <sub>5</sub>         | 7                      |
| EA <sub>6</sub>         | 6                      |
| EA <sub>7</sub>         | 5                      |
| EA <sub>8</sub>         | 27                     |
| $\overline{\text{OE}}$  | 24                     |
| EA <sub>10</sub>        | 23                     |
| EA <sub>11</sub>        | 25                     |
| EA <sub>12</sub>        | 4                      |
| EA <sub>13</sub>        | 28                     |
| EA <sub>14</sub>        | 29                     |
| $\overline{\text{CE}}$  | 22                     |
| EA <sub>16</sub>        | 2                      |
| EA <sub>15</sub>        | 3                      |
| $\overline{\text{PGM}}$ | 31                     |
| V <sub>CC</sub>         | 32                     |
| V <sub>SS</sub>         | 16                     |

V<sub>PP</sub> : Program voltage  
 EO<sub>7</sub> to EO<sub>0</sub> : Data input/output  
 EA<sub>16</sub> to EA<sub>0</sub> : Address input  
 $\overline{\text{OE}}$  : Output enable  
 $\overline{\text{CE}}$  : Chip enable  
 $\overline{\text{PGM}}$  : Program enable



**Figure 14-3 H8/3297 Memory Map in PROM Mode**

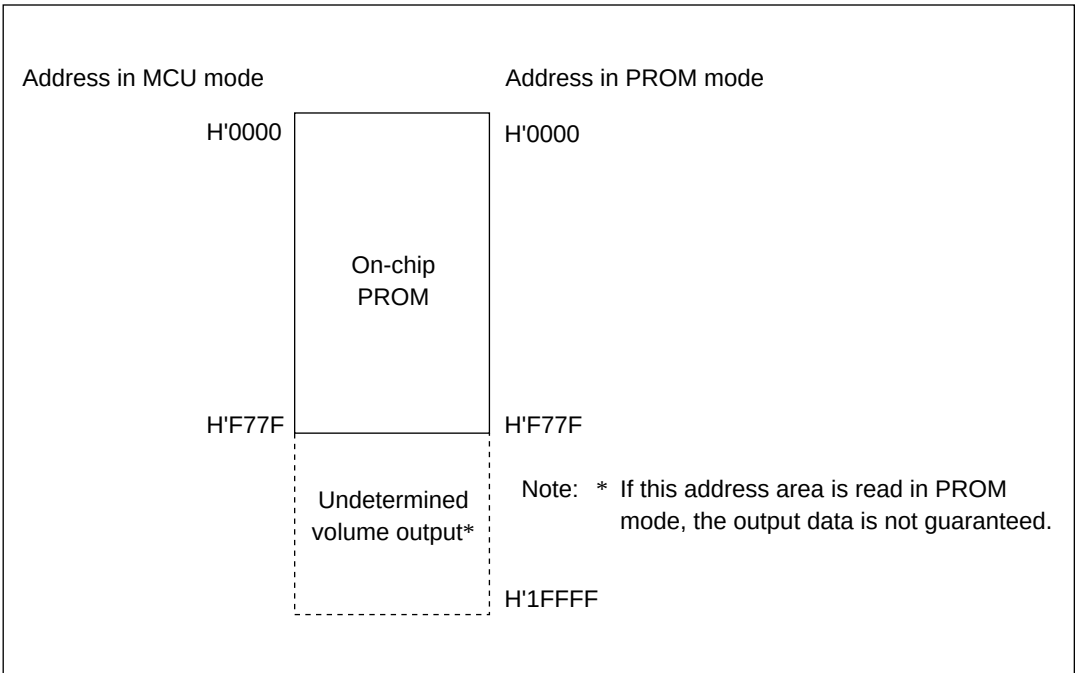

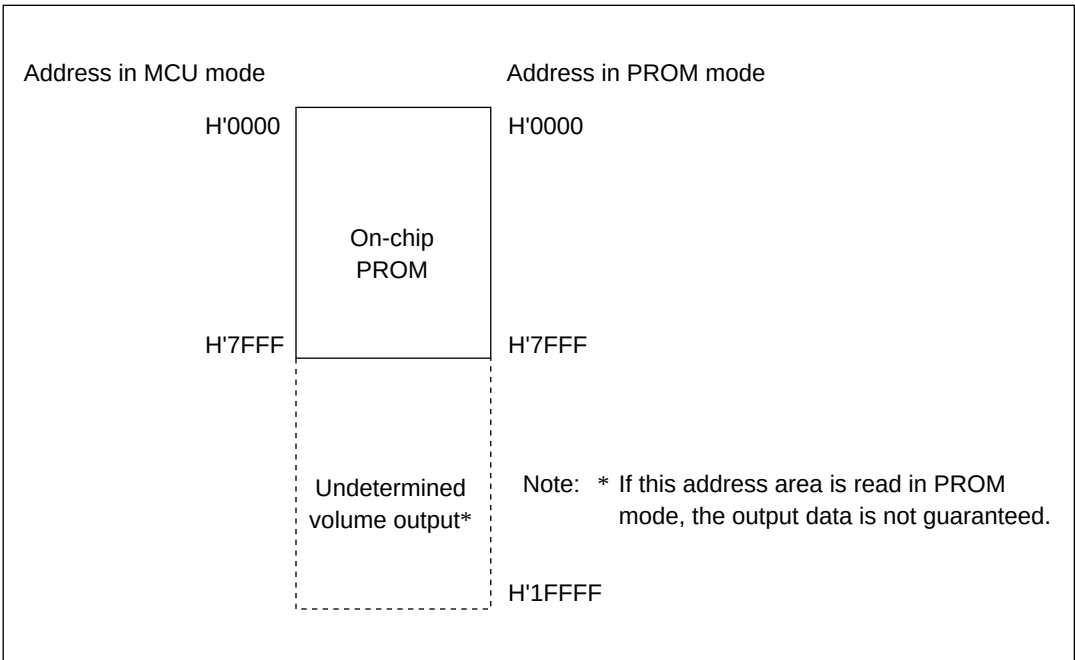**Figure 14-4 H8/3294 Memory Map in PROM Mode**

# 14.3 PROM Programming

The write, verify, and other sub-modes of the PROM mode are selected as shown in table 14-4.

**Table 14-4 Selection of Sub-Modes in PROM Mode**

| Sub-Mode              | $\overline{\text{CE}}$ | $\overline{\text{OE}}$ | $\overline{\text{PGM}}$ | $\text{V}_{\text{PP}}$ | $\text{V}_{\text{CC}}$ | $\text{EO}_7$ to $\text{EO}_0$ | $\text{EA}_{16}$ to $\text{EA}_0$ |
|-----------------------|------------------------|------------------------|-------------------------|------------------------|------------------------|--------------------------------|-----------------------------------|
| Write                 | Low                    | High                   | Low                     | $\text{V}_{\text{PP}}$ | $\text{V}_{\text{CC}}$ | Data input                     | Address input                     |
| Verify                | Low                    | Low                    | High                    | $\text{V}_{\text{PP}}$ | $\text{V}_{\text{CC}}$ | Data output                    | Address input                     |
| Programming inhibited | Low                    | Low                    | Low                     | $\text{V}_{\text{PP}}$ | $\text{V}_{\text{CC}}$ | High impedance                 | Address input                     |
|                       | Low                    | High                   | High                    |                        |                        |                                |                                   |
|                       | High                   | Low                    | Low                     |                        |                        |                                |                                   |
|                       | High                   | High                   | High                    |                        |                        |                                |                                   |


The H8/3297 and H8/3294 PROM have the same standard read/write specifications as the HN27C101 EPROM. Page programming is not supported, however, so do not select page programming mode. PROM programmers that provide only page programming cannot be used. When selecting a PROM programmer, check that it supports a byte-at-a-time high-speed programming mode. Be sure to set the address range to H'0000 to H'F77F for the H8/3297, and to H'0000 to H'7FFF for the H8/3294.

## 14.3.1 Programming and Verifying

An efficient, high-speed programming procedure can be used to program and verify PROM data. This procedure programs data quickly without subjecting the chip to voltage stress and without sacrificing data reliability. It leaves the data H'FF in unused addresses.

Figure 14-5 shows the basic high-speed programming flowchart.

Tables 14-5 and 14-6 list the electrical characteristics of the chip in PROM mode. Figure 14-6 shows a program/verify timing chart.

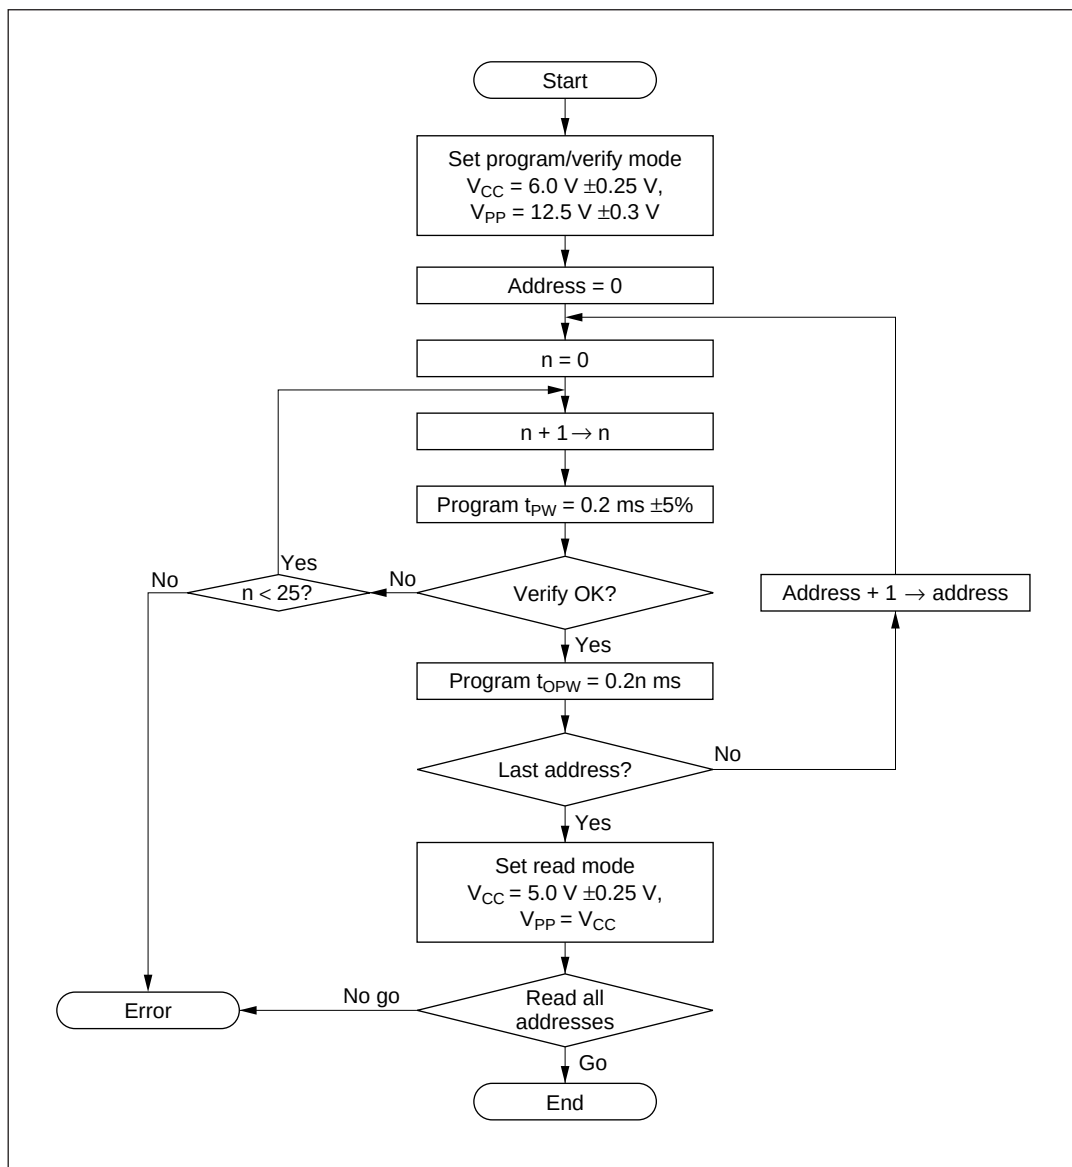

**Figure 14-5 High-Speed Programming Flowchart**

**Table 14-5 DC Characteristics**(when  $V_{CC} = 6.0 \text{ V} \pm 0.25 \text{ V}$ ,  $V_{PP} = 12.5 \text{ V} \pm 0.3 \text{ V}$ ,  $V_{SS} = 0 \text{ V}$ ,  $T_a = 25^\circ\text{C} \pm 5^\circ\text{C}$ )

| Item                  |                                                                                               | Symbol     | Min  | Typ | Max            | Unit          | Test Conditions                         |
|-----------------------|-----------------------------------------------------------------------------------------------|------------|------|-----|----------------|---------------|-----------------------------------------|
| Input high voltage    | $EO_7 - EO_0$ ,<br>$A_{16} - A_0$ ,<br>$\overline{OE}$ , $\overline{CE}$ , $\overline{PGM}$   | $V_{IH}$   | 2.4  | —   | $V_{CC} + 0.3$ | V             |                                         |
| Input low voltage     | $EO_7 - EO_0$ ,<br>$A_{16} - A_0$ ,<br>$\overline{OE}$ , $\overline{CE}$ , $\overline{PGM}$   | $V_{IL}$   | -0.3 | —   | 0.8            | V             |                                         |
| Output high voltage   | $EO_7 - EO_0$                                                                                 | $V_{OH}$   | 2.4  | —   | —              | V             | $I_{OH} = -200 \mu\text{A}$             |
| Output low voltage    | $EO_7 - EO_0$                                                                                 | $V_{OL}$   | —    | —   | 0.45           | V             | $I_{OL} = 1.6 \text{ mA}$               |
| Input leakage current | $EO_7 - EO_0$ ,<br>$EA_{16} - EA_0$ ,<br>$\overline{OE}$ , $\overline{CE}$ , $\overline{PGM}$ | $ I_{LI} $ | —    | —   | 2              | $\mu\text{A}$ | $V_{in} = 5.25 \text{ V}/0.5 \text{ V}$ |
| $V_{CC}$ current      |                                                                                               | $I_{CC}$   | —    | —   | 40             | mA            |                                         |
| $V_{PP}$ current      |                                                                                               | $I_{PP}$   | —    | —   | 40             | mA            |                                         |

**Table 14-6 AC Characteristics**(when  $V_{CC} = 6.0 \text{ V} \pm 0.25 \text{ V}$ ,  $V_{PP} = 12.5 \text{ V} \pm 0.3 \text{ V}$ ,  $T_a = 25^\circ\text{C} \pm 5^\circ\text{C}$ )

| Item                       | Symbol    | Min  | Typ  | Max  | Unit          | Test Conditions  |
|----------------------------|-----------|------|------|------|---------------|------------------|
| Address setup time         | $t_{AS}$  | 2    | —    | —    | $\mu\text{s}$ | See figure 14-6* |
| $\overline{OE}$ setup time | $t_{OES}$ | 2    | —    | —    | $\mu\text{s}$ |                  |
| Data setup time            | $t_{DS}$  | 2    | —    | —    | $\mu\text{s}$ |                  |
| Address hold time          | $t_{AH}$  | 0    | —    | —    | $\mu\text{s}$ |                  |
| Data hold time             | $t_{DH}$  | 2    | —    | —    | $\mu\text{s}$ |                  |
| Data output disable time   | $t_{DF}$  | —    | —    | 130  | ns            |                  |
| $V_{PP}$ setup time        | $t_{VPS}$ | 2    | —    | —    | $\mu\text{s}$ |                  |
| Program pulse width        | $t_{PW}$  | 0.19 | 0.20 | 0.21 | ms            |                  |

Note: \* Input pulse level: 0.8 V to 2.2 V

Input rise/fall time  $\leq 20 \text{ ns}$ 

Timing reference levels: input—1.0 V, 2.0 V; output—0.8 V, 2.0 V


**Table 14-6 AC Characteristics (cont)**(when  $V_{CC} = 6.0 \text{ V} \pm 0.25 \text{ V}$ ,  $V_{PP} = 12.5 \text{ V} \pm 0.3 \text{ V}$ ,  $T_a = 25^\circ\text{C} \pm 5^\circ\text{C}$ )

| Item                                                         | Symbol           | Min  | Typ | Max  | Unit          | Test Conditions  |
|--------------------------------------------------------------|------------------|------|-----|------|---------------|------------------|
| $\overline{\text{OE}}$ pulse width for overwrite-programming | $t_{\text{OPW}}$ | 0.19 | —   | 5.25 | ms            | See figure 14-6* |
| $V_{CC}$ setup time                                          | $t_{\text{VCS}}$ | 2    | —   | —    | $\mu\text{s}$ |                  |
| $\overline{\text{CE}}$ setup time                            | $t_{\text{CES}}$ | 2    | —   | —    | $\mu\text{s}$ |                  |
| Data output delay time                                       | $t_{\text{OE}}$  | 0    | —   | 150  | ns            |                  |

Note: \* Input pulse level: 0.8 V to 2.2 V

Input rise/fall time  $\leq 20 \text{ ns}$ 

Timing reference levels: input—1.0 V, 2.0 V; output—0.8 V, 2.0 V

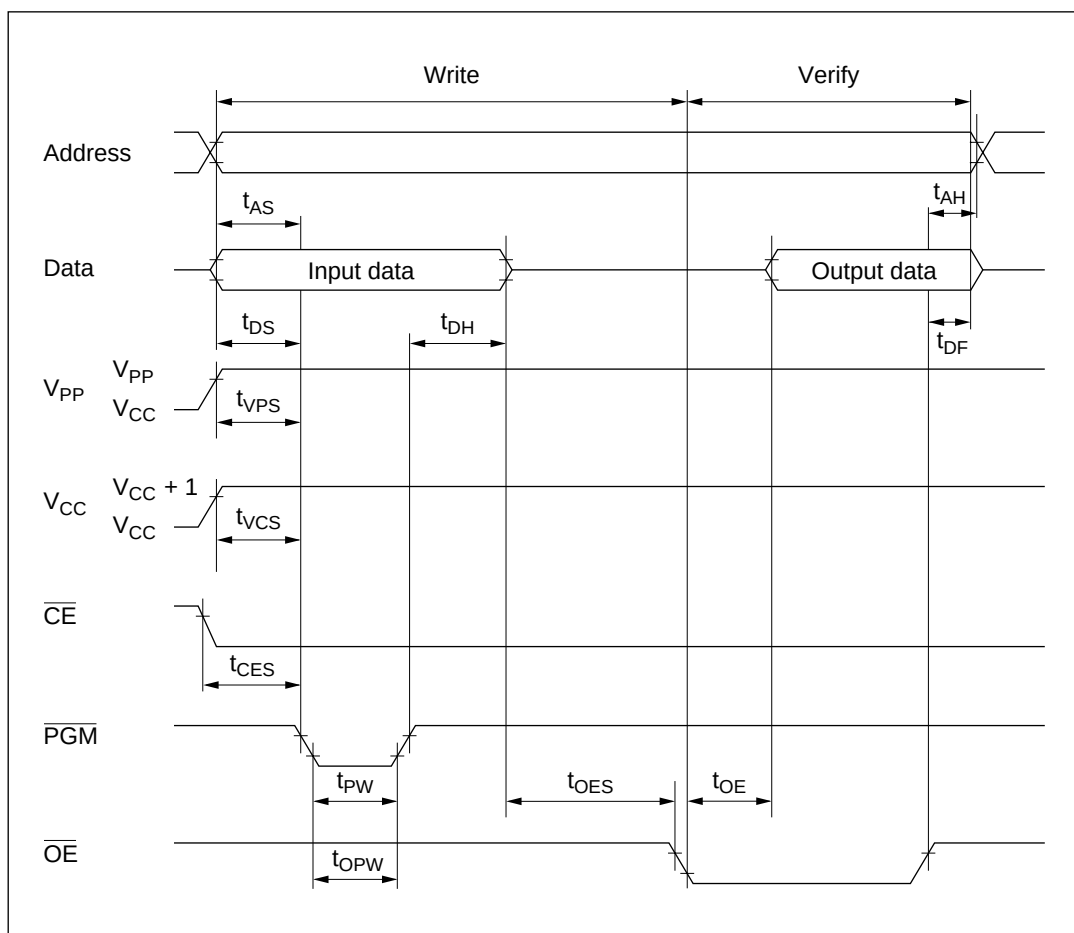**Figure 14-6 PROM Program/Verify Timing**

### 14.3.2 Notes on Programming

**(1) Program with the specified voltages and timing. The programming voltage ( $V_{pp}$ ) is 12.5 V.**

**Caution:** Applied voltages in excess of the specified values can permanently destroy the chip. Be particularly careful about the PROM programmer's overshoot characteristics.

If the PROM programmer is set to HN27C101 specifications,  $V_{pp}$  will be 12.5 V.

**(2) Before writing data, check that the socket adapter and chip are correctly mounted in the PROM writer.** Overcurrent damage to the chip can result if the index marks on the PROM programmer, socket adapter, and chip are not correctly aligned.

**(3) Don't touch the socket adapter or chip while writing.** Touching either of these can cause contact faults and write errors.


**(4) Page programming is not supported.** Do not select page programming mode.

**(5) The H8/3297 PROM size is 60 kbytes. The H8/3294 PROM size is 32 kbytes.** Set the address range to H'0000 to H'F77F for the H8/3297, and to H'0000 to H'7FFF for the H8/3294. When programming, specify H'FF data for unused address areas (H'F780 to H'1FFFF in the H8/3297, H'8000 to H'1FFFF in the H8/3294).

### 14.3.3 Reliability of Programmed Data

An effective way to assure the data holding characteristics of the programmed chips is to bake them at 150°C, then screen them for data errors. This procedure quickly eliminates chips with PROM memory cells prone to early failure.

Figure 14-7 shows the recommended screening procedure.

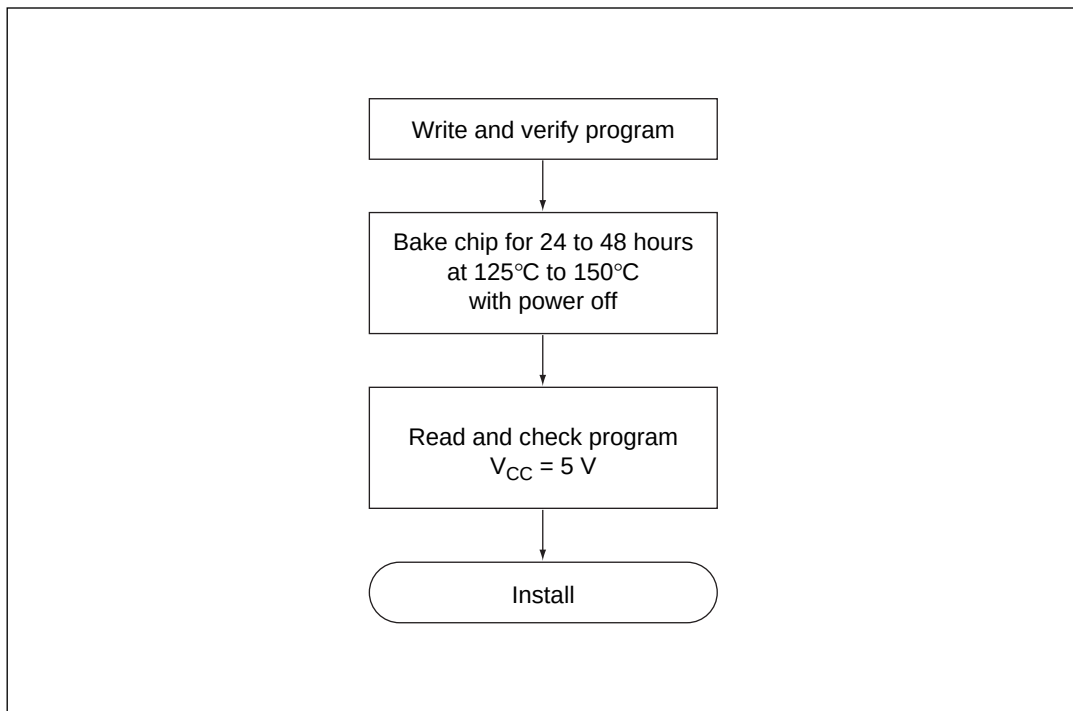

**Figure 14-7 Recommended Screening Procedure**

If a series of write errors occurs while the same PROM programmer is in use, stop programming and check the PROM programmer and socket adapter for defects, using a microcomputer chip with a windowed package and on-chip EPROM.

Please inform Hitachi of any abnormal conditions noted during programming or in screening of program data after high-temperature baking.

#### **14.3.4 Erasing of Data**

The windowed package enables data to be erased by illuminating the window with ultraviolet light. Table 14-7 lists the erasing conditions.

**Table 14-7 Erasing Conditions**

| Item                   | Value                  |
|------------------------|------------------------|
| Ultraviolet wavelength | 253.7 nm               |
| Minimum illumination   | 15 W·s/cm <sup>2</sup> |

The conditions in table 14-7 can be satisfied by placing a 12000  $\mu\text{W}/\text{cm}^2$  ultraviolet lamp 2 or 3 centimeters directly above the chip and leaving it on for about 20 minutes.



## 14.4 Handling of Windowed Packages

**(1) Grass Erasing Window:** Rubbing the glass erasing window of a windowed package with a plastic material or touching it with an electrically charged object can create a static charge on the window surface which may cause the chip to malfunction.

If the erasing window becomes charged, the charge can be neutralized by a short exposure to ultraviolet light. This returns the chip to its normal condition, but it also reduces the charge stored in the floating gates of the PROM, so it is recommended that the chip be reprogrammed afterward.

Accumulation of static charge on the window surface can be prevented by the following precautions:

1. When handling the package, ground yourself. Don't wear gloves. Avoid other possible sources of static charge.
2. Avoid friction between the glass window and plastic or other materials that tend to accumulate static charge.
3. Be careful when using cooling sprays, since they may have a slight ionic content.
4. Cover the window with an ultraviolet-shield label, preferably a label including a conductive material. Besides protecting the PROM contents from ultraviolet light, the label protects the chip by distributing static charge uniformly.

**(2) Handling after Programming:** Fluorescent light and sunlight contain small amounts of ultraviolet, so prolonged exposure to these types of light can cause programmed data to invert. In addition, exposure to any type of intense light can induce photoelectric effects that may lead to chip malfunction. It is recommended that after programming the chip, you cover the erasing window with a light-proof label (such as an ultraviolet-shield label).

## Section 15 Power-Down State

### 15.1 Overview

The H8/3297 Series has a power-down state that greatly reduces power consumption by stopping some or all of the chip functions. The power-down state includes three modes:

- (1) Sleep mode
- (2) Software standby mode
- (3) Hardware standby mode

Table 15-1 lists the conditions for entering and leaving the power-down modes. It also indicates the status of the CPU, on-chip supporting modules, etc. in each power-down mode.

**Table 15-1 Power-Down State**

| Mode                  | Entering Procedure                                         | Clock | CPU  | Reg's.   | CPU Mod.             | Sup. RAM | I/O Ports            | Exiting Methods                                                                                                                                                                                                                         |
|-----------------------|------------------------------------------------------------|-------|------|----------|----------------------|----------|----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Sleep mode            | Execute SLEEP instruction                                  | Run   | Halt | Held     | Run                  | Held     | Held                 | <ul style="list-style-type: none"><li>• Interrupt</li><li>• <math>\overline{\text{RES}}</math></li><li>• STBY</li></ul>                                                                                                                 |
| Software standby mode | Set SSBY bit in SYSCR to 1, then execute SLEEP instruction | Halt  | Halt | Held     | Halt and initialized | Held     | Held                 | <ul style="list-style-type: none"><li>• <math>\overline{\text{NMI}}</math></li><li>• <math>\overline{\text{IRQ}}_0</math> to <math>\overline{\text{IRQ}}_2</math></li><li>• <math>\overline{\text{RES}}</math></li><li>• STBY</li></ul> |
| Hardware standby mode | Set $\overline{\text{STBY}}$ pin to low level              | Halt  | Halt | Not held | Halt and initialized | Held     | High impedance state | <ul style="list-style-type: none"><li>• <math>\overline{\text{STBY}}</math> and <math>\overline{\text{RES}}</math></li></ul>                                                                                                            |

Notes: 1. SYSCR: System control register  
2. SSBY: Software standby bit

15.1.1 System Control Register (SYSCR)

Four of the eight bits in the system control register (SYSCR) control the power-down state. These are bit 7 (SSBY) and bits 6 to 4 (STS2 to STS0). See table 15-2.

Table 15-2 System Control Register

| Name                    | Abbreviation |      |      | R/W  | Initial Value |       | Address |      |
|-------------------------|--------------|------|------|------|---------------|-------|---------|------|
| System control register | SYSCR        |      |      | R/W  | H'0B          |       | H'FFC4  |      |
| Bit                     | 7            | 6    | 5    | 4    | 3             | 2     | 1       | 0    |
|                         | SSBY         | STS2 | STS1 | STS0 | XRST          | NMIEG | —       | RAME |
| Initial value           | 0            | 0    | 0    | 0    | 1             | 0     | 1       | 1    |
| Read/Write              | R/W          | R/W  | R/W  | R/W  | R             | R/W   | —       | R/W  |

**Bit 7—Software Standby (SSBY):** This bit enables or disables the transition to software standby mode.

On recovery from the software standby mode by an external interrupt, SSBY remains set to 1. To clear this bit, software must write a 0.

| Bit 7 |                                                                          |
|-------|--------------------------------------------------------------------------|
| SSBY  | Description                                                              |
| 0     | The SLEEP instruction causes a transition to sleep mode. (Initial value) |
| 1     | The SLEEP instruction causes a transition to software standby mode.      |

**Bits 6 to 4—Standby Timer Select 2 to 0 (STS2 to STS0):** These bits select the clock settling time when the chip recovers from software standby mode by an external interrupt. During the selected time, the clock oscillator runs but the CPU and on-chip supporting modules remain in standby. Set bits STS2 to STS0 according to the clock frequency to obtain a settling time of at least 8 ms. See table 15-3.

| Bit 6<br>STS2 | Bit 5<br>STS1 | Bit 4<br>STS0 | Description                                  |
|---------------|---------------|---------------|----------------------------------------------|
| 0             | 0             | 0             | Settling time = 8,192 states (Initial value) |
| 0             | 0             | 1             | Settling time = 16,384 states                |
| 0             | 1             | 0             | Settling time = 32,768 states                |
| 0             | 1             | 1             | Settling time = 65,536 states                |
| 1             | 0             | —             | Settling time = 131,072 states               |
| 1             | 1             | —             | Disabled                                     |

## 15.2 Sleep Mode

### 15.2.1 Transition to Sleep Mode

When the SSBY bit in the system control register is cleared to 0, execution of the SLEEP instruction causes a transition from the program execution state to sleep mode. After executing the SLEEP instruction, the CPU halts, but the contents of its internal registers remain unchanged. The on-chip supporting modules continue to operate normally.

### 15.2.2 Exit from Sleep Mode

The chip exits sleep mode when it receives an internal or external interrupt request, or a low input at the  $\overline{\text{RES}}$  or  $\overline{\text{STBY}}$  pin.

**(1) Exit by Interrupt:** An interrupt releases sleep mode and starts the CPU's interrupt-handling sequence.

If an interrupt from an on-chip supporting module is disabled by the corresponding enable/disable bit in the module's control register, the interrupt cannot be requested, so it cannot wake the chip up. Similarly, the CPU cannot be awoken by an interrupt other than NMI if the I (interrupt mask) bit is set when the SLEEP instruction is executed.

**(2) Exit by  $\overline{\text{RES}}$  pin:** When the  $\overline{\text{RES}}$  pin goes low, the chip exits from sleep mode to the reset state.

**(3) Exit by  $\overline{\text{STBY}}$  pin:** When the  $\overline{\text{STBY}}$  pin goes low, the chip exits from sleep mode to hardware standby mode.

## 15.3 Software Standby Mode

### 15.3.1 Transition to Software Standby Mode

To enter software standby mode, set the standby bit (SSBY) in the system control register (SYSCR) to 1, then execute the SLEEP instruction.

In software standby mode, the system clock stops and chip functions halt, including both CPU functions and the functions of the on-chip supporting modules. Power consumption is reduced to an extremely low level. The on-chip supporting modules and their registers are reset to their initial states, but as long as a minimum necessary voltage supply is maintained, the contents of the CPU registers and on-chip RAM remain unchanged.

### 15.3.2 Exit from Software Standby Mode

The chip can be brought out of software standby mode by by  $\overline{\text{RES}}$  input,  $\overline{\text{STBY}}$  input, or external interrupt input at the  $\overline{\text{NMI}}$  pin,  $\overline{\text{IRQ}}_0$  to  $\overline{\text{IRQ}}_2$  pins.

**(1) Exit by Interrupt:** When an NMI,  $\overline{\text{IRQ}}_0$ ,  $\overline{\text{IRQ}}_1$ , or  $\overline{\text{IRQ}}_2$  interrupt request signal is input, the clock oscillator begins operating. After the waiting time set in bits STS2 to STS0 of SYSCR, a stable clock is supplied to the entire chip, software standby mode is released, and interrupt exception-handling begins.

**(2) Exit by  $\overline{\text{RES}}$  Pin:** When the  $\overline{\text{RES}}$  input goes low, the clock oscillator begins operating. When  $\overline{\text{RES}}$  is brought to the high level (after allowing time for the clock oscillator to settle), the CPU starts reset exception handling. Be sure to hold  $\overline{\text{RES}}$  low long enough for clock oscillation to stabilize.

**(3) Exit by  $\overline{\text{STBY}}$  Pin:** When the  $\overline{\text{STBY}}$  input goes low, the chip exits from software standby mode to hardware standby mode.

### 15.3.3 Clock Settling Time for Exit from Software Standby Mode

Set bits STS2 to STS0 in SYSCR as follows:

- Crystal oscillator

Set STS2 to STS0 for a settling time of at least 10 ms. Table 15-3 lists the settling times selected by these bits at several clock frequencies.

- External clock

The STS bits can be set to any value. Normally, use of the minimum time is recommended (STS2 = STS1 = STS0 = 0).

**Table 15-3 Times Set by Standby Timer Select Bits (Unit: ms)**


| STS2 | STS1 | STS0 | Settling<br>Time<br>(States) | System Clock Frequency (MHz) |             |             |            |             |            |            |            |             |
|------|------|------|------------------------------|------------------------------|-------------|-------------|------------|-------------|------------|------------|------------|-------------|
|      |      |      |                              | 16                           | 12          | 10          | 8          | 6           | 4          | 2          | 1          | 0.5         |
| 0    | 0    | 0    | 8,192                        | 0.51                         | 0.65        | 0.8         | 1.0        | 1.3         | 2.0        | 4.1        | <b>8.2</b> | <b>16.4</b> |
| 0    | 0    | 1    | 16,384                       | 1.0                          | 1.3         | 1.6         | 2.0        | 2.7         | 4.1        | <b>8.2</b> | 16.4       | 32.8        |
| 0    | 1    | 0    | 32,768                       | 2.0                          | 2.7         | 3.3         | 4.1        | 5.5         | <b>8.2</b> | 16.4       | 32.8       | 65.5        |
| 0    | 1    | 1    | 65,536                       | 4.1                          | 5.5         | 6.6         | <b>8.2</b> | <b>10.9</b> | 16.4       | 32.8       | 65.5       | 131.1       |
| 1    | 0    | —    | 131,072                      | <b>8.2</b>                   | <b>10.9</b> | <b>13.1</b> | 16.4       | 21.8        | 32.8       | 65.5       | 131.1      | 262.1       |

Notes: 1. All times are in milliseconds.  
2. Recommended values are printed in boldface.

### 15.3.4 Sample Application of Software Standby Mode

In this example the chip enters the software standby mode when  $\overline{\text{NMI}}$  goes low and exits when  $\overline{\text{NMI}}$  goes high, as shown in figure 15-1.

The NMI edge bit (NMIEG) in the system control register is originally cleared to 0, selecting the falling edge. When  $\overline{\text{NMI}}$  goes low, the  $\overline{\text{NMI}}$  interrupt handling routine sets NMIEG to 1, sets SSBY to 1 (selecting the rising edge), then executes the SLEEP instruction. The chip enters software standby mode. It recovers from software standby mode on the next rising edge of  $\overline{\text{NMI}}$ .

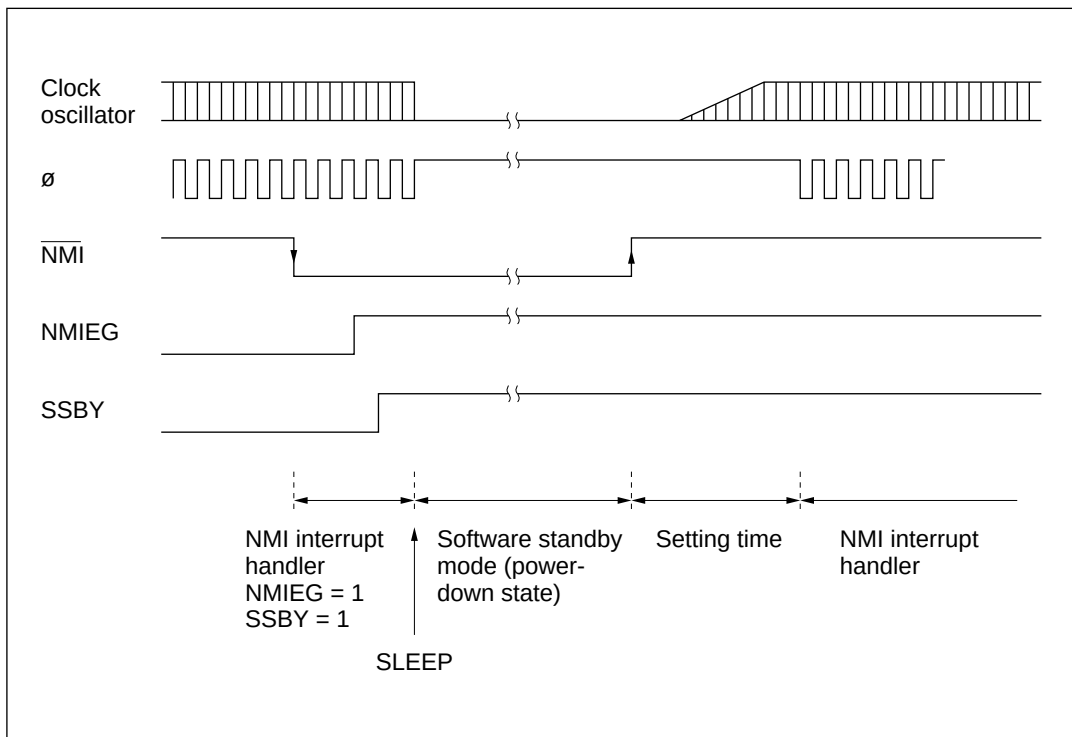

**Figure 15-1 NMI Timing in Software Standby Mode**

### 15.3.5 Usage Note

The I/O ports retain their current states in software standby mode. If a port is in the high output state, the current dissipation caused by the output current is not reduced.

## 15.4 Hardware Standby Mode

### 15.4.1 Transition to Hardware Standby Mode

Regardless of its current state, the chip enters hardware standby mode whenever the  $\overline{\text{STBY}}$  pin goes low.

Hardware standby mode reduces power consumption drastically by halting the CPU, stopping all the functions of the on-chip supporting modules, and placing I/O ports in the high-impedance state. The registers of the on-chip supporting modules are reset to their initial values. Only the on-chip RAM is held unchanged, provided the minimum necessary voltage supply is maintained.

- Notes:
1. The RAME bit in the system control register should be cleared to 0 before the  $\overline{\text{STBY}}$  pin goes low.
  2. Do not change the inputs at the mode pins ( $\overline{\text{MD}}_1$ ,  $\overline{\text{MD}}_0$ ) during hardware standby mode. Be particularly careful not to let both mode pins go low in hardware standby mode, since that places the chip in PROM mode and increases current dissipation.

### 15.4.2 Recovery from Hardware Standby Mode


Recovery from the hardware standby mode requires inputs at both the  $\overline{\text{STBY}}$  and  $\overline{\text{RES}}$  pins. When the  $\overline{\text{STBY}}$  pin goes high, the clock oscillator begins running. The  $\overline{\text{RES}}$  pin should be low at this time and should be held low long enough for the clock to stabilize. When the  $\overline{\text{RES}}$  pin changes from low to high, the reset sequence is executed and the chip returns to the program execution state.



### 15.4.3 Timing Relationships

Figure 15-2 shows the timing relationships in hardware standby mode.

In the sequence shown, first  $\overline{\text{RES}}$  goes low, then  $\overline{\text{STBY}}$  goes low, at which point the chip enters hardware standby mode. To recover, first  $\overline{\text{STBY}}$  goes high, then after the clock settling time,  $\overline{\text{RES}}$  goes high.

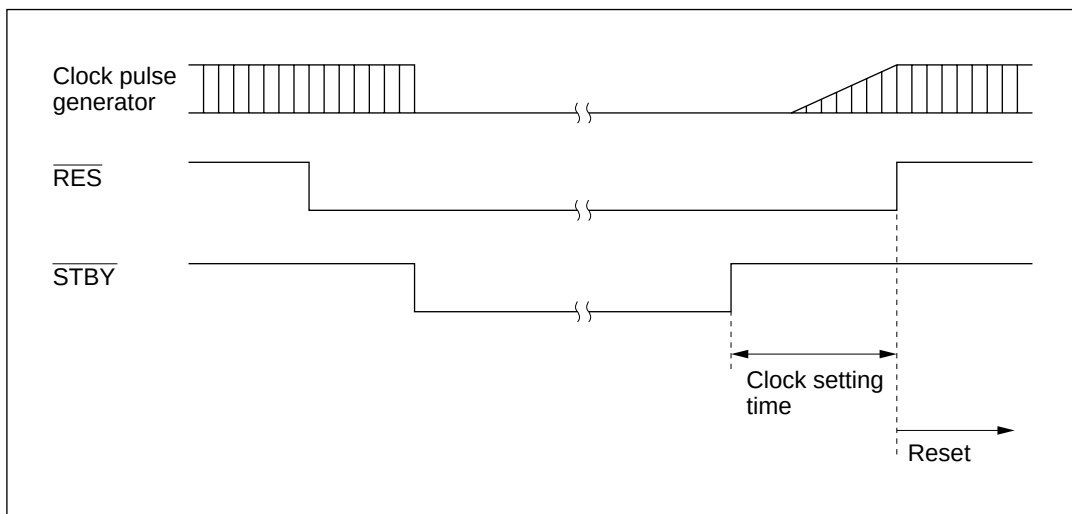

**Figure 15-2 Hardware Standby Mode Timing**

# Section 16 Electrical Specifications

## 16.1 Absolute Maximum Ratings

Table 16-1 lists the absolute maximum ratings.

**Table 16-1 Absolute Maximum Ratings**

| Item                  | Symbol                   | Rating                                | Unit |
|-----------------------|--------------------------|---------------------------------------|------|
| Supply voltage        | $V_{CC}$                 | −0.3 to +7.0                          | V    |
| Programming voltage   | $V_{PP}$                 | −0.3 to +13.5                         | V    |
| Input voltage         | Ports 1 to 6<br>$V_{in}$ | −0.3 to $V_{CC} + 0.3$                | V    |
|                       | Port 7<br>$V_{in}$       | −0.3 to $AV_{CC} + 0.3$               | V    |
| Analog supply voltage | $AV_{CC}$                | −0.3 to +7.0                          | V    |
| Analog input voltage  | $V_{AN}$                 | −0.3 to $AV_{CC} + 0.3$               | V    |
| Operating temperature | $T_{opr}$                | Regular specifications: −20 to +75    | °C   |
|                       |                          | Wide-range specifications: −40 to +85 | °C   |
| Storage temperature   | $T_{stg}$                | −55 to +125                           | °C   |

Note: Exceeding the absolute maximum ratings shown in table 16-1 can permanently destroy the chip.

## 16.2 Electrical Characteristics

### 16.2.1 DC Characteristics

The DC characteristics of the 5 V, 4 V, and 3 V versions are shown in tables 16-2, 16-3, and 16-4 respectively. The allowable output current values for the 5 V and 4 V versions are shown in table 16-5, and those for the 3 V version in table 16-6.

**Table 16-2 DC Characteristics (5-V Version)**

Conditions:  $V_{CC} = 5.0\text{ V} \pm 10\%$ ,  $AV_{CC} = 5.0\text{ V} \pm 10\%$ \*1,  $V_{SS} = AV_{SS} = 0\text{ V}$ ,

$T_a = -20\text{ to }75^\circ\text{C}$  (regular specifications),  $T_a = -40\text{ to }85^\circ\text{C}$  (wide-range specifications)

| Item                                   |                                                                                     | Symbol              | Min            | Typ | Max                 | Unit          | Test Conditions                                   |
|----------------------------------------|-------------------------------------------------------------------------------------|---------------------|----------------|-----|---------------------|---------------|---------------------------------------------------|
| Schmitt trigger input voltage (1)      | $P6_7$ to $P6_0$ *4, $IRQ_2$ to $IRQ_0$ *5                                          | $V_{T^-}$           | 1.0            | —   | —                   | V             |                                                   |
|                                        |                                                                                     | $V_{T^+}$           | —              | —   | $V_{CC} \times 0.7$ |               |                                                   |
|                                        |                                                                                     | $V_{T^+} - V_{T^-}$ | 0.4            | —   | —                   |               |                                                   |
| Input high voltage (2)                 | $\overline{RES}$ , $\overline{STBY}$ , $\overline{NMI}$ , $MD_1$ , $MD_0$ , $EXTAL$ | $V_{IH}$            | $V_{CC} - 0.7$ | —   | $V_{CC} + 0.3$      | V             |                                                   |
|                                        | $P7_7$ to $P7_0$                                                                    |                     | 2.0            | —   | $AV_{CC} + 0.3$     |               |                                                   |
| Input high voltage                     | Input pins other than (1) and (2)                                                   | $V_{IH}$            | 2.0            | —   | $V_{CC} + 0.3$      |               |                                                   |
| Input low voltage (3)                  | $\overline{RES}$ , $\overline{STBY}$ , $MD_1$ , $MD_0$                              | $V_{IL}$            | -0.3           | —   | 0.5                 | V             |                                                   |
| Input low voltage                      | Input pins other than (1) and (3) above                                             | $V_{IL}$            | -0.3           | —   | 0.8                 |               |                                                   |
| Output high voltage                    | All output pins                                                                     | $V_{OH}$            | $V_{CC} - 0.5$ | —   | —                   | V             | $I_{OH} = -200\text{ }\mu\text{A}$                |
|                                        |                                                                                     |                     | 3.5            | —   | —                   |               | $I_{OH} = -1.0\text{ mA}$                         |
| Output low voltage                     | All output pins                                                                     | $V_{OL}$            | —              | —   | 0.4                 | V             | $I_{OL} = 1.6\text{ mA}$                          |
|                                        | Ports 1 and 2                                                                       |                     | —              | —   | 1.0                 |               | $I_{OL} = 10.0\text{ mA}$                         |
| Input leakage current                  | $\overline{RES}$ , $\overline{STBY}$                                                | $ I_{in} $          | —              | —   | 10.0                | $\mu\text{A}$ | $V_{in} = 0.5\text{ V to }V_{CC} - 0.5\text{ V}$  |
|                                        | $\overline{NMI}$ , $MD_1$ , $MD_0$                                                  |                     | —              | —   | 1.0                 |               |                                                   |
|                                        | $P7_7$ to $P7_0$                                                                    |                     | —              | —   | 1.0                 |               | $V_{in} = 0.5\text{ V to }AV_{CC} - 0.5\text{ V}$ |
| Leakage current in 3-state (off state) | Ports 1 to 6                                                                        | $ I_{TSil} $        | —              | —   | 1.0                 | $\mu\text{A}$ | $V_{in} = 0.5\text{ V to }V_{CC} - 0.5\text{ V}$  |
| Input pull-up MOS current              | Ports 1, 2, 3                                                                       | $-I_p$              | 30             | —   | 250                 | $\mu\text{A}$ | $V_{in} = 0\text{ V}$                             |

Refer to notes at the end of the table.

**Table 16-2 DC Characteristics (5-V Version) (cont)**

Conditions:  $V_{CC} = 5.0 \text{ V} \pm 10\%$ ,  $AV_{CC} = 5.0 \text{ V} \pm 10\%^{*1}$ ,  $V_{SS} = AV_{SS} = 0 \text{ V}$ ,  $T_a = -20 \text{ to } 75^\circ\text{C}$  (regular specifications),  $T_a = -40 \text{ to } 85^\circ\text{C}$  (wide-range specifications)

| Item                                |                                                                                                | Symbol    | Min | Typ  | Max  | Unit          | Test Conditions                                                           |
|-------------------------------------|------------------------------------------------------------------------------------------------|-----------|-----|------|------|---------------|---------------------------------------------------------------------------|
| Input capacitance                   | $\overline{\text{RES}}$ , $\text{STBY}$                                                        | $C_{in}$  | —   | —    | 60   | $\mu\text{F}$ | $V_{in} = 0 \text{ V}$<br>$f = 1 \text{ MHz}$<br>$T_a = 25^\circ\text{C}$ |
|                                     | $\text{NMI}$ , $\text{MD}_1$                                                                   |           | —   | —    | 30   |               |                                                                           |
|                                     | All input pins except $\overline{\text{RES}}$ , $\text{STBY}$ , $\text{NMI}$ and $\text{MD}_1$ |           | —   | —    | 15   |               |                                                                           |
| Current dissipation <sup>*2</sup>   | Normal operation                                                                               | $I_{CC}$  | —   | 27   | 45   | $\text{mA}$   | $f = 12 \text{ MHz}$                                                      |
|                                     |                                                                                                |           | —   | 36   | 60   |               | $f = 16 \text{ MHz}$                                                      |
|                                     | Sleep mode                                                                                     |           | —   | 18   | 30   |               | $f = 12 \text{ MHz}$                                                      |
|                                     |                                                                                                |           | —   | 24   | 40   |               | $f = 16 \text{ MHz}$                                                      |
|                                     | Standby modes <sup>*3</sup>                                                                    |           | —   | 0.01 | 5.0  | $\mu\text{A}$ | $T_a \leq 50^\circ\text{C}$                                               |
|                                     |                                                                                                |           | —   | —    | 20.0 | $\mu\text{A}$ | $50^\circ\text{C} < T_a$                                                  |
| Analog supply current               | During A/D conversion                                                                          | $AI_{CC}$ | —   | 2.0  | 5.0  | $\text{mA}$   | $AV_{CC} = 2.0 \text{ V}$<br>to $5.5 \text{ V}$                           |
|                                     | Waiting                                                                                        |           | —   | 0.01 | 5.0  | $\mu\text{A}$ |                                                                           |
| Analog supply voltage <sup>*1</sup> |                                                                                                | $AV_{CC}$ | 4.5 | —    | 5.5  | $\text{V}$    | During operation                                                          |
|                                     |                                                                                                |           | 2.0 | —    | 5.5  |               | During wait state or when not in use                                      |
| RAM standby voltage                 |                                                                                                | $V_{RAM}$ | 2.0 | —    | —    | $\text{V}$    |                                                                           |

- Notes: 1. Even when the A/D converter is not used, connect  $AV_{CC}$  to power supply  $V_{CC}$  and keep the applied voltage between  $2.0 \text{ V}$  and  $5.5 \text{ V}$ .
2. Current dissipation values assume that  $V_{IH \min} = V_{CC} - 0.5 \text{ V}$ ,  $V_{IL \max} = 0.5 \text{ V}$ , all output pins are in the no-load state, and all input pull-up transistors are off.
3. For these values it is assumed that  $V_{RAM} \leq V_{CC} < 4.5 \text{ V}$  and  $V_{IH \min} = V_{CC} \times 0.9$ ,  $V_{IL \max} = 0.3 \text{ V}$ .
4.  $\text{P6}_7$  to  $\text{P6}_0$  include supporting module inputs multiplexed with them.
5.  $\text{IRQ}_2$  includes  $\text{ADTRG}$  multiplexed with it.

**Table 16-3 DC Characteristics (4-V Version)**

Conditions:  $V_{CC} = 4.0\text{ V to }5.5\text{ V}$ ,  $AV_{CC} = 4.0\text{ V to }5.5\text{ V}^{*1}$ ,  $V_{SS} = AV_{SS} = 0\text{ V}$ ,

$T_a = -20\text{ to }75^\circ\text{C}$  (regular specifications),  $T_a = -40\text{ to }85^\circ\text{C}$  (wide-range specifications)

| Item                              |                                                                                | Symbol                                                    | Min                   | Typ | Max                    | Unit                             | Test Conditions                                            |
|-----------------------------------|--------------------------------------------------------------------------------|-----------------------------------------------------------|-----------------------|-----|------------------------|----------------------------------|------------------------------------------------------------|
| Schmitt trigger input voltage (1) | P6 <sub>7</sub> to P6 <sub>0</sub> *4, IRQ <sub>2</sub> to IRQ <sub>0</sub> *5 | V <sub>T</sub> <sup>−</sup>                               | 1.0                   | —   | —                      | V                                | V <sub>CC</sub> = 4.5 V to 5.5 V                           |
|                                   |                                                                                | V <sub>T</sub> <sup>+</sup>                               | —                     | —   | V <sub>CC</sub> × 0.7  |                                  |                                                            |
|                                   |                                                                                | V <sub>T</sub> <sup>+</sup> − V <sub>T</sub> <sup>−</sup> | 0.4                   | —   | —                      |                                  |                                                            |
|                                   |                                                                                | V <sub>T</sub> <sup>−</sup>                               | 0.8                   | —   | —                      | V <sub>CC</sub> = 4.0 V to 4.5 V |                                                            |
|                                   |                                                                                | V <sub>T</sub> <sup>+</sup>                               | —                     | —   | V <sub>CC</sub> × 0.7  |                                  |                                                            |
|                                   |                                                                                | V <sub>T</sub> <sup>+</sup> − V <sub>T</sub> <sup>−</sup> | 0.3                   | —   | —                      |                                  |                                                            |
| Input high voltage (2)            | RES, STBY, NMI MD <sub>1</sub> , MD <sub>0</sub> EXTAL                         | V <sub>IH</sub>                                           | V <sub>CC</sub> − 0.7 | —   | V <sub>CC</sub> + 0.3  | V                                |                                                            |
|                                   | P7 <sub>7</sub> to P7 <sub>0</sub>                                             |                                                           | 2.0                   | —   | AV <sub>CC</sub> + 0.3 |                                  |                                                            |
| Input high voltage                | Input pins other than (1) and (2)                                              |                                                           | 2.0                   | —   | V <sub>CC</sub> + 0.3  |                                  |                                                            |
| Input low voltage (3)             | RES, STBY MD <sub>1</sub> , MD <sub>0</sub>                                    | V <sub>IL</sub>                                           | −0.3                  | —   | 0.5                    | V                                |                                                            |
| Input low voltage                 | Input pins other than (1) and (3) above                                        |                                                           | −0.3                  | —   | 0.8                    |                                  | V <sub>CC</sub> = 4.5 V to 5.5 V                           |
|                                   |                                                                                |                                                           | −0.3                  | —   | 0.6                    |                                  | V <sub>CC</sub> = 4.0 V to 4.5 V                           |
| Output high voltage               | All output pins                                                                | V <sub>OH</sub>                                           | V <sub>CC</sub> − 0.5 | —   | —                      | V                                | I <sub>OH</sub> = −200 μA                                  |
|                                   |                                                                                |                                                           | 3.5                   | —   | —                      |                                  | I <sub>OH</sub> = −1.0 mA V <sub>CC</sub> = 4.5 V to 5.5 V |
|                                   |                                                                                |                                                           | 2.8                   | —   | —                      |                                  | I <sub>OH</sub> = −1.0 mA V <sub>CC</sub> = 4.0 V to 4.5 V |
| Output low voltage                | All output pins                                                                | V <sub>OL</sub>                                           | —                     | —   | 0.4                    | V                                | I <sub>OL</sub> = 1.6 mA                                   |
|                                   | P1 <sub>7</sub> to P1 <sub>0</sub> , P2 <sub>7</sub> to P2 <sub>0</sub>        |                                                           | —                     | —   | 1.0                    |                                  | I <sub>OL</sub> = 10.0 mA                                  |
| Input leakage current             | RES, STBY                                                                      | I <sub>in</sub>                                           | —                     | —   | 10.0                   | V                                | V <sub>in</sub> = 0.5 V to V <sub>CC</sub> − 0.5 V         |
|                                   | NMI, MD <sub>1</sub> , MD <sub>0</sub>                                         |                                                           | —                     | —   | 1.0                    |                                  |                                                            |
|                                   | P7 <sub>7</sub> to P7 <sub>0</sub>                                             |                                                           | —                     | —   | 1.0                    | μA                               | V <sub>in</sub> = 0.5 V to AV <sub>CC</sub> − 0.5 V        |

Refer to notes at the end of the table.

**Table 16-3 DC Characteristics (4-V Version) (cont)**

Conditions:  $V_{CC} = 4.0\text{ V to }5.5\text{ V}$ ,  $AV_{CC} = 4.0\text{ V to }5.5\text{ V}^{*1}$ ,  $V_{SS} = AV_{SS} = 0\text{ V}$ ,  
 $T_a = -20\text{ to }75^{\circ}\text{C}$  (regular specifications),  $T_a = -40\text{ to }85^{\circ}\text{C}$  (wide-range specifications)

| Item                                   |                                                                                                                      | Symbol      | Min | Typ  | Max  | Unit          | Test Conditions                                                           |
|----------------------------------------|----------------------------------------------------------------------------------------------------------------------|-------------|-----|------|------|---------------|---------------------------------------------------------------------------|
| Leakage current in 3-state (off state) | Ports 1 to 6                                                                                                         | $ I_{TSI} $ | —   | —    | 1.0  | $\mu\text{A}$ | $V_{in} = 0.5\text{ V to }V_{CC} - 0.5\text{ V}$                          |
| Input pull-up MOS current              | Ports 1, 2, 3                                                                                                        | $-I_p$      | 30  | —    | 250  | $\mu\text{A}$ | $V_{in} = 0\text{ V}$<br>$V_{CC} = 4.5\text{ V to }5.5\text{ V}$          |
|                                        |                                                                                                                      |             | 20  | —    | 200  |               | $V_{in} = 0\text{ V}$<br>$V_{CC} = 4.0\text{ V to }4.5\text{ V}$          |
| Input capacitance                      | $\overline{\text{RES}}, \overline{\text{STBY}}$                                                                      | $C_{in}$    | —   | —    | 60   | $\text{pF}$   | $V_{in} = 0\text{ V}$<br>$f = 1\text{ MHz}$<br>$T_a = 25^{\circ}\text{C}$ |
|                                        | $\overline{\text{NMI}}, \text{MD}_1$                                                                                 |             | —   | —    | 30   |               |                                                                           |
|                                        | All input pins except $\overline{\text{RES}}$ , $\overline{\text{STBY}}$ , $\overline{\text{NMI}}$ and $\text{MD}_1$ |             | —   | —    | 15   |               |                                                                           |
| Current dissipation*2                  | Normal operation                                                                                                     | $I_{CC}$    | —   | 27   | 45   | $\text{mA}$   | $f = 12\text{ MHz}$                                                       |
|                                        |                                                                                                                      |             | —   | 36   | 60   |               | $f = 16\text{ MHz}$<br>$V_{CC} = 4.5\text{ V to }5.5\text{ V}$            |
|                                        | Sleep mode                                                                                                           |             | —   | 18   | 30   |               | $f = 12\text{ MHz}$                                                       |
|                                        |                                                                                                                      |             | —   | 24   | 40   |               | $f = 16\text{ MHz}$<br>$V_{CC} = 4.5\text{ V to }5.5\text{ V}$            |
|                                        | Standby modes*3                                                                                                      |             | —   | 0.01 | 5.0  | $\mu\text{A}$ | $T_a \leq 50^{\circ}\text{C}$                                             |
|                                        |                                                                                                                      |             | —   | —    | 20.0 |               | $50^{\circ}\text{C} < T_a$                                                |
| Analog supply current                  | During A/D conversion                                                                                                | $AI_{CC}$   | —   | 2.0  | 5.0  | $\text{mA}$   | $AV_{CC} = 2.0\text{ V to }5.5\text{ V}$                                  |
|                                        | Waiting                                                                                                              |             | —   | 0.01 | 5.0  | $\mu\text{A}$ |                                                                           |
| Analog supply voltage*1                |                                                                                                                      | $AV_{CC}$   | 4.0 | —    | 5.5  | $\text{V}$    | During operation                                                          |
|                                        |                                                                                                                      |             | 2.0 | —    | 5.5  |               | During wait state or when not in use                                      |
| RAM standby voltage                    |                                                                                                                      | $V_{RAM}$   | 2.0 | —    | —    | $\text{V}$    |                                                                           |

Refer to notes at the end of the table.

- Notes:
1. Even when the A/D converter is not used, connect  $AV_{CC}$  to power supply  $V_{CC}$  and keep the applied voltage between 2.0 V and 5.5 V.
  2. Current dissipation values assume that  $V_{IH\ min} = V_{CC} - 0.5\ V$ ,  $V_{IL\ max} = 0.5\ V$ , all output pins are in the no-load state, and all input pull-up transistors are off.
  3. For these values it is assumed that  $V_{RAM} \leq V_{CC} < 4.0\ V$  and  $V_{IH\ min} = V_{CC} \times 0.9$ ,  $V_{IL\ max} = 0.3\ V$ .
  4.  $P6_7$  to  $P6_0$  include supporting module inputs multiplexed with them.
  5.  $\overline{IRQ}_2$  includes  $\overline{ADTRG}$  multiplexed with it.

**Table 16-4 DC Characteristics (3-V Version)**

Conditions:  $V_{CC} = 2.7 \text{ V to } 5.5 \text{ V}$ ,  $AV_{CC} = 2.7 \text{ V to } 5.5 \text{ V}^{*1}$ ,  $V_{SS} = AV_{SS} = 0 \text{ V}$ ,  $T_a = -20 \text{ to } 75^\circ\text{C}$

| Item                                   |                                                                                         | Symbol              | Min                  | Typ | Max                 | Unit          | Test Conditions                                                        |
|----------------------------------------|-----------------------------------------------------------------------------------------|---------------------|----------------------|-----|---------------------|---------------|------------------------------------------------------------------------|
| Schmitt trigger input voltage (1)      | P6 <sub>7</sub> to P6 <sub>0</sub> *4, IRQ <sub>2</sub> to IRQ <sub>0</sub> *5          | $V_{T^-}$           | $V_{CC} \times 0.15$ | —   | —                   | V             |                                                                        |
|                                        |                                                                                         | $V_{T^+}$           | —                    | —   | $V_{CC} \times 0.7$ |               |                                                                        |
|                                        |                                                                                         | $V_{T^+} - V_{T^-}$ | 0.2                  | —   | —                   |               |                                                                        |
| Input high voltage (2)                 | $\overline{RES}$ , $\overline{STBY}$<br>MD <sub>1</sub> , MD <sub>0</sub><br>EXTAL, NMI | $V_{IH}$            | $V_{CC} \times 0.9$  | —   | $V_{CC} + 0.3$      | V             |                                                                        |
|                                        | P7 <sub>7</sub> to P7 <sub>0</sub>                                                      |                     |                      |     |                     |               | $V_{CC} \times 0.7$ — $AV_{CC} + 0.3$                                  |
| Input high voltage                     | Input pins other than (1) and (2) above                                                 |                     | $V_{CC} \times 0.7$  | —   | $V_{CC} + 0.3$      |               |                                                                        |
| Input low voltage (3)                  | $\overline{RES}$ , $\overline{STBY}$<br>MD <sub>1</sub> , MD <sub>0</sub>               | $V_{IL}$            | -0.3                 | —   | $V_{CC} \times 0.1$ | V             |                                                                        |
|                                        | Input pins other than (1) and (3) above                                                 |                     |                      |     |                     |               | $V_{CC} \times 0.15$                                                   |
| Output high voltage                    | All output pins                                                                         | $V_{OH}$            | $V_{CC} - 0.5$       | —   | —                   | V             | $I_{OH} = -200 \mu\text{A}$                                            |
|                                        |                                                                                         |                     | $V_{CC} - 1.0$       | —   | —                   |               | $I_{OH} = -1.0 \text{ mA}$                                             |
| Output low voltage                     | All output pins                                                                         | $V_{OL}$            | —                    | —   | 0.4                 | V             | $I_{OL} = 0.8 \text{ mA}$                                              |
|                                        | Ports 1 and 2                                                                           |                     | —                    | —   | 0.4                 |               | $I_{OL} = 1.6 \text{ mA}$                                              |
| Input leakage current                  | $\overline{RES}$ , $\overline{STBY}$                                                    | $ I_{in} $          | —                    | —   | 10.0                | $\mu\text{A}$ | $V_{in} = 0.5 \text{ V to } V_{CC} - 0.5 \text{ V}$                    |
|                                        | $\overline{NMI}$ , MD <sub>1</sub> , MD <sub>0</sub>                                    |                     | —                    | —   | 1.0                 |               |                                                                        |
|                                        | P7 <sub>7</sub> to P7 <sub>0</sub>                                                      |                     | —                    | —   | 1.0                 |               | $V_{in} = 0.5 \text{ V to } AV_{CC} - 0.5 \text{ V}$                   |
| Leakage current in 3-state (off state) | Ports 1 to 6                                                                            | $ I_{TSI} $         | —                    | —   | 1.0                 | $\mu\text{A}$ | $V_{in} = 0.5 \text{ V to } V_{CC} - 0.5 \text{ V}$                    |
| Input pull-up MOS current              | Ports 1, 2, 3                                                                           | $-I_p$              | 3                    | —   | 120                 | $\mu\text{A}$ | $V_{in} = 0 \text{ V}$ ,<br>$V_{CC} = 2.7 \text{ V to } 4.0 \text{ V}$ |

Refer to notes at the end of the table.



**Table 16-4 DC Characteristics (3-V Version) (cont)**

Conditions:  $V_{CC} = 2.7\text{ V to }5.5\text{ V}$ ,  $AV_{CC} = 2.7\text{ V to }5.5\text{ V}^{*1}$ ,  $V_{SS} = AV_{SS} = 0\text{ V}$ ,  $T_a = -20\text{ to }75^{\circ}\text{C}$

| Item                                  |                                                                                          | Symbol    | Min | Typ  | Max  | Unit          | Test Conditions                                                           |
|---------------------------------------|------------------------------------------------------------------------------------------|-----------|-----|------|------|---------------|---------------------------------------------------------------------------|
| Input capacitance                     | $\overline{RES}$ , $\overline{STBY}$                                                     | $C_{in}$  | —   | —    | 60   | pF            | $V_{in} = 0\text{ V}$<br>$f = 1\text{ MHz}$<br>$T_a = 25^{\circ}\text{C}$ |
|                                       | $\overline{NMI}$ , $MD_1$                                                                |           | —   | —    | 30   |               |                                                                           |
|                                       | All input pins except $\overline{RES}$ , $\overline{STBY}$ , $\overline{NMI}$ and $MD_1$ |           | —   | —    | 15   |               |                                                                           |
| Current dissipation*2                 | Normal operation                                                                         | $I_{CC}$  | —   | 7    | —    | mA            | $f = 6\text{ MHz}$<br>$V_{CC} = 2.7\text{ V to }3.6\text{ V}$             |
|                                       |                                                                                          |           | —   | 12   | 22   |               | $f = 10\text{ MHz}$ ,<br>$V_{CC} = 2.7\text{ V to }3.6\text{ V}$          |
|                                       |                                                                                          |           | —   | 25   | —    |               | $f = 10\text{ MHz}$ ,<br>$V_{CC} = 4.0\text{ V to }5.5\text{ V}$          |
|                                       | Sleep mode                                                                               |           | —   | 5    | —    |               | $f = 6\text{ MHz}$<br>$V_{CC} = 2.7\text{ V to }3.6\text{ V}$             |
|                                       |                                                                                          |           | —   | 9    | 16   |               | $f = 10\text{ MHz}$<br>$V_{CC} = 2.7\text{ V to }3.6\text{ V}$            |
|                                       |                                                                                          |           | —   | 18   | —    |               | $f = 10\text{ MHz}$<br>$V_{CC} = 4.0\text{ V to }5.5\text{ V}$            |
|                                       | Standby modes*3                                                                          |           | —   | 0.01 | 5.0  | $\mu\text{A}$ | $T_a \leq 50^{\circ}\text{C}$                                             |
|                                       |                                                                                          |           | —   | —    | 20.0 | $\mu\text{A}$ | $50^{\circ}\text{C} < T_a$                                                |
|                                       |                                                                                          |           |     |      |      |               |                                                                           |
| Analog supply current                 | During A/D conversion                                                                    | $AI_{CC}$ | —   | 2.0  | 5.0  | mA            | $AV_{CC} = 2.0\text{ V to }5.5\text{ V}$                                  |
|                                       | Waiting                                                                                  |           | —   | 0.01 | 5.0  |               |                                                                           |
| Analog supply voltage*1               |                                                                                          | $AV_{CC}$ | 2.7 | —    | 5.5  | V             | During operation                                                          |
|                                       |                                                                                          |           | 2.0 | —    | 5.5  |               | During wait state or when not in use                                      |
| RAM backup voltage (in standby modes) |                                                                                          | $V_{RAM}$ | 2.0 | —    | —    | V             |                                                                           |

- Notes: 1. Even when the A/D converter is not used, connect  $AV_{CC}$  to power supply  $V_{CC}$  and keep the applied voltage between 2.0 V and 5.5 V.
2. Current dissipation values assume that  $V_{IH\min} = V_{CC} - 0.5\text{ V}$ ,  $V_{IL\max} = 0.5\text{ V}$ , all output pins are in the no-load state, and all input pull-up transistors are off.
3. For these values it is assumed that  $V_{RAM} \leq V_{CC} < 2.7\text{ V}$  and  $V_{IH\min} = V_{CC} \times 0.9$ ,  $V_{IL\max} = 0.3\text{ V}$ .
4.  $\overline{P6_7}$  to  $P6_0$  include supporting module inputs multiplexed with them.
5.  $\overline{IRQ_2}$  includes  $\overline{ADTRG}$  multiplexed with it.

**Table 16-5 Allowable Output Current Values (5-V Version 4-V Version)**

Conditions:  $V_{CC} = 4.0\text{ V to }5.5\text{ V}$ ,  $AV_{CC} = 4.0\text{ V to }5.5\text{ V}$ ,  $V_{SS} = AV_{SS} = 0\text{ V}$ ,  
 $T_a = -20\text{ to }75^\circ\text{C}$  (regular specifications),  $T_a = -40\text{ to }85^\circ\text{C}$  (wide-range specifications)


| Item                                    |                      | Symbol           | Min | Typ | Max | Unit |
|-----------------------------------------|----------------------|------------------|-----|-----|-----|------|
| Allowable output low                    | Ports 1 and 2        | $I_{OL}$         | —   | 10  | mA  |      |
|                                         | Other output pins    |                  | —   | —   | 2   |      |
| Allowable output low current (total)    | Ports 1 and 2, total | $\Sigma I_{OL}$  | —   | —   | 80  | mA   |
|                                         | Total of all output  |                  | —   | —   | 120 |      |
| Allowable output high current (per pin) | All output pins      | $-I_{OH}$        | —   | —   | 2   | mA   |
| Allowable output high current (total)   | Total of all output  | $\Sigma -I_{OH}$ | —   | —   | 40  | mA   |

**Table 16-6 Allowable Output Current Values (3-V Version)**


Conditions:  $V_{CC} = 2.7\text{ to }5.5\text{ V}$ ,  $AV_{CC} = 2.7\text{ V to }5.5\text{ V}$ ,  $V_{SS} = AV_{SS} = 0\text{ V}$ ,  $T_a = -20\text{ to }75^\circ\text{C}$

| Item                                    |                      | Symbol           | Min | Typ | Max | Unit |
|-----------------------------------------|----------------------|------------------|-----|-----|-----|------|
| Allowable output low                    | Ports 1 and 2        | $I_{OL}$         | —   | —   | 2   | mA   |
|                                         | Other output pins    |                  | —   | —   | 1   |      |
| Allowable output low current (total)    | Ports 1 and 2, total | $\Sigma I_{OL}$  | —   | —   | 40  | mA   |
|                                         | Total of all output  |                  | —   | —   | 60  |      |
| Allowable output high current (per pin) | All output pins      | $-I_{OH}$        | —   | —   | 2   | mA   |
| Allowable output high current (total)   | Total of all output  | $\Sigma -I_{OH}$ | —   | —   | 30  | mA   |

Note: To avoid degrading the reliability of the chip, be careful not to exceed the output current values in tables 16-5 and 16-6. In particular, when driving a darlington transistor pair or LED directly, be sure to insert a current-limiting resistor in the output path. See figures 16-1 and 16-2.

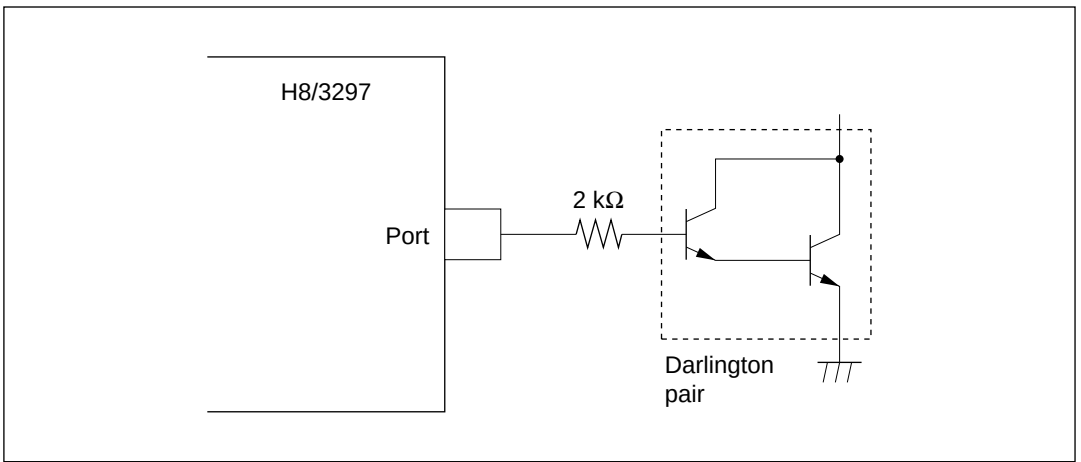

**Figure 16-1 Example of Circuit for Driving a Darlington Pair (5-V Version)**

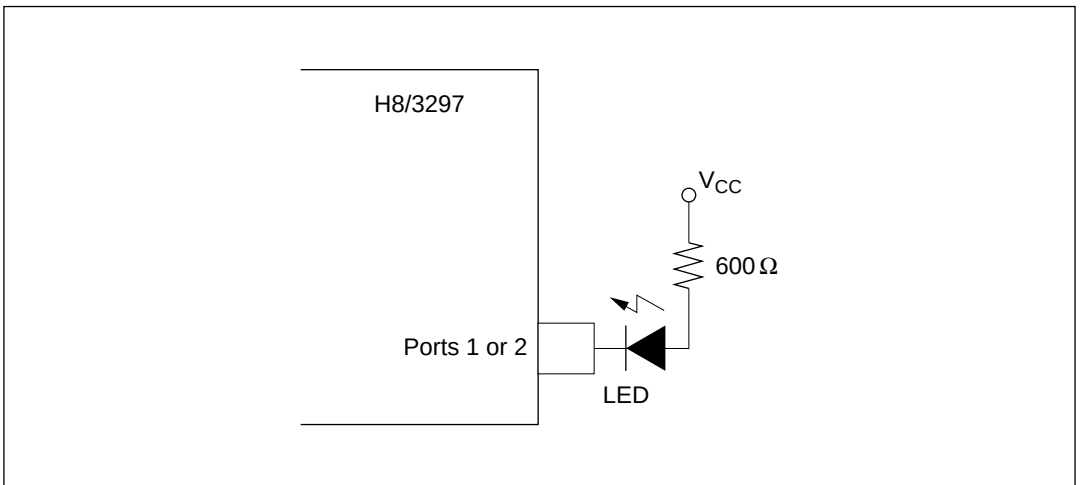

**Figure 16-2 Example of Circuit for Driving an LED (5-V Version)**

## 16.2.2 AC Characteristics

The AC characteristics are listed in three tables. Bus timing parameters are given in table 16-7, control signal timing parameters in table 16-8, and timing parameters of the on-chip supporting modules in table 16-9.

**Table 16-7 Bus Timing**

Condition A:  $V_{CC} = 5.0\text{ V} \pm 10\%$ ,  $V_{SS} = 0\text{ V}$ ,  $\phi = 2.0\text{ MHz}$  to maximum operating frequency,

$T_a = -20\text{ to }75^\circ\text{C}$  (regular specifications),

$T_a = -40\text{ to }85^\circ\text{C}$  (wide-range specifications)

Condition B:  $V_{CC} = 4.0\text{ V to }5.5\text{ V}$ ,  $V_{SS} = 0\text{ V}$ ,  $\phi = 2.0\text{ MHz}$  to maximum operating frequency,

$T_a = -20\text{ to }75^\circ\text{C}$  (regular specifications),

$T_a = -40\text{ to }85^\circ\text{C}$  (wide-range specifications)

Condition C:  $V_{CC} = 2.7\text{ V to }5.5\text{ V}$ ,  $V_{SS} = 0\text{ V}$ ,  $\phi = 2.0\text{ MHz}$  to maximum operating frequency,

$T_a = -20\text{ to }75^\circ\text{C}$

| Item                      | Symbol           | Condition C |     | Condition B |     | Condition A |     | Unit | Test Conditions |
|---------------------------|------------------|-------------|-----|-------------|-----|-------------|-----|------|-----------------|
|                           |                  | 10 MHz      |     | 12 MHz      |     | 16 MHz      |     |      |                 |
|                           |                  | Min         | Max | Min         | Max | Min         | Max |      |                 |
| Clock cycle time          | t <sub>cyc</sub> | 100         | 500 | 83.3        | 500 | 62.5        | 500 | ns   | Fig. 16-4       |
| Clock pulse width low     | t <sub>CL</sub>  | 30          | —   | 30          | —   | 20          | —   | ns   | Fig. 16-4       |
| Clock pulse width high    | t <sub>CH</sub>  | 30          | —   | 30          | —   | 20          | —   | ns   | Fig. 16-4       |
| Clock rise time           | t <sub>Cr</sub>  | —           | 20  | —           | 10  | —           | 10  | ns   | Fig. 16-4       |
| Clock fall time           | t <sub>Cf</sub>  | —           | 20  | —           | 10  | —           | 10  | ns   | Fig. 16-4       |
| Address delay time        | t <sub>AD</sub>  | —           | 50  | —           | 35  | —           | 30  | ns   | Fig. 16-4       |
| Address hold time         | t <sub>AH</sub>  | 20          | —   | 15          | —   | 10          | —   | ns   | Fig. 16-4       |
| Address strobe delay time | t <sub>ASD</sub> | —           | 50  | —           | 35  | —           | 30  | ns   | Fig. 16-4       |
| Write strobe delay time   | t <sub>WSD</sub> | —           | 50  | —           | 35  | —           | 30  | ns   | Fig. 16-4       |
| Strobe delay time         | t <sub>SD</sub>  | —           | 50  | —           | 35  | —           | 30  | ns   | Fig. 16-4       |
| Write strobe pulse width* | t <sub>WSW</sub> | 110         | —   | 90          | —   | 60          | —   | ns   | Fig. 16-4       |
| Address setup time 1*     | t <sub>AS1</sub> | 15          | —   | 10          | —   | 10          | —   | ns   | Fig. 16-4       |
| Address setup time 2*     | t <sub>AS2</sub> | 65          | —   | 50          | —   | 40          | —   | ns   | Fig. 16-4       |
| Read data setup time      | t <sub>RDS</sub> | 35          | —   | 20          | —   | 20          | —   | ns   | Fig. 16-4       |
| Read data hold time*      | t <sub>RDH</sub> | 0           | —   | 0           | —   | 0           | —   | ns   | Fig. 16-4       |
| Read data access time*    | t <sub>ACC</sub> | —           | 170 | —           | 160 | —           | 110 | ns   | Fig. 16-4       |
| Write data delay time     | t <sub>WDD</sub> | —           | 75  | —           | 60  | —           | 60  | ns   | Fig. 16-4       |
| Write data setup time     | t <sub>WDS</sub> | 5           | —   | 5           | —   | 5           | —   | ns   | Fig. 16-4       |
| Write data hold time      | t <sub>WDH</sub> | 20          | —   | 20          | —   | 20          | —   | ns   | Fig. 16-4       |
| Wait setup time           | t <sub>WTS</sub> | 40          | —   | 35          | —   | 30          | —   | ns   | Fig. 16-5       |
| Wait hold time            | t <sub>WTH</sub> | 10          | —   | 10          | —   | 10          | —   | ns   | Fig. 16-5       |

Note: \* Values at maximum operating frequency

**Table 16-8 Control Signal Timing**


Condition A:  $V_{CC} = 5.0 \text{ V} \pm 10\%$ ,  $V_{SS} = 0 \text{ V}$ ,  $\phi = 2.0 \text{ MHz}$  to maximum operating frequency,  
 $T_a = -20$  to  $75^\circ\text{C}$  (regular specifications),  
 $T_a = -40$  to  $85^\circ\text{C}$  (wide-range specifications)

Condition B:  $V_{CC} = 4.0 \text{ V}$  to  $5.5 \text{ V}$ ,  $V_{SS} = 0 \text{ V}$ ,  $\phi = 2.0 \text{ MHz}$  to maximum operating frequency,  
 $T_a = -20$  to  $75^\circ\text{C}$  (regular specifications),  
 $T_a = -40$  to  $85^\circ\text{C}$  (wide-range specifications)

Condition C:  $V_{CC} = 2.7 \text{ V}$  to  $5.5 \text{ V}$ ,  $V_{SS} = 0 \text{ V}$ ,  $\phi = 2.0 \text{ MHz}$  to maximum operating frequency,  
 $T_a = -20$  to  $75^\circ\text{C}$

| Item                                                                                                                                                          | Symbol            | Condition C |     | Condition B |     | Condition A |     | Unit             | Test Conditions |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|-------------|-----|-------------|-----|-------------|-----|------------------|-----------------|
|                                                                                                                                                               |                   | Min         | Max | Min         | Max | Min         | Max |                  |                 |
| $\overline{\text{RES}}$ setup time                                                                                                                            | $t_{\text{RESS}}$ | 300         | –   | 200         | –   | 200         | –   | ns               | Fig. 16-6       |
| $\overline{\text{RES}}$ pulse width                                                                                                                           | $t_{\text{RESW}}$ | 10          | –   | 10          | –   | 10          | –   | $t_{\text{cyc}}$ | Fig. 16-6       |
| NMI setup time<br>( $\overline{\text{NMI}}$ , $\overline{\text{IRQ}}_0$ to $\overline{\text{IRQ}}_2$ )                                                        | $t_{\text{NMIS}}$ | 300         | –   | 150         | –   | 150         | –   | ns               | Fig. 16-7       |
| NMI hold time<br>( $\overline{\text{NMI}}$ , $\overline{\text{IRQ}}_0$ to $\overline{\text{IRQ}}_2$ )                                                         | $t_{\text{NMIH}}$ | 10          | –   | 10          | –   | 10          | –   | ns               | Fig. 16-7       |
| Interrupt pulse width<br>for recovery from soft-<br>ware standby mode<br>( $\overline{\text{NMI}}$ , $\overline{\text{IRQ}}_0$ to $\overline{\text{IRQ}}_2$ ) | $t_{\text{NMIW}}$ | 300         | –   | 200         | –   | 200         | –   | ns               | Fig. 16-7       |
| Crystal oscillator settling<br>time (reset)                                                                                                                   | $t_{\text{OSC1}}$ | 20          | –   | 20          | –   | 20          | –   | ms               | Fig. 16-8       |
| Crystal oscillator settling<br>time (software standby)                                                                                                        | $t_{\text{OSC2}}$ | 8           | –   | 8           | –   | 8           | –   | ms               | Fig. 16-9       |

• **Measurement Conditions for AC Characteristics**

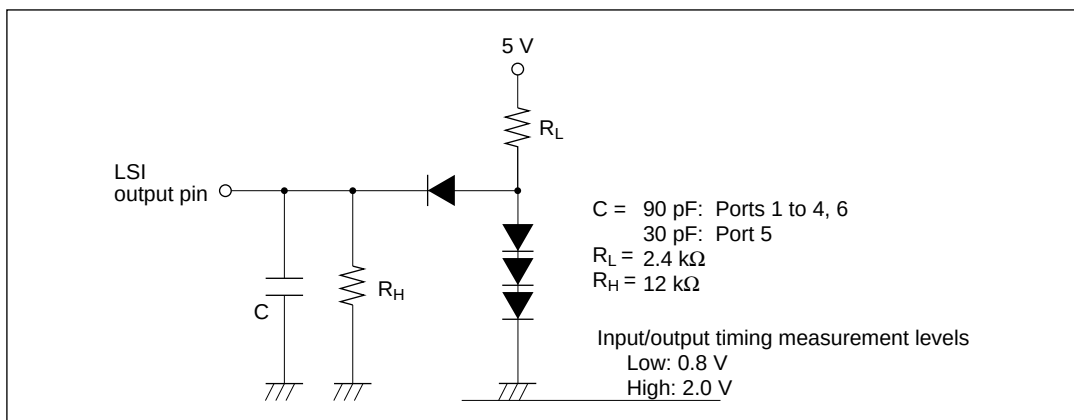

**Figure 16-3 Measurement Conditions for A/C Characteristics**

**Table 16-9 Timing Conditions of On-Chip Supporting Modules**

Condition A:  $V_{CC} = 5.0\text{ V} \pm 10\%$ ,  $V_{SS} = 0\text{ V}$ ,  $\phi = 2.0\text{ MHz}$  to maximum operating frequency,

$T_a = -20\text{ to }75^\circ\text{C}$  (regular specifications),

$T_a = -40\text{ to }85^\circ\text{C}$  (wide-range specifications)

Condition B:  $V_{CC} = 4.0\text{ V to }5.5\text{ V}$ ,  $V_{SS} = 0\text{ V}$ ,  $\phi = 2.0\text{ MHz}$  to maximum operating frequency,

$T_a = -20\text{ to }75^\circ\text{C}$  (regular specifications),

$T_a = -40\text{ to }85^\circ\text{C}$  (wide-range specifications)

Condition C:  $V_{CC} = 2.7\text{ V to }5.5\text{ V}$ ,  $V_{SS} = 0\text{ V}$ ,  $\phi = 2.0\text{ MHz}$  to maximum operating frequency,

$T_a = -20\text{ to }75^\circ\text{C}$

| Item  |                                       | Symbol                                   | Condition C |     | Condition B |     | Condition A |     | Unit              | Test Conditions |
|-------|---------------------------------------|------------------------------------------|-------------|-----|-------------|-----|-------------|-----|-------------------|-----------------|
|       |                                       |                                          | 10 MHz      |     | 12 MHz      |     | 16 MHz      |     |                   |                 |
|       |                                       |                                          | Min         | Max | Min         | Max | Min         | Max |                   |                 |
| FRT   | Timer output delay time               | t <sub>FTOD</sub>                        | –           | 150 | –           | 100 | –           | 100 | ns                | Fig. 16-10      |
|       | Timer input setup time                | t <sub>FTIS</sub>                        | 80          | –   | 50          | –   | 50          | –   | ns                | Fig. 16-10      |
|       | Timer clock input setup time          | t <sub>FTCS</sub>                        | 80          | –   | 50          | –   | 50          | –   | ns                | Fig. 16-11      |
|       | Timer clock pulse width               | t <sub>FTCWH</sub><br>t <sub>FTCWL</sub> | 1.5         | –   | 1.5         | –   | 1.5         | –   | t <sub>cyc</sub>  | Fig. 16-11      |
| TMR   | Timer output delay time               | t <sub>TMOD</sub>                        | –           | 150 | –           | 100 | –           | 100 | ns                | Fig. 16-12      |
|       | Timer reset input setup time          | t <sub>TMRS</sub>                        | 80          | –   | 50          | –   | 50          | –   | ns                | Fig. 16-14      |
|       | Timer clock input setup time          | t <sub>TMCS</sub>                        | 80          | –   | 50          | –   | 50          | –   | ns                | Fig. 16-13      |
|       | Timer clock pulse width (single edge) | t <sub>TMCWH</sub>                       | 1.5         | –   | 1.5         | –   | 1.5         | –   | t <sub>cyc</sub>  | Fig. 16-13      |
|       | Timer clock pulse width (both edges)  | t <sub>TMCWL</sub>                       | 2.5         | –   | 2.5         | –   | 2.5         | –   | t <sub>cyc</sub>  | Fig. 16-13      |
| SCI   | Input clock cycle                     | (Async) t <sub>Scyc</sub>                | 4           | –   | 4           | –   | 4           | –   | t <sub>cyc</sub>  | Fig. 16-15      |
|       |                                       | (Sync) t <sub>Scyc</sub>                 | 6           | –   | 6           | –   | 6           | –   | t <sub>cyc</sub>  | Fig. 16-15      |
|       | Transmit data delay time (Sync)       | t <sub>TXD</sub>                         | –           | 200 | –           | 100 | –           | 100 | ns                | Fig. 16-15      |
|       | Receive data setup time (Sync)        | t <sub>RXS</sub>                         | 150         | –   | 100         | –   | 100         | –   | ns                | Fig. 16-15      |
|       | Receive data hold time (Sync)         | t <sub>RXH</sub>                         | 150         | –   | 100         | –   | 100         | –   | ns                | Fig. 16-15      |
|       | Input clock pulse width               | t <sub>SCKW</sub>                        | 0.4         | 0.6 | 0.4         | 0.6 | 0.4         | 0.6 | t <sub>Scyc</sub> | Fig. 16-16      |
| Ports | Output data delay time                | t <sub>PWD</sub>                         | –           | 150 | –           | 100 | –           | 100 | ns                | Fig. 16-17      |
|       | Input data setup time                 | t <sub>PRS</sub>                         | 80          | –   | 50          | –   | 50          | –   | ns                | Fig. 16-17      |
|       | Input data hold time                  | t <sub>PRH</sub>                         | 80          | –   | 50          | –   | 50          | –   | ns                | Fig. 16-17      |

**Table 16-10 External Clock Output Delay Timing**

Conditions:  $V_{CC} = 2.7\text{ V to }5.5\text{ V}$ ,  $AV_{CC} = 2.7\text{ V to }5.5\text{ V}$ ,  
 $V_{SS} = AV_{SS} = 0\text{ V}$ ,  $T_a = -40\text{ to }+85^{\circ}\text{C}$

| Item                             | Symbol     | Condition |     | Unit          | Test Conditions |
|----------------------------------|------------|-----------|-----|---------------|-----------------|
|                                  |            | Min       | Max |               |                 |
| External clock output delay time | $t_{DEXT}$ | 500       | —   | $\mu\text{s}$ | Fig. 16-18      |

Note: \*  $t_{DEXT}$  includes  $\overline{RES}$  pulse width  $t_{RESW}$  (10 tcyc).

### 16.2.3 A/D Converter Characteristics

Table 16-11 lists the characteristics of the on-chip A/D converter.

**Table 16-11 A/D Converter Characteristics**

- Condition A:  $V_{CC} = 5.0\text{ V} \pm 10\%$ ,  $V_{CCB} = 5.0\text{ V} \pm 10\%$ ,  $AV_{CC} = 5.0\text{ V} \pm 10\%$ ,  
 $AV_{ref} = 4.5\text{ V}$  to  $AV_{CC}$ ,  $V_{SS} = 0\text{ V}$ ,  $\phi = 2.0\text{ MHz}$  to maximum operating frequency,  
 $T_a = -20$  to  $+75^\circ\text{C}$  (regular specifications),  $T_a = -40$  to  $+85^\circ\text{C}$  (wide-range specifications)
- Condition B:  $V_{CC} = 4.0\text{ V}$  to  $5.5\text{ V}$ ,  $V_{CCB} = 4.0$  to  $5.5\text{ V}$ ,  $AV_{CC} = 4.0$  to  $5.5\text{ V}$ ,  
 $AV_{ref} = 4.0$  to  $AV_{CC}$ ,  $V_{SS} = 0\text{ V}$ ,  $\phi = 2.0\text{ MHz}$  to maximum operating frequency,  
 $T_a = -20$  to  $+75^\circ\text{C}$  (regular specifications),  $T_a = -40$  to  $+85^\circ\text{C}$  (wide-range specifications)
- Condition C:  $V_{CC} = 2.7$  to  $5.5\text{ V}$ ,  $V_{CCB} = 2.7$  to  $5.5\text{ V}$ ,  $AV_{CC} = 2.7$  to  $5.5\text{ V}$ ,  
 $AV_{ref} = 2.7\text{ V}$  to  $AV_{CC}$ ,  $V_{SS} = AV_{SS} = 0\text{ V}$ ,  $\phi = 2.0\text{ MHz}$  to maximum operating frequency,  
 $T_a = -20$  to  $+75^\circ\text{C}$

| Item                                 | Condition C |     |      | Condition B |     |      | Condition A |     |      | Unit |
|--------------------------------------|-------------|-----|------|-------------|-----|------|-------------|-----|------|------|
|                                      | 10 MHz      |     |      | 12 MHz      |     |      | 16 MHz      |     |      |      |
|                                      | Min         | Typ | Max  | Min         | Typ | Max  | Min         | Typ | Max  |      |
| Resolution                           | 10          | 10  | 10   | 10          | 10  | 10   | 10          | 10  | 10   | Bits |
| Conversion time<br>(single mode)*    | —           | —   | 13.4 | —           | —   | 11.2 | —           | —   | 8.4  | μs   |
| Analog input capacitance             | —           | —   | 20   | —           | —   | 20   | —           | —   | 20   | pF   |
| Allowable signal source<br>impedance | —           | —   | 5    | —           | —   | 10   | —           | —   | 10   | kΩ   |
| Nonlinearity error                   | —           | —   | ±6.0 | —           | —   | ±3.0 | —           | —   | ±3.0 | LSB  |
| Offset error                         | —           | —   | ±4.0 | —           | —   | ±3.5 | —           | —   | ±3.5 | LSB  |
| Full-scale error                     | —           | —   | ±4.0 | —           | —   | ±3.5 | —           | —   | ±3.5 | LSB  |
| Quantizing error                     | —           | —   | ±0.5 | —           | —   | ±0.5 | —           | —   | ±0.5 | LSB  |
| Absolute accuracy                    | —           | —   | ±8.0 | —           | —   | ±4.0 | —           | —   | ±4.0 | LSB  |

Note: \* Values at maximum operating frequency



# 16.3 MCU Operational Timing

This section provides the following timing charts:

|                                         |                        |
|-----------------------------------------|------------------------|
| 16.3.1 Bus Timing                       | Figures 16-4 to 16-5   |
| 16.3.2 Control Signal Timing            | Figures 16-6 to 16-9   |
| 16.3.3 16-Bit Free-Running Timer Timing | Figures 16-10 to 16-11 |
| 16.3.4 8-Bit Timer Timing               | Figures 16-12 to 16-14 |
| 16.3.5 SCI Timing                       | Figures 16-15 to 16-16 |
| 16.3.6 I/O Port Timing                  | Figure 16-17           |
| 16.3.7 External Clock Output Timing     | Figure 16-18           |

## 16.3.1 Bus Timing

### (1) Basic Bus Cycle (without Wait States) in Expanded Modes


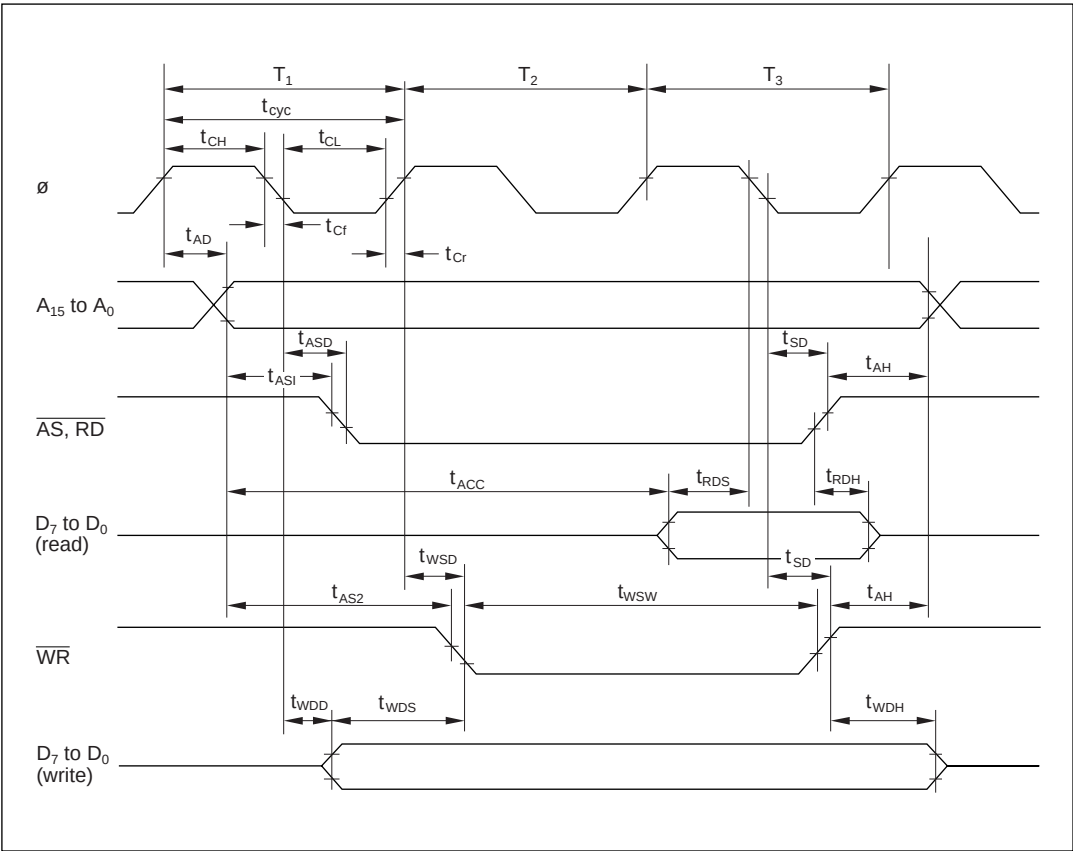


Figure 16-4 Basic Bus Cycle (without Wait States) in Expanded Modes

## (2) Basic Bus Cycle (with 1 Wait State) in Expanded Modes

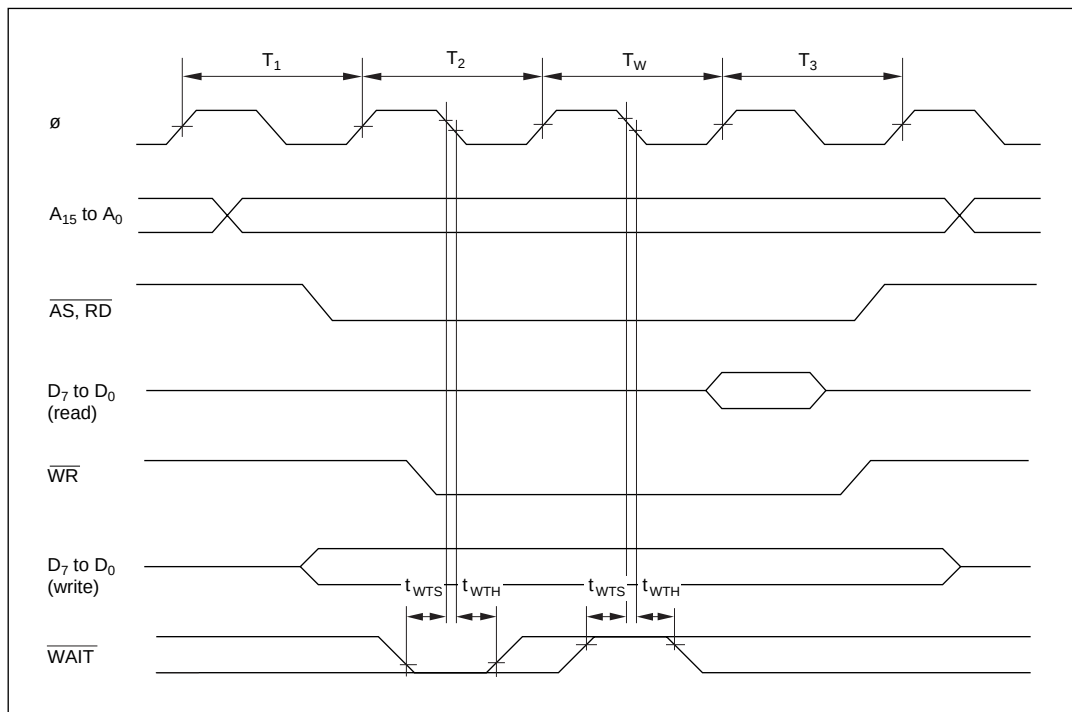

**Figure 16-5 Basic Bus Cycle (with 1 Wait State) in Expanded Modes**

### 16.3.2 Control Signal Timing

#### (1) Reset Input Timing

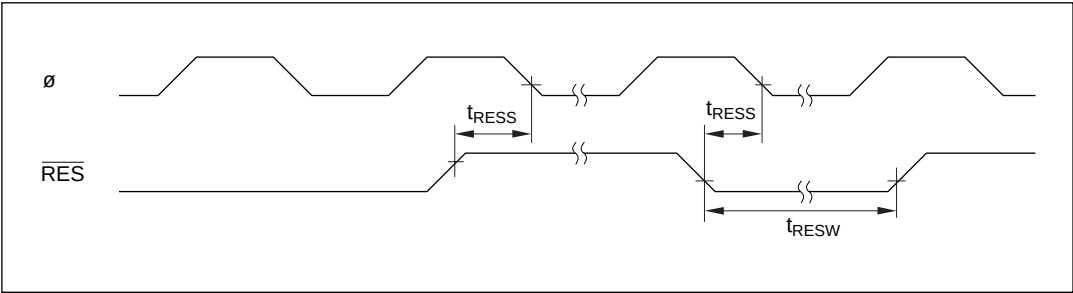


Figure 16-6 Reset Input Timing

#### (2) Interrupt Input Timing


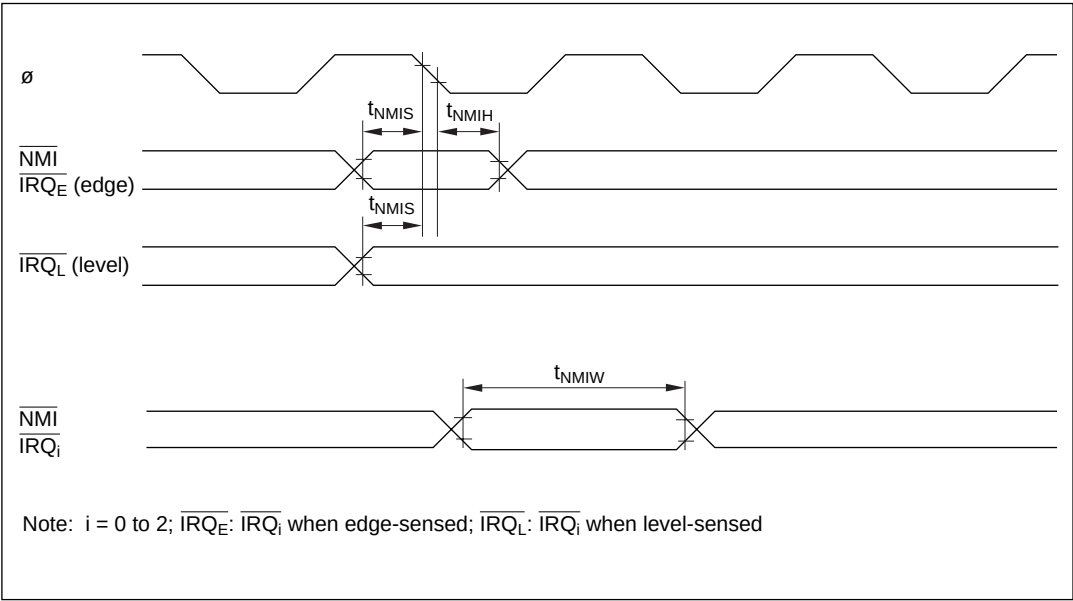



Figure 16-7 Interrupt Input Timing

### (3) Clock Settling Timing

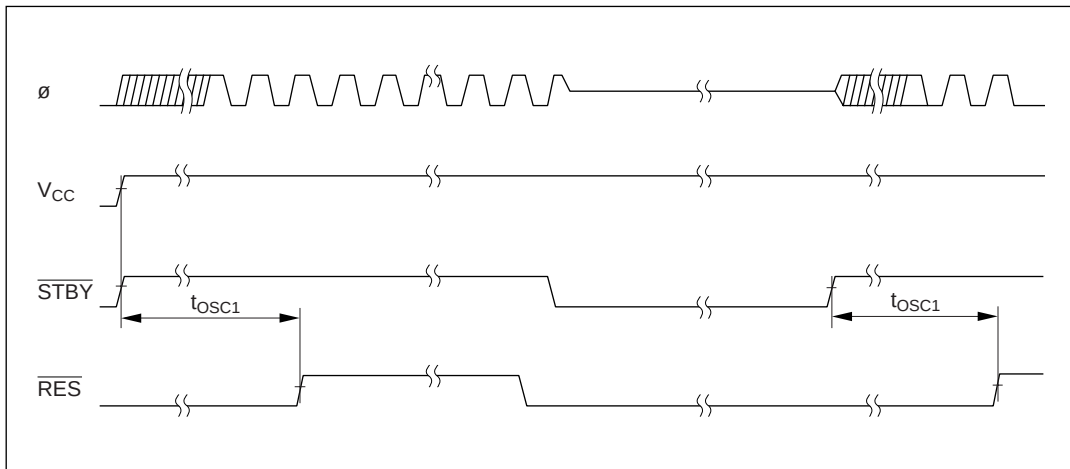

**Figure 16-8 Clock Settling Timing**

### (4) Clock Settling Timing for Recovery from Software Standby Mode

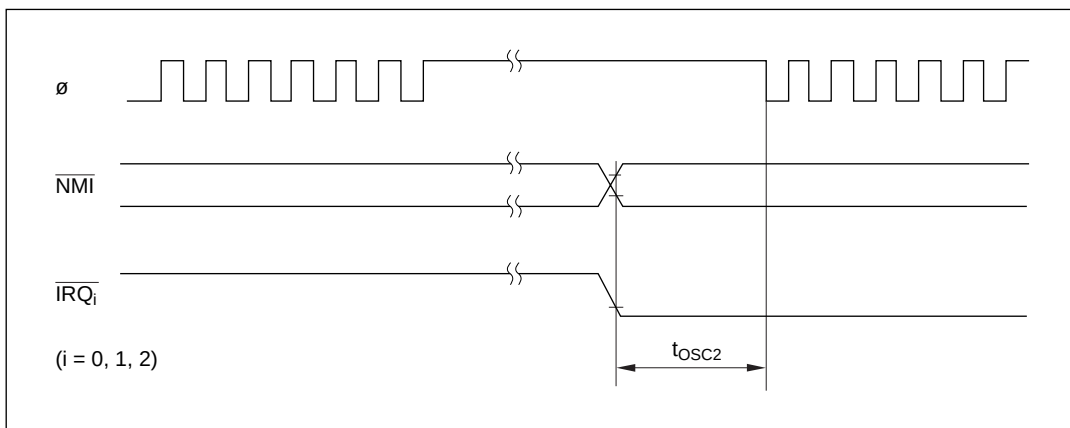

**Figure 16-9 Clock Settling Timing for Recovery from Software Standby Mode**

16.3.3 16-Bit Free-Running Timer Timing

(1) Free-Running Timer Input/Output Timing

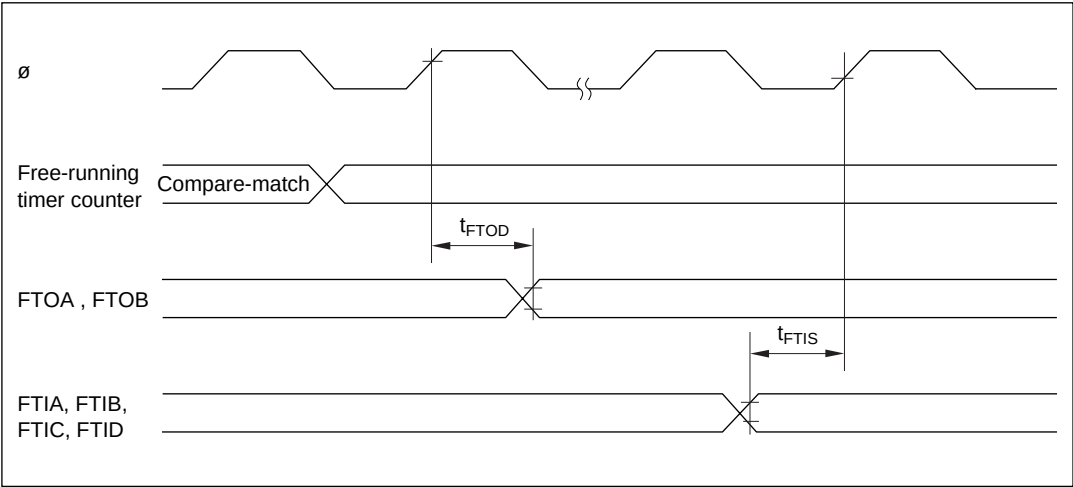


Figure 16-10 Free-Running Timer Input/Output Timing

(2) External Clock Input Timing for Free-Running Timer

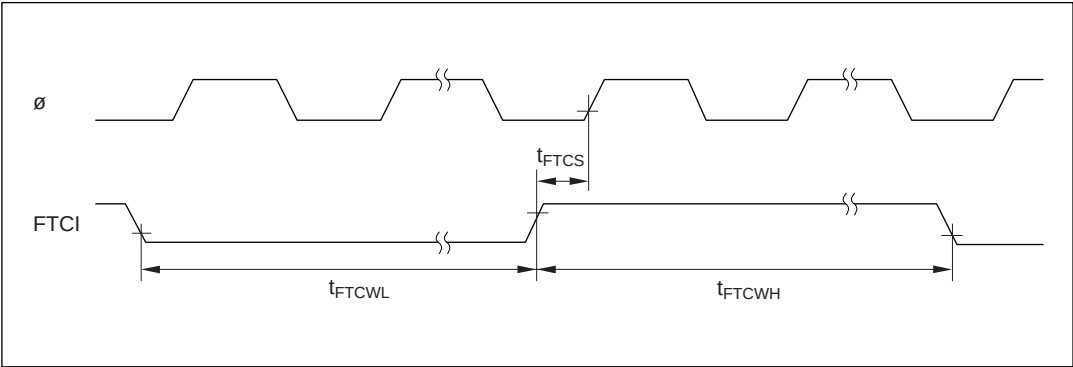


Figure 16-11 External Clock Input Timing for Free-Running Timer

16.3.4 8-Bit Timer Timing

(1) 8-Bit Timer Output Timing

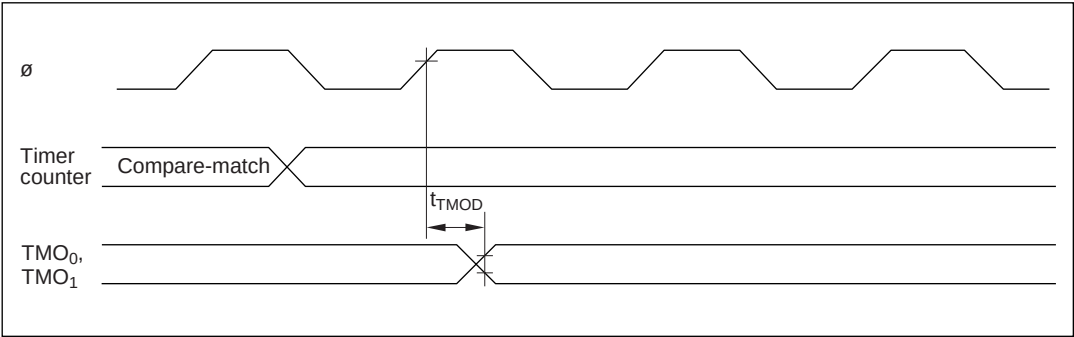


Figure 16-12 8-Bit Timer Output Timing

(2) 8-Bit Timer Clock Input Timing

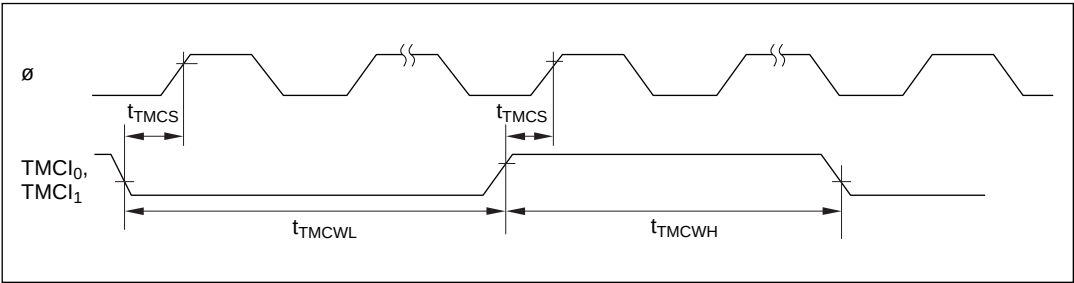


Figure 16-13 8-Bit Timer Clock Input Timing

(3) 8-Bit Timer Reset Input Timing

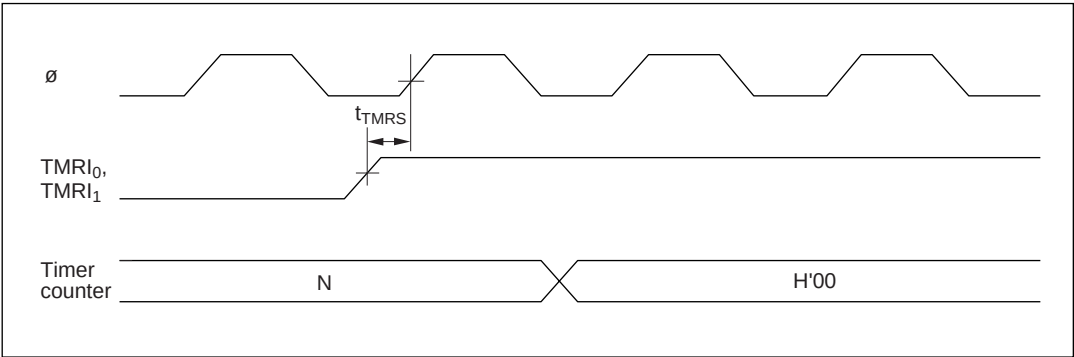


Figure 16-14 8-Bit Timer Reset Input Timing

16.3.5 Serial Communication Interface Timing

(1) SCI Input/Output Timing

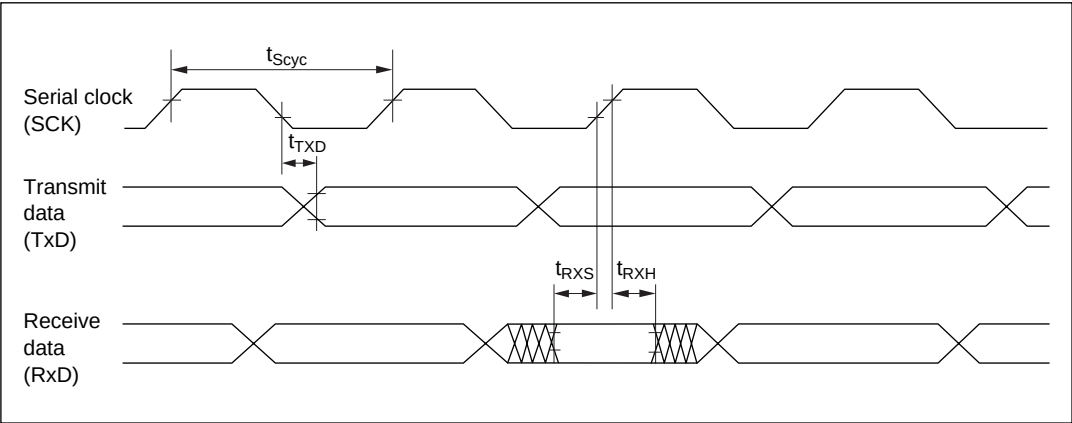


Figure 16-15 SCI Input/Output Timing (Synchronous Mode)

(2) SCI Input Clock Timing

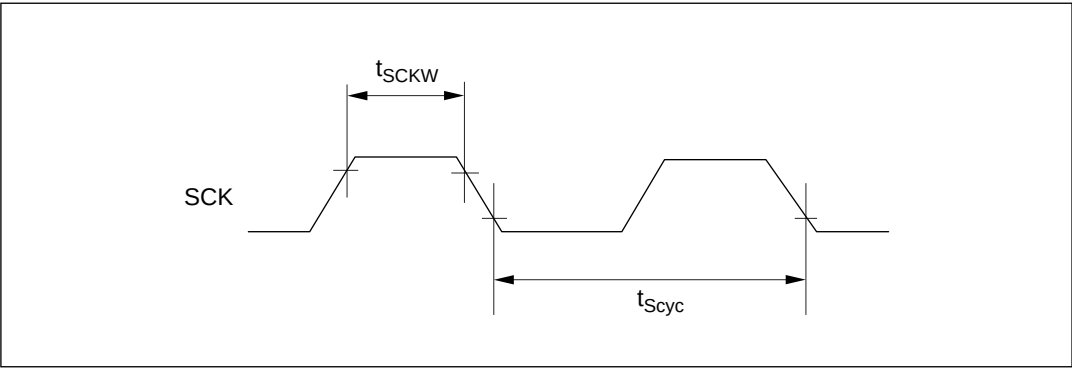


Figure 16-16 SCI Input Clock Timing

### 16.3.6 I/O Port Timing

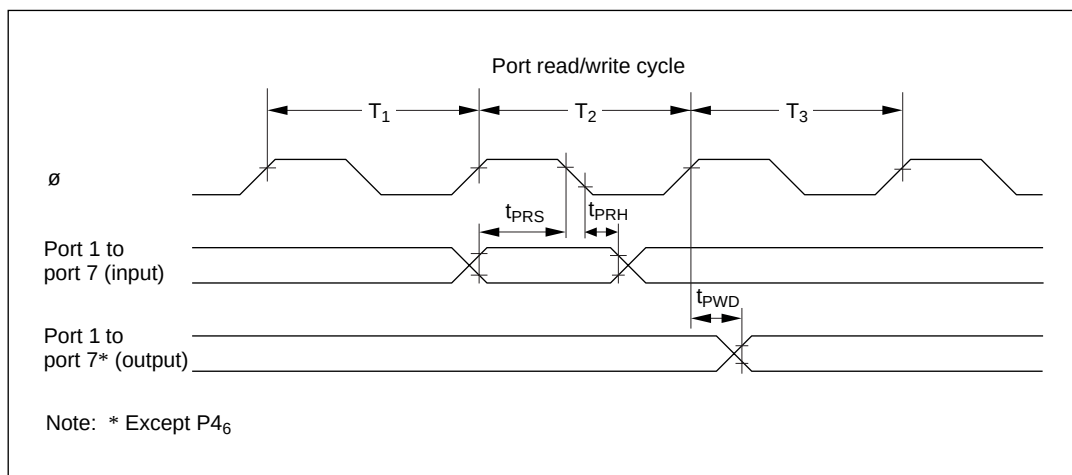


Figure 16-17 I/O Port Input/Output Timing

### 16.3.7 External Clock Output Timing

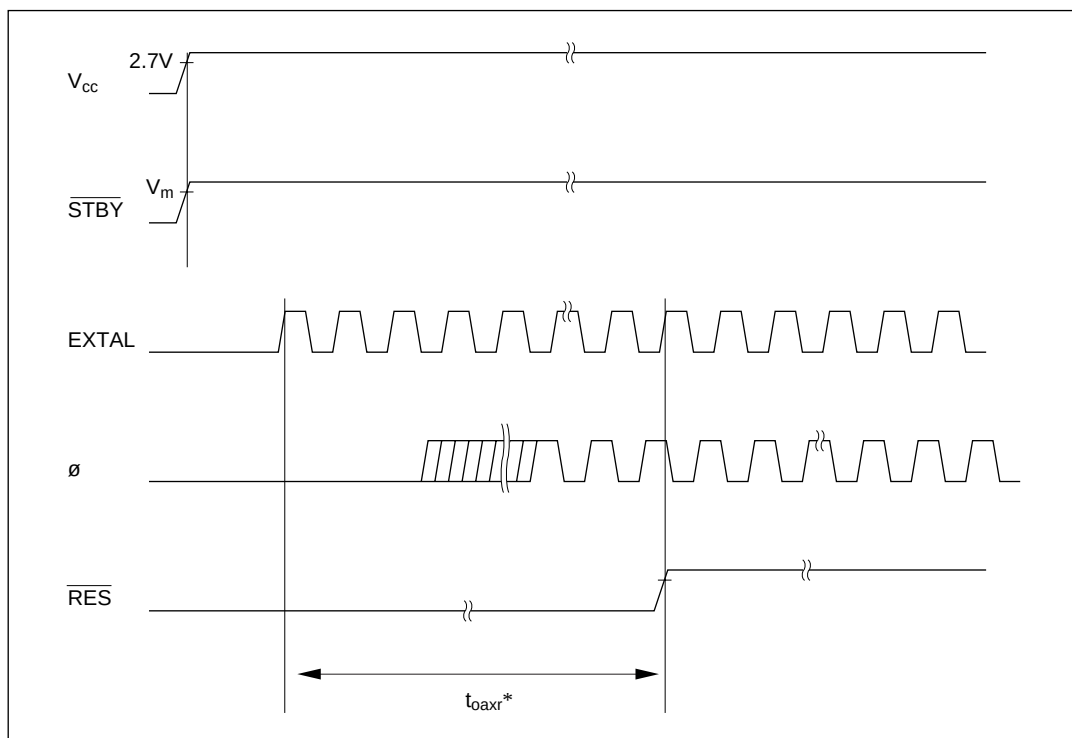


Figure 16-18 External Clock Output Delay Timing

Note: \*  $t_{DEXT}$  includes  $\overline{RES}$  pulse width  $t_{RESW}$  (10 tcyc).





# Appendix A CPU Instruction Set

## A.1 Instruction Set List

### Operation Notation

|            |                                               |
|------------|-----------------------------------------------|
| Rd8/16     | General register (destination) (8 or 16 bits) |
| Rs8/16     | General register (source) (8 or 16 bits)      |
| Rn8/16     | General register (8 or 16 bits)               |
| CCR        | Condition code register                       |
| N          | N (negative) flag in CCR                      |
| Z          | Z (zero) flag in CCR                          |
| V          | V (overflow) flag in CCR                      |
| C          | C (carry) flag in CCR                         |
| PC         | Program counter                               |
| SP         | Stack pointer                                 |
| #xx:3/8/16 | Immediate data (3, 8, or 16 bits)             |
| d:8/16     | Displacement (8 or 16 bits)                   |
| @aa:8/16   | Absolute address (8 or 16 bits)               |
| +          | Addition                                      |
| −          | Subtraction                                   |
| ×          | Multiplication                                |
| ÷          | Division                                      |
| ^          | AND logical                                   |
| ∨          | OR logical                                    |
| ⊕          | Exclusive OR logical                          |
| →          | Move                                          |
| —          | Not                                           |

### Condition Code Notation

|        |                                              |
|--------|----------------------------------------------|
| ↑<br>↓ | Modified according to the instruction result |
| *      | Undetermined (unpredictable)                 |
| 0      | Always cleared to 0                          |
| —      | Not affected by the instruction result       |





**Table A-1 Instruction Set**

| Mnemonic              | Operand Size | Operation                     | Addressing Mode/<br>Instruction Length |    |     |              |            |           |             |      |         | Condition Code |   |   |   |   |   | No. of States |   |
|-----------------------|--------------|-------------------------------|----------------------------------------|----|-----|--------------|------------|-----------|-------------|------|---------|----------------|---|---|---|---|---|---------------|---|
|                       |              |                               | #xx: 8/16                              | Rn | @Rn | @ (d:16, Rn) | @ -Rn/@Rn+ | @aa: 8/16 | @ (d:8, PC) | @@aa | Implied | I              | H | N | Z | V | C |               |   |
|                       |              |                               |                                        |    |     |              |            |           |             |      |         |                |   |   |   |   |   |               |   |
| MOV.B #xx:8, Rd       | B            | #xx:8 → Rd8                   | 2                                      |    |     |              |            |           |             |      |         |                | — | — | ↑ | ↑ | 0 | —             | 2 |
| MOV.B Rs, Rd          | B            | Rs8 → Rd8                     |                                        | 2  |     |              |            |           |             |      |         |                | — | — | ↑ | ↑ | 0 | —             | 2 |
| MOV.B @Rs, Rd         | B            | @Rs16 → Rd8                   |                                        |    | 2   |              |            |           |             |      |         |                | — | — | ↑ | ↑ | 0 | —             | 4 |
| MOV.B @(d:16, Rs), Rd | B            | @(d:16, Rs16)→ Rd8            |                                        |    |     | 4            |            |           |             |      |         |                | — | — | ↑ | ↑ | 0 | —             | 6 |
| MOV.B @Rs+, Rd        | B            | @Rs16 → Rd8<br>Rs16+1 → Rs16  |                                        |    |     |              | 2          |           |             |      |         |                | — | — | ↑ | ↑ | 0 | —             | 6 |
| MOV.B @aa:8, Rd       | B            | @aa:8 → Rd8                   |                                        |    |     |              |            | 2         |             |      |         |                | — | — | ↑ | ↑ | 0 | —             | 4 |
| MOV.B @aa:16, Rd      | B            | @aa:16 → Rd8                  |                                        |    |     |              |            | 4         |             |      |         |                | — | — | ↑ | ↑ | 0 | —             | 6 |
| MOV.B Rs, @Rd         | B            | Rs8 → @Rd16                   |                                        |    | 2   |              |            |           |             |      |         |                | — | — | ↑ | ↑ | 0 | —             | 4 |
| MOV.B Rs, @(d:16, Rd) | B            | Rs8 → @(d:16, Rd16)           |                                        |    |     | 4            |            |           |             |      |         |                | — | — | ↑ | ↑ | 0 | —             | 6 |
| MOV.B Rs, @-Rd        | B            | Rd16-1 → Rd16<br>Rs8 → @Rd16  |                                        |    |     |              | 2          |           |             |      |         |                | — | — | ↑ | ↑ | 0 | —             | 6 |
| MOV.B Rs, @aa:8       | B            | Rs8 → @aa:8                   |                                        |    |     |              |            | 2         |             |      |         |                | — | — | ↑ | ↑ | 0 | —             | 4 |
| MOV.B Rs, @aa:16      | B            | Rs8 → @aa:16                  |                                        |    |     |              |            | 4         |             |      |         |                | — | — | ↑ | ↑ | 0 | —             | 6 |
| MOV.W #xx:16, Rd      | W            | #xx:16 → Rd16                 | 4                                      |    |     |              |            |           |             |      |         |                | — | — | ↑ | ↑ | 0 | —             | 4 |
| MOV.W Rs, Rd          | W            | Rs16 → Rd16                   |                                        | 2  |     |              |            |           |             |      |         |                | — | — | ↑ | ↑ | 0 | —             | 2 |
| MOV.W @Rs, Rd         | W            | @Rs16 → Rd16                  |                                        |    | 2   |              |            |           |             |      |         |                | — | — | ↑ | ↑ | 0 | —             | 4 |
| MOV.W @(d:16, Rs), Rd | W            | @(d:16, Rs16) → Rd16          |                                        |    |     | 4            |            |           |             |      |         |                | — | — | ↑ | ↑ | 0 | —             | 6 |
| MOV.W @Rs+, Rd        | W            | @Rs16 → Rd16<br>Rs16+2 → Rs16 |                                        |    |     |              | 2          |           |             |      |         |                | — | — | ↑ | ↑ | 0 | —             | 6 |
| MOV.W @aa:16, Rd      | W            | @aa:16 → Rd16                 |                                        |    |     |              |            | 4         |             |      |         |                | — | — | ↑ | ↑ | 0 | —             | 6 |
| MOV.W Rs, @Rd         | W            | Rs16 → @Rd16                  |                                        |    | 2   |              |            |           |             |      |         |                | — | — | ↑ | ↑ | 0 | —             | 4 |
| MOV.W Rs, @(d:16, Rd) | W            | Rs16 → @(d:16, Rd16)          |                                        |    |     | 4            |            |           |             |      |         |                | — | — | ↑ | ↑ | 0 | —             | 6 |
| MOV.W Rs, @-Rd        | W            | Rd16-2 → Rd16<br>Rs16 → @Rd16 |                                        |    |     |              | 2          |           |             |      |         |                | — | — | ↑ | ↑ | 0 | —             | 6 |
| MOV.W Rs, @aa:16      | W            | Rs16 → @aa:16                 |                                        |    |     |              |            | 4         |             |      |         |                | — | — | ↑ | ↑ | 0 | —             | 6 |
| POP Rd                | W            | @SP → Rd16<br>SP+2 → SP       |                                        |    |     |              | 2          |           |             |      |         |                | — | — | ↑ | ↑ | 0 | —             | 6 |
| PUSH Rs               | W            | SP-2 → SP<br>Rs16 → @SP       |                                        |    |     |              | 2          |           |             |      |         |                | — | — | ↑ | ↑ | 0 | —             | 6 |



**Table A-1 Instruction Set (cont)**

| Mnemonic           | Operand Size | Operation                                                                                                  | Addressing Mode/<br>Instruction Length |    |     |              |            |           |             |      |         | Condition Code |   |   |   |   |   | No. of States |
|--------------------|--------------|------------------------------------------------------------------------------------------------------------|----------------------------------------|----|-----|--------------|------------|-----------|-------------|------|---------|----------------|---|---|---|---|---|---------------|
|                    |              |                                                                                                            | #xx: 8/16                              | Rn | @Rn | @ (d:16, Rn) | @ -Rn/@Rn+ | @aa: 8/16 | @ (d:8, PC) | @@aa | Implied | I              | H | N | Z | V | C |               |
|                    |              |                                                                                                            |                                        |    |     |              |            |           |             |      |         |                |   |   |   |   |   |               |
| MOVFPPE @aa:16, Rd | B            | Not supported                                                                                              |                                        |    |     |              |            |           |             |      |         |                |   |   |   |   |   |               |
| MOVTPE Rs, @aa:16  | B            | Not supported                                                                                              |                                        |    |     |              |            |           |             |      |         |                |   |   |   |   |   |               |
| EEPMOV             | —            | if R4L≠0 then<br>Repeat @R5 → @R6<br>R5+1 → R5<br>R6+1 → R6<br>R4L-1 → R4L<br><br>Until R4L=0<br>else next |                                        |    |     |              |            |           |             |      | 4       | —              | — | — | — | — | ④ |               |
| ADD.B #xx:8, Rd    | B            | Rd8+#xx:8 → Rd8                                                                                            | 2                                      |    |     |              |            |           |             |      |         | —              | ↑ | ↑ | ↑ | ↑ | ↑ |               |
| ADD.B Rs, Rd       | B            | Rd8+Rs8 → Rd8                                                                                              |                                        | 2  |     |              |            |           |             |      |         | —              | ↑ | ↑ | ↑ | ↑ | ↑ |               |
| ADD.W Rs, Rd       | W            | Rd16+Rs16 → Rd16                                                                                           |                                        | 2  |     |              |            |           |             |      |         | —              | ① | ↑ | ↑ | ↑ | ↑ |               |
| ADDX.B #xx:8, Rd   | B            | Rd8+#xx:8 +C → Rd8                                                                                         | 2                                      |    |     |              |            |           |             |      |         | —              | ↑ | ↑ | ② | ↑ | ↑ |               |
| ADDX.B Rs, Rd      | B            | Rd8+Rs8 +C → Rd8                                                                                           |                                        | 2  |     |              |            |           |             |      |         | —              | ↑ | ↑ | ② | ↑ | ↑ |               |
| ADDS.W #1, Rd      | W            | Rd16+1 → Rd16                                                                                              |                                        | 2  |     |              |            |           |             |      |         | —              | — | — | — | — | 2 |               |
| ADDS.W #2, Rd      | W            | Rd16+2 → Rd16                                                                                              |                                        | 2  |     |              |            |           |             |      |         | —              | — | — | — | — | 2 |               |
| INC.B Rd           | B            | Rd8+1 → Rd8                                                                                                |                                        | 2  |     |              |            |           |             |      |         | —              | — | ↑ | ↑ | ↑ | — |               |
| DAA.B Rd           | B            | Rd8 decimal adjust → Rd8                                                                                   |                                        | 2  |     |              |            |           |             |      |         | —              | * | ↑ | ↑ | * | ③ |               |
| SUB.B Rs, Rd       | B            | Rd8-Rs8 → Rd8                                                                                              |                                        | 2  |     |              |            |           |             |      |         | —              | ↑ | ↑ | ↑ | ↑ | ↑ |               |
| SUB.W Rs, Rd       | W            | Rd16-Rs16 → Rd16                                                                                           |                                        | 2  |     |              |            |           |             |      |         | —              | ① | ↑ | ↑ | ↑ | ↑ |               |
| SUBX.B #xx:8, Rd   | B            | Rd8-#xx:8 -C → Rd8                                                                                         | 2                                      |    |     |              |            |           |             |      |         | —              | ↑ | ↑ | ② | ↑ | ↑ |               |
| SUBX.B Rs, Rd      | B            | Rd8-Rs8 -C → Rd8                                                                                           |                                        | 2  |     |              |            |           |             |      |         | —              | ↑ | ↑ | ② | ↑ | ↑ |               |
| SUBS.W #1, Rd      | W            | Rd16-1 → Rd16                                                                                              |                                        | 2  |     |              |            |           |             |      |         | —              | — | — | — | — | 2 |               |
| SUBS.W #2, Rd      | W            | Rd16-2 → Rd16                                                                                              |                                        | 2  |     |              |            |           |             |      |         | —              | — | — | — | — | 2 |               |
| DEC.B Rd           | B            | Rd8-1 → Rd8                                                                                                |                                        | 2  |     |              |            |           |             |      |         | —              | — | ↑ | ↑ | ↑ | — |               |
| DAS.B Rd           | B            | Rd8 decimal adjust → Rd8                                                                                   |                                        | 2  |     |              |            |           |             |      |         | —              | * | ↑ | ↑ | * | — |               |
| NEG.B Rd           | B            | 0-Rd8 → Rd8                                                                                                |                                        | 2  |     |              |            |           |             |      |         | —              | ↑ | ↑ | ↑ | ↑ | ↑ |               |
| CMP.B #xx:8, Rd    | B            | Rd8-#xx:8                                                                                                  | 2                                      |    |     |              |            |           |             |      |         | —              | ↑ | ↑ | ↑ | ↑ | ↑ |               |
| CMP.B Rs, Rd       | B            | Rd8-Rs8                                                                                                    |                                        | 2  |     |              |            |           |             |      |         | —              | ↑ | ↑ | ↑ | ↑ | ↑ |               |
| CMP.W Rs, Rd       | W            | Rd16-Rs16                                                                                                  |                                        | 2  |     |              |            |           |             |      |         | —              | ① | ↑ | ↑ | ↑ | ↑ |               |

**Table A-1 Instruction Set (cont)**

| Mnemonic        | Operand Size | Operation                                                                           | Addressing Mode/<br>Instruction Length |    |     |              |           |           |             |      |         | Condition Code |   |   |   |   |   | No. of States |    |
|-----------------|--------------|-------------------------------------------------------------------------------------|----------------------------------------|----|-----|--------------|-----------|-----------|-------------|------|---------|----------------|---|---|---|---|---|---------------|----|
|                 |              |                                                                                     | #xx: 8/16                              | Rn | @Rn | @ (d:16, Rn) | @-Rn/@Rn+ | @aa: 8/16 | @ (d:8, PC) | @@aa | Implied | I              | H | N | Z | V | C |               |    |
|                 |              |                                                                                     |                                        |    |     |              |           |           |             |      |         |                |   |   |   |   |   |               |    |
| MULXU.B Rs, Rd  | B            | $Rd8 \times Rs8 \rightarrow Rd16$                                                   |                                        | 2  |     |              |           |           |             |      |         |                | — | — | — | — | — | —             | 14 |
| DIVXU.B Rs, Rd  | B            | $Rd16 \div Rs8 \rightarrow Rd16$<br>(RdH: remainder,<br>RdL: quotient)              |                                        | 2  |     |              |           |           |             |      |         |                | — | — | ⑥ | ⑦ | — | —             | 14 |
| AND.B #xx:8, Rd | B            | $Rd8 \wedge \#xx:8 \rightarrow Rd8$                                                 | 2                                      |    |     |              |           |           |             |      |         |                | — | — | ↑ | ↑ | 0 | —             | 2  |
| AND.B Rs, Rd    | B            | $Rd8 \wedge Rs8 \rightarrow Rd8$                                                    |                                        | 2  |     |              |           |           |             |      |         |                | — | — | ↑ | ↑ | 0 | —             | 2  |
| OR.B #xx:8, Rd  | B            | $Rd8 \vee \#xx:8 \rightarrow Rd8$                                                   | 2                                      |    |     |              |           |           |             |      |         |                | — | — | ↑ | ↑ | 0 | —             | 2  |
| OR.B Rs, Rd     | B            | $Rd8 \vee Rs8 \rightarrow Rd8$                                                      |                                        | 2  |     |              |           |           |             |      |         |                | — | — | ↑ | ↑ | 0 | —             | 2  |
| XOR.B #xx:8, Rd | B            | $Rd8 \oplus \#xx:8 \rightarrow Rd8$                                                 | 2                                      |    |     |              |           |           |             |      |         |                | — | — | ↑ | ↑ | 0 | —             | 2  |
| XOR.B Rs, Rd    | B            | $Rd8 \oplus Rs8 \rightarrow Rd8$                                                    |                                        | 2  |     |              |           |           |             |      |         |                | — | — | ↑ | ↑ | 0 | —             | 2  |
| NOT.B Rd        | B            | $\overline{Rd8} \rightarrow Rd8$                                                    |                                        | 2  |     |              |           |           |             |      |         |                | — | — | ↑ | ↑ | 0 | —             | 2  |
| SHAL.B Rd       | B            |    |                                        | 2  |     |              |           |           |             |      |         |                | — | — | ↑ | ↑ | ↑ | ↑             | 2  |
| SHAR.B Rd       | B            |    |                                        | 2  |     |              |           |           |             |      |         |                | — | — | ↑ | ↑ | 0 | ↑             | 2  |
| SHLL.B Rd       | B            |   |                                        | 2  |     |              |           |           |             |      |         |                | — | — | ↑ | ↑ | 0 | ↑             | 2  |
| SHLR.B Rd       | B            |  |                                        | 2  |     |              |           |           |             |      |         |                | — | — | 0 | ↑ | 0 | ↑             | 2  |
| ROTXL.B Rd      | B            |  |                                        | 2  |     |              |           |           |             |      |         |                | — | — | ↑ | ↑ | 0 | ↑             | 2  |
| ROTXR.B Rd      | B            |  |                                        | 2  |     |              |           |           |             |      |         |                | — | — | ↑ | ↑ | 0 | ↑             | 2  |

**Table A-1 Instruction Set (cont)**

| Mnemonic          | Operand Size | Operation                                                                         | Addressing Mode/<br>Instruction Length |    |     |              |            |           |             |      |         | Condition Code |   |   |   |   |   | No. of States |   |
|-------------------|--------------|-----------------------------------------------------------------------------------|----------------------------------------|----|-----|--------------|------------|-----------|-------------|------|---------|----------------|---|---|---|---|---|---------------|---|
|                   |              |                                                                                   | #xx: 8/16                              | Rn | @Rn | @ (d:16, Rn) | @ -Rn/@Rn+ | @aa: 8/16 | @ (d:8, PC) | @@aa | Implied | I              | H | N | Z | V | C |               |   |
|                   |              |                                                                                   |                                        |    |     |              |            |           |             |      |         |                |   |   |   |   |   |               |   |
| ROTL.B Rd         | B            |  |                                        | 2  |     |              |            |           |             |      |         |                | — | — | ↑ | ↑ | 0 | ↑             | 2 |
| ROTR.B Rd         | B            |  |                                        | 2  |     |              |            |           |             |      |         |                | — | — | ↑ | ↑ | 0 | ↑             | 2 |
| BSET #xx:3, Rd    | B            | (#xx:3 of Rd8) ← 1                                                                |                                        | 2  |     |              |            |           |             |      |         |                | — | — | — | — | — | —             | 2 |
| BSET #xx:3, @Rd   | B            | (#xx:3 of @Rd16) ← 1                                                              |                                        |    | 4   |              |            |           |             |      |         |                | — | — | — | — | — | —             | 8 |
| BSET #xx:3, @aa:8 | B            | (#xx:3 of @aa:8) ← 1                                                              |                                        |    |     |              |            | 4         |             |      |         |                | — | — | — | — | — | —             | 8 |
| BSET Rn, Rd       | B            | (Rn8 of Rd8) ← 1                                                                  |                                        | 2  |     |              |            |           |             |      |         |                | — | — | — | — | — | —             | 2 |
| BSET Rn, @Rd      | B            | (Rn8 of @Rd16) ← 1                                                                |                                        |    | 4   |              |            |           |             |      |         |                | — | — | — | — | — | —             | 8 |
| BSET Rn, @aa:8    | B            | (Rn8 of @aa:8) ← 1                                                                |                                        |    |     |              |            | 4         |             |      |         |                | — | — | — | — | — | —             | 8 |
| BCLR #xx:3, Rd    | B            | (#xx:3 of Rd8) ← 0                                                                |                                        | 2  |     |              |            |           |             |      |         |                | — | — | — | — | — | —             | 2 |
| BCLR #xx:3, @Rd   | B            | (#xx:3 of @Rd16) ← 0                                                              |                                        |    | 4   |              |            |           |             |      |         |                | — | — | — | — | — | —             | 8 |
| BCLR #xx:3, @aa:8 | B            | (#xx:3 of @aa:8) ← 0                                                              |                                        |    |     |              |            | 4         |             |      |         |                | — | — | — | — | — | —             | 8 |
| BCLR Rn, Rd       | B            | (Rn8 of Rd8) ← 0                                                                  |                                        | 2  |     |              |            |           |             |      |         |                | — | — | — | — | — | —             | 2 |
| BCLR Rn, @Rd      | B            | (Rn8 of @Rd16) ← 0                                                                |                                        |    | 4   |              |            |           |             |      |         |                | — | — | — | — | — | —             | 8 |
| BCLR Rn, @aa:8    | B            | (Rn8 of @aa:8) ← 0                                                                |                                        |    |     |              |            | 4         |             |      |         |                | — | — | — | — | — | —             | 8 |
| BNOT #xx:3, Rd    | B            | (#xx:3 of Rd8) ←<br>(#xx:3 of Rd8)                                                |                                        | 2  |     |              |            |           |             |      |         |                | — | — | — | — | — | —             | 2 |
| BNOT #xx:3, @Rd   | B            | (#xx:3 of @Rd16) ←<br>(#xx:3 of @Rd16)                                            |                                        |    | 4   |              |            |           |             |      |         |                | — | — | — | — | — | —             | 8 |
| BNOT #xx:3, @aa:8 | B            | (#xx:3 of @aa:8) ←<br>(#xx:3 of @aa:8)                                            |                                        |    |     |              |            | 4         |             |      |         |                | — | — | — | — | — | —             | 8 |
| BNOT Rn, Rd       | B            | (Rn8 of Rd8) ←<br>(Rn8 of Rd8)                                                    |                                        | 2  |     |              |            |           |             |      |         |                | — | — | — | — | — | —             | 2 |
| BNOT Rn, @Rd      | B            | (Rn8 of @Rd16) ←<br>(Rn8 of @Rd16)                                                |                                        |    | 4   |              |            |           |             |      |         |                | — | — | — | — | — | —             | 8 |
| BNOT Rn, @aa:8    | B            | (Rn8 of @aa:8) ←<br>(Rn8 of @aa:8)                                                |                                        |    |     |              |            | 4         |             |      |         |                | — | — | — | — | — | —             | 8 |

**Table A-1 Instruction Set (cont)**

| Mnemonic           | Operand Size | Operation                                          | Addressing Mode/<br>Instruction Length |    |     |              |           |           |             |      |         | Condition Code |   |   |   |   |   | No. of States |   |
|--------------------|--------------|----------------------------------------------------|----------------------------------------|----|-----|--------------|-----------|-----------|-------------|------|---------|----------------|---|---|---|---|---|---------------|---|
|                    |              |                                                    | #xx: 8/16                              | Rn | @Rn | @ (d:16, Rn) | @-Rn/@Rn+ | @aa: 8/16 | @ (d:8, PC) | @@aa | Implied | I              | H | N | Z | V | C |               |   |
|                    |              |                                                    |                                        |    |     |              |           |           |             |      |         |                |   |   |   |   |   |               |   |
| BTST #xx:3, Rd     | B            | (#xx:3 of Rd8) → Z                                 |                                        | 2  |     |              |           |           |             |      |         |                | — | — | — | ↑ | — | —             | 2 |
| BTST #xx:3, @Rd    | B            | (#xx:3 of @Rd16) → Z                               |                                        |    | 4   |              |           |           |             |      |         |                | — | — | — | ↑ | — | —             | 6 |
| BTST #xx:3, @aa:8  | B            | (#xx:3 of @aa:8) → Z                               |                                        |    |     |              |           | 4         |             |      |         |                | — | — | — | ↑ | — | —             | 6 |
| BTST Rn, Rd        | B            | (Rn8 of Rd8) → Z                                   |                                        | 2  |     |              |           |           |             |      |         |                | — | — | — | ↑ | — | —             | 2 |
| BTST Rn, @Rd       | B            | (Rn8 of @Rd16) → Z                                 |                                        |    | 4   |              |           |           |             |      |         |                | — | — | — | ↑ | — | —             | 6 |
| BTST Rn, @aa:8     | B            | (Rn8 of @aa:8) → Z                                 |                                        |    |     |              |           | 4         |             |      |         |                | — | — | — | ↑ | — | —             | 6 |
| BLD #xx:3, Rd      | B            | (#xx:3 of Rd8) → C                                 |                                        | 2  |     |              |           |           |             |      |         |                | — | — | — | — | — | ↑             | 2 |
| BLD #xx:3, @Rd     | B            | (#xx:3 of @Rd16) → C                               |                                        |    | 4   |              |           |           |             |      |         |                | — | — | — | — | — | ↑             | 6 |
| BLD #xx:3, @aa:8   | B            | (#xx:3 of @aa:8) → C                               |                                        |    |     |              |           | 4         |             |      |         |                | — | — | — | — | — | ↑             | 6 |
| BILD #xx:3, Rd     | B            | (#xx:3 of Rd8) → C                                 |                                        | 2  |     |              |           |           |             |      |         |                | — | — | — | — | — | ↑             | 2 |
| BILD #xx:3, @Rd    | B            | (#xx:3 of @Rd16) → C                               |                                        |    | 4   |              |           |           |             |      |         |                | — | — | — | — | — | ↑             | 6 |
| BILD #xx:3, @aa:8  | B            | (#xx:3 of @aa:8) → C                               |                                        |    |     |              |           | 4         |             |      |         |                | — | — | — | — | — | ↑             | 6 |
| BST #xx:3, Rd      | B            | C → (#xx:3 of Rd8)                                 |                                        | 2  |     |              |           |           |             |      |         |                | — | — | — | — | — | —             | 2 |
| BST #xx:3, @Rd     | B            | C → (#xx:3 of @Rd16)                               |                                        |    | 4   |              |           |           |             |      |         |                | — | — | — | — | — | —             | 8 |
| BST #xx:3, @aa:8   | B            | C → (#xx:3 of @aa:8)                               |                                        |    |     |              |           | 4         |             |      |         |                | — | — | — | — | — | —             | 8 |
| BIST #xx:3, Rd     | B            | $\overline{C}$ → (#xx:3 of Rd8)                    |                                        | 2  |     |              |           |           |             |      |         |                | — | — | — | — | — | —             | 2 |
| BIST #xx:3, @Rd    | B            | $\overline{C}$ → (#xx:3 of @Rd16)                  |                                        |    | 4   |              |           |           |             |      |         |                | — | — | — | — | — | —             | 8 |
| BIST #xx:3, @aa:8  | B            | $\overline{C}$ → (#xx:3 of @aa:8)                  |                                        |    |     |              |           | 4         |             |      |         |                | — | — | — | — | — | —             | 8 |
| BAND #xx:3, Rd     | B            | $C \wedge (\#xx:3 \text{ of Rd8}) \rightarrow C$   |                                        | 2  |     |              |           |           |             |      |         |                | — | — | — | — | — | ↑             | 2 |
| BAND #xx:3, @Rd    | B            | $C \wedge (\#xx:3 \text{ of @Rd16}) \rightarrow C$ |                                        |    | 4   |              |           |           |             |      |         |                | — | — | — | — | — | ↑             | 6 |
| BAND #xx:3, @aa:8  | B            | $C \wedge (\#xx:3 \text{ of @aa:8}) \rightarrow C$ |                                        |    |     |              |           | 4         |             |      |         |                | — | — | — | — | — | ↑             | 6 |
| BIAND #xx:3, Rd    | B            | $C \wedge (\#xx:3 \text{ of Rd8}) \rightarrow C$   |                                        | 2  |     |              |           |           |             |      |         |                | — | — | — | — | — | ↑             | 2 |
| BIAND #xx:3, @Rd   | B            | $C \wedge (\#xx:3 \text{ of @Rd16}) \rightarrow C$ |                                        |    | 4   |              |           |           |             |      |         |                | — | — | — | — | — | ↑             | 6 |
| BIAND #xx:3, @aa:8 | B            | $C \wedge (\#xx:3 \text{ of @aa:8}) \rightarrow C$ |                                        |    |     |              |           | 4         |             |      |         |                | — | — | — | — | — | ↑             | 6 |
| BOR #xx:3, Rd      | B            | $C \vee (\#xx:3 \text{ of Rd8}) \rightarrow C$     |                                        | 2  |     |              |           |           |             |      |         |                | — | — | — | — | — | ↑             | 2 |
| BOR #xx:3, @Rd     | B            | $C \vee (\#xx:3 \text{ of @Rd16}) \rightarrow C$   |                                        |    | 4   |              |           |           |             |      |         |                | — | — | — | — | — | ↑             | 6 |
| BOR #xx:3, @aa:8   | B            | $C \vee (\#xx:3 \text{ of @aa:8}) \rightarrow C$   |                                        |    |     |              |           | 4         |             |      |         |                | — | — | — | — | — | ↑             | 6 |
| BIOR #xx:3, Rd     | B            | $C \vee (\#xx:3 \text{ of Rd8}) \rightarrow C$     |                                        | 2  |     |              |           |           |             |      |         |                | — | — | — | — | — | ↑             | 2 |
| BIOR #xx:3, @Rd    | B            | $C \vee (\#xx:3 \text{ of @Rd16}) \rightarrow C$   |                                        |    | 4   |              |           |           |             |      |         |                | — | — | — | — | — | ↑             | 6 |

**Table A-1 Instruction Set (cont)**

| Mnemonic           | Operand Size | Operation                                                                    |                           | Addressing Mode/<br>Instruction Length |    |     |              |           |           |             |      | Condition Code |                |   |   |   |   | No. of States |   |   |   |
|--------------------|--------------|------------------------------------------------------------------------------|---------------------------|----------------------------------------|----|-----|--------------|-----------|-----------|-------------|------|----------------|----------------|---|---|---|---|---------------|---|---|---|
|                    |              |                                                                              |                           | #xx: 8/16                              | Rn | @Rn | @ (d:16, Rn) | @-Rn/@Rn+ | @aa: 8/16 | @ (d:8, PC) | @@aa | Implied        | Condition Code |   |   |   |   |               |   |   |   |
|                    |              | I                                                                            | H                         |                                        |    |     |              |           |           |             |      |                | N              | Z | V | C |   |               |   |   |   |
| BIOR #xx:3, @aa:8  | B            | $C \vee (\#xx:3 \text{ of } @aa:8) \rightarrow C$                            |                           |                                        |    |     |              |           | 4         |             |      |                |                | — | — | — | — | —             | ↑ | 6 |   |
| BXOR #xx:3, Rd     | B            | $C \oplus (\#xx:3 \text{ of } Rd8) \rightarrow C$                            |                           | 2                                      |    |     |              |           |           |             |      |                |                | — | — | — | — | —             | ↑ | 2 |   |
| BXOR #xx:3, @Rd    | B            | $C \oplus (\#xx:3 \text{ of } @Rd16) \rightarrow C$                          |                           |                                        | 4  |     |              |           |           |             |      |                |                | — | — | — | — | —             | ↑ | 6 |   |
| BXOR #xx:3, @aa:8  | B            | $C \oplus (\#xx:3 \text{ of } @aa:8) \rightarrow C$                          |                           |                                        |    |     |              |           | 4         |             |      |                |                | — | — | — | — | —             | ↑ | 6 |   |
| BIXOR #xx:3, Rd    | B            | $C \oplus (\#xx:3 \text{ of } Rd8) \rightarrow C$                            |                           | 2                                      |    |     |              |           |           |             |      |                |                | — | — | — | — | —             | ↑ | 2 |   |
| BIXOR #xx:3, @Rd   | B            | $C \oplus (\#xx:3 \text{ of } @Rd16) \rightarrow C$                          |                           |                                        | 4  |     |              |           |           |             |      |                |                | — | — | — | — | —             | ↑ | 6 |   |
| BIXOR #xx:3, @aa:8 | B            | $C \oplus (\#xx:3 \text{ of } @aa:8) \rightarrow C$                          |                           |                                        |    |     |              |           | 4         |             |      |                |                | — | — | — | — | —             | ↑ | 6 |   |
| BRA d:8 (BT d:8)   | —            | $PC \leftarrow PC + d:8$                                                     |                           |                                        |    |     |              |           |           | 2           |      |                |                | — | — | — | — | —             | — | 4 |   |
| BRN d:8 (BF d:8)   | —            | $PC \leftarrow PC + 2$                                                       |                           |                                        |    |     |              |           |           | 2           |      |                |                | — | — | — | — | —             | — | 4 |   |
| BHI d:8            | —            | If<br>condition<br>is true<br>then<br>$PC \leftarrow PC + d:8$<br>else next; | $C \vee Z = 0$            |                                        |    |     |              |           |           | 2           |      |                |                | — | — | — | — | —             | — | 4 |   |
| BLS d:8            | —            |                                                                              | $C \vee Z = 1$            |                                        |    |     |              |           |           |             | 2    |                |                |   | — | — | — | —             | — | — | 4 |
| BCC d:8 (BHS d:8)  | —            |                                                                              | $C = 0$                   |                                        |    |     |              |           |           |             | 2    |                |                |   | — | — | — | —             | — | — | 4 |
| BCS d:8 (BLO d:8)  | —            |                                                                              | $C = 1$                   |                                        |    |     |              |           |           |             | 2    |                |                |   | — | — | — | —             | — | — | 4 |
| BNE d:8            | —            |                                                                              | $Z = 0$                   |                                        |    |     |              |           |           |             | 2    |                |                |   | — | — | — | —             | — | — | 4 |
| BEQ d:8            | —            |                                                                              | $Z = 1$                   |                                        |    |     |              |           |           |             | 2    |                |                |   | — | — | — | —             | — | — | 4 |
| BVC d:8            | —            |                                                                              | $V = 0$                   |                                        |    |     |              |           |           |             | 2    |                |                |   | — | — | — | —             | — | — | 4 |
| BVS d:8            | —            |                                                                              | $V = 1$                   |                                        |    |     |              |           |           |             | 2    |                |                |   | — | — | — | —             | — | — | 4 |
| BPL d:8            | —            |                                                                              | $N = 0$                   |                                        |    |     |              |           |           |             | 2    |                |                |   | — | — | — | —             | — | — | 4 |
| BMI d:8            | —            |                                                                              | $N = 1$                   |                                        |    |     |              |           |           |             | 2    |                |                |   | — | — | — | —             | — | — | 4 |
| BGE d:8            | —            |                                                                              | $N \oplus V = 0$          |                                        |    |     |              |           |           |             | 2    |                |                |   | — | — | — | —             | — | — | 4 |
| BLT d:8            | —            |                                                                              | $N \oplus V = 1$          |                                        |    |     |              |           |           |             | 2    |                |                |   | — | — | — | —             | — | — | 4 |
| BGT d:8            | —            |                                                                              | $Z \vee (N \oplus V) = 0$ |                                        |    |     |              |           |           |             | 2    |                |                |   | — | — | — | —             | — | — | 4 |
| BLE d:8            | —            |                                                                              | $Z \vee (N \oplus V) = 1$ |                                        |    |     |              |           |           |             | 2    |                |                |   | — | — | — | —             | — | — | 4 |
| JMP @Rn            | —            | $PC \leftarrow Rn16$                                                         |                           |                                        | 2  |     |              |           |           |             |      |                |                | — | — | — | — | —             | — | 4 |   |
| JMP @aa:16         | —            | $PC \leftarrow aa:16$                                                        |                           |                                        |    |     |              |           | 4         |             |      |                |                | — | — | — | — | —             | — | 6 |   |
| JMP @@aa:8         | —            | $PC \leftarrow @@aa:8$                                                       |                           |                                        |    |     |              |           |           |             | 2    |                |                | — | — | — | — | —             | — | 8 |   |
| BSR d:8            | —            | SP-2 → SP<br>PC → @SP<br>PC ← PC+d:8                                         |                           |                                        |    |     |              |           |           | 2           |      |                |                | — | — | — | — | —             | — | 6 |   |



**Table A-1 Instruction Set (cont)**

| Mnemonic        | Operand Size | Operation                                       | Addressing Mode/<br>Instruction Length (bytes) |    |     |              |           |           |             |      | Condition Code |                |   |   |   |   | No. of States |    |
|-----------------|--------------|-------------------------------------------------|------------------------------------------------|----|-----|--------------|-----------|-----------|-------------|------|----------------|----------------|---|---|---|---|---------------|----|
|                 |              |                                                 | #xx: 8/16                                      | Rn | @Rn | @ (d:16, Rn) | @-Rn/@Rn+ | @aa: 8/16 | @ (d:8, PC) | @@aa | Implied        | Condition Code |   |   |   |   |               |    |
|                 |              |                                                 |                                                |    |     |              |           |           |             |      |                | I              | H | N | Z | V |               | C  |
| JSR @Rn         | —            | SP-2 → SP<br>PC → @SP<br>PC ← Rn16              |                                                |    | 2   |              |           |           |             |      |                | —              | — | — | — | — | —             | 6  |
| JSR @aa:16      | —            | SP-2 → SP<br>PC → @SP<br>PC ← aa:16             |                                                |    |     |              |           | 4         |             |      |                | —              | — | — | — | — | —             | 8  |
| JSR @@aa:8      |              | SP-2 → SP<br>PC → @SP<br>PC ← @aa:8             |                                                |    |     |              |           |           |             | 2    |                | —              | — | — | — | — | —             | 8  |
| RTS             | —            | PC ← @SP<br>SP+2 → SP                           |                                                |    |     |              |           |           |             |      | 2              | —              | — | — | — | — | —             | 8  |
| RTE             | —            | CCR ← @SP<br>SP+2 → SP<br>PC ← @SP<br>SP+2 → SP |                                                |    |     |              |           |           |             |      | 2              | ↑              | ↑ | ↑ | ↑ | ↑ | ↑             | 10 |
| SLEEP           | —            | Transit to sleep mode.                          |                                                |    |     |              |           |           |             |      | 2              | —              | — | — | — | — | —             | 2  |
| LDC #xx:8, CCR  | B            | #xx:8 → CCR                                     | 2                                              |    |     |              |           |           |             |      |                | ↑              | ↑ | ↑ | ↑ | ↑ | ↑             | 2  |
| LDC Rs, CCR     | B            | Rs8 → CCR                                       |                                                | 2  |     |              |           |           |             |      |                | ↑              | ↑ | ↑ | ↑ | ↑ | ↑             | 2  |
| STC CCR, Rd     | B            | CCR → Rd8                                       |                                                | 2  |     |              |           |           |             |      |                | —              | — | — | — | — | —             | 2  |
| ANDC #xx:8, CCR | B            | CCR^#xx:8 → CCR                                 | 2                                              |    |     |              |           |           |             |      |                | ↑              | ↑ | ↑ | ↑ | ↑ | ↑             | 2  |
| ORC #xx:8, CCR  | B            | CCR∨#xx:8 → CCR                                 | 2                                              |    |     |              |           |           |             |      |                | ↑              | ↑ | ↑ | ↑ | ↑ | ↑             | 2  |
| XORC #xx:8, CCR | B            | CCR⊕#xx:8 → CCR                                 | 2                                              |    |     |              |           |           |             |      |                | ↑              | ↑ | ↑ | ↑ | ↑ | ↑             | 2  |
| NOP             | —            | PC ← PC+2                                       |                                                |    |     |              |           |           |             |      | 2              | —              | — | — | — | — | —             | 2  |

Notes: The number of states is the number of states required for execution when the instruction and its operands are located in on-chip memory.

- ① Set to 1 when there is a carry or borrow from bit 11; otherwise cleared to 0.
- ② If the result is zero, the previous value of the flag is retained; otherwise the flag is cleared to 0.
- ③ Set to 1 if decimal adjustment produces a carry; otherwise cleared to 0.
- ④ The number of states required for execution is 4n+8 (n = value of R4L).
- ⑤ These instructions are not supported by the H8/3437 Series.
- ⑥ Set to 1 if the divisor is negative; otherwise cleared to 0.
- ⑦ Set to 1 if the divisor is zero; otherwise cleared to 0.

# A.2 Operation Code Map

Table A-2 is a map of the operation codes contained in the first byte of the instruction code (bits 15 to 8 of the first instruction word).

Some pairs of instructions have identical first bytes. These instructions are differentiated by the first bit of the second byte (bit 7 of the first instruction word).




Table A-2 Operation Code Map

| Low<br>High | 0            | 1            | 2             | 3             | 4     | 5     | 6    | 7          | 8     | 9   | A   | B     | C                             | D   | E    | F   |
|-------------|--------------|--------------|---------------|---------------|-------|-------|------|------------|-------|-----|-----|-------|-------------------------------|-----|------|-----|
| 0           | NOP          | SLEEP        | STC           | LDC           | ORC   | XORC  | ANDC | LDC        | ADD   |     | INC | ADDS  | MOV                           |     | ADDX | DAA |
| 1           | SHLL<br>SHAL | SHLR<br>SHAR | ROTXL<br>ROTL | ROTXR<br>ROTR | OR    | XOR   | AND  | NOT<br>NEG | SUB   |     | DEC | SUBS  | CMP                           |     | SUBX | DAS |
| 2           | MOV          |              |               |               |       |       |      |            |       |     |     |       |                               |     |      |     |
| 3           |              |              |               |               |       |       |      |            |       |     |     |       |                               |     |      |     |
| 4           | BRA*2        | BRN*2        | BHI           | BLS           | BCC*2 | BCS*2 | BNE  | BEQ        | BVC   | BVS | BPL | BMI   | BGE                           | BLT | BGT  | BLE |
| 5           | MULXU        | DIVXU        |               |               | RTS   | BSR   | RTE  |            |       | JMP |     |       |                               | JSR |      |     |
| 6           |              |              |               |               |       |       | BST  |            | MOV*1 |     |     |       |                               |     |      |     |
| 7           | BSET         | BNOT         | BCLR          | BTS           | BOR   | BXOR  | BAND | BLD        | BIST  |     |     | EEMOV | Bit manipulation instructions |     |      |     |
| 8           | ADD          |              |               |               |       |       |      |            |       |     |     |       |                               |     |      |     |
| 9           | ADDX         |              |               |               |       |       |      |            |       |     |     |       |                               |     |      |     |
| A           | CMP          |              |               |               |       |       |      |            |       |     |     |       |                               |     |      |     |
| B           | SUBX         |              |               |               |       |       |      |            |       |     |     |       |                               |     |      |     |
| C           | OR           |              |               |               |       |       |      |            |       |     |     |       |                               |     |      |     |
| D           | XOR          |              |               |               |       |       |      |            |       |     |     |       |                               |     |      |     |
| E           | AND          |              |               |               |       |       |      |            |       |     |     |       |                               |     |      |     |
| F           | MOV          |              |               |               |       |       |      |            |       |     |     |       |                               |     |      |     |

Notes: 1. The MOVFPE and MOVTPPE instructions are identical to MOV instructions in the first byte and first bit of the second byte (bits 15 to 7 of the instruction word).  
The PUSH and POP instructions are identical in machine language to MOV instructions.  
2. The BT, BF, BHS, and BLO instructions are identical in machine language to BRA, BRN, BCC, and BCS, respectively.

### A.3 Number of States Required for Execution

The tables below can be used to calculate the number of states required for instruction execution. Table A-3 indicates the number of states required for each cycle (instruction fetch, branch address read, stack operation, byte data access, word data access, internal operation). Table A-4 indicates the number of cycles of each type occurring in each instruction. The total number of states required for execution of an instruction can be calculated from these two tables as follows:

$$\text{Execution states} = I \times S_I + J \times S_J + K \times S_K + L \times S_L + M \times S_M + N \times S_N$$

**Examples:** Mode 1 (on-chip ROM disabled), stack located in external memory, 1 wait state inserted in external memory access.

1. BSET #0, @FFC7  
From table A-4:  $I = L = 2, \quad J = K = M = N = 0$   
From table A-3:  $S_I = 8, \quad S_L = 3$   
Number of states required for execution:  $2 \times 8 + 2 \times 3 = 22$
2. JSR @@30  
From table A-4:  $I = 2, \quad J = K = 1, \quad L = M = N = 0$   
From table A-3:  $S_I = S_J = S_K = 8$   
Number of states required for execution:  $2 \times 8 + 1 \times 8 + 1 \times 8 = 32$

**Table A-3. Number of States Taken by Each Cycle in Instruction Execution**

| Execution Status<br>(Instruction Cycle) |       | Access location |                    |                 |
|-----------------------------------------|-------|-----------------|--------------------|-----------------|
|                                         |       | On-Chip Memory  | On-Chip Reg. Field | External Memory |
| Instruction fetch                       | $S_I$ | 2               | 6                  | 6 + 2m          |
| Branch address read                     | $S_J$ |                 |                    |                 |
| Stack operation                         | $S_K$ |                 |                    |                 |
| Byte data access                        | $S_L$ |                 | 3                  | 3 + m           |
| Word data access                        | $S_M$ |                 | 6                  | 6 + 2m          |
| Internal operation                      | $S_N$ | 1               | 1                  | 1               |

Notes: m: Number of wait states inserted in access to external device.

**Table A-4 Number of Cycles in Each Instruction**

| Instruction | Mnemonic          | Instruction<br>Fetch<br>I | Branch<br>Addr. Read<br>J | Stack<br>Operation<br>K | Byte Data<br>Access<br>L | Word Data<br>Access<br>M | Internal<br>Operation<br>N |
|-------------|-------------------|---------------------------|---------------------------|-------------------------|--------------------------|--------------------------|----------------------------|
| ADD         | ADD.B #xx:8, Rd   | 1                         |                           |                         |                          |                          |                            |
|             | ADD.B Rs, Rd      | 1                         |                           |                         |                          |                          |                            |
|             | ADD.W Rs, Rd      | 1                         |                           |                         |                          |                          |                            |
| ADDS        | ADDS.W #1/2, Rd   | 1                         |                           |                         |                          |                          |                            |
| ADDX        | ADDX.B #xx:8, Rd  | 1                         |                           |                         |                          |                          |                            |
|             | ADDX.B Rs, Rd     | 1                         |                           |                         |                          |                          |                            |
| AND         | AND.B #xx:8, Rd   | 1                         |                           |                         |                          |                          |                            |
|             | AND.B Rs, Rd      | 1                         |                           |                         |                          |                          |                            |
| ANDC        | ANDC #xx:8, CCR   | 1                         |                           |                         |                          |                          |                            |
| BAND        | BAND #xx:3, Rd    | 1                         |                           |                         |                          |                          |                            |
|             | BAND #xx:3, @Rd   | 2                         |                           |                         | 1                        |                          |                            |
|             | BAND #xx:3, @aa:8 | 2                         |                           |                         | 1                        |                          |                            |
| Bcc         | BRA d:8 (BT d:8)  | 2                         |                           |                         |                          |                          |                            |
|             | BRN d:8 (BF d:8)  | 2                         |                           |                         |                          |                          |                            |
|             | BHI d:8           | 2                         |                           |                         |                          |                          |                            |
|             | BLS d:8           | 2                         |                           |                         |                          |                          |                            |
|             | BCC d:8 (BHS d:8) | 2                         |                           |                         |                          |                          |                            |
|             | BCS d:8 (BLO d:8) | 2                         |                           |                         |                          |                          |                            |
|             | BNE d:8           | 2                         |                           |                         |                          |                          |                            |
|             | BEQ d:8           | 2                         |                           |                         |                          |                          |                            |
|             | BVC d:8           | 2                         |                           |                         |                          |                          |                            |
|             | BVS d:8           | 2                         |                           |                         |                          |                          |                            |
|             | BPL d:8           | 2                         |                           |                         |                          |                          |                            |
|             | BMI d:8           | 2                         |                           |                         |                          |                          |                            |
|             | BGE d:8           | 2                         |                           |                         |                          |                          |                            |
|             | BLT d:8           | 2                         |                           |                         |                          |                          |                            |
|             | BGT d:8           | 2                         |                           |                         |                          |                          |                            |
|             | BLE d:8           | 2                         |                           |                         |                          |                          |                            |
| BCLR        | BCLR #xx:3, Rd    | 1                         |                           |                         |                          |                          |                            |
|             | BCLR #xx:3, @Rd   | 2                         |                           |                         | 2                        |                          |                            |
|             | BCLR #xx:3, @aa:8 | 2                         |                           |                         | 2                        |                          |                            |
|             | BCLR Rn, Rd       | 1                         |                           |                         |                          |                          |                            |
|             | BCLR Rn, @Rd      | 2                         |                           |                         | 2                        |                          |                            |
|             | BCLR Rn, @aa:8    | 2                         |                           |                         | 2                        |                          |                            |

Note: All values left blank are zero.

**Table A-4 Number of Cycles in Each Instruction (cont)**

| Instruction | Mnemonic           | Instruction | Branch     | Stack     | Byte Data | Word Data | Internal  |
|-------------|--------------------|-------------|------------|-----------|-----------|-----------|-----------|
|             |                    | Fetch       | Addr. Read | Operation | Access    | Access    | Operation |
|             |                    | I           | J          | K         | L         | M         | N         |
| BIAND       | BIAND #xx:3, Rd    | 1           |            |           |           |           |           |
|             | BIAND #xx:3, @Rd   | 2           |            |           | 1         |           |           |
|             | BIAND #xx:3, @aa:8 | 2           |            |           | 1         |           |           |
| BILD        | BILD #xx:3, Rd     | 1           |            |           |           |           |           |
|             | BILD #xx:3, @Rd    | 2           |            |           | 1         |           |           |
|             | BILD #xx:3, @aa:8  | 2           |            |           | 1         |           |           |
| BIOR        | BIOR #xx:3, Rd     | 1           |            |           |           |           |           |
|             | BIOR #xx:3, @Rd    | 2           |            |           | 1         |           |           |
|             | BIOR #xx:3, @aa:8  | 2           |            |           | 1         |           |           |
| BIST        | BIST #xx:3, Rd     | 1           |            |           |           |           |           |
|             | BIST #xx:3, @Rd    | 2           |            |           | 2         |           |           |
|             | BIST #xx:3, @aa:8  | 2           |            |           | 2         |           |           |
| BIXOR       | BIXOR #xx:3, Rd    | 1           |            |           |           |           |           |
|             | BIXOR #xx:3, @Rd   | 2           |            |           | 1         |           |           |
|             | BIXOR #xx:3, @aa:8 | 2           |            |           | 1         |           |           |
| BLD         | BLD #xx:3, Rd      | 1           |            |           |           |           |           |
|             | BLD #xx:3, @Rd     | 2           |            |           | 1         |           |           |
|             | BLD #xx:3, @aa:8   | 2           |            |           | 1         |           |           |
| BNOT        | BNOT #xx:3, Rd     | 1           |            |           |           |           |           |
|             | BNOT #xx:3, @Rd    | 2           |            |           | 2         |           |           |
|             | BNOT #xx:3, @aa:8  | 2           |            |           | 2         |           |           |
|             | BNOT Rn, Rd        | 1           |            |           |           |           |           |
|             | BNOT Rn, @Rd       | 2           |            |           | 2         |           |           |
|             | BNOT Rn, @aa:8     | 2           |            |           | 2         |           |           |
| BOR         | BOR #xx:3, Rd      | 1           |            |           |           |           |           |
|             | BOR #xx:3, @Rd     | 2           |            |           | 1         |           |           |
|             | BOR #xx:3, @aa:8   | 2           |            |           | 1         |           |           |
| BSET        | BSET #xx:3, Rd     | 1           |            |           |           |           |           |
|             | BSET #xx:3, @Rd    | 2           |            |           | 2         |           |           |
|             | BSET #xx:3, @aa:8  | 2           |            |           | 2         |           |           |
|             | BSET Rn, Rd        | 1           |            |           |           |           |           |
|             | BSET Rn, @Rd       | 2           |            |           | 2         |           |           |
|             | BSET Rn, @aa:8     | 2           |            |           | 2         |           |           |

Note: All values left blank are zero.

**Table A-4 Number of Cycles in Each Instruction (cont)**

| Instruction | Mnemonic             | Instruction<br>Fetch<br>I | Branch<br>Addr. Read<br>J | Stack<br>Operation<br>K | Byte Data<br>Access<br>L | Word Data<br>Access<br>M | Internal<br>Operation<br>N |
|-------------|----------------------|---------------------------|---------------------------|-------------------------|--------------------------|--------------------------|----------------------------|
| BSR         | BSR d:8              | 2                         |                           | 1                       |                          |                          |                            |
| BST         | BST #xx:3, Rd        | 1                         |                           |                         |                          |                          |                            |
|             | BST #xx:3, @Rd       | 2                         |                           |                         | 2                        |                          |                            |
|             | BST #xx:3, @aa:8     | 2                         |                           |                         | 2                        |                          |                            |
| BTST        | BTST #xx:3, Rd       | 1                         |                           |                         |                          |                          |                            |
|             | BTST #xx:3, @Rd      | 2                         |                           |                         | 1                        |                          |                            |
|             | BTST #xx:3, @aa:8    | 2                         |                           |                         | 1                        |                          |                            |
|             | BTST Rn, Rd          | 1                         |                           |                         |                          |                          |                            |
|             | BTST Rn, @Rd         | 2                         |                           |                         | 1                        |                          |                            |
|             | BTST Rn, @aa:8       | 2                         |                           |                         | 1                        |                          |                            |
| BXOR        | BXOR #xx:3, Rd       | 1                         |                           |                         |                          |                          |                            |
|             | BXOR #xx:3, @Rd      | 2                         |                           |                         | 1                        |                          |                            |
|             | BXOR #xx:3, @aa:8    | 2                         |                           |                         | 1                        |                          |                            |
| CMP         | CMP.B #xx:8, Rd      | 1                         |                           |                         |                          |                          |                            |
|             | CMP.B Rs, Rd         | 1                         |                           |                         |                          |                          |                            |
|             | CMP.W Rs, Rd         | 1                         |                           |                         |                          |                          |                            |
| DAA         | DAA.B Rd             | 1                         |                           |                         |                          |                          |                            |
| DAS         | DAS.B Rd             | 1                         |                           |                         |                          |                          |                            |
| DEC         | DEC.B Rd             | 1                         |                           |                         |                          |                          |                            |
| DIVXU       | DIVXU.B Rs, Rd       | 1                         |                           |                         |                          |                          | 12                         |
| EEPMOV      | EEPMOV               | 2                         |                           |                         | 2n+2*                    |                          | 1                          |
| INC         | INC.B Rd             | 1                         |                           |                         |                          |                          |                            |
| JMP         | JMP @Rn              | 2                         |                           |                         |                          |                          |                            |
|             | JMP @aa:16           | 2                         |                           |                         |                          |                          | 2                          |
|             | JMP @@aa:8           | 2                         | 1                         |                         |                          |                          | 2                          |
| JSR         | JSR @Rn              | 2                         |                           | 1                       |                          |                          |                            |
|             | JSR @aa:16           | 2                         |                           | 1                       |                          |                          | 2                          |
|             | JSR @@aa:8           | 2                         | 1                         | 1                       |                          |                          |                            |
| LDC         | LDC #xx:8, CCR       | 1                         |                           |                         |                          |                          |                            |
|             | LDC Rs, CCR          | 1                         |                           |                         |                          |                          |                            |
| MOV         | MOV.B #xx:8, Rd      | 1                         |                           |                         |                          |                          |                            |
|             | MOV.B Rs, Rd         | 1                         |                           |                         |                          |                          |                            |
|             | MOV.B @Rs, Rd        | 1                         |                           |                         | 1                        |                          |                            |
|             | MOV.B @(d:16,Rs), Rd | 2                         |                           |                         | 1                        |                          |                            |

Notes: All values left blank are zero.

\* n: Initial value in R4L. Source and destination are accessed n + 1 times each.

**Table A-4 Number of Cycles in Each Instruction (cont)**

| Instruction | Mnemonic              | Instruction<br>Fetch | Branch<br>Addr. Read | Stack<br>Operation | Byte Data<br>Access | Word Data<br>Access | Internal<br>Operation |
|-------------|-----------------------|----------------------|----------------------|--------------------|---------------------|---------------------|-----------------------|
|             |                       | I                    | J                    | K                  | L                   | M                   | N                     |
| MOV         | MOV.B @Rs+, Rd        | 1                    |                      |                    | 1                   |                     | 2                     |
|             | MOV.B @aa:8, Rd       | 1                    |                      |                    | 1                   |                     |                       |
|             | MOV.B @aa:16, Rd      | 2                    |                      |                    | 1                   |                     |                       |
|             | MOV.B Rs, @Rd         | 1                    |                      |                    | 1                   |                     |                       |
|             | MOV.B Rs, @(d:16, Rd) | 2                    |                      |                    | 1                   |                     |                       |
|             | MOV.B Rs, @-Rd        | 1                    |                      |                    | 1                   |                     | 2                     |
|             | MOV.B Rs, @aa:8       | 1                    |                      |                    | 1                   |                     |                       |
|             | MOV.B Rs, @aa:16      | 2                    |                      |                    | 1                   |                     |                       |
|             | MOV.W #xx:16, Rd      | 2                    |                      |                    |                     |                     |                       |
|             | MOV.W Rs, Rd          | 1                    |                      |                    |                     |                     |                       |
|             | MOV.W @Rs, Rd         | 1                    |                      |                    |                     | 1                   |                       |
|             | MOV.W @(d:16, Rs), Rd | 2                    |                      |                    |                     | 1                   |                       |
|             | MOV.W @Rs+, Rd        | 1                    |                      |                    |                     | 1                   | 2                     |
|             | MOV.W @aa:16, Rd      | 2                    |                      |                    |                     | 1                   |                       |
|             | MOV.W Rs, @Rd         | 1                    |                      |                    |                     | 1                   |                       |
|             | MOV.W Rs, @(d:16, Rd) | 2                    |                      |                    |                     | 1                   |                       |
|             | MOV.W Rs, @-Rd        | 1                    |                      |                    |                     | 1                   | 2                     |
|             | MOV.W Rs, @aa:16      | 2                    |                      |                    |                     | 1                   |                       |
| MOVFPPE     | MOVFPPE @aa:16, Rd    | Not supported        |                      |                    |                     |                     |                       |
| MOVTPE      | MOVTPE.Rs, @aa:16     | Not supported        |                      |                    |                     |                     |                       |
| MULXU       | MULXU.Rs, Rd          | 1                    |                      |                    |                     |                     | 12                    |
| NEG         | NEG.B Rd              | 1                    |                      |                    |                     |                     |                       |
| NOP         | NOP                   | 1                    |                      |                    |                     |                     |                       |
| NOT         | NOT.B Rd              | 1                    |                      |                    |                     |                     |                       |
| OR          | OR.B #xx:8, Rd        | 1                    |                      |                    |                     |                     |                       |
|             | OR.B Rs, Rd           | 1                    |                      |                    |                     |                     |                       |
| ORC         | ORC #xx:8, CCR        | 1                    |                      |                    |                     |                     |                       |
| POP         | POP Rd                | 1                    |                      |                    | 1                   |                     | 2                     |
| PUSH        | PUSH Rd               | 1                    |                      |                    | 1                   |                     | 2                     |
| ROTL        | ROTL.B Rd             | 1                    |                      |                    |                     |                     |                       |
| ROTR        | ROTR.B Rd             | 1                    |                      |                    |                     |                     |                       |
| ROTXL       | ROTXL.B Rd            | 1                    |                      |                    |                     |                     |                       |
| ROTXR       | ROTXR.B Rd            | 1                    |                      |                    |                     |                     |                       |
| RTE         | RTE                   | 2                    |                      | 2                  |                     |                     | 2                     |
| RTS         | RTS                   | 2                    |                      | 1                  |                     |                     | 2                     |

Note: All values left blank are zero.



**Table A-4 Number of Cycles in Each Instruction (cont)**

| Instruction | Mnemonic         | Instruction<br>Fetch<br>I | Branch<br>Addr. Read<br>J | Stack<br>Operation<br>K | Byte Data<br>Access<br>L | Word Data<br>Access<br>M | Internal<br>Operation<br>N |
|-------------|------------------|---------------------------|---------------------------|-------------------------|--------------------------|--------------------------|----------------------------|
| SHAL        | SHAL.B Rd        | 1                         |                           |                         |                          |                          |                            |
| SHAR        | SHAR.B Rd        | 1                         |                           |                         |                          |                          |                            |
| SHLL        | SHLL.B Rd        | 1                         |                           |                         |                          |                          |                            |
| SHLR        | SHLR.B Rd        | 1                         |                           |                         |                          |                          |                            |
| SLEEP       | SLEEP            | 1                         |                           |                         |                          |                          |                            |
| STC         | STC CCR, Rd      | 1                         |                           |                         |                          |                          |                            |
| SUB         | SUB.B Rs, Rd     | 1                         |                           |                         |                          |                          |                            |
|             | SUB.W Rs, Rd     | 1                         |                           |                         |                          |                          |                            |
| SUBS        | SUBS.W #1/2, Rd  | 1                         |                           |                         |                          |                          |                            |
| SUBX        | SUBX.B #xx:8, Rd | 1                         |                           |                         |                          |                          |                            |
|             | SUBX.B Rs, Rd    | 1                         |                           |                         |                          |                          |                            |
| XOR         | XOR.B #xx:8, Rd  | 1                         |                           |                         |                          |                          |                            |
|             | XOR.B Rs, Rd     | 1                         |                           |                         |                          |                          |                            |
| XORC        | XORC #xx:8, CCR  | 1                         |                           |                         |                          |                          |                            |

Note: All values left blank are zero.

# Appendix B Internal I/O Register

## B.1 Addresses

| Addr.<br>(Last<br>Byte) | Register<br>Name | Bit Names |       |       |       |       |       |       |       | Module                                            |
|-------------------------|------------------|-----------|-------|-------|-------|-------|-------|-------|-------|---------------------------------------------------|
|                         |                  | Bit 7     | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |                                                   |
| H'80                    |                  |           |       |       |       |       |       |       |       | External<br>addresses<br>(in expand-<br>ed modes) |
| H'81                    |                  |           |       |       |       |       |       |       |       |                                                   |
| H'82                    |                  |           |       |       |       |       |       |       |       |                                                   |
| H'83                    |                  |           |       |       |       |       |       |       |       |                                                   |
| H'84                    |                  |           |       |       |       |       |       |       |       |                                                   |
| H'85                    |                  |           |       |       |       |       |       |       |       |                                                   |
| H'86                    |                  |           |       |       |       |       |       |       |       |                                                   |
| H'87                    |                  |           |       |       |       |       |       |       |       |                                                   |
| H'88                    | —                | —         | —     | —     | —     | —     | —     | —     | —     | FRT                                               |
| H'89                    | —                | —         | —     | —     | —     | —     | —     | —     | —     |                                                   |
| H'8A                    | —                | —         | —     | —     | —     | —     | —     | —     | —     |                                                   |
| H'8B                    | —                | —         | —     | —     | —     | —     | —     | —     | —     |                                                   |
| H'8C                    | —                | —         | —     | —     | —     | —     | —     | —     | —     |                                                   |
| H'8D                    | —                | —         | —     | —     | —     | —     | —     | —     | —     |                                                   |
| H'8E                    | —                | —         | —     | —     | —     | —     | —     | —     | —     |                                                   |
| H'8F                    | —                | —         | —     | —     | —     | —     | —     | —     | —     |                                                   |
| H'90                    | TIER             | ICIAE     | ICIBE | ICICE | ICIDE | OCIAE | OCIBE | OVIE  | —     | FRT                                               |
| H'91                    | TCSR             | ICFA      | ICFB  | ICFC  | ICFD  | OCFA  | OCFB  | OVF   | CCLRA |                                                   |
| H'92                    | FRCH             |           |       |       |       |       |       |       |       |                                                   |
| H'93                    | FRCL             |           |       |       |       |       |       |       |       |                                                   |
| H'94                    | OCRAH            |           |       |       |       |       |       |       |       |                                                   |
|                         | OCRBH            |           |       |       |       |       |       |       |       |                                                   |
| H'95                    | OCRAL            |           |       |       |       |       |       |       |       |                                                   |
|                         | OCRBL            |           |       |       |       |       |       |       |       |                                                   |
| H'96                    | TCR              | IEDGA     | IEDGB | IEDGC | IEDGD | BUFEA | BUFEB | CKS1  | CKS0  |                                                   |
| H'97                    | TOCR             | —         | —     | —     | OCRS  | OEA   | OEB   | OLVLA | OLVLB |                                                   |
| H'98                    | ICRAH            |           |       |       |       |       |       |       |       |                                                   |
| H'99                    | ICRAL            |           |       |       |       |       |       |       |       |                                                   |
| H'9A                    | ICRBH            |           |       |       |       |       |       |       |       |                                                   |
| H'9B                    | ICRBL            |           |       |       |       |       |       |       |       |                                                   |
| H'9C                    | ICRCH            |           |       |       |       |       |       |       |       |                                                   |
| H'9D                    | ICRCL            |           |       |       |       |       |       |       |       |                                                   |
| H'9E                    | ICRDH            |           |       |       |       |       |       |       |       |                                                   |
| H'9F                    | ICRDL            |           |       |       |       |       |       |       |       |                                                   |

Notes: FRT: Free-running timer

(Continued on next page)

| Addr.<br>(Last<br>Byte) | Register<br>Name | Bit Names           |                     |                     |                     |                     |                     |                     |                     | Module |
|-------------------------|------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|--------|
|                         |                  | Bit 7               | Bit 6               | Bit 5               | Bit 4               | Bit 3               | Bit 2               | Bit 1               | Bit 0               |        |
| H'A0                    | —                | —                   | —                   | —                   | —                   | —                   | —                   | —                   | —                   | —      |
| H'A1                    | —                | —                   | —                   | —                   | —                   | —                   | —                   | —                   | —                   | —      |
| H'A2                    | —                | —                   | —                   | —                   | —                   | —                   | —                   | —                   | —                   | —      |
| H'A3                    | —                | —                   | —                   | —                   | —                   | —                   | —                   | —                   | —                   | —      |
| H'A4                    | —                | —                   | —                   | —                   | —                   | —                   | —                   | —                   | —                   | —      |
| H'A5                    | —                | —                   | —                   | —                   | —                   | —                   | —                   | —                   | —                   | —      |
| H'A6                    | —                | —                   | —                   | —                   | —                   | —                   | —                   | —                   | —                   | —      |
| H'A7                    | —                | —                   | —                   | —                   | —                   | —                   | —                   | —                   | —                   | —      |
| H'A8                    | TCSR/TCNT OVF    | WT/IT               | TME                 | —                   | RST/NMI             | CKS2                | CKS1                | CKS0                | —                   | WDT    |
| H'A9                    | TCNT             | —                   | —                   | —                   | —                   | —                   | —                   | —                   | —                   | —      |
| H'AA                    | —                | —                   | —                   | —                   | —                   | —                   | —                   | —                   | —                   | —      |
| H'AB                    | —                | —                   | —                   | —                   | —                   | —                   | —                   | —                   | —                   | —      |
| H'AC                    | P1PCR            | P1 <sub>7</sub> PCR | P1 <sub>6</sub> PCR | P1 <sub>5</sub> PCR | P1 <sub>4</sub> PCR | P1 <sub>3</sub> PCR | P1 <sub>2</sub> PCR | P1 <sub>1</sub> PCR | P1 <sub>0</sub> PCR | Port 1 |
| H'AD                    | P2PCR            | P2 <sub>7</sub> PCR | P2 <sub>6</sub> PCR | P2 <sub>5</sub> PCR | P2 <sub>4</sub> PCR | P2 <sub>3</sub> PCR | P2 <sub>2</sub> PCR | P2 <sub>1</sub> PCR | P2 <sub>0</sub> PCR | Port 2 |
| H'AE                    | P3PCR            | P3 <sub>7</sub> PCR | P3 <sub>6</sub> PCR | P3 <sub>5</sub> PCR | P3 <sub>4</sub> PCR | P3 <sub>3</sub> PCR | P3 <sub>2</sub> PCR | P3 <sub>1</sub> PCR | P3 <sub>0</sub> PCR | Port 3 |
| H'AF                    | —                | —                   | —                   | —                   | —                   | —                   | —                   | —                   | —                   | —      |
| H'B0                    | P1DDR            | P1 <sub>7</sub> DDR | P1 <sub>6</sub> DDR | P1 <sub>5</sub> DDR | P1 <sub>4</sub> DDR | P1 <sub>3</sub> DDR | P1 <sub>2</sub> DDR | P1 <sub>1</sub> DDR | P1 <sub>0</sub> DDR | Port 1 |
| H'B1                    | P2DDR            | P2 <sub>7</sub> DDR | P2 <sub>6</sub> DDR | P2 <sub>5</sub> DDR | P2 <sub>4</sub> DDR | P2 <sub>3</sub> DDR | P2 <sub>2</sub> DDR | P2 <sub>1</sub> DDR | P2 <sub>0</sub> DDR | Port 2 |
| H'B2                    | P1DR             | P1 <sub>7</sub>     | P1 <sub>6</sub>     | P1 <sub>5</sub>     | P1 <sub>4</sub>     | P1 <sub>3</sub>     | P1 <sub>2</sub>     | P1 <sub>1</sub>     | P1 <sub>0</sub>     | Port 1 |
| H'B3                    | P2DR             | P2 <sub>7</sub>     | P2 <sub>6</sub>     | P2 <sub>5</sub>     | P2 <sub>4</sub>     | P2 <sub>3</sub>     | P2 <sub>2</sub>     | P2 <sub>1</sub>     | P2 <sub>0</sub>     | Port 2 |
| H'B4                    | P3DDR            | P3 <sub>7</sub> DDR | P3 <sub>6</sub> DDR | P3 <sub>5</sub> DDR | P3 <sub>4</sub> DDR | P3 <sub>3</sub> DDR | P3 <sub>2</sub> DDR | P3 <sub>1</sub> DDR | P3 <sub>0</sub> DDR | Port 3 |
| H'B5                    | P4DDR            | P4 <sub>7</sub> DDR | P4 <sub>6</sub> DDR | P4 <sub>5</sub> DDR | P4 <sub>4</sub> DDR | P4 <sub>3</sub> DDR | P4 <sub>2</sub> DDR | P4 <sub>1</sub> DDR | P4 <sub>0</sub> DDR | Port 4 |
| H'B6                    | P3DR             | P3 <sub>7</sub>     | P3 <sub>6</sub>     | P3 <sub>5</sub>     | P3 <sub>4</sub>     | P3 <sub>3</sub>     | P3 <sub>2</sub>     | P3 <sub>1</sub>     | P3 <sub>0</sub>     | Port 3 |
| H'B7                    | P4DR             | P4 <sub>7</sub>     | P4 <sub>6</sub>     | P4 <sub>5</sub>     | P4 <sub>4</sub>     | P4 <sub>3</sub>     | P4 <sub>2</sub>     | P4 <sub>1</sub>     | P4 <sub>0</sub>     | Port 4 |
| H'B8                    | P5DDR            | —                   | —                   | —                   | —                   | —                   | P5 <sub>2</sub> DDR | P5 <sub>1</sub> DDR | P5 <sub>0</sub> DDR | Port 5 |
| H'B9                    | P6DDR            | P6 <sub>7</sub> DDR | P6 <sub>6</sub> DDR | P6 <sub>5</sub> DDR | P6 <sub>4</sub> DDR | P6 <sub>3</sub> DDR | P6 <sub>2</sub> DDR | P6 <sub>1</sub> DDR | P6 <sub>0</sub> DDR | Port 6 |
| H'BA                    | P5DR             | —                   | —                   | —                   | —                   | —                   | P5 <sub>2</sub>     | P5 <sub>1</sub>     | P5 <sub>0</sub>     | Port 5 |
| H'BB                    | P6DR             | P6 <sub>7</sub>     | P6 <sub>6</sub>     | P6 <sub>5</sub>     | P6 <sub>4</sub>     | P6 <sub>3</sub>     | P6 <sub>2</sub>     | P6 <sub>1</sub>     | P6 <sub>0</sub>     | Port 6 |

Notes: WDT: Watchdog timer

(Continued on next page)

(Continued from preceding page)

| Addr.<br>(Last<br>Byte) | Register<br>Name | Bit Names       |                 |                 |                 |                 |                 |                 |                 | Module            |  |
|-------------------------|------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-------------------|--|
|                         |                  | Bit 7           | Bit 6           | Bit 5           | Bit 4           | Bit 3           | Bit 2           | Bit 1           | Bit 0           |                   |  |
| H'BC                    | —                | —               | —               | —               | —               | —               | —               | —               | —               | —                 |  |
| H'BD                    | —                | —               | —               | —               | —               | —               | —               | —               | —               | —                 |  |
| H'BE                    | P7PIN            | P7 <sub>7</sub> | P7 <sub>6</sub> | P7 <sub>5</sub> | P7 <sub>4</sub> | P7 <sub>3</sub> | P7 <sub>2</sub> | P7 <sub>1</sub> | P7 <sub>0</sub> | Port 7            |  |
| H'BF                    | —                | —               | —               | —               | —               | —               | —               | —               | —               | —                 |  |
| H'C0                    | —                | —               | —               | —               | —               | —               | —               | —               | —               | —                 |  |
| H'C1                    | —                | —               | —               | —               | —               | —               | —               | —               | —               | —                 |  |
| H'C2                    | WSCR             | —               | —               | CKDBL           | —               | WMS1            | WMS0            | WC1             | WC0             | System<br>control |  |
| H'C3                    | STCR             | —               | —               | —               | —               | —               | MPE             | ICKS1           | ICKS0           |                   |  |
| H'C4                    | SYSCR            | SSBY            | STS2            | STS1            | STS0            | XRST            | NMIEG           | —               | RAME            |                   |  |
| H'C5                    | MDCR             | —               | —               | —               | —               | —               | —               | MDS1            | MDS0            |                   |  |
| H'C6                    | ISCR             | —               | —               | —               | —               | —               | IRQ2SC          | IRQ1SC          | IRQ0SC          |                   |  |
| H'C7                    | IER              | —               | —               | —               | —               | —               | IRQ2E           | IRQ1E           | IRQ0E           | TMR0              |  |
| H'C8                    | TCR              | CMIEB           | CMIEA           | OVIE            | CCLR1           | CCLR0           | CKS2            | CKS1            | CKS0            |                   |  |
| H'C9                    | TCSR             | CMFB            | CMFA            | OVF             | —               | OS3             | OS2             | OS1             | OS0             |                   |  |
| H'CA                    | TCORA            |                 |                 |                 |                 |                 |                 |                 |                 |                   |  |
| H'CB                    | TCORB            |                 |                 |                 |                 |                 |                 |                 |                 |                   |  |
| H'CC                    | TCNT             |                 |                 |                 |                 |                 |                 |                 |                 |                   |  |
| H'CD                    | —                | —               | —               | —               | —               | —               | —               | —               | —               | TMR1              |  |
| H'CE                    | —                | —               | —               | —               | —               | —               | —               | —               | —               |                   |  |
| H'CF                    | —                | —               | —               | —               | —               | —               | —               | —               | —               |                   |  |
| H'D0                    | TCR              | CMIEB           | CMIEA           | OVIE            | CCLR1           | CCLR0           | CKS2            | CKS1            | CKS0            |                   |  |
| H'D1                    | TCSR             | CMFB            | CMFA            | OVF             | —               | OS3             | OS2             | OS1             | OS0             |                   |  |
| H'D2                    | TCORA            |                 |                 |                 |                 |                 |                 |                 |                 |                   |  |
| H'D3                    | TCORB            |                 |                 |                 |                 |                 |                 |                 |                 |                   |  |
| H'D4                    | TCNT             |                 |                 |                 |                 |                 |                 |                 |                 |                   |  |
| H'D5                    | —                | —               | —               | —               | —               | —               | —               | —               | —               | TMR1              |  |
| H'D6                    | —                | —               | —               | —               | —               | —               | —               | —               | —               |                   |  |
| H'D7                    | —                | —               | —               | —               | —               | —               | —               | —               | —               |                   |  |

Notes: TMR0: 8-bit timer channel 0  
TMR1: 8-bit timer channel 1

(Continued on next page)

(Continued from preceding page)

| Addr.<br>(Last<br>Byte) | Register<br>Name | Bit Names         |       |       |                   |       |       |       |       | Module |
|-------------------------|------------------|-------------------|-------|-------|-------------------|-------|-------|-------|-------|--------|
|                         |                  | Bit 7             | Bit 6 | Bit 5 | Bit 4             | Bit 3 | Bit 2 | Bit 1 | Bit 0 |        |
| H'D8                    | SMR              | C/ $\overline{A}$ | CHR   | PE    | O/ $\overline{E}$ | STOP  | MP    | CKS1  | CKS0  | SCI    |
| H'D9                    | BRR              |                   |       |       |                   |       |       |       |       |        |
| H'DA                    | SCR              | TIE               | RIE   | TE    | RE                | MPIE  | TEIE  | CKE1  | CKE0  |        |
| H'DB                    | TDR              |                   |       |       |                   |       |       |       |       |        |
| H'DC                    | SSR              | TDRE              | RDRF  | ORER  | FER               | PER   | TEND  | MPB   | MPBT  |        |
| H'DD                    | RDR              |                   |       |       |                   |       |       |       |       | A/D    |
| H'DE                    | —                | —                 | —     | —     | —                 | —     | —     | —     | —     |        |
| H'DF                    | —                | —                 | —     | —     | —                 | —     | —     | —     | —     |        |
| H'E0                    | ADDRAH           | AD9               | AD8   | AD7   | AD6               | AD5   | AD4   | AD3   | AD2   |        |
| H'E1                    | ADDRAL           | AD1               | AD0   | —     | —                 | —     | —     | —     | —     |        |
| H'E2                    | ADDRBH           | AD9               | AD8   | AD7   | AD6               | AD5   | AD4   | AD3   | AD2   |        |
| H'E3                    | ADDRBL           | AD1               | AD0   | —     | —                 | —     | —     | —     | —     |        |
| H'E4                    | ADDRCH           | AD9               | AD8   | AD7   | AD6               | AD5   | AD4   | AD3   | AD2   |        |
| H'E5                    | ADDRCL           | AD1               | AD0   | —     | —                 | —     | —     | —     | —     |        |
| H'E6                    | ADDRDH           | AD9               | AD8   | AD7   | AD6               | AD5   | AD4   | AD3   | AD2   |        |
| H'E7                    | ADDRDL           | AD1               | AD0   | —     | —                 | —     | —     | —     | —     |        |
| H'E8                    | ADCSR            | ADF               | ADIE  | ADST  | SCAN              | CKS   | CH2   | CH1   | CH0   |        |
| H'E9                    | ADCR             | TRGE              | —     | —     | —                 | —     | —     | —     | —     |        |
| H'EA                    | —                | —                 | —     | —     | —                 | —     | —     | —     | —     |        |
| H'EB                    | —                | —                 | —     | —     | —                 | —     | —     | —     | —     |        |
| H'EC                    | —                | —                 | —     | —     | —                 | —     | —     | —     | —     | —      |
| H'ED                    | —                | —                 | —     | —     | —                 | —     | —     | —     | —     |        |
| H'EE                    | —                | —                 | —     | —     | —                 | —     | —     | —     | —     |        |
| H'EF                    | —                | —                 | —     | —     | —                 | —     | —     | —     | —     |        |


Notes: A/D: Analog-to-digital converter  
SCI: Serial communication interface


(Continued on next page)

(Continued from preceding page)


| Addr.<br>(Last<br>Byte) | Register<br>Name | Bit Names |       |       |       |       |       |       |       | Module |
|-------------------------|------------------|-----------|-------|-------|-------|-------|-------|-------|-------|--------|
|                         |                  | Bit 7     | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |        |
| H'F0                    | —                | —         | —     | —     | —     | —     | —     | —     | —     | —      |
| H'F1                    | —                | —         | —     | —     | —     | —     | —     | —     | —     |        |
| H'F2                    | —                | —         | —     | —     | —     | —     | —     | —     | —     |        |
| H'F3                    | —                | —         | —     | —     | —     | —     | —     | —     | —     |        |
| H'F4                    | —                | —         | —     | —     | —     | —     | —     | —     | —     |        |
| H'F5                    | —                | —         | —     | —     | —     | —     | —     | —     | —     |        |
| H'F6                    | —                | —         | —     | —     | —     | —     | —     | —     | —     |        |
| H'F7                    | —                | —         | —     | —     | —     | —     | —     | —     | —     |        |
| H'F8                    | —                | —         | —     | —     | —     | —     | —     | —     | —     |        |
| H'F9                    | —                | —         | —     | —     | —     | —     | —     | —     | —     |        |
| H'FA                    | —                | —         | —     | —     | —     | —     | —     | —     | —     |        |
| H'FB                    | —                | —         | —     | —     | —     | —     | —     | —     | —     |        |
| H'FC                    | —                | —         | —     | —     | —     | —     | —     | —     | —     |        |
| H'FD                    | —                | —         | —     | —     | —     | —     | —     | —     | —     |        |
| H'FE                    | —                | —         | —     | —     | —     | —     | —     | —     | —     |        |
| H'FF                    | —                | —         | —     | —     | —     | —     | —     | —     | —     |        |

B.2 Function Descriptions

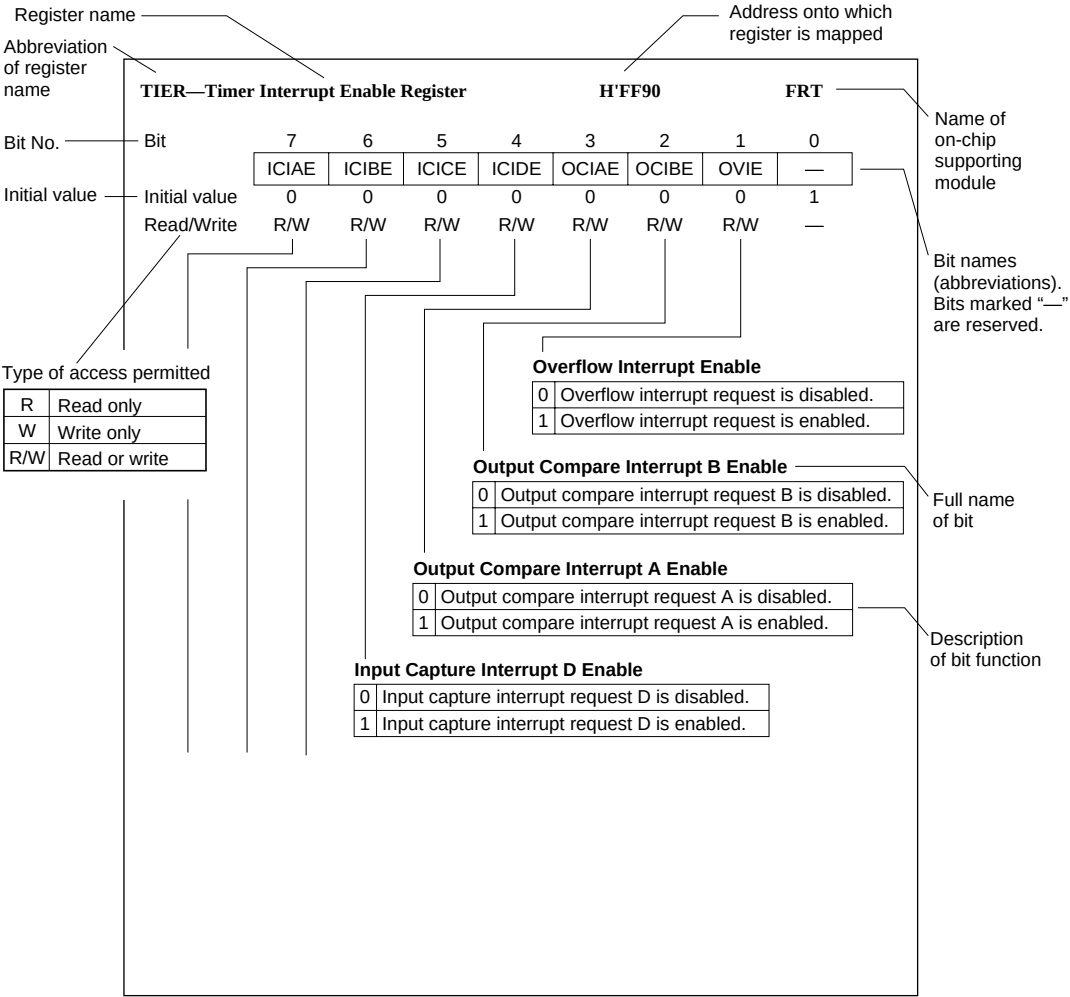

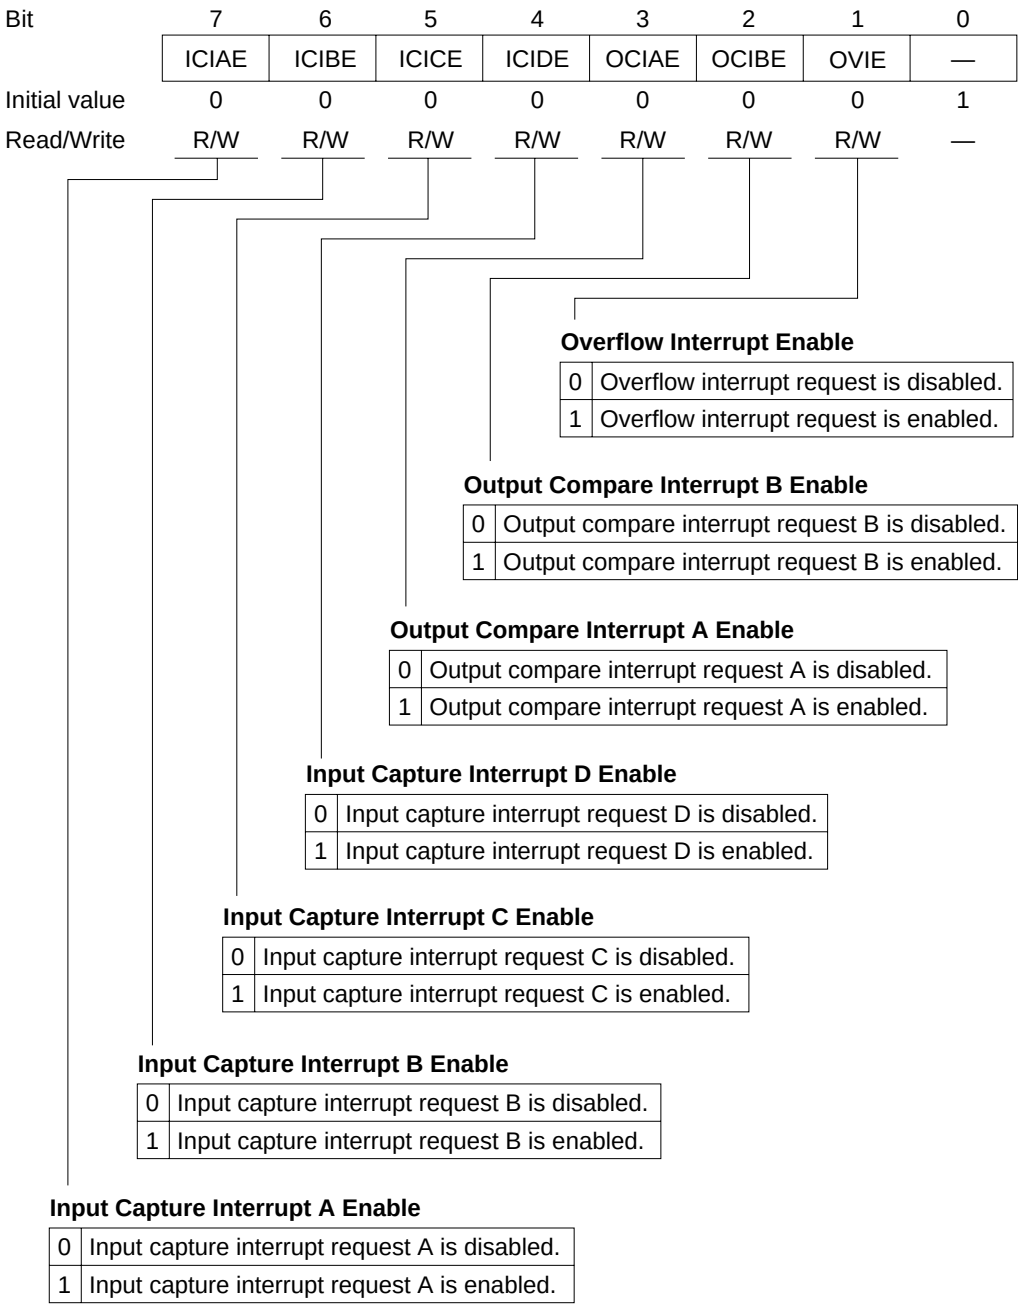



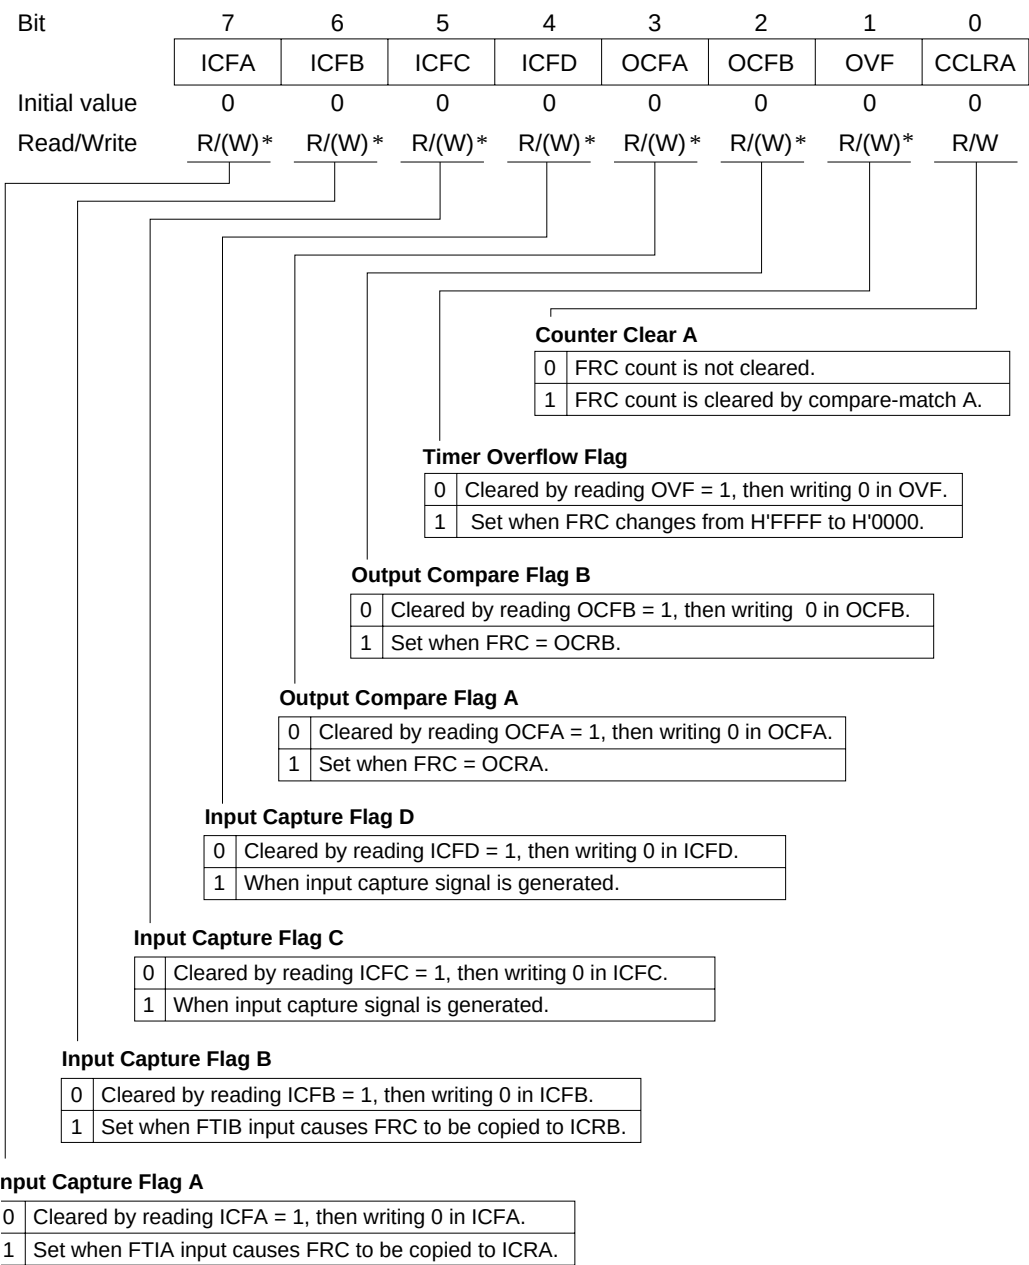

Note: \* Software can write a 0 in bits 7 to 1 to clear the flags, but cannot write a 1 in these bits.

|                                    |             |             |             |             |             |             |             |             |             |             |             |             |             |             |             |             |
|------------------------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Bit                                | 15          | 14          | 13          | 12          | 11          | 10          | 9           | 8           | 7           | 6           | 5           | 4           | 3           | 2           | 1           | 0           |
|                                    | <div></div> | <div></div> | <div></div> | <div></div> | <div></div> | <div></div> | <div></div> | <div></div> | <div></div> | <div></div> | <div></div> | <div></div> | <div></div> | <div></div> | <div></div> | <div></div> |
| Initial value                      | 0           | 0           | 0           | 0           | 0           | 0           | 0           | 0           | 0           | 0           | 0           | 0           | 0           | 0           | 0           | 0           |
| Read/Write                         | R/W         | R/W         | R/W         | R/W         | R/W         | R/W         | R/W         | R/W         | R/W         | R/W         | R/W         | R/W         | R/W         | R/W         | R/W         | R/W         |
| <div></div> <div>Count value</div> |             |             |             |             |             |             |             |             |             |             |             |             |             |             |             |             |

OCRA (H and L)—Output Compare Register A

H'FF94, H'FF95

FRT

|                                                                                         |             |             |             |             |             |             |             |             |             |             |             |             |             |             |             |             |
|-----------------------------------------------------------------------------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Bit                                                                                     | 15          | 14          | 13          | 12          | 11          | 10          | 9           | 8           | 7           | 6           | 5           | 4           | 3           | 2           | 1           | 0           |
|                                                                                         | <div></div> | <div></div> | <div></div> | <div></div> | <div></div> | <div></div> | <div></div> | <div></div> | <div></div> | <div></div> | <div></div> | <div></div> | <div></div> | <div></div> | <div></div> | <div></div> |
| Initial value                                                                           | 1           | 1           | 1           | 1           | 1           | 1           | 1           | 1           | 1           | 1           | 1           | 1           | 1           | 1           | 1           | 1           |
| Read/Write                                                                              | R/W         | R/W         | R/W         | R/W         | R/W         | R/W         | R/W         | R/W         | R/W         | R/W         | R/W         | R/W         | R/W         | R/W         | R/W         | R/W         |
| <div></div> <div>Continually compared with FRC. OCFA is set to 1 when OCRA = FRC.</div> |             |             |             |             |             |             |             |             |             |             |             |             |             |             |             |             |


OCRB (H and L)—Output Compare Register B

H'FF94, H'FF95

FRT

|                                                                                         |             |             |             |             |             |             |             |             |             |             |             |             |             |             |             |             |
|-----------------------------------------------------------------------------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Bit                                                                                     | 15          | 14          | 13          | 12          | 11          | 10          | 9           | 8           | 7           | 6           | 5           | 4           | 3           | 2           | 1           | 0           |
|                                                                                         | <div></div> | <div></div> | <div></div> | <div></div> | <div></div> | <div></div> | <div></div> | <div></div> | <div></div> | <div></div> | <div></div> | <div></div> | <div></div> | <div></div> | <div></div> | <div></div> |
| Initial value                                                                           | 1           | 1           | 1           | 1           | 1           | 1           | 1           | 1           | 1           | 1           | 1           | 1           | 1           | 1           | 1           | 1           |
| Read/Write                                                                              | R/W         | R/W         | R/W         | R/W         | R/W         | R/W         | R/W         | R/W         | R/W         | R/W         | R/W         | R/W         | R/W         | R/W         | R/W         | R/W         |
| <div></div> <div>Continually compared with FRC. OCFB is set to 1 when OCRB = FRC.</div> |             |             |             |             |             |             |             |             |             |             |             |             |             |             |             |             |

|               |       |       |       |       |       |       |      |      |
|---------------|-------|-------|-------|-------|-------|-------|------|------|
| Bit           | 7     | 6     | 5     | 4     | 3     | 2     | 1    | 0    |
|               | IEDGA | IEDGB | IEDGC | IEDGD | BUFEA | BUFEB | CKS1 | CKS0 |
| Initial value | 0     | 0     | 0     | 0     | 0     | 0     | 0    | 0    |
| Read/Write    | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W  | R/W  |

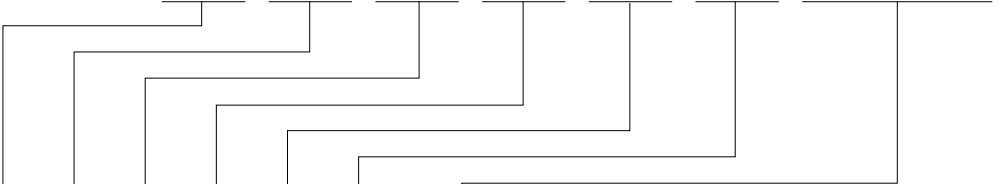

Clock Select

|   |   |                                               |
|---|---|-----------------------------------------------|
| 0 | 0 | Internal clock source: $\varnothing_P/2$      |
| 0 | 1 | Internal clock source: $\varnothing_P/8$      |
| 1 | 0 | Internal clock source: $\varnothing_P/32$     |
| 1 | 1 | External clock source: counted on rising edge |

Buffer Enable B

|   |                                              |
|---|----------------------------------------------|
| 0 | ICRD is used for input capture D.            |
| 1 | ICRD is buffer register for input capture B. |

Buffer Enable A

|   |                                              |
|---|----------------------------------------------|
| 0 | ICRC is used for input capture C.            |
| 1 | ICRC is buffer register for input capture A. |

Input Edge Select D

|   |                                |
|---|--------------------------------|
| 0 | Falling edge of FTID is valid. |
| 1 | Rising edge of FTID is valid.  |

Input Edge Select C


|   |                                |
|---|--------------------------------|
| 0 | Falling edge of FTIC is valid. |
| 1 | Rising edge of FTIC is valid.  |

Input Edge Select B

|   |                                |
|---|--------------------------------|
| 0 | Falling edge of FTIB is valid. |
| 1 | Rising edge of FTIB is valid.  |

Input Edge Select A

|   |                                |
|---|--------------------------------|
| 0 | Falling edge of FTIA is valid. |
| 1 | Rising edge of FTIA is valid.  |

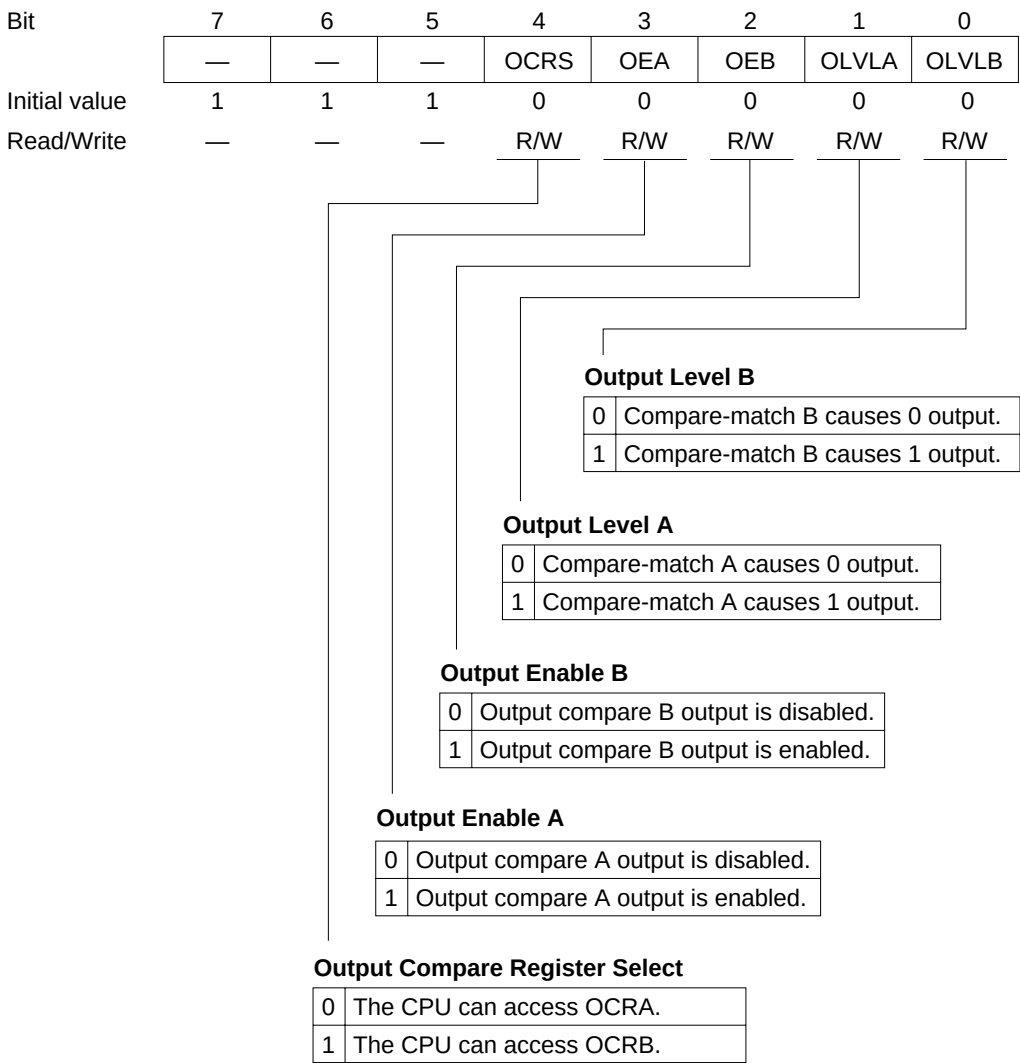

|               |    |    |    |    |    |    |   |   |   |   |   |   |   |   |   |   |
|---------------|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| Bit           | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Initial value | 0  | 0  | 0  | 0  | 0  | 0  | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Read/Write    | R  | R  | R  | R  | R  | R  | R | R | R | R | R | R | R | R | R | R |

Contains FRC count captured on FTIA input.

**ICRB (H and L)—Input Capture Register B****H'FF9A, H'FF9B****FRT**

| Bit           | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|---------------|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
|               |    |    |    |    |    |    |   |   |   |   |   |   |   |   |   |   |
| Initial value | 0  | 0  | 0  | 0  | 0  | 0  | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Read/Write    | R  | R  | R  | R  | R  | R  | R | R | R | R | R | R | R | R | R | R |

Contains FRC count captured on FTIB input.

**ICRC (H and L)—Input Capture Register C****H'FF9C, H'FF9D****FRT**

| Bit           | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|---------------|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
|               |    |    |    |    |    |    |   |   |   |   |   |   |   |   |   |   |
| Initial value | 0  | 0  | 0  | 0  | 0  | 0  | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Read/Write    | R  | R  | R  | R  | R  | R  | R | R | R | R | R | R | R | R | R | R |

Contains FRC count captured on FTIC input, or old ICRA value in buffer mode.

**ICRD (H and L)—Input Capture Register D****H'FF9E, H'FF9F****FRT**

| Bit           | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|---------------|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
|               |    |    |    |    |    |    |   |   |   |   |   |   |   |   |   |   |
| Initial value | 0  | 0  | 0  | 0  | 0  | 0  | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Read/Write    | R  | R  | R  | R  | R  | R  | R | R | R | R | R | R | R | R | R | R |

Contains FRC count captured on FTID input, or old ICRB value in buffer mode.

|               |        |                     |     |   |         |      |      |      |
|---------------|--------|---------------------|-----|---|---------|------|------|------|
| Bit           | 7      | 6                   | 5   | 4 | 3       | 2    | 1    | 0    |
|               | OVF    | WT/I $\overline{T}$ | TME | — | RST/NMI | CKS2 | CKS1 | CKS0 |
| Initial value | 0      | 0                   | 0   | 1 | 0       | 0    | 0    | 0    |
| Read/Write    | R/(W)* | R/W                 | R/W | — | R/W     | R/W  | R/W  | R/W  |

Clock Select 2 to 0

|   |   |   |                      |
|---|---|---|----------------------|
| 0 | 0 | 0 | $\varnothing_P/2$    |
|   |   | 1 | $\varnothing_P/32$   |
|   | 1 | 0 | $\varnothing_P/64$   |
|   |   | 1 | $\varnothing_P/128$  |
| 1 | 0 | 0 | $\varnothing_P/256$  |
|   |   | 1 | $\varnothing_P/512$  |
|   | 1 | 0 | $\varnothing_P/2048$ |
|   |   | 1 | $\varnothing_P/4096$ |

Reset or NMI Select

|   |                        |
|---|------------------------|
| 0 | NMI function enabled   |
| 1 | Reset function enabled |

Timer Enable

|   |                                                           |
|---|-----------------------------------------------------------|
| 0 | Timer disabled: TCNT is initialized to H'00 and stopped   |
| 1 | Timer enabled: TCNT runs; CPU interrupts can be requested |

Timer Mode Select

|   |                                                        |
|---|--------------------------------------------------------|
| 0 | Interval timer mode (interval timer interrupt request) |
| 1 | Watchdog timer mode (generates reset or NMI signal)    |

Overflow Flag

|   |                                                   |
|---|---------------------------------------------------|
| 0 | Cleared by reading OVF = 1, then writing 1 in OVF |
| 1 | Set when TCNT changes from H'FF to H'00           |

Note: \* Only 0 can be written, to clear the flag.

327

| TCNT—Timer Counter |     |     |     | H'FFA9 (read),<br>H'FFA8 (write) |     |     |     | WDT |
|--------------------|-----|-----|-----|----------------------------------|-----|-----|-----|-----|
| Bit                | 7   | 6   | 5   | 4                                | 3   | 2   | 1   | 0   |
|                    |     |     |     |                                  |     |     |     |     |
| Initial value      | 0   | 0   | 0   | 0                                | 0   | 0   | 0   | 0   |
| Read/Write         | R/W | R/W | R/W | R/W                              | R/W | R/W | R/W | R/W |
| Count value        |     |     |     |                                  |     |     |     |     |

| PIPCR—Port 1 Input Pull-Up Control Register                                                                                                                                    |                                  |                     |                     |                     | H'FFAC              |                     | Port 1              |                     |   |                                  |   |                                 |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---|----------------------------------|---|---------------------------------|
| Bit                                                                                                                                                                            | 7                                | 6                   | 5                   | 4                   | 3                   | 2                   | 1                   | 0                   |   |                                  |   |                                 |
|                                                                                                                                                                                | P1 <sub>7</sub> PCR              | P1 <sub>6</sub> PCR | P1 <sub>5</sub> PCR | P1 <sub>4</sub> PCR | P1 <sub>3</sub> PCR | P1 <sub>2</sub> PCR | P1 <sub>1</sub> PCR | P1 <sub>0</sub> PCR |   |                                  |   |                                 |
| Initial value                                                                                                                                                                  | 0                                | 0                   | 0                   | 0                   | 0                   | 0                   | 0                   | 0                   |   |                                  |   |                                 |
| Read/Write                                                                                                                                                                     | R/W                              | R/W                 | R/W                 | R/W                 | R/W                 | R/W                 | R/W                 | R/W                 |   |                                  |   |                                 |
| <div>Port 1 Input Pull-Up Control</div> <table><tr><td>0</td><td>Input pull-up transistor is off.</td></tr><tr><td>1</td><td>Input pull-up transistor is on.</td></tr></table> |                                  |                     |                     |                     |                     |                     |                     |                     | 0 | Input pull-up transistor is off. | 1 | Input pull-up transistor is on. |
| 0                                                                                                                                                                              | Input pull-up transistor is off. |                     |                     |                     |                     |                     |                     |                     |   |                                  |   |                                 |
| 1                                                                                                                                                                              | Input pull-up transistor is on.  |                     |                     |                     |                     |                     |                     |                     |   |                                  |   |                                 |

| P2PCR—Port 2 Input Pull-Up Control Register                                                                                                                                    |                                  |                     |                     |                     | H'FFAD              |                     | Port 2              |                     |   |                                  |   |                                 |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---|----------------------------------|---|---------------------------------|
| Bit                                                                                                                                                                            | 7                                | 6                   | 5                   | 4                   | 3                   | 2                   | 1                   | 0                   |   |                                  |   |                                 |
|                                                                                                                                                                                | P2 <sub>7</sub> PCR              | P2 <sub>6</sub> PCR | P2 <sub>5</sub> PCR | P2 <sub>4</sub> PCR | P2 <sub>3</sub> PCR | P2 <sub>2</sub> PCR | P2 <sub>1</sub> PCR | P2 <sub>0</sub> PCR |   |                                  |   |                                 |
| Initial value                                                                                                                                                                  | 0                                | 0                   | 0                   | 0                   | 0                   | 0                   | 0                   | 0                   |   |                                  |   |                                 |
| Read/Write                                                                                                                                                                     | R/W                              | R/W                 | R/W                 | R/W                 | R/W                 | R/W                 | R/W                 | R/W                 |   |                                  |   |                                 |
| <div>Port 2 Input Pull-Up Control</div> <table><tr><td>0</td><td>Input pull-up transistor is off.</td></tr><tr><td>1</td><td>Input pull-up transistor is on.</td></tr></table> |                                  |                     |                     |                     |                     |                     |                     |                     | 0 | Input pull-up transistor is off. | 1 | Input pull-up transistor is on. |
| 0                                                                                                                                                                              | Input pull-up transistor is off. |                     |                     |                     |                     |                     |                     |                     |   |                                  |   |                                 |
| 1                                                                                                                                                                              | Input pull-up transistor is on.  |                     |                     |                     |                     |                     |                     |                     |   |                                  |   |                                 |

|               |                     |                     |                     |                     |                     |                     |                     |                     |
|---------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|
| Bit           | 7                   | 6                   | 5                   | 4                   | 3                   | 2                   | 1                   | 0                   |
|               | P3 <sub>7</sub> PCR | P3 <sub>6</sub> PCR | P3 <sub>5</sub> PCR | P3 <sub>4</sub> PCR | P3 <sub>3</sub> PCR | P3 <sub>2</sub> PCR | P3 <sub>1</sub> PCR | P3 <sub>0</sub> PCR |
| Initial value | 0                   | 0                   | 0                   | 0                   | 0                   | 0                   | 0                   | 0                   |
| Read/Write    | R/W                 | R/W                 | R/W                 | R/W                 | R/W                 | R/W                 | R/W                 | R/W                 |

Port 3 Input Pull-Up Control

|   |                                  |
|---|----------------------------------|
| 0 | Input pull-up transistor is off. |
| 1 | Input pull-up transistor is on.  |

|               |                     |                     |                     |                     |                     |                     |                     |                     |
|---------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|
| Bit           | 7                   | 6                   | 5                   | 4                   | 3                   | 2                   | 1                   | 0                   |
|               | P1 <sub>7</sub> DDR | P1 <sub>6</sub> DDR | P1 <sub>5</sub> DDR | P1 <sub>4</sub> DDR | P1 <sub>3</sub> DDR | P1 <sub>2</sub> DDR | P1 <sub>1</sub> DDR | P1 <sub>0</sub> DDR |
| Mode 1        |                     |                     |                     |                     |                     |                     |                     |                     |
| Initial value | 1                   | 1                   | 1                   | 1                   | 1                   | 1                   | 1                   | 1                   |
| Read/Write    | —                   | —                   | —                   | —                   | —                   | —                   | —                   | —                   |
| Modes 2 and 3 |                     |                     |                     |                     |                     |                     |                     |                     |
| Initial value | 0                   | 0                   | 0                   | 0                   | 0                   | 0                   | 0                   | 0                   |
| Read/Write    | W                   | W                   | W                   | W                   | W                   | W                   | W                   | W                   |

Port 1 Input/Output Control

|   |             |
|---|-------------|
| 0 | Input port  |
| 1 | Output port |

|               |                 |                 |                 |                 |                 |                 |                 |                 |
|---------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| Bit           | 7               | 6               | 5               | 4               | 3               | 2               | 1               | 0               |
|               | P1 <sub>7</sub> | P1 <sub>6</sub> | P1 <sub>5</sub> | P1 <sub>4</sub> | P1 <sub>3</sub> | P1 <sub>2</sub> | P1 <sub>1</sub> | P1 <sub>0</sub> |
| Initial value | 0               | 0               | 0               | 0               | 0               | 0               | 0               | 0               |
| Read/Write    | R/W             | R/W             | R/W             | R/W             | R/W             | R/W             | R/W             | R/W             |



P2DDR—Port 2 Data Direction Register

H'FFB1

Port 2

|               |                     |                     |                     |                     |                     |                     |                     |                     |
|---------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|
| Bit           | 7                   | 6                   | 5                   | 4                   | 3                   | 2                   | 1                   | 0                   |
|               | P2 <sub>7</sub> DDR | P2 <sub>6</sub> DDR | P2 <sub>5</sub> DDR | P2 <sub>4</sub> DDR | P2 <sub>3</sub> DDR | P2 <sub>2</sub> DDR | P2 <sub>1</sub> DDR | P2 <sub>0</sub> DDR |
| Mode 1        |                     |                     |                     |                     |                     |                     |                     |                     |
| Initial value | 1                   | 1                   | 1                   | 1                   | 1                   | 1                   | 1                   | 1                   |
| Read/Write    | —                   | —                   | —                   | —                   | —                   | —                   | —                   | —                   |
| Modes 2 and 3 |                     |                     |                     |                     |                     |                     |                     |                     |
| Initial value | 0                   | 0                   | 0                   | 0                   | 0                   | 0                   | 0                   | 0                   |
| Read/Write    | W                   | W                   | W                   | W                   | W                   | W                   | W                   | W                   |

Port 2 Input/Output Control

|   |             |
|---|-------------|
| 0 | Input port  |
| 1 | Output port |

P2DR—Port 2 Data Register

H'FFB3

Port 2

|               |                 |                 |                 |                 |                 |                 |                 |                 |
|---------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| Bit           | 7               | 6               | 5               | 4               | 3               | 2               | 1               | 0               |
|               | P2 <sub>7</sub> | P2 <sub>6</sub> | P2 <sub>5</sub> | P2 <sub>4</sub> | P2 <sub>3</sub> | P2 <sub>2</sub> | P2 <sub>1</sub> | P2 <sub>0</sub> |
| Initial value | 0               | 0               | 0               | 0               | 0               | 0               | 0               | 0               |
| Read/Write    | R/W             | R/W             | R/W             | R/W             | R/W             | R/W             | R/W             | R/W             |

P3DDR—Port 3 Data Direction Register

H'FFB4

Port 3

|               |                     |                     |                     |                     |                     |                     |                     |                     |
|---------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|
| Bit           | 7                   | 6                   | 5                   | 4                   | 3                   | 2                   | 1                   | 0                   |
|               | P3 <sub>7</sub> DDR | P3 <sub>6</sub> DDR | P3 <sub>5</sub> DDR | P3 <sub>4</sub> DDR | P3 <sub>3</sub> DDR | P3 <sub>2</sub> DDR | P3 <sub>1</sub> DDR | P3 <sub>0</sub> DDR |
| Initial value | 0                   | 0                   | 0                   | 0                   | 0                   | 0                   | 0                   | 0                   |
| Read/Write    | W                   | W                   | W                   | W                   | W                   | W                   | W                   | W                   |

Port 3 Input/Output Control

|   |             |
|---|-------------|
| 0 | Input port  |
| 1 | Output port |

P3DR—Port 3 Data Register

H'FFB6

Port 3

|               |                 |                 |                 |                 |                 |                 |                 |                 |
|---------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| Bit           | 7               | 6               | 5               | 4               | 3               | 2               | 1               | 0               |
|               | P3 <sub>7</sub> | P3 <sub>6</sub> | P3 <sub>5</sub> | P3 <sub>4</sub> | P3 <sub>3</sub> | P3 <sub>2</sub> | P3 <sub>1</sub> | P3 <sub>0</sub> |
| Initial value | 0               | 0               | 0               | 0               | 0               | 0               | 0               | 0               |
| Read/Write    | R/W             | R/W             | R/W             | R/W             | R/W             | R/W             | R/W             | R/W             |

P4DDR—Port 4 Data Direction Register

H'FFB5

Port 4

|               |                     |                     |                     |                     |                     |                     |                     |                     |
|---------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|
| Bit           | 7                   | 6                   | 5                   | 4                   | 3                   | 2                   | 1                   | 0                   |
|               | P4 <sub>7</sub> DDR | P4 <sub>6</sub> DDR | P4 <sub>5</sub> DDR | P4 <sub>4</sub> DDR | P4 <sub>3</sub> DDR | P4 <sub>2</sub> DDR | P4 <sub>1</sub> DDR | P4 <sub>0</sub> DDR |
| Initial value | 0                   | 0                   | 0                   | 0                   | 0                   | 0                   | 0                   | 0                   |
| Read/Write    | W                   | W                   | W                   | W                   | W                   | W                   | W                   | W                   |

Port 4 Input/Output Control

|   |             |
|---|-------------|
| 0 | Input port  |
| 1 | Output port |

P4DR—Port 4 Data Register

H'FFB7

Port 4

|               |                 |                 |                 |                 |                 |                 |                 |                 |
|---------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| Bit           | 7               | 6               | 5               | 4               | 3               | 2               | 1               | 0               |
|               | P4 <sub>7</sub> | P4 <sub>6</sub> | P4 <sub>5</sub> | P4 <sub>4</sub> | P4 <sub>3</sub> | P4 <sub>2</sub> | P4 <sub>1</sub> | P4 <sub>0</sub> |
| Initial value | 0               | 0               | 0               | 0               | 0               | 0               | 0               | 0               |
| Read/Write    | R/W             | R/W             | R/W             | R/W             | R/W             | R/W             | R/W             | R/W             |

P5DDR—Port 5 Data Direction Register

H'FFB8

Port 5

|               |   |   |   |   |   |                     |                     |                     |
|---------------|---|---|---|---|---|---------------------|---------------------|---------------------|
| Bit           | 7 | 6 | 5 | 4 | 3 | 2                   | 1                   | 0                   |
|               | — | — | — | — | — | P5 <sub>2</sub> DDR | P5 <sub>1</sub> DDR | P5 <sub>0</sub> DDR |
| Initial value | 1 | 1 | 1 | 1 | 1 | 0                   | 0                   | 0                   |
| Read/Write    | — | — | — | — | — | W                   | W                   | W                   |

Port 5 Input/Output Control

|   |             |
|---|-------------|
| 0 | Input port  |
| 1 | Output port |

|               |   |   |   |   |   |                 |                 |                 |
|---------------|---|---|---|---|---|-----------------|-----------------|-----------------|
| Bit           | 7 | 6 | 5 | 4 | 3 | 2               | 1               | 0               |
|               | — | — | — | — | — | P5 <sub>2</sub> | P5 <sub>1</sub> | P5 <sub>0</sub> |
| Initial value | 1 | 1 | 1 | 1 | 1 | 0               | 0               | 0               |
| Read/Write    | — | — | — | — | — | R/W             | R/W             | R/W             |

|               |                     |                     |                     |                     |                     |                     |                     |                     |
|---------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|
| Bit           | 7                   | 6                   | 5                   | 4                   | 3                   | 2                   | 1                   | 0                   |
|               | P6 <sub>7</sub> DDR | P6 <sub>6</sub> DDR | P6 <sub>5</sub> DDR | P6 <sub>4</sub> DDR | P6 <sub>3</sub> DDR | P6 <sub>2</sub> DDR | P6 <sub>1</sub> DDR | P6 <sub>0</sub> DDR |
| Initial value | 0                   | 0                   | 0                   | 0                   | 0                   | 0                   | 0                   | 0                   |
| Read/Write    | W                   | W                   | W                   | W                   | W                   | W                   | W                   | W                   |

Port 6 Input/Output Control

|   |             |
|---|-------------|
| 0 | Input port  |
| 1 | Output port |

|               |                 |                 |                 |                 |                 |                 |                 |                 |
|---------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| Bit           | 7               | 6               | 5               | 4               | 3               | 2               | 1               | 0               |
|               | P6 <sub>7</sub> | P6 <sub>6</sub> | P6 <sub>5</sub> | P6 <sub>4</sub> | P6 <sub>3</sub> | P6 <sub>2</sub> | P6 <sub>1</sub> | P6 <sub>0</sub> |
| Initial value | 0               | 0               | 0               | 0               | 0               | 0               | 0               | 0               |
| Read/Write    | R/W             | R/W             | R/W             | R/W             | R/W             | R/W             | R/W             | R/W             |

|               |                 |                 |                 |                 |                 |                 |                 |                 |
|---------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| Bit           | 7               | 6               | 5               | 4               | 3               | 2               | 1               | 0               |
|               | P7 <sub>7</sub> | P7 <sub>6</sub> | P7 <sub>5</sub> | P7 <sub>4</sub> | P7 <sub>3</sub> | P7 <sub>2</sub> | P7 <sub>1</sub> | P7 <sub>0</sub> |
| Initial value | *               | *               | *               | *               | *               | *               | *               | *               |
| Read/Write    | R               | R               | R               | R               | R               | R               | R               | R               |

Note: \* Depends on the levels of pins P7<sub>7</sub> to P7<sub>0</sub>.

|               |     |     |       |     |      |      |     |     |
|---------------|-----|-----|-------|-----|------|------|-----|-----|
| Bit           | 7   | 6   | 5     | 4   | 3    | 2    | 1   | 0   |
|               | —   | —   | CKDBL | —   | WMS1 | WMS0 | WC1 | WC0 |
| Initial value | 0   | 0   | 0     | 0   | 1    | 0    | 0   | 0   |
| Read/Write    | R/W | R/W | R/W   | R/W | R/W  | R/W  | R/W | R/W |

Wait Count

|   |   |                                                  |
|---|---|--------------------------------------------------|
| 0 | 0 | No wait states inserted by wait-state controller |
| 0 | 1 | 1 state inserted                                 |
| 1 | 0 | 2 states inserted                                |
| 1 | 1 | 3 states inserted                                |

Wait Mode Select

|   |   |                                                  |
|---|---|--------------------------------------------------|
| 0 | 0 | Programmable wait mode                           |
| 0 | 1 | No wait states inserted by wait-state controller |
| 1 | 0 | Pin wait mode                                    |
| 1 | 1 | Pin auto-wait mode                               |

Clock Double


|   |                                                                                         |
|---|-----------------------------------------------------------------------------------------|
| 0 | Supporting module clock frequency is not divided ( $\varnothing_P = \varnothing$ )      |
| 1 | Supporting module clock frequency is divided by two ( $\varnothing_P = \varnothing/2$ ) |

|               |   |   |   |   |   |     |       |       |
|---------------|---|---|---|---|---|-----|-------|-------|
| Bit           | 7 | 6 | 5 | 4 | 3 | 2   | 1     | 0     |
|               | — | — | — | — | — | MPE | ICKS1 | ICKS0 |
| Initial value | 1 | 1 | 1 | 1 | 1 | 0   | 0     | 0     |
| Read/Write    | — | — | — | — | — | R/W | R/W   | R/W   |

Internal Clock Source Select  
See TCR under TMR0 and TMR1.

Multiprocessor Enable

|   |                                                    |
|---|----------------------------------------------------|
| 0 | Multiprocessor communication function is disabled. |
| 1 | Multiprocessor communication function is enabled.  |

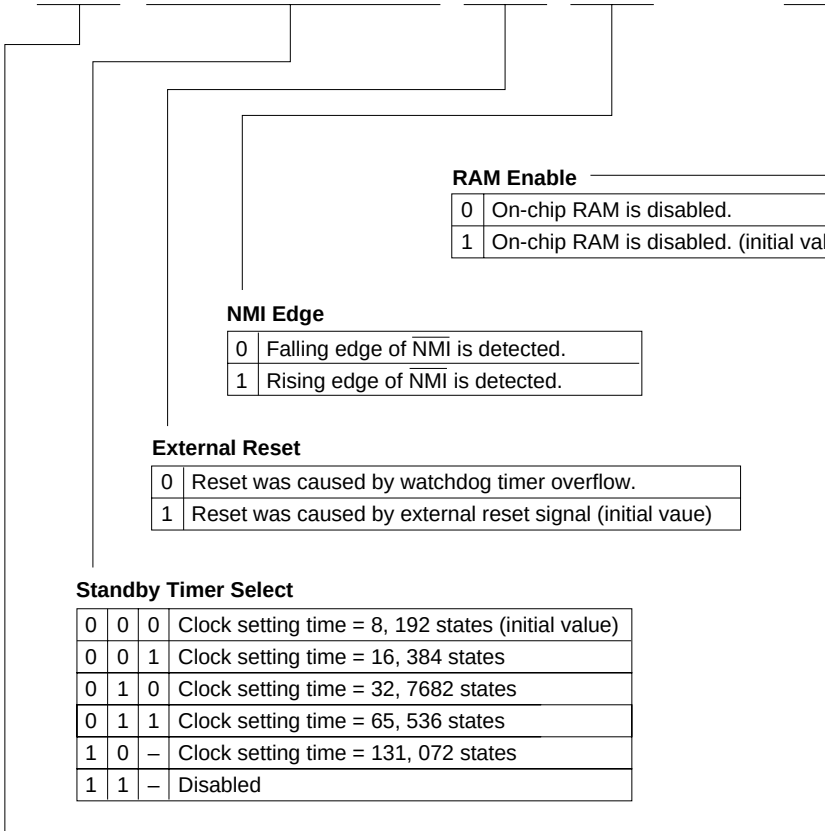

|   |                                                                    |
|---|--------------------------------------------------------------------|
| 0 | SLEEP instruction causes transition to sleep mode, (initial value) |
| 1 | SLEEP instruction causes transition to software standby mode.      |

| MDCR—Mode Control Register |   |   |   |   |   | H'FFC5 |                     | System Control |  |
|----------------------------|---|---|---|---|---|--------|---------------------|----------------|--|
| Bit                        | 7 | 6 | 5 | 4 | 3 | 2      | 1                   | 0              |  |
|                            | — | — | — | — | — | —      | MDS1                | MDS0           |  |
| Initial value              | 1 | 1 | 1 | 0 | 0 | 1      | *                   | *              |  |
| Read/Write                 | — | — | — | — | — | —      | R                   | R              |  |
|                            |   |   |   |   |   |        | Mode Select Bits    |                |  |
|                            |   |   |   |   |   |        | Value at mode pins. |                |  |

Note: \* Determined by inputs at pins MD<sub>1</sub> and MD<sub>0</sub>.

| ISCR—IRQ Sense Control Register |   |   |   |   |   | H'FFC6                                             |                                                                      | System Control      |  |
|---------------------------------|---|---|---|---|---|----------------------------------------------------|----------------------------------------------------------------------|---------------------|--|
| Bit                             | 7 | 6 | 5 | 4 | 3 | 2                                                  | 1                                                                    | 0                   |  |
|                                 | — | — | — | — | — | IRQ <sub>2</sub> SC                                | IRQ <sub>1</sub> SC                                                  | IRQ <sub>0</sub> SC |  |
| Initial value                   | 1 | 1 | 1 | 1 | 1 | 0                                                  | 0                                                                    | 0                   |  |
| Read/Write                      | — | — | — | — | — | R/W                                                | R/W                                                                  | R/W                 |  |
|                                 |   |   |   |   |   | IRQ <sub>0</sub> to IRQ <sub>2</sub> Sense Control |                                                                      |                     |  |
|                                 |   |   |   |   |   | 0                                                  | IRQ <sub>0</sub> to IRQ <sub>2</sub> are level-sensed (active low).  |                     |  |
|                                 |   |   |   |   |   | 1                                                  | IRQ <sub>0</sub> to IRQ <sub>2</sub> are edge-sensed (falling edge). |                     |  |

| IER—IRQ Enable Register |   |   |   |   |   | H'FFC7                                      |                                                    | System Control     |  |
|-------------------------|---|---|---|---|---|---------------------------------------------|----------------------------------------------------|--------------------|--|
| Bit                     | 7 | 6 | 5 | 4 | 3 | 2                                           | 1                                                  | 0                  |  |
|                         | — | — | — | — | — | IRQ <sub>2</sub> E                          | IRQ <sub>1</sub> E                                 | IRQ <sub>0</sub> E |  |
| Initial value           | 1 | 1 | 1 | 1 | 1 | 0                                           | 0                                                  | 0                  |  |
| Read/Write              | — | — | — | — | — | R/W                                         | R/W                                                | R/W                |  |
|                         |   |   |   |   |   | IRQ <sub>0</sub> to IRQ <sub>2</sub> Enable |                                                    |                    |  |
|                         |   |   |   |   |   | 0                                           | IRQ <sub>0</sub> to IRQ <sub>2</sub> are disabled. |                    |  |
|                         |   |   |   |   |   | 1                                           | IRQ <sub>0</sub> to IRQ <sub>2</sub> are enabled.  |                    |  |

| Bit           | 7     | 6     | 5    | 4     | 3     | 2    | 1    | 0    |
|---------------|-------|-------|------|-------|-------|------|------|------|
|               | CMIEB | CMIEA | OVIE | CCLR1 | CCLR0 | CKS2 | CKS1 | CKS0 |
| Initial value | 0     | 0     | 0    | 0     | 0     | 0    | 0    | 0    |
| Read/Write    | R/W   | R/W   | R/W  | R/W   | R/W   | R/W  | R/W  | R/W  |

**Clock Select**

| TCR  |      |      | STCR  |       | Description                                 |
|------|------|------|-------|-------|---------------------------------------------|
| CKS2 | CKS1 | CKS0 | ICKS1 | ICKS0 |                                             |
| 0    | 0    | 0    | —     | —     | Timer stopped                               |
| 0    | 0    | 1    | —     | 0     | $\phi_P$ /8 internal clock, falling edge    |
| 0    | 0    | 1    | —     | 1     | $\phi_P$ /2 internal clock, falling edge    |
| 0    | 1    | 0    | —     | 0     | $\phi_P$ /64 internal clock, falling edge   |
| 0    | 1    | 0    | —     | 1     | $\phi_P$ /32 internal clock, falling edge   |
| 0    | 1    | 1    | —     | 0     | $\phi_P$ /1024 internal clock, falling edge |
| 0    | 1    | 1    | —     | 1     | $\phi_P$ /256 internal clock, falling edge  |
| 1    | 0    | 0    | —     | —     | Timer stopped                               |
| 1    | 0    | 1    | —     | —     | External clock, rising edge                 |
| 1    | 1    | 0    | —     | —     | External clock, falling edge                |
| 1    | 1    | 1    | —     | —     | External clock, rising and falling edges    |

**Counter Clear**

|   |   |                                                 |
|---|---|-------------------------------------------------|
| 0 | 0 | Counter is not cleared.                         |
| 0 | 1 | Cleared by compare-match A.                     |
| 1 | 0 | Cleared by compare-match B.                     |
| 1 | 1 | Cleared on rising edge of external reset input. |

**Timer Overflow Interrupt Enable**

|   |                                         |
|---|-----------------------------------------|
| 0 | Overflow interrupt request is disabled. |
| 1 | Overflow interrupt request is enabled.  |


**Compare-Match Interrupt Enable A**

|   |                                                |
|---|------------------------------------------------|
| 0 | Compare-match A interrupt request is disabled. |
| 1 | Compare-match A interrupt request is enabled.  |

**Compare-Match Interrupt Enable B**

|   |                                                |
|---|------------------------------------------------|
| 0 | Compare-match B interrupt request is disabled. |
| 1 | Compare-match B interrupt request is enabled.  |



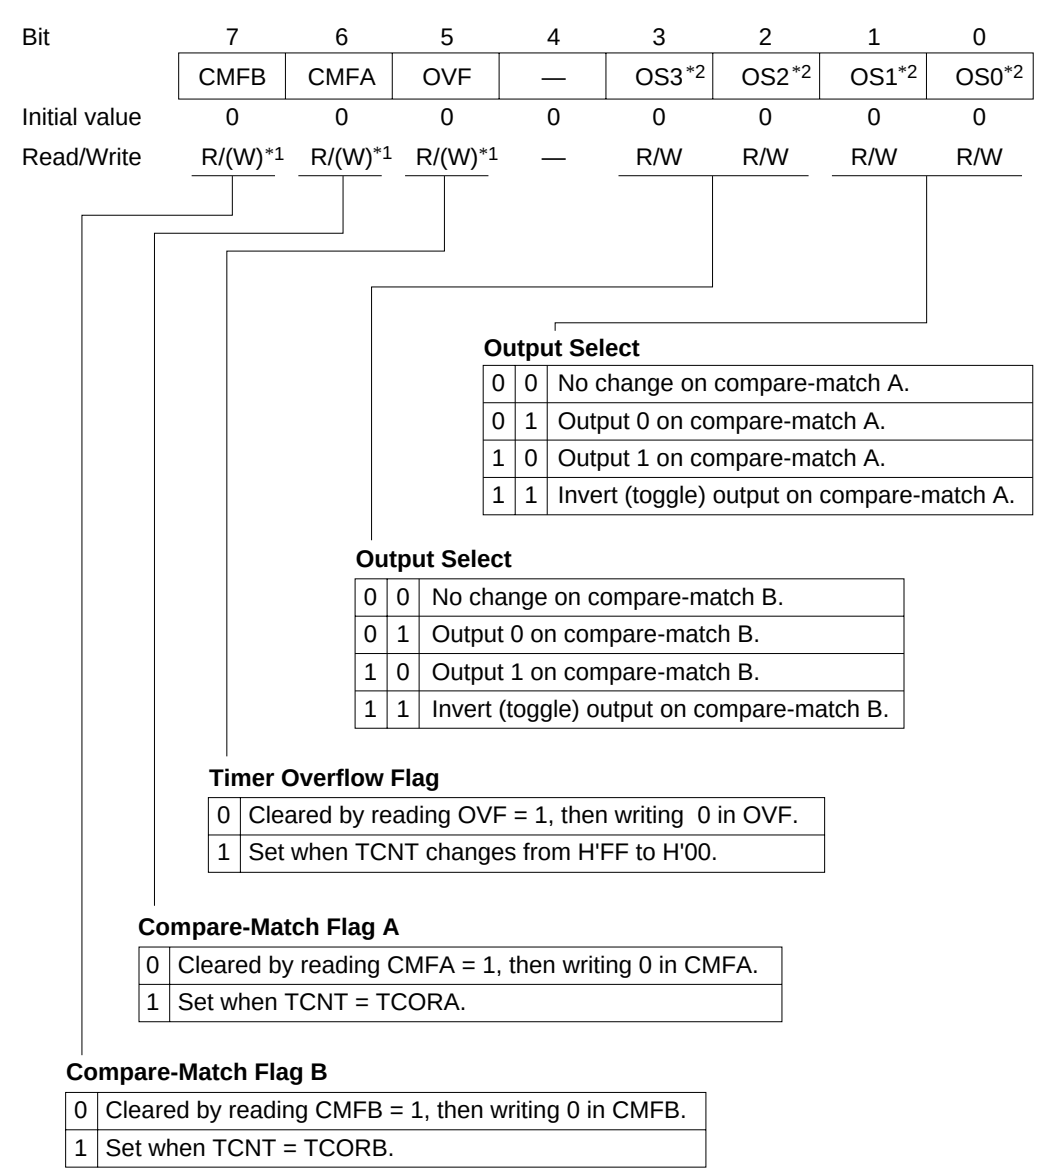

Notes: 1. Software can write a 0 in bits 7 to 5 to clear the flags, but cannot write a 1 in these bits.  
2. When all four bits (OS3 to OS0) are cleared to 0, output is disabled.

| Bit           | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|---------------|-----|-----|-----|-----|-----|-----|-----|-----|
|               |     |     |     |     |     |     |     |     |
| Initial value | 1   | 1   | 1   | 1   | 1   | 1   | 1   | 1   |
| Read/Write    | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

The CMFA bit is set to 1 when TCORA = TCNT.

| Bit           | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|---------------|-----|-----|-----|-----|-----|-----|-----|-----|
|               |     |     |     |     |     |     |     |     |
| Initial value | 1   | 1   | 1   | 1   | 1   | 1   | 1   | 1   |
| Read/Write    | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

The CMFB bit is set to 1 when TCORB = TCNT.

| Bit           | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|---------------|-----|-----|-----|-----|-----|-----|-----|-----|
|               |     |     |     |     |     |     |     |     |
| Initial value | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| Read/Write    | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

Count value

| TCR  |      |      | STCR  |       | Description                                   |
|------|------|------|-------|-------|-----------------------------------------------|
| CKS2 | CKS1 | CKS0 | ICKS1 | ICKS0 |                                               |
| 0    | 0    | 0    | —     | —     | Timer stopped                                 |
| 0    | 0    | 1    | 0     | —     | $\sigma_P$ /8 internal clock, falling edge    |
| 0    | 0    | 1    | 1     | —     | $\sigma_P$ /2 internal clock, falling edge    |
| 0    | 1    | 0    | 0     | —     | $\sigma_P$ /64 internal clock, falling edge   |
| 0    | 1    | 0    | 1     | —     | $\sigma_P$ /128 internal clock, falling edge  |
| 0    | 1    | 1    | 0     | —     | $\sigma_P$ /1024 internal clock, falling edge |
| 0    | 1    | 1    | 1     | —     | $\sigma_P$ /2048 internal clock, falling edge |
| 1    | 0    | 0    | —     | —     | Timer stopped                                 |
| 1    | 0    | 1    | —     | —     | External clock, rising edge                   |
| 1    | 1    | 0    | —     | —     | External clock, falling edge                  |
| 1    | 1    | 1    | —     | —     | External clock, rising and falling edges      |

|   |   |                                                 |
|---|---|-------------------------------------------------|
| 0 | 0 | Counter is not cleared.                         |
| 0 | 1 | Cleared by compare-match A.                     |
| 1 | 0 | Cleared by compare-match B.                     |
| 1 | 1 | Cleared on rising edge of external reset input. |

|   |                                         |
|---|-----------------------------------------|
| 0 | Overflow interrupt request is disabled. |
| 1 | Overflow interrupt request is enabled.  |

|   |                                                |
|---|------------------------------------------------|
| 0 | Compare-match A interrupt request is disabled. |
| 1 | Compare-match A interrupt request is enabled.  |

|   |                                                |
|---|------------------------------------------------|
| 0 | Compare-match B interrupt request is disabled. |
| 1 | Compare-match B interrupt request is enabled.  |

**TCSR—Timer Control/Status Register****H'FFD1****TMR1**

| Bit           | 7       | 6       | 5       | 4 | 3     | 2     | 1     | 0     |
|---------------|---------|---------|---------|---|-------|-------|-------|-------|
|               | CMFB    | CMFA    | OVF     | — | OS3*2 | OS2*2 | OS1*2 | OS0*2 |
| Initial value | 0       | 0       | 0       | 1 | 0     | 0     | 0     | 0     |
| Read/Write    | R/(W)*1 | R/(W)*1 | R/(W)*1 | — | R/W   | R/W   | R/W   | R/W   |

Notes: Bit functions are the same as for TMR0.

1. Software can write a 0 in bits 7 to 5 to clear the flags, but cannot write a 1 in these bits.
2. When all four bits (OS3 to OS0) are cleared to 0, output is disabled.

**TCORA—Time Constant Register A****H'FFD2****TMR1**

| Bit           | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|---------------|-----|-----|-----|-----|-----|-----|-----|-----|
|               |     |     |     |     |     |     |     |     |
| Initial value | 1   | 1   | 1   | 1   | 1   | 1   | 1   | 1   |
| Read/Write    | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

Note: Bit functions are the same as for TMR0.

**TCORB—Time Constant Register B****H'FFD3****TMR1**


| Bit           | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|---------------|-----|-----|-----|-----|-----|-----|-----|-----|
|               |     |     |     |     |     |     |     |     |
| Initial value | 1   | 1   | 1   | 1   | 1   | 1   | 1   | 1   |
| Read/Write    | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

Note: Bit functions are the same as for TMR0.

**TCNT—Timer Counter****H'FFD4****TMR1**


| Bit           | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|---------------|-----|-----|-----|-----|-----|-----|-----|-----|
|               |     |     |     |     |     |     |     |     |
| Initial value | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| Read/Write    | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

Note: Bit functions are the same as for TMR0.

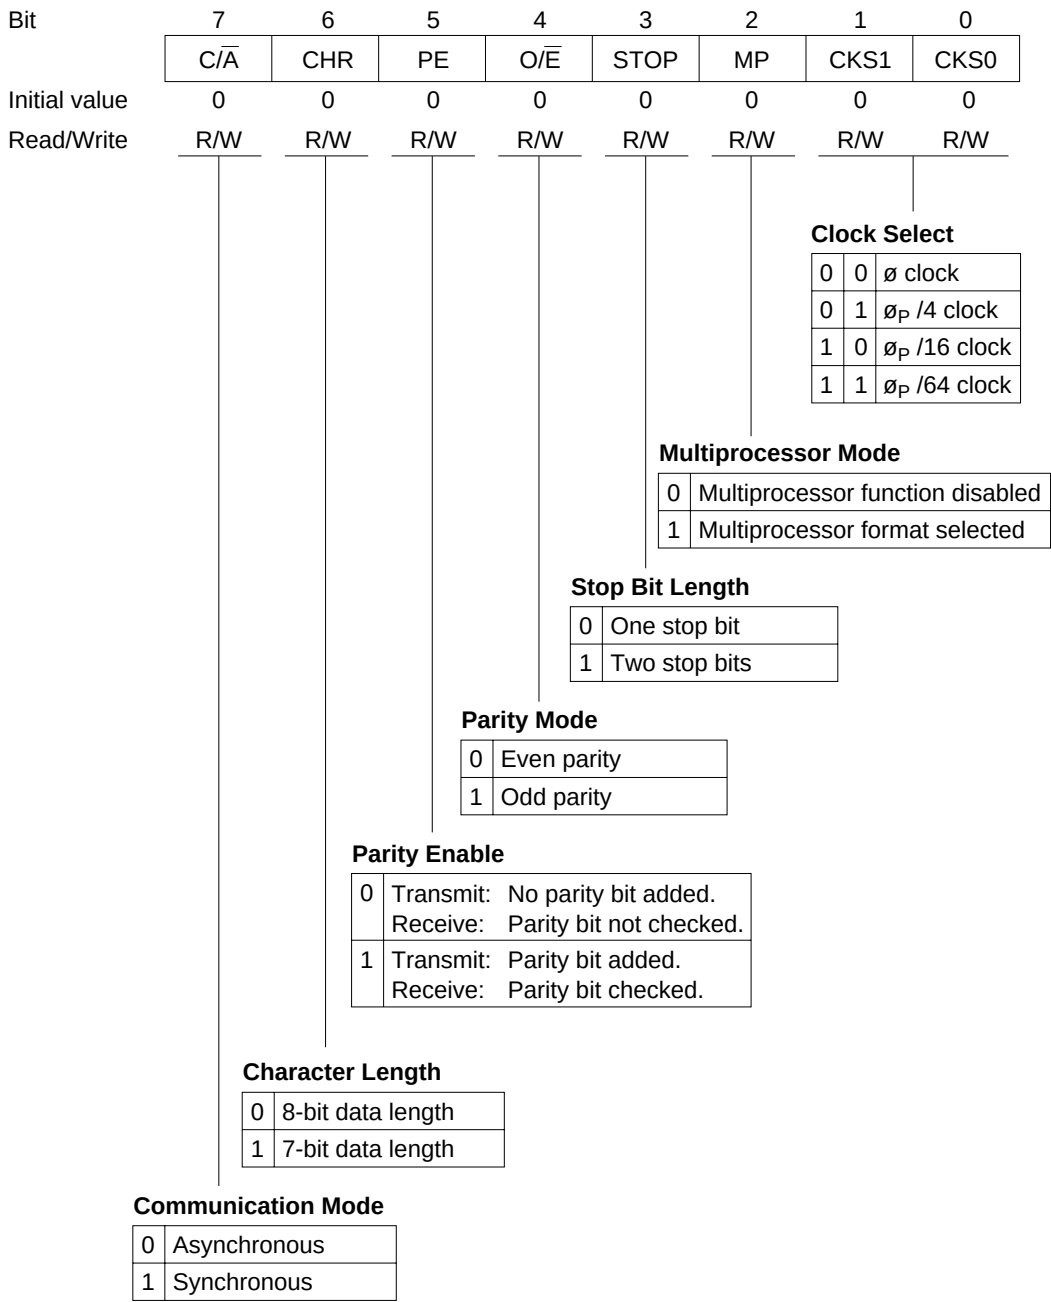

|               |     |     |     |     |     |     |     |     |
|---------------|-----|-----|-----|-----|-----|-----|-----|-----|
| Bit           | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|               |     |     |     |     |     |     |     |     |
| Initial value | 1   | 1   | 1   | 1   | 1   | 1   | 1   | 1   |
| Read/Write    | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |


Constant that determines the bit rate

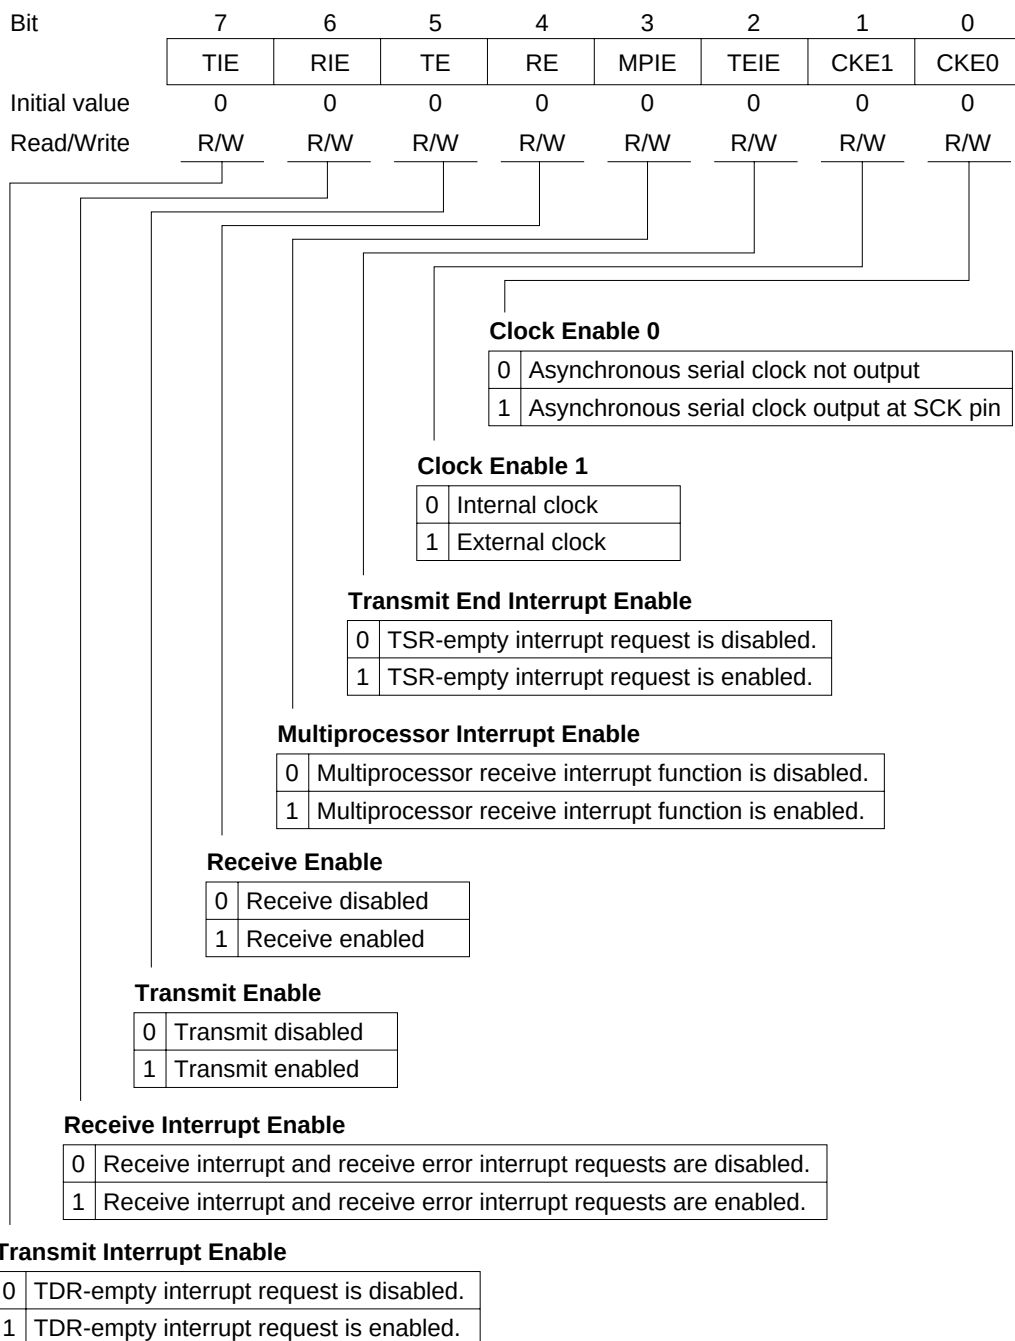

|               |     |     |     |     |     |     |     |     |
|---------------|-----|-----|-----|-----|-----|-----|-----|-----|
| Bit           | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|               |     |     |     |     |     |     |     |     |
| Initial value | 1   | 1   | 1   | 1   | 1   | 1   | 1   | 1   |
| Read/Write    | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

Transmit data



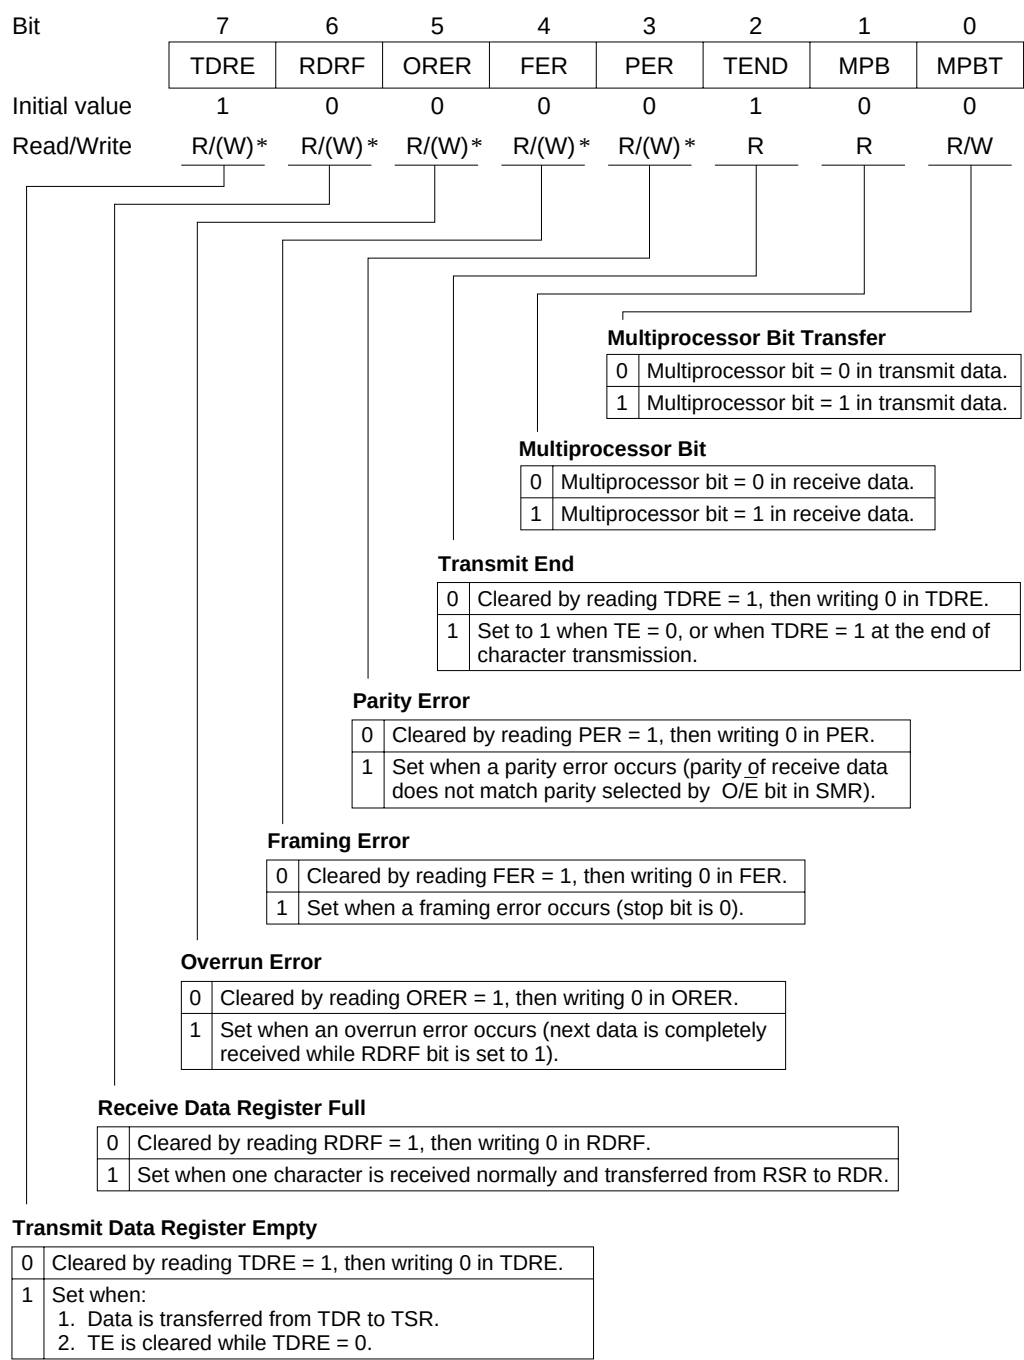

Note: \* Software can write a 0 in bits 7 to 3 to clear the flags, but cannot write a 1 in these bits.

|               |              |   |   |   |   |   |   |   |
|---------------|--------------|---|---|---|---|---|---|---|
| Bit           | 7            | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|               |              |   |   |   |   |   |   |   |
| Initial value | 0            | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Read/Write    | R            | R | R | R | R | R | R | R |
|               | Receive data |   |   |   |   |   |   |   |

|               |                                             |     |     |     |     |     |     |     |        |     |               |   |   |   |   |   |
|---------------|---------------------------------------------|-----|-----|-----|-----|-----|-----|-----|--------|-----|---------------|---|---|---|---|---|
| Bit           | 15                                          | 14  | 13  | 12  | 11  | 10  | 9   | 8   | 7      | 6   | 5             | 4 | 3 | 2 | 1 | 0 |
|               | AD9                                         | AD8 | AD7 | AD6 | AD5 | AD4 | AD3 | AD2 | AD1    | AD0 | —             | — | — | — | — | — |
| Initial value | 0                                           | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0      | 0   | 0             | 0 | 0 | 0 | 0 | 0 |
| Read/Write    | R                                           | R   | R   | R   | R   | R   | R   | R   | R      | R   | R             | R | R | R | R | R |
|               | ADDRAH                                      |     |     |     |     |     |     |     | ADDRAL |     |               |   |   |   |   |   |
|               | A/D Conversion Data                         |     |     |     |     |     |     |     |        |     | Reserved Bits |   |   |   |   |   |
|               | 10-bit data giving an A/D conversion result |     |     |     |     |     |     |     |        |     |               |   |   |   |   |   |

|               |                                             |     |     |     |     |     |     |     |        |     |               |   |   |   |   |   |
|---------------|---------------------------------------------|-----|-----|-----|-----|-----|-----|-----|--------|-----|---------------|---|---|---|---|---|
| Bit           | 15                                          | 14  | 13  | 12  | 11  | 10  | 9   | 8   | 7      | 6   | 5             | 4 | 3 | 2 | 1 | 0 |
|               | AD9                                         | AD8 | AD7 | AD6 | AD5 | AD4 | AD3 | AD2 | AD1    | AD0 | —             | — | — | — | — | — |
| Initial value | 0                                           | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0      | 0   | 0             | 0 | 0 | 0 | 0 | 0 |
| Read/Write    | R                                           | R   | R   | R   | R   | R   | R   | R   | R      | R   | R             | R | R | R | R | R |
|               | ADDRBH                                      |     |     |     |     |     |     |     | ADDRBL |     |               |   |   |   |   |   |
|               | A/D Conversion Data                         |     |     |     |     |     |     |     |        |     | Reserved Bits |   |   |   |   |   |
|               | 10-bit data giving an A/D conversion result |     |     |     |     |     |     |     |        |     |               |   |   |   |   |   |

|               |                                             |     |     |     |     |     |     |     |        |     |               |   |   |   |   |   |
|---------------|---------------------------------------------|-----|-----|-----|-----|-----|-----|-----|--------|-----|---------------|---|---|---|---|---|
| Bit           | 15                                          | 14  | 13  | 12  | 11  | 10  | 9   | 8   | 7      | 6   | 5             | 4 | 3 | 2 | 1 | 0 |
|               | AD9                                         | AD8 | AD7 | AD6 | AD5 | AD4 | AD3 | AD2 | AD1    | AD0 | —             | — | — | — | — | — |
| Initial value | 0                                           | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0      | 0   | 0             | 0 | 0 | 0 | 0 | 0 |
| Read/Write    | R                                           | R   | R   | R   | R   | R   | R   | R   | R      | R   | R             | R | R | R | R | R |
|               | ADDRCH                                      |     |     |     |     |     |     |     | ADDRCL |     |               |   |   |   |   |   |
|               | A/D Conversion Data                         |     |     |     |     |     |     |     |        |     | Reserved Bits |   |   |   |   |   |
|               | 10-bit data giving an A/D conversion result |     |     |     |     |     |     |     |        |     |               |   |   |   |   |   |

|               |                                             |     |     |     |     |     |     |     |        |     |               |   |   |   |   |   |
|---------------|---------------------------------------------|-----|-----|-----|-----|-----|-----|-----|--------|-----|---------------|---|---|---|---|---|
| Bit           | 15                                          | 14  | 13  | 12  | 11  | 10  | 9   | 8   | 7      | 6   | 5             | 4 | 3 | 2 | 1 | 0 |
|               | AD9                                         | AD8 | AD7 | AD6 | AD5 | AD4 | AD3 | AD2 | AD1    | AD0 | —             | — | — | — | — | — |
| Initial value | 0                                           | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0      | 0   | 0             | 0 | 0 | 0 | 0 | 0 |
| Read/Write    | R                                           | R   | R   | R   | R   | R   | R   | R   | R      | R   | R             | R | R | R | R | R |
|               | ADDRDH                                      |     |     |     |     |     |     |     | ADDRDL |     |               |   |   |   |   |   |
|               | A/D Conversion Data                         |     |     |     |     |     |     |     |        |     | Reserved Bits |   |   |   |   |   |
|               | 10-bit data giving an A/D conversion result |     |     |     |     |     |     |     |        |     |               |   |   |   |   |   |

[illegible]

| CH2 | CH1 | CH0 | Single Mode     | Scan Mode                          |
|-----|-----|-----|-----------------|------------------------------------|
| 0   | 0   | 0   | AN <sub>0</sub> | AN <sub>0</sub>                    |
|     |     | 1   | AN <sub>1</sub> | AN <sub>0</sub> , AN <sub>1</sub>  |
|     | 1   | 0   | AN <sub>2</sub> | AN <sub>0</sub> to AN <sub>2</sub> |
|     |     | 1   | AN <sub>3</sub> | AN <sub>0</sub> to AN <sub>3</sub> |
| 1   | 0   | 0   | AN <sub>4</sub> | AN <sub>4</sub>                    |
|     |     | 1   | AN <sub>5</sub> | AN <sub>4</sub> , AN <sub>5</sub>  |
|     | 1   | 0   | AN <sub>6</sub> | AN <sub>4</sub> to AN <sub>6</sub> |
|     |     | 1   | AN <sub>7</sub> | AN <sub>4</sub> to AN <sub>7</sub> |

|   |                                    |
|---|------------------------------------|
| 0 | Conversion time = 266 states (max) |
| 1 | Conversion time = 134 states (max) |

|   |             |
|---|-------------|
| 0 | Single mode |
| 1 | Scan mode   |

|   |                                                                                                                                                                                                                                                                                  |
|---|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0 | A/D conversion is halted.                                                                                                                                                                                                                                                        |
| 1 | <ol style="list-style-type: none"> <li>Single mode:<br/>One A/D conversion is performed, then this bit is automatically cleared to 0.</li> <li>Scan mode:<br/>A/C conversion starts and continues cyclically on all selected channels until 0 is written in this bit.</li> </ol> |

|   |                                              |
|---|----------------------------------------------|
| 0 | The A/D interrupt request (ADI) is disabled. |
| 1 | The A/D interrupt request (ADI) is enabled.  |

|   |                                                                                                                                                                                                               |
|---|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0 | Cleared from 1 to 0 when CPU reads ADF = 1, then writes 0 in ADF.                                                                                                                                             |
| 1 | Set to 1 at the following times: <ol style="list-style-type: none"> <li>1. Single mode: at the completion of A/D conversion</li> <li>2. Scan mode: when all selected channels have been converted.</li> </ol> |

350


|               |      |   |   |   |   |   |   |   |
|---------------|------|---|---|---|---|---|---|---|
| Bit           | 7    | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|               | TRGE | — | — | — | — | — | — | — |
| Initial value | 0    | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| Read/Write    | R/W  | — | — | — | — | — | — | — |

Trigger Enable

|   |                                                                                      |
|---|--------------------------------------------------------------------------------------|
| 0 | ADTRG is disabled.                                                                   |
| 1 | ADTRG is enabled. A/D conversion can be started by external trigger, or by software. |

# Appendix C I/O Port Block Diagrams

## C.1 Port 1 Block Diagram

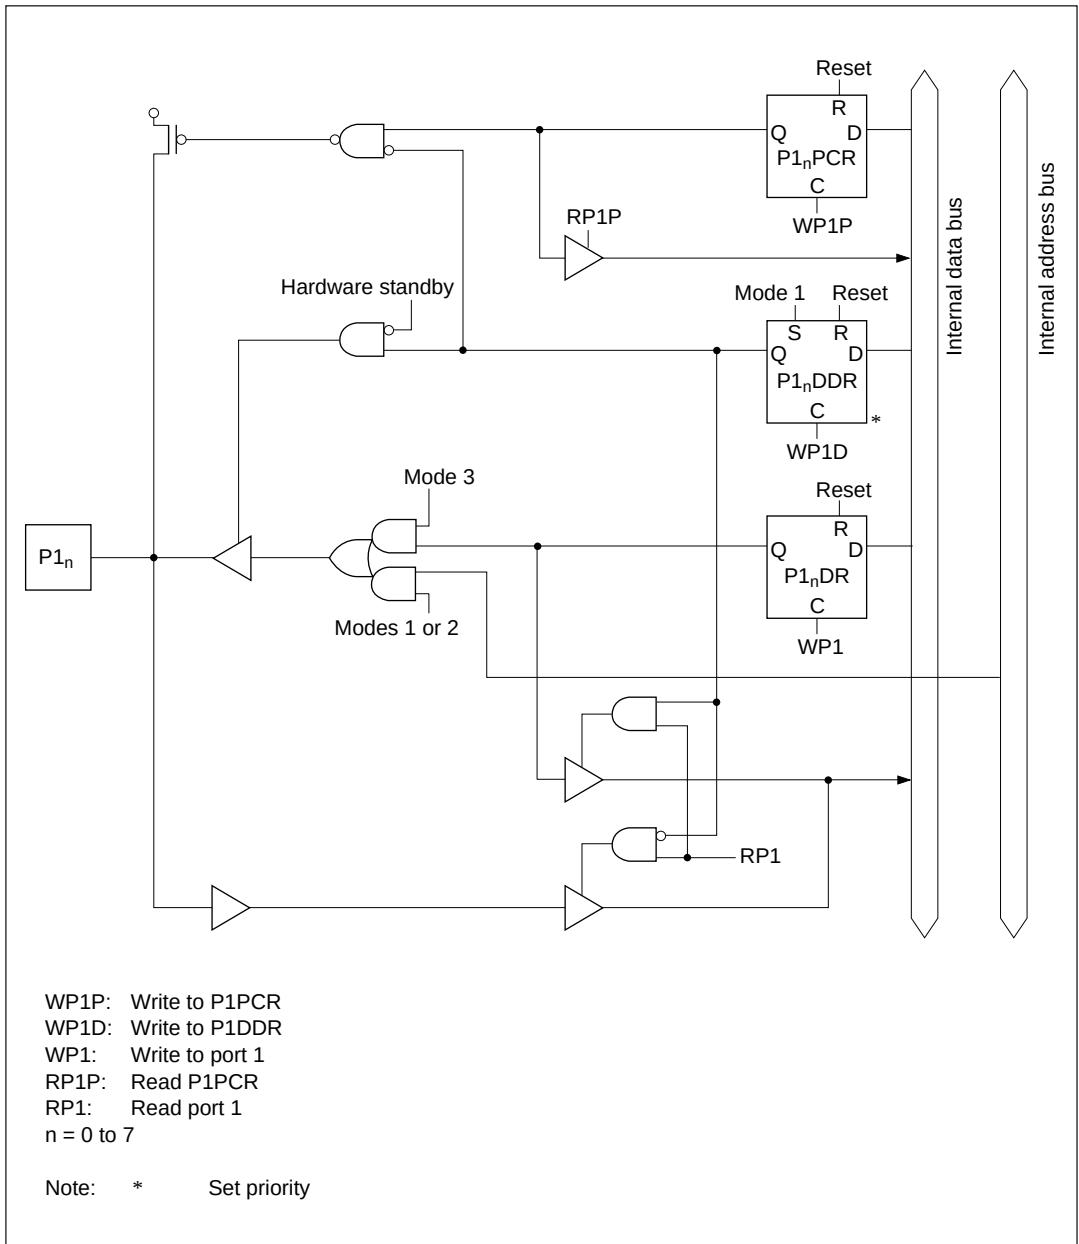

**Figure C-1 Port 1 Block Diagram**

## C.2 Port 2 Block Diagram


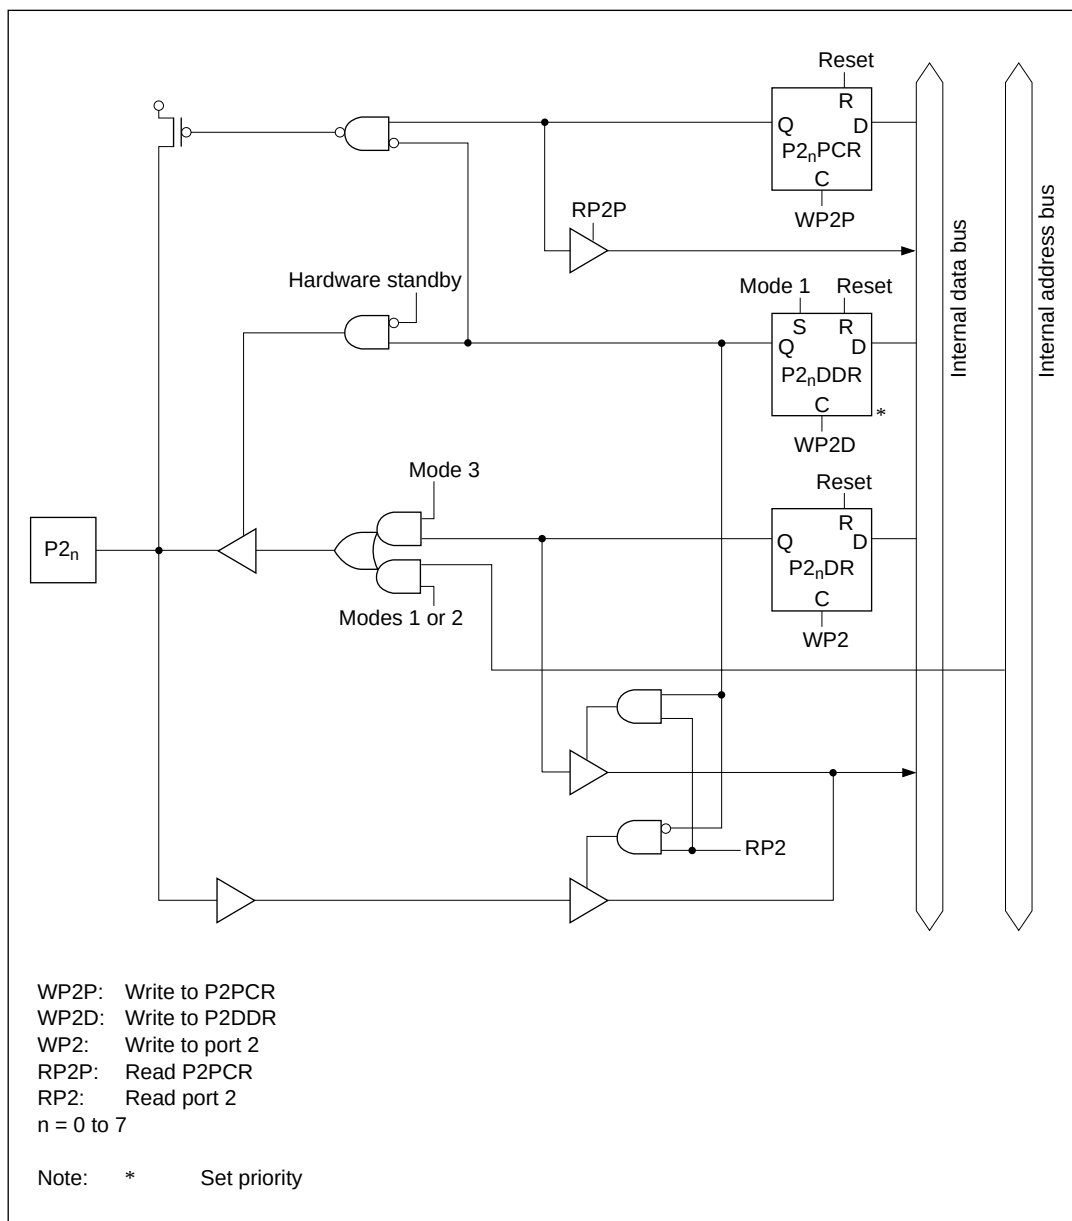


Figure C-2 Port 2 Block Diagram




### C.3 Port 3 Block Diagram

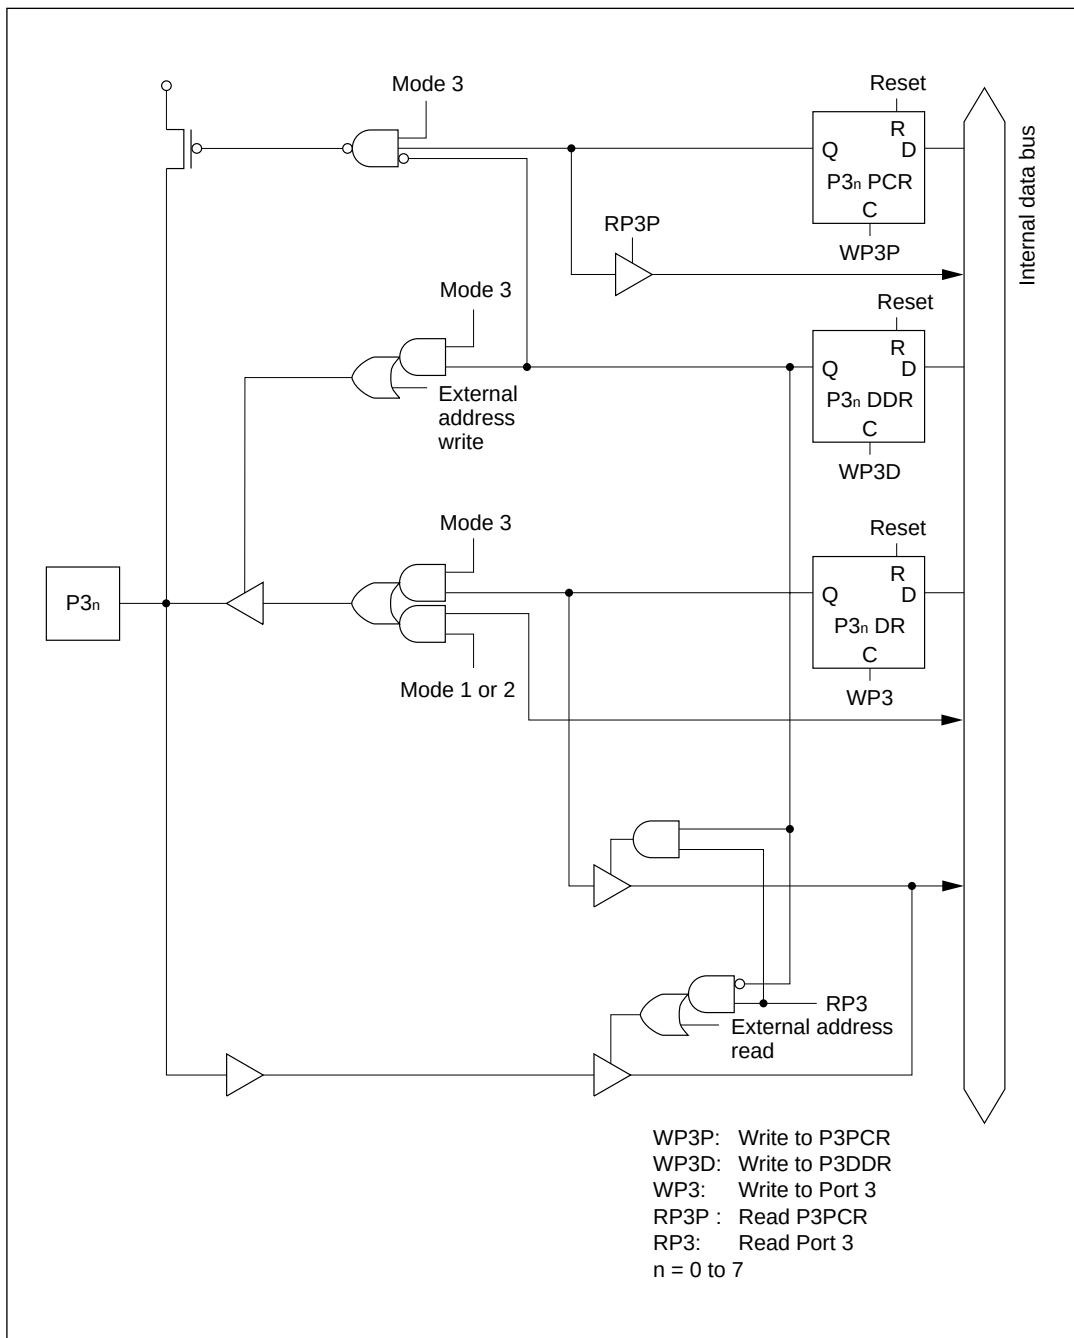


**Figure C-3 Port 3 Block Diagram**

## C.4 Port 4 Block Diagrams

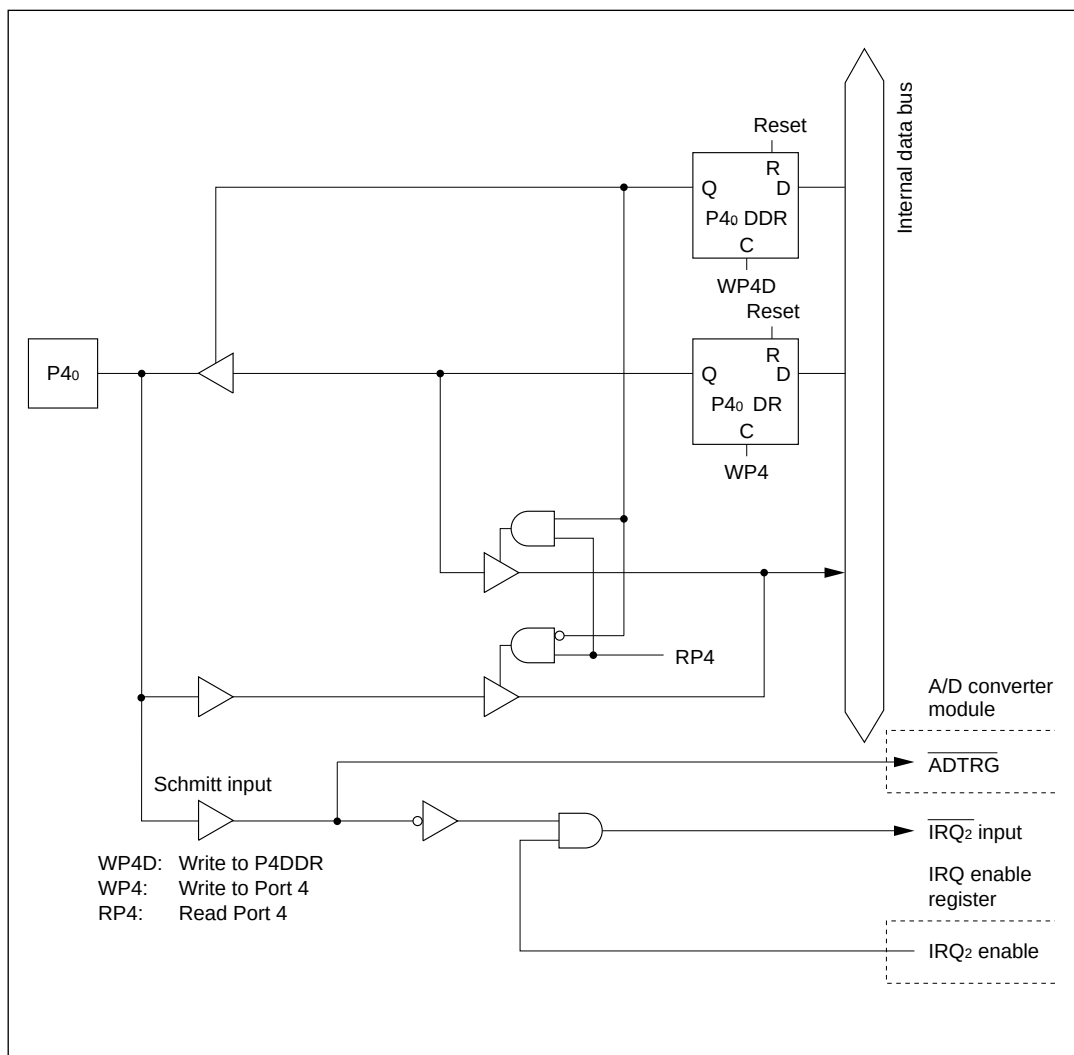


**Figure C-4 (a) Port 4 Block Diagram (Pin P4<sub>0</sub>)**



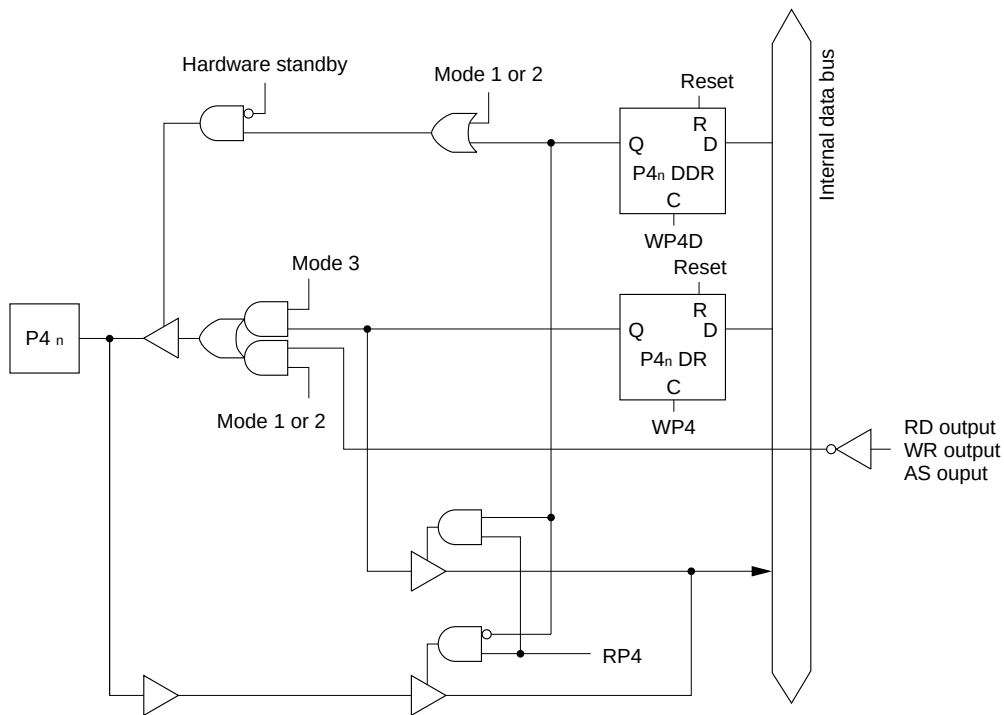


WP4D: Write to P4DDR  
 WP4: Write to Port 4  
 RP4: Read Port 4  
 n = 3, 4, 5

**Figure C-4 (c) Port 4 Block Diagram (Pins P4<sub>3</sub> to P4<sub>5</sub>)**

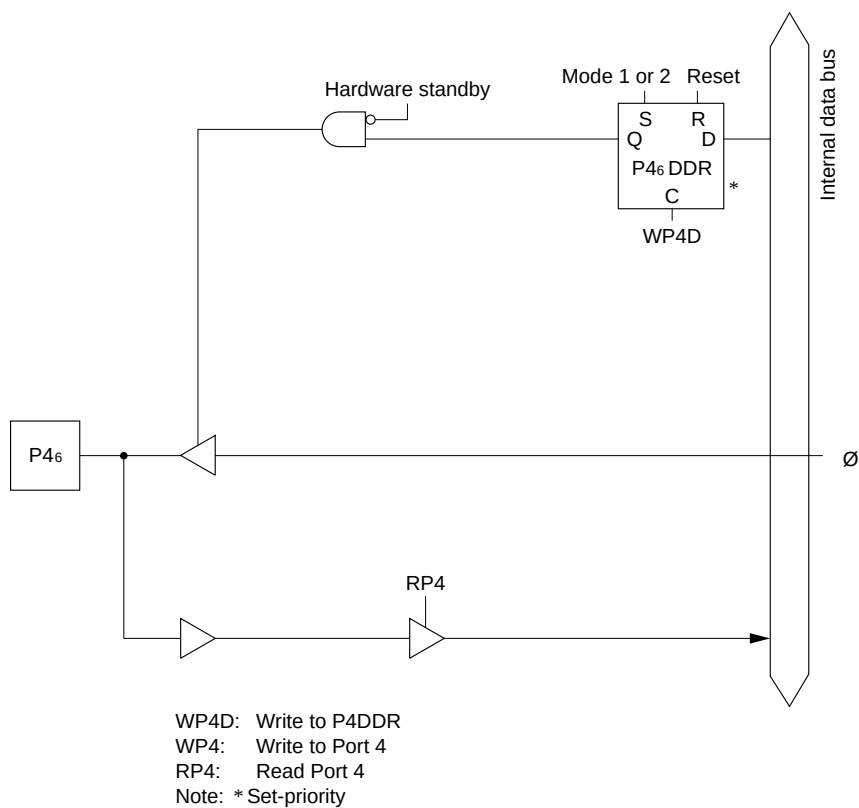

**Figure C-4 (d) Port 4 Block Diagram (Pin P4<sub>6</sub>)**

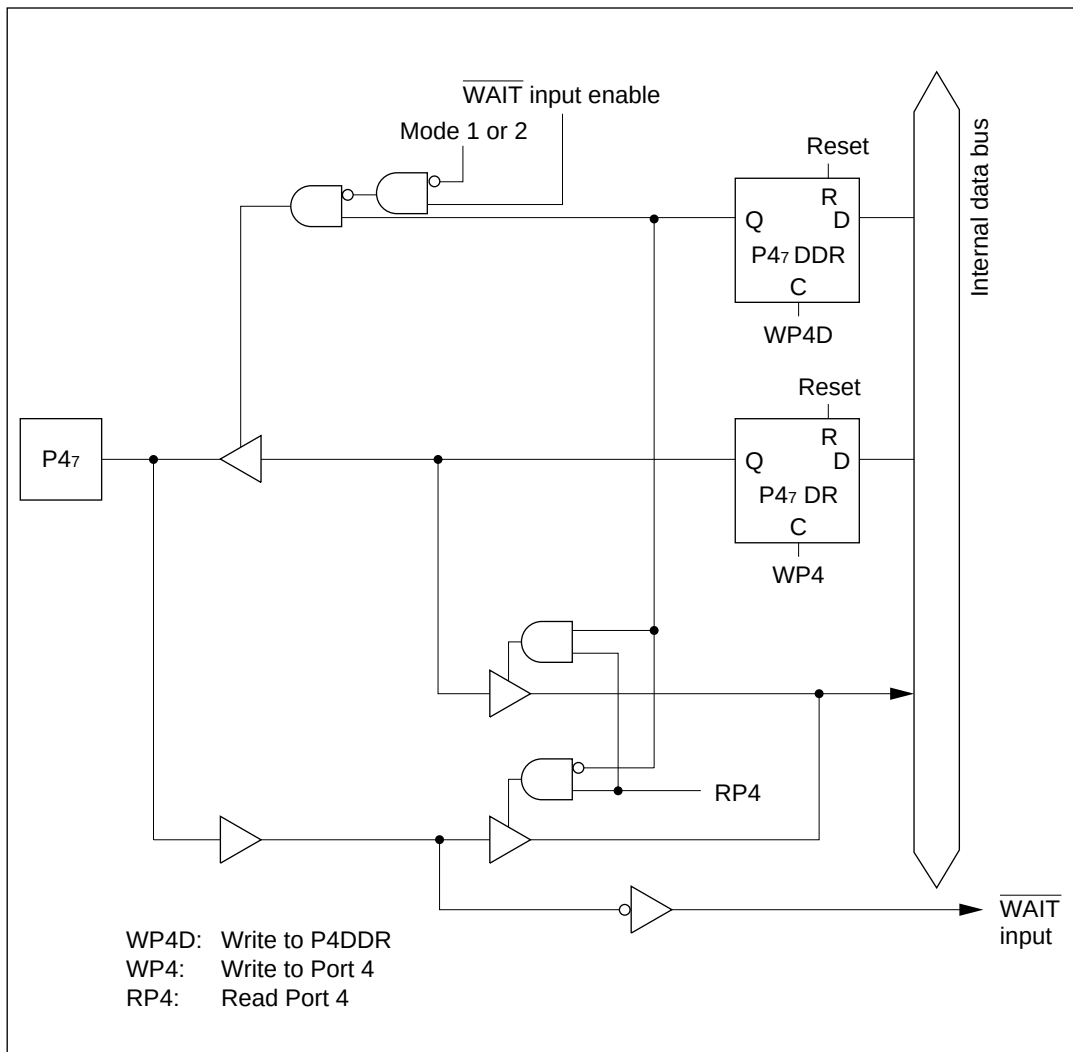

**Figure C-4 (e) Port 4 Block Diagram (Pin P47)**

# C.5 Port 5 Block Diagrams

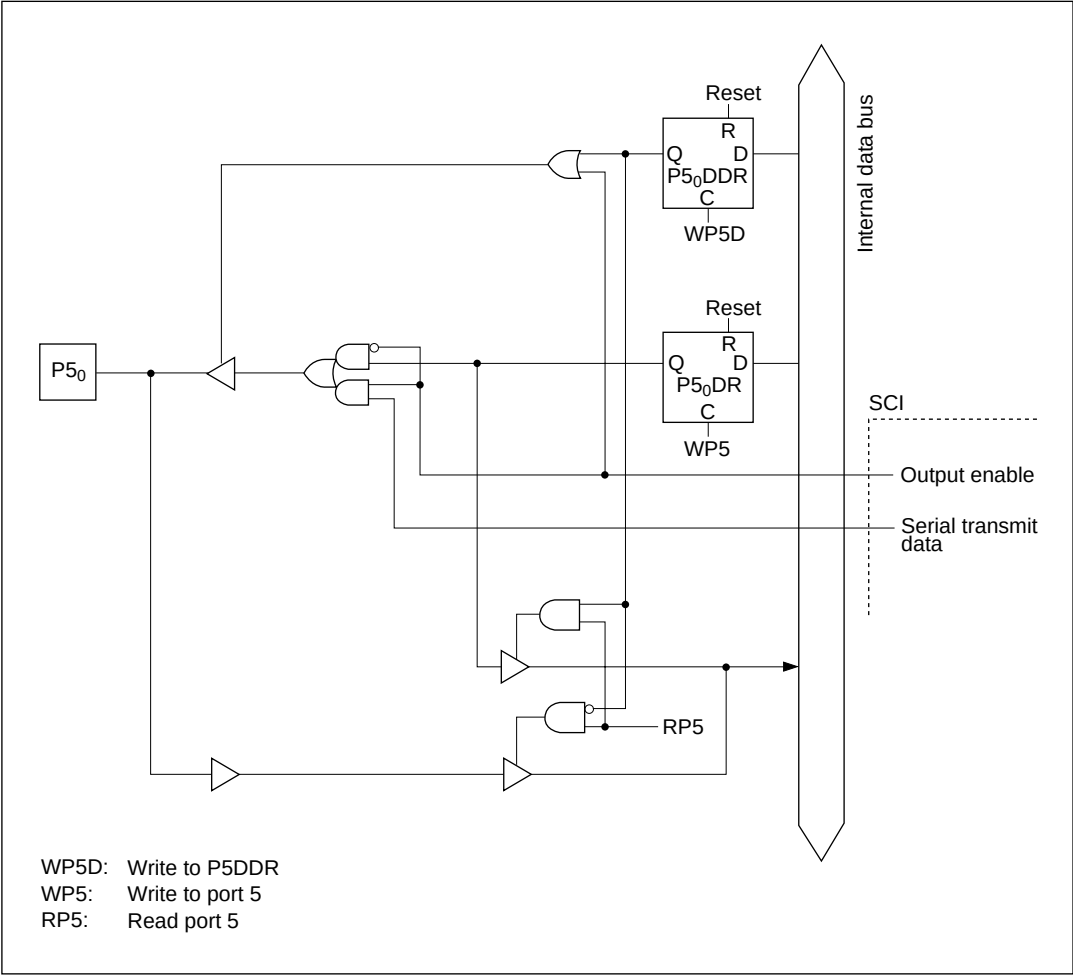



Figure C-5 (a) Port 5 Block Diagram (Pin P50)








## C.6 Port 6 Block Diagrams

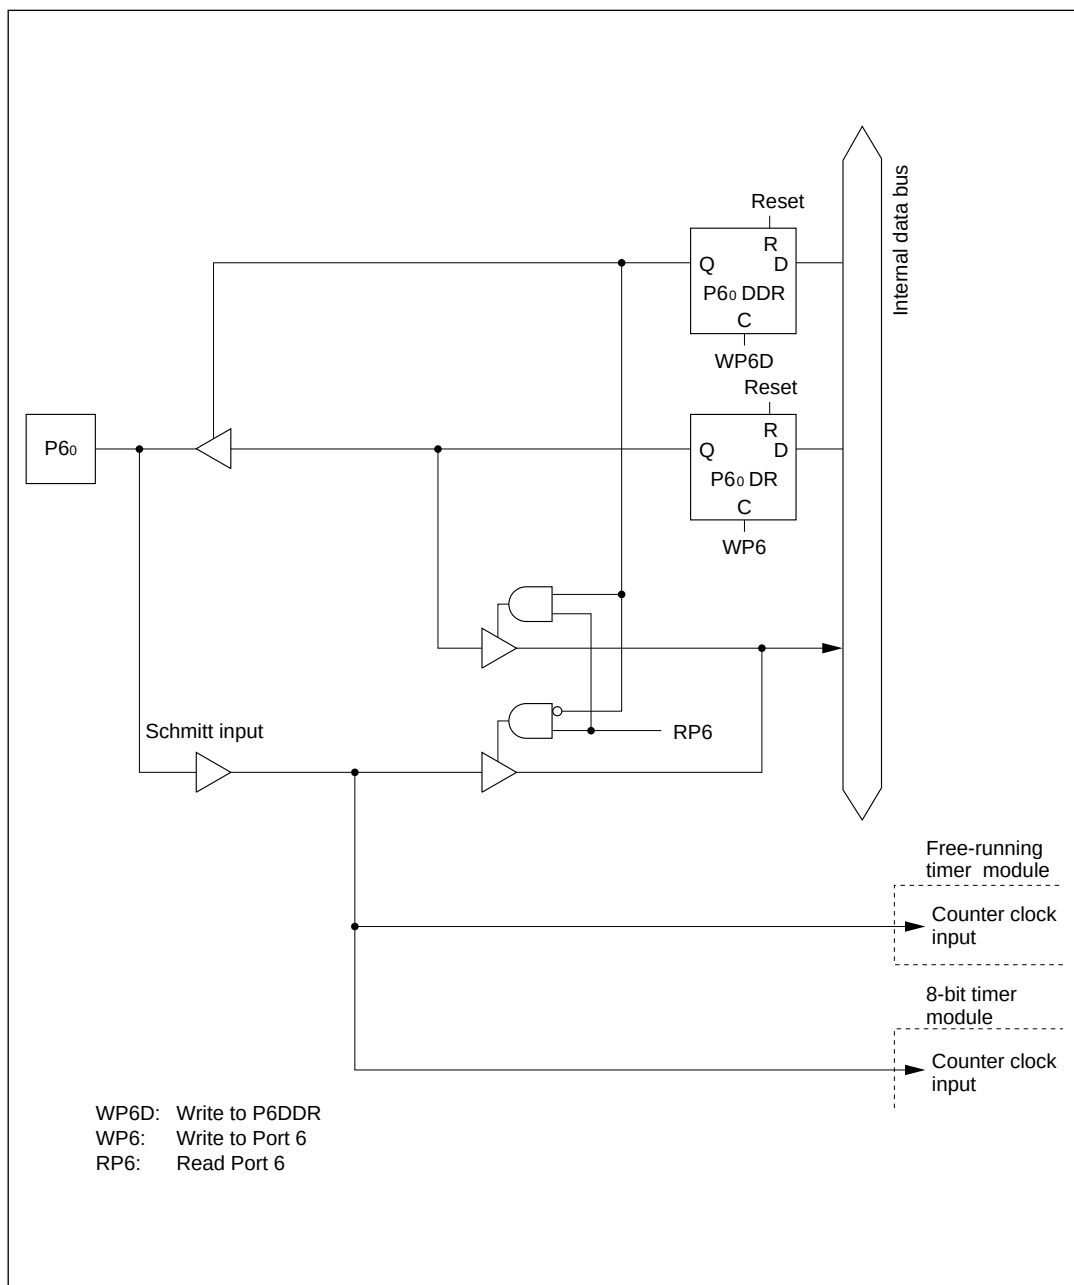


**Figure C-6 (a) Port 6 Block Diagram (Pin P6<sub>0</sub>)**






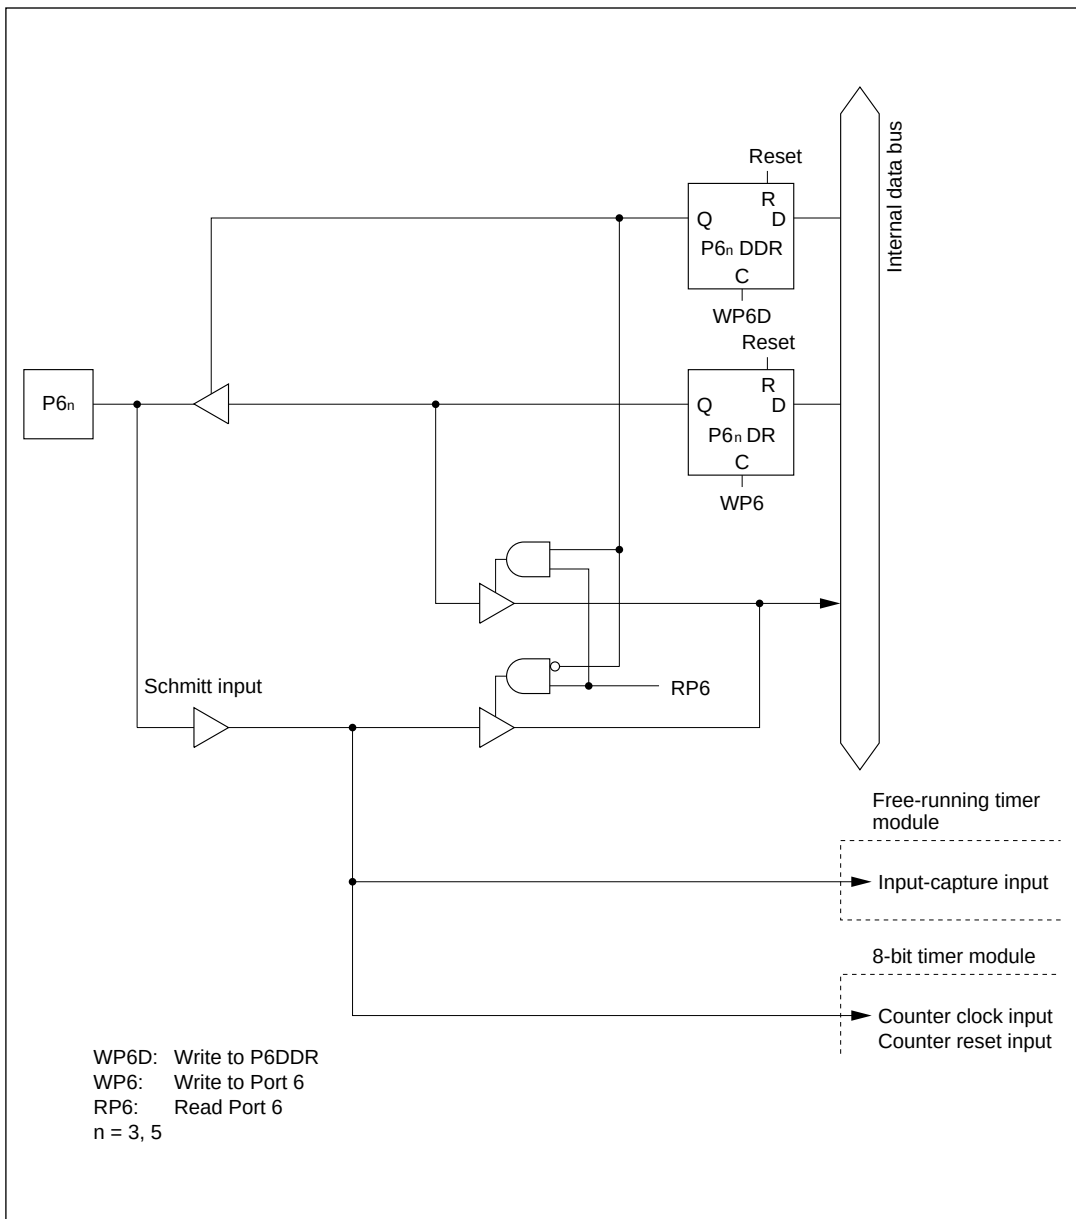

**Figure C-6 (d) Port 6 Block Diagram (Pins P6<sub>3</sub> and P6<sub>5</sub>)**

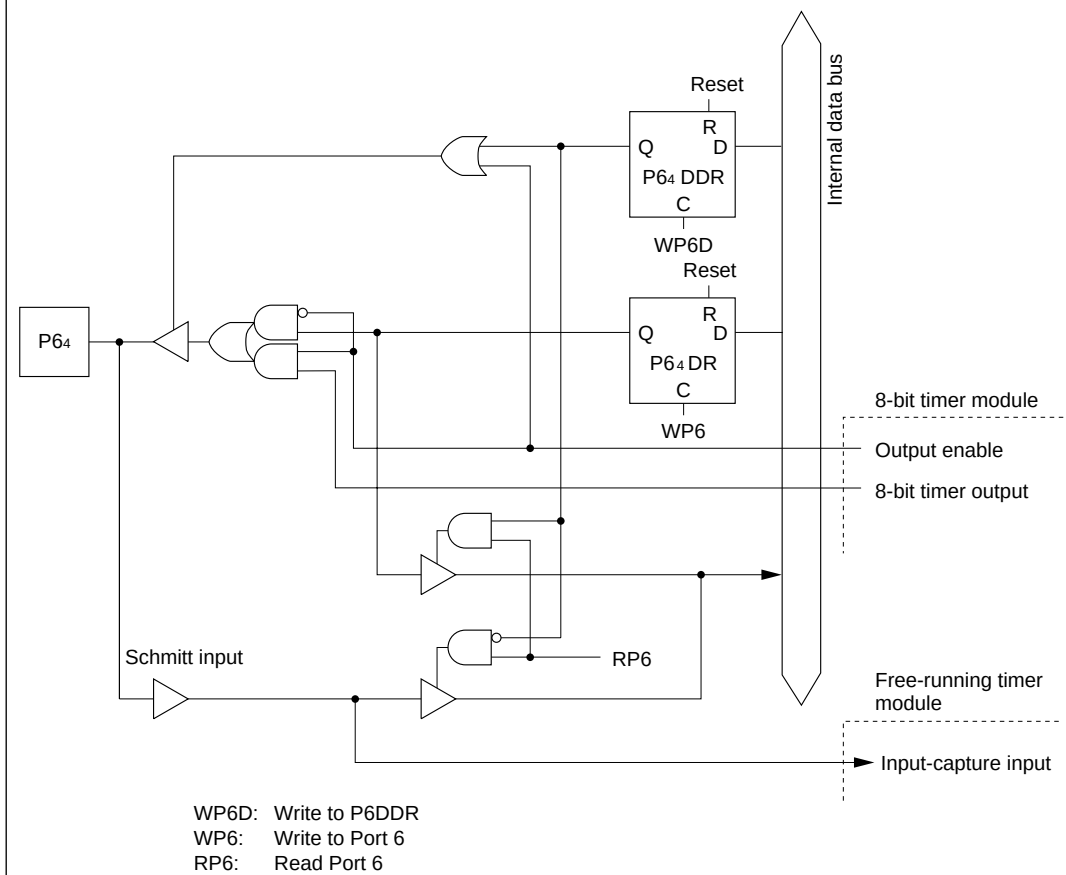

**Figure C-6 (e) Port 6 Block Diagram (Pin P6<sub>4</sub>)**

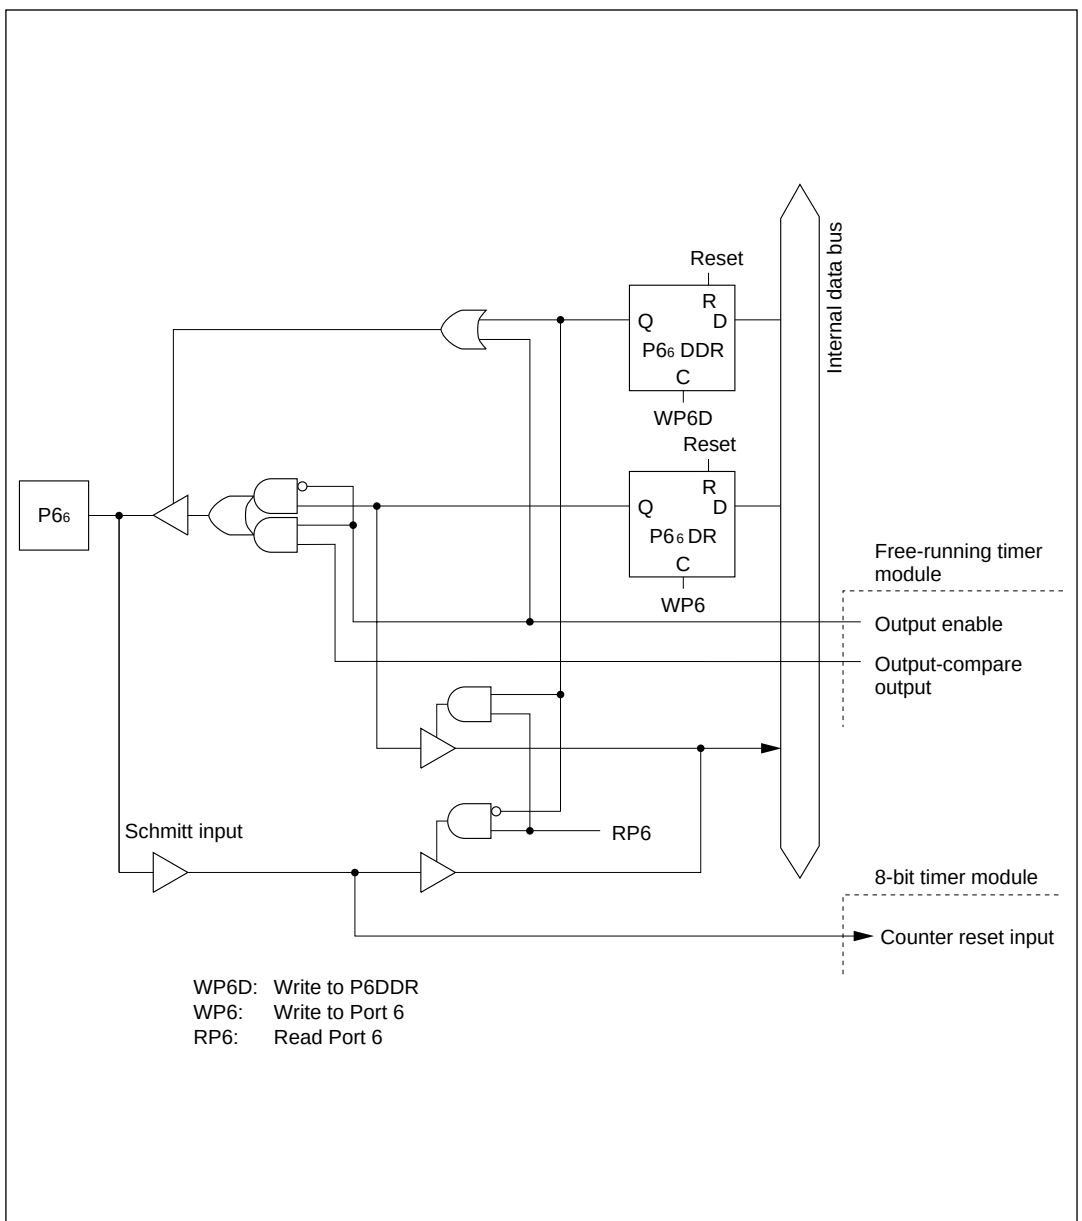

**Figure C-6 (f) Port 6 Block Diagram (Pin P6<sub>6</sub>)**





C.7 Port 7 Block Diagrams

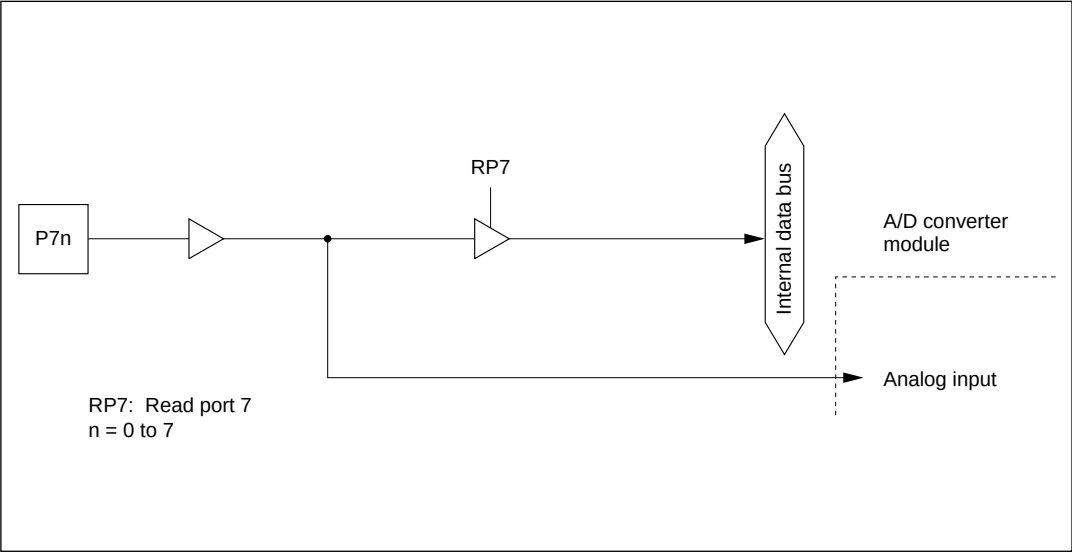


Figure C-7 Port 7 Block Diagram

# Appendix D Pin States

## D.1 Port States in Each Mode

**Table D-1 Port States**

| Pin Name                           | Mode | Reset        | Hardware Standby | Software Standby                       | Sleep Mode                                             | Normal Operation                               |
|------------------------------------|------|--------------|------------------|----------------------------------------|--------------------------------------------------------|------------------------------------------------|
| P1 <sub>7</sub> to P1 <sub>0</sub> | 1    | Low          | 3-state          | Low                                    | Prev. state (Addr. output pins: last address accessed) | A <sub>7</sub> to A <sub>0</sub>               |
| A <sub>7</sub> to A <sub>0</sub>   | 2    | 3-state      |                  | Low if DDR = 1, prev. state if DDR = 0 |                                                        | Addr. output or input port                     |
|                                    | 3    |              |                  | Prev. state                            |                                                        | I/O port                                       |
| P2 <sub>7</sub> to P2 <sub>0</sub> | 1    | Low          | 3-state          | Low                                    | Prev. state (Addr. output pins: last address accessed) | A <sub>15</sub> to A <sub>8</sub>              |
| A <sub>15</sub> to A <sub>8</sub>  | 2    | 3-state      |                  | Low if DDR = 1, prev. state if DDR = 0 |                                                        | Addr. output or input port                     |
|                                    | 3    |              |                  | Prev. state                            |                                                        | I/O port                                       |
| P3 <sub>7</sub> to P3 <sub>0</sub> | 1    | 3-state      | 3-state          | 3-state                                | 3-state                                                | D <sub>7</sub> to D <sub>0</sub>               |
| D <sub>7</sub> to D <sub>0</sub>   | 2    |              |                  |                                        |                                                        |                                                |
|                                    | 3    |              |                  | Prev. state                            | Prev. state                                            | I/O port                                       |
| P4 <sub>7</sub> /WAIT              | 1    | 3-state      | 3-state          | 3-state / Prev. state                  | 3-state / Prev. state                                  | WAIT / I/O port                                |
|                                    | 2    |              |                  |                                        |                                                        |                                                |
|                                    | 3    |              |                  | Prev. state                            | Prev. state                                            | I/O port                                       |
| P4 <sub>6</sub> /ø                 | 1    | Clock output | 3-state          | High                                   | Clock output                                           | Clock output                                   |
|                                    | 2    |              |                  |                                        |                                                        |                                                |
|                                    | 3    |              |                  | High if DDR = 1, 3-state if DDR = 0    | Clock output if DDR = 1, 3-state if DDR = 0            | Clock output if DDR = 1, input port if DDR = 0 |

- Notes:
1. 3-state: High-impedance state
  2. Prev. state: Previous state. Input ports are in the high-impedance state (with the MOS pull-up on if PCR = 1). Output ports hold their previous output level.
  3. I/O port: Direction depends on the data direction (DDR) bit. Note that these pins may also be used by the on-chip supporting modules. See section 7, I/O Ports, for further information.

\* On-chip supporting modules are initialized, so these pins revert to I/O ports according to the DDR and DR bits.

**Table D-1 Port States (cont)**

| Pin Name                                           | Mode | Reset   | Hardware Standby | Software Standby | Sleep Mode  | Normal Operation |
|----------------------------------------------------|------|---------|------------------|------------------|-------------|------------------|
| P4 <sub>5</sub> to P4 <sub>3</sub> ,<br>AS, WR, RD | 1    | High    | 3-state          | High             | High        | AS, WR, RD       |
|                                                    | 2    |         |                  |                  |             |                  |
|                                                    | 3    |         |                  | Prev. state      | Prev. state | I/O port         |
| P4 <sub>2</sub> to P4 <sub>0</sub>                 | 1    | 3-state | 3-state          | Prev. state      | Prev. state | I/O port         |
|                                                    | 2    |         |                  |                  |             |                  |
|                                                    | 3    |         |                  |                  |             |                  |
| P5 <sub>2</sub> to P5 <sub>0</sub>                 | 1    | 3-state | 3-state          | Prev. state*     | Prev. state | I/O port         |
|                                                    | 2    |         |                  |                  |             |                  |
|                                                    | 3    |         |                  |                  |             |                  |
| P6 <sub>7</sub> to P6 <sub>0</sub>                 | 1    | 3-state | 3-state          | Prev. state*     | Prev. state | I/O port         |
|                                                    | 2    |         |                  |                  |             |                  |
|                                                    | 3    |         |                  |                  |             |                  |
| P7 <sub>7</sub> to P7 <sub>0</sub>                 | 1    | 3-state | 3-state          | 3-state          | 3-state     | Input port       |
|                                                    | 2    |         |                  |                  |             |                  |
|                                                    | 3    |         |                  |                  |             |                  |

Notes: 1. 3-state: High-impedance state

2. Prev. state: Previous state. Input ports are in the high-impedance state (with the MOS pull-up on if PCR = 1). Output ports hold their previous output level.


3. I/O port: Direction depends on the data direction (DDR) bit. Note that these pins may also be used by the on-chip supporting modules.  
See section 7, I/O Ports, for further information.

\* On-chip supporting modules are initialized, so these pins revert to I/O ports according to the DDR and DR bits.

# Appendix E Timing of Transition to and Recovery from Hardware Standby Mode


## Timing of Transition to Hardware Standby Mode

- (1) To retain RAM contents when the RAME bit in SYSCR is set to 1, drive the  $\overline{\text{RES}}$  signal low 10 system clock cycles before the  $\overline{\text{STBY}}$  signal goes low, as shown below.  $\overline{\text{RES}}$  must remain low until  $\overline{\text{STBY}}$  goes low (minimum delay from  $\overline{\text{STBY}}$  low to  $\overline{\text{RES}}$  high: 0 ns).

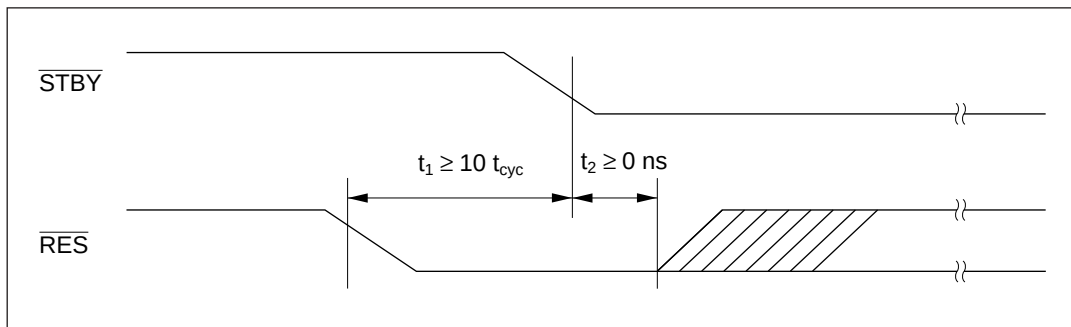

- (2) When the RAME bit in SYSCR is cleared to 0 or when it is not necessary to retain RAM contents,  $\overline{\text{RES}}$  does not have to be driven low as in (1).

**Timing of Recovery From Hardware Standby Mode:** Drive the  $\overline{\text{RES}}$  signal low approximately 100 ns before  $\overline{\text{STBY}}$  goes high.

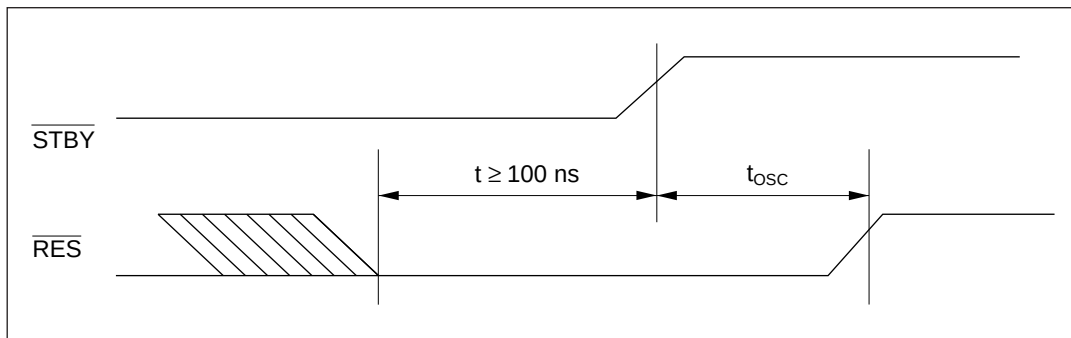

# Appendix F Product Code Lineup

**Table F-1 H8/3297 Series Product Code Lineup**

| Product Type |                  |                   | Product Code  | Mark Code        | Package (Hitachi Package Code)    |
|--------------|------------------|-------------------|---------------|------------------|-----------------------------------|
| H8/3297      | ZTAT version     | Standard products | HD6473297C16  | HD6473297C16     | 64-pin window shrink DIP (DC-64S) |
|              |                  |                   | HD6473297P16  | HD6473297P16     | 64-pin shrink DIP (DP-64S)        |
|              |                  |                   | HD6473297F16  | HD6473297F16     | 64-pin QFP (FP-64A)               |
|              |                  |                   | HD6473297TF16 | HD6473297TF16    | 80-pin TQFP (TFP-80C)             |
|              | Mask ROM version | Standard products | HD6433297P    | HD6433297(***)P  | 64-pin shrink DIP (DC-64S)        |
|              |                  |                   | HD6433297F    | HD6433297(***)F  | 64-pin QFP (FP64A)                |
|              |                  |                   | HD6433297TF   | HD6433297(***)TF | 80-pin TQFP (TFP-80C)             |
| H8/3296      | Mask ROM version | Standard products | HD6433296P    | HD6433296(***)P  | 64-pin shrink DIP (DP-64S)        |
|              |                  |                   | HD6433296F    | HD6433296(***)F  | 64-pin QFP (FP-64A)               |
|              |                  |                   | HD6433296TF   | HD6433296(***)TF | 80-pin TQFP (TFP-80C)             |

Notes: (\*\*) in mask ROM versions is the ROM code.

**Table F-1 H8/3297 Series Product Code Lineup (cont)**


| <b>Product Type</b> |                     |                      | <b>Product Code</b> | <b>Mark Code</b> | <b>Package<br/>(Hitachi Package Code)</b> |
|---------------------|---------------------|----------------------|---------------------|------------------|-------------------------------------------|
| H8/3294*            | ZTAT<br>version     | Standard<br>products | HD6473294P16        | HD6473294P16     | 64-pin shrink DIP<br>(DP-64S)             |
|                     |                     |                      | HD6473294F16        | HD6473294F16     | 64-pin QFP<br>(FP-64A)                    |
|                     |                     |                      | HD6473294TF16       | HD6473294TF16    | 80-pin TQFP<br>(TFP-80C)                  |
|                     | Mask ROM<br>version | Standard<br>products | HD6433294P          | HD6433294(***)P  | 64-pin shrink DIP<br>(DP-64S)             |
|                     |                     |                      | HD6433294F          | HD6433294(***)F  | 64-pin QFP<br>(FP64A)                     |
|                     |                     |                      | HD6433294TF         | HD6433294(***)TF | 80-pin TQFP<br>(TFP-80C)                  |
| H8/3292             | Mask ROM<br>version | Standard<br>products | HD6433292P          | HD6433292(***)P  | 64-pin shrink DIP<br>(DP-64S)             |
|                     |                     |                      | HD6433292F          | HD6433292(***)F  | 64-pin QFP<br>(FP-64A)                    |
|                     |                     |                      | HD6433292TF         | HD6433292(***)TF | 80-pin TQFP<br>(TFP-80C)                  |

Notes: (\*\*\*) in mask ROM versions is the ROM code.

# Appendix G Package Dimensions


Figure G-1 shows the dimensions of the DC-64S package. Figure G-2 shows the dimensions of the DP-64S package. Figure G-3 shows the dimensions of the FP-64A package. Figure G-4 shows the dimensions of the TFP-80C package.

Unit: mm

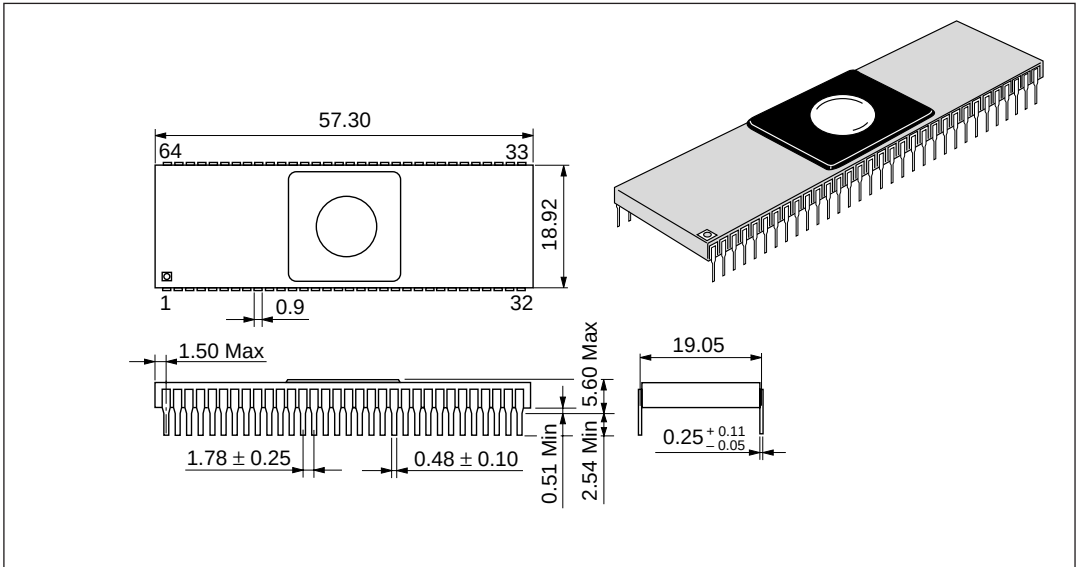

**Figure G-1 Package Dimensions (DC-64S)**

Unit: mm

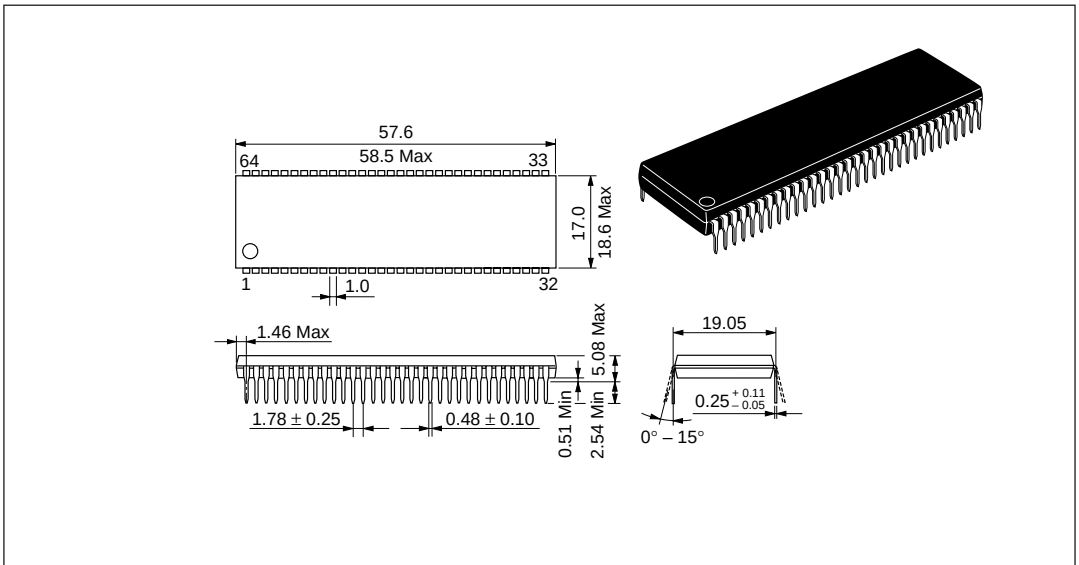

**Figure G-2 Package Dimensions (DP-64S)**

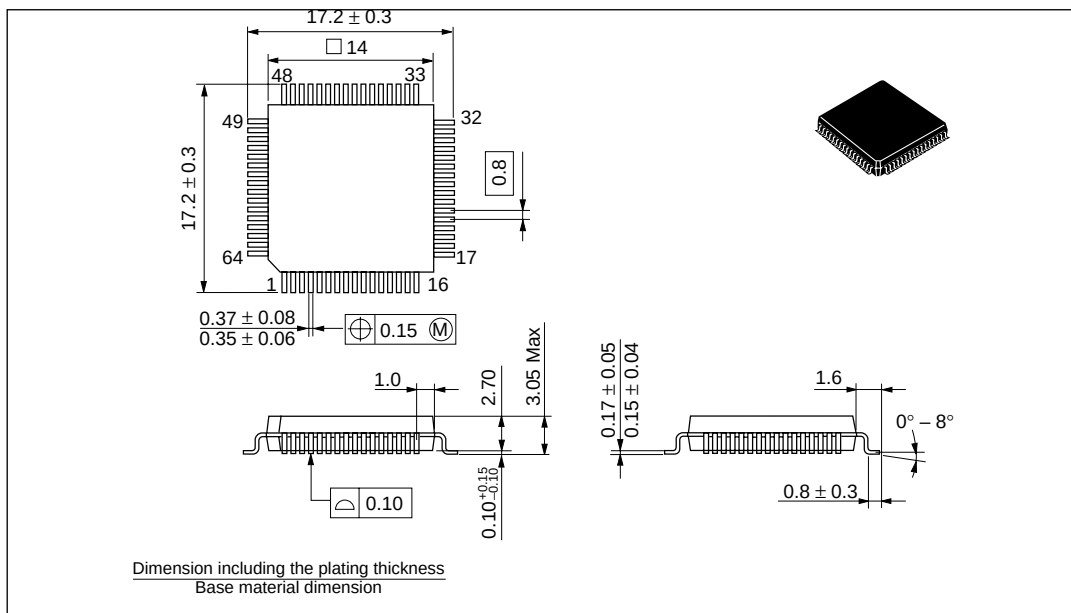


Figure G-3 Package Dimensions (FP-64A)

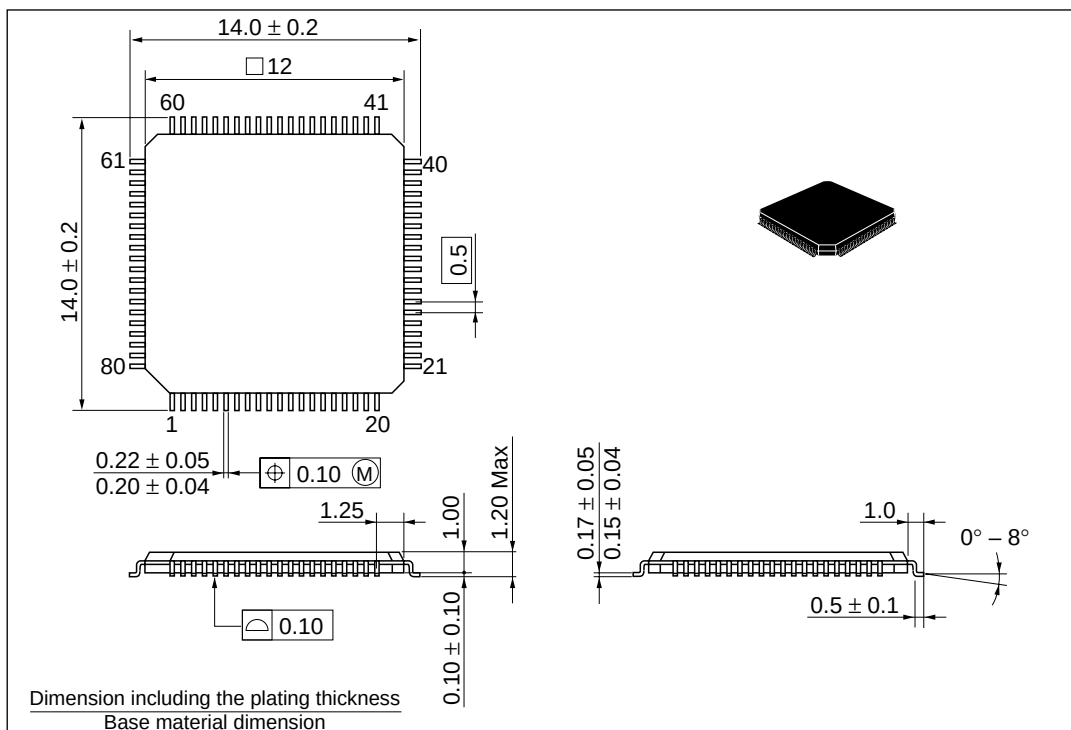


Figure G-4 Package Dimensions (TFP-80C)



---

## H8/3297 Series Hardware Manual

Publication Date: 1st Edition, October 1994  
3rd Edition, September 1997

Published by: Semiconductor and IC Div.  
Hitachi, Ltd.

Edited by: Technical Documentation Center  
Hitachi, Microcomputer System Ltd.

Copyright © Hitachi, Ltd., 1994. All rights reserved. Printed in Japan.