

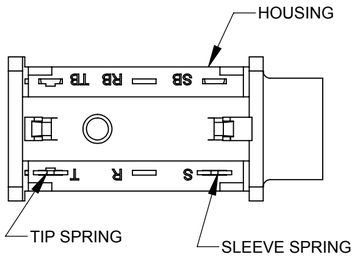



2 CONDUCTOR SINGLE OPEN CIRCUIT

SN37A11



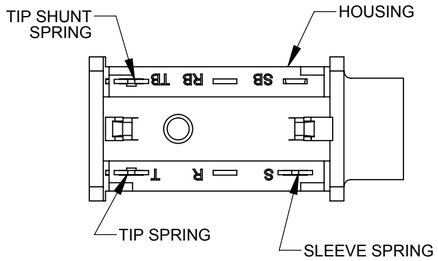



2 CONDUCTOR SINGLE CLOSED CIRCUIT

SN37A12A



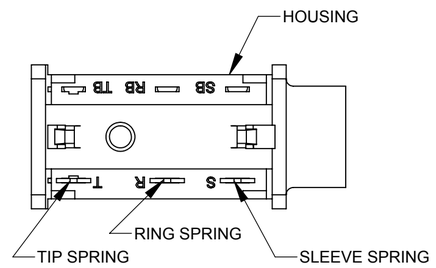



3 CONDUCTOR DOUBLE OPEN CIRCUIT

SN37A12B



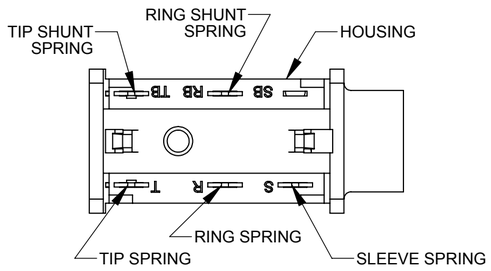



3 CONDUCTOR DOUBLE CLOSED CIRCUIT

SN37A14B

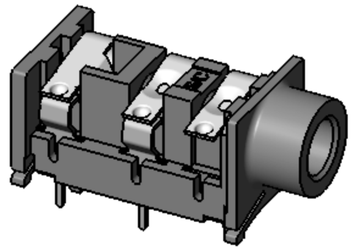

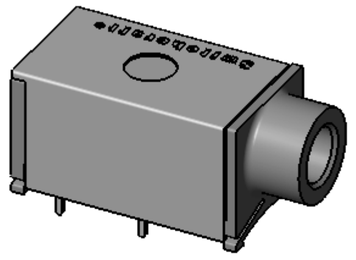

SHOWN WITH COVER ASSEMBLED

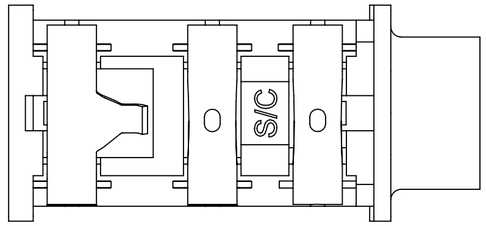

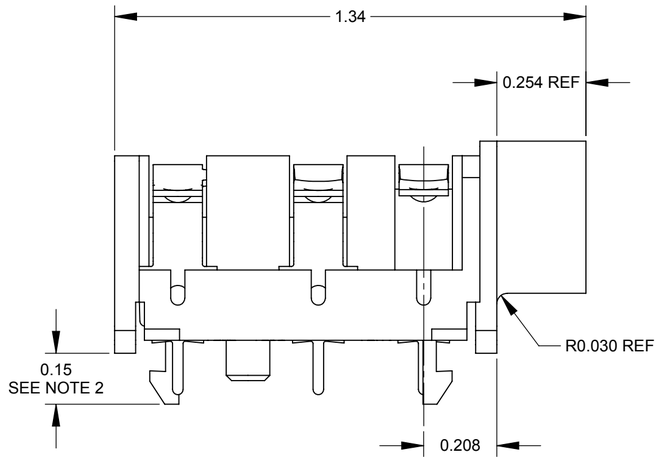

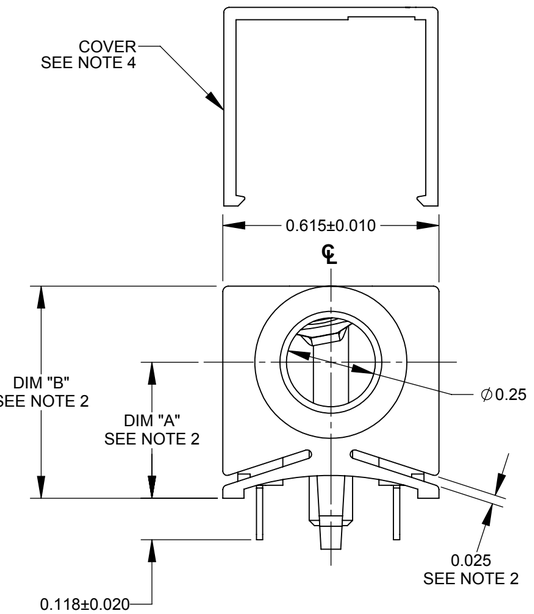

SN37A14B SHOWN WITH COVER UNASSEMBLED

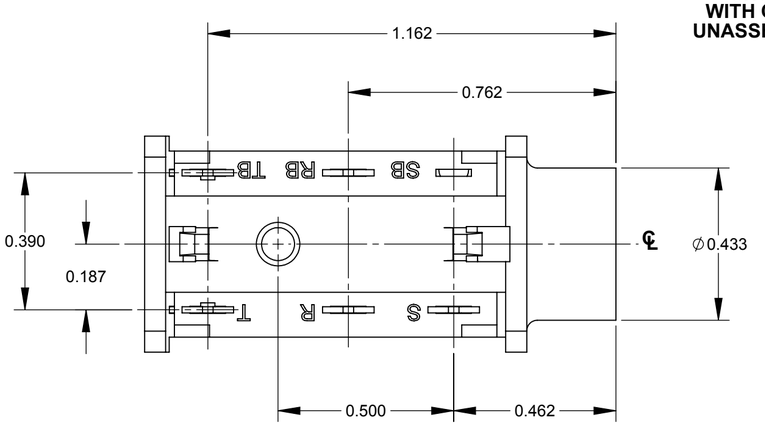

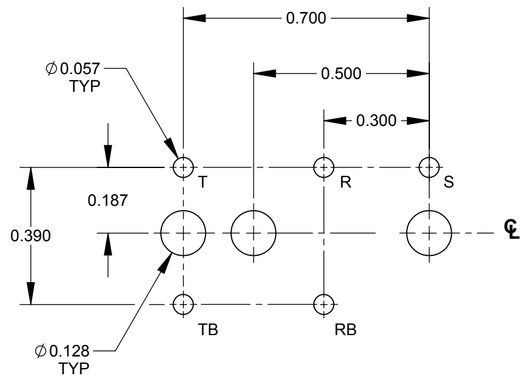

RECOMMENDED PC BOARD LAYOUT COMPONENT SIDE

NOTES:

1. MAY BE USED WITH PC BOARD THICKNESSES RANGING FROM 0.054 - 0.070.
2. THESE DIMENSIONS VARY DEPENDING ON PCB THICKNESS. DIMENSIONS SHOWN ARE FREE STATE AS SHIPPED.
3. MATERIAL SPECIFICATIONS:
   HOUSING - THERMOPLASTIC, BLACK
   SPRINGS - SPECIAL COPPER ALLOY, TINNED
   COVER - THERMOPLASTIC, BLACK
4. COVER SHIPPED ASSEMBLED ON ALL PART NUMBERS.
5. THESE PRODUCTS ARE RoHS COMPLIANT.

PART NUMBER	DIM "A"		DIM "B"	
	FREE STATE	WITH 0.062 THICK PCB	FREE STATE	WITH 0.062 THICK PCB
SN37A11	0.387	0.375	0.604	0.592
SN37A12A	0.387	0.375	0.604	0.592
SN37A12B	0.387	0.375	0.604	0.592
SN37A14B	0.387	0.375	0.604	0.592

REV	ECO NUMBER	DATE	BY	APVD
F	CAD REDRAW WAS REV A - ECO #27409	11/17/14	PC	TJK

REVISIONS

UNLESS OTHERWISE SPECIFIED

1. ALL DIMENSIONS IN INCHES
   - TWO PLACE DECIMALS ±0.02
   - THREE PLACE DECIMALS ±0.005

DO NOT SCALE DRAWING

THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.

CUSTOMER DRAWING

SIZE	WIDTH	MULT	LBS/M	TEMPER

FINISH: SPEC No.

MATERIAL: SPEC No.

FIRST USED ON: 10/01/94

SCALE: 3:1

DATE DRAWN	BY	CHKD	APVD
10/01/94	ES	ES 10/05/94	GHJ 10/05/94

Switchcraft®

SHEET 1 OF 1

NAME: PHONE JACK INSULATED BUSHING

PART No.: SN37A SERIES

REV: F

SolidWorks CAD File C