THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PART NUMBER PREFIX	STUD SIZE	WIRE RANGE mm²	DIMENSIONS mm A ±,50	W ±,25	C ±,38	B ±,25	M ±,50
PMNF6-3R	M3	*2,5-6,0 (12-10)	26,67 (1.05)	5,84 (.23)	9,14 (.36)	1,02 (.04)	24,13 (.95)
PMNF6-4R	M4	*2,5-6,0 (12-10)	27,43 (1.08)	7,87 (.31)	9,14 (.36)	1,02 (.04)	23,62 (.93)
PMNF6-5R	M5	*2,5-6,0 (12-10)	27,04 (1.06)	9,65 (.38)	9,14 (.36)	1,02 (.04)	22,18 (.87)
PMNF6-6R	M6	*2,5-6,0 (12-10)	30,23 (1.19)	10,92 (.43)	10,92 (.43)	1,02 (.04)	24,89 (.98)
PMNF6-8R	M8	*2,5-6,0 (12-10)	31,50 (1.24)	13,21 (.52)	10,92 (.43)	1,02 (.04)	24,89 (.98)

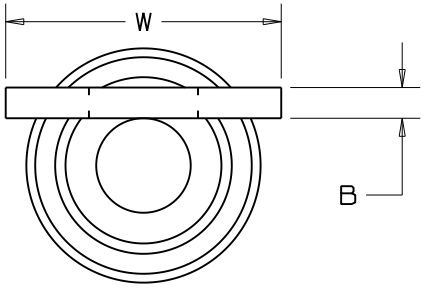

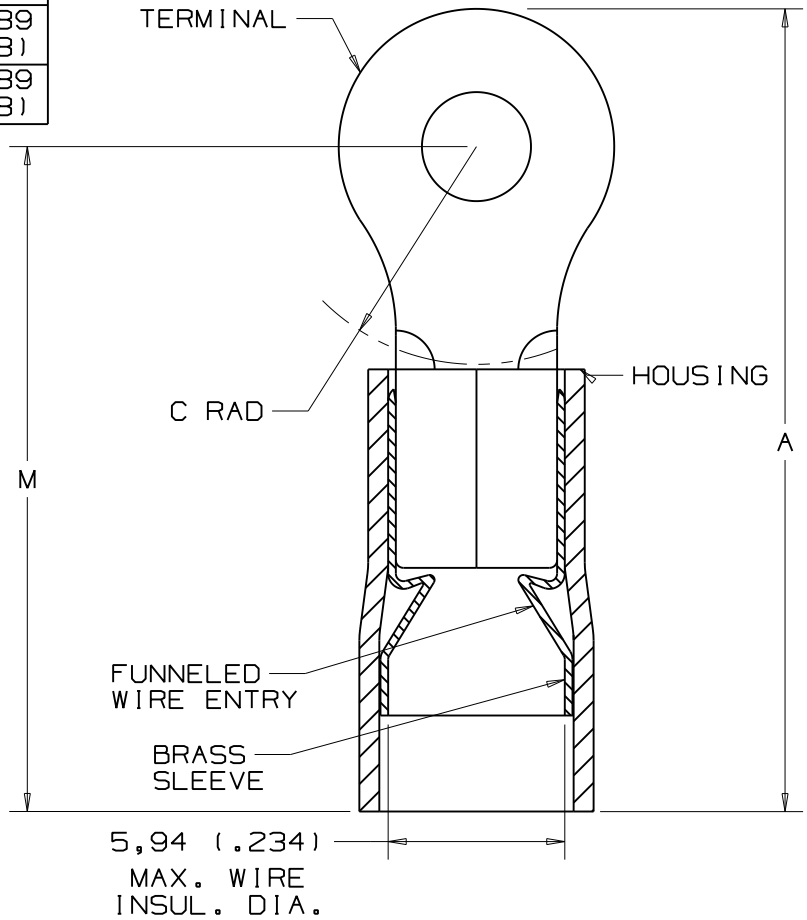

NOTES:

1. USED FOR:
   A. 600V MAX. VOLTAGE RATING
   B. 105°C (221°F) MAX. TEMP. RATING
   C. SOLID & STRANDED COPPER WIRE
   *D. WIRE RANGE; 4,0-6,0mm² FOR CT-1551M
2. SEE www.panduit.com FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE.
3. MATERIAL:
   A. STAMPING: ETP 110 COPPER, TIN PLATED
   B. HOUSING: TYPE 6/6 NYLON, YELLOW
4. WIRE STRIP LENGTH: $7,1\ ^{+,8}_{-0}$ $(9/32\ ^{+1/32}_{-0})$
5. INSTALLATION TOOLS: REF. DWGS. A41522, A41523, A41524, A41525
6. DIMENSIONS IN BRACKETS ARE IN INCHES OR AWG

REV	DATE	BY	CHK	DESCRIPTION	ECN #	CUST	PM
08	5/11	SRB		Revised note #2			

PANDUIT CORP TINLEY PARK, ILLINOIS

2,5-6,0 mm² METRIC NYLON INSULATED, FUNNELED ENTRY RING TERMINAL

DRAWN BY	CHK'D	SCALE	DRAWING NO.
BDK	LM	NONE	A41515