

Steward

Advanced Ferrite Materials, EMI Suppression, and Inductive Products

Home • Ferrite Product Lines • New Products • Technical • General • Contact • Steward Sales

29F0318-0SR

STEWARD PART NUMBERING SYSTEM

25	F	0330	-	2	S	R
MATERIAL TYPE	PRODUCT CODE	PART SIZE CODE	SELECTED DIMENSION CODE	ADDITIONAL DESCRIPTION	PACKAGING CODE	

Ambient Operating Temperature Range : -55°C to + 125°C




Figure #1




Figure #2




Figure #3

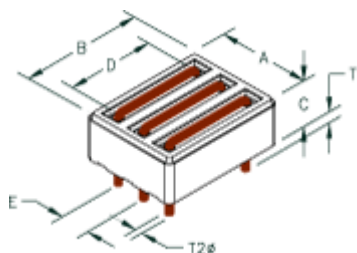


Figure #4




Figure #5




Figure #6




Figure #7




Figure #8




Figure #9




Figure #10




Figure #11

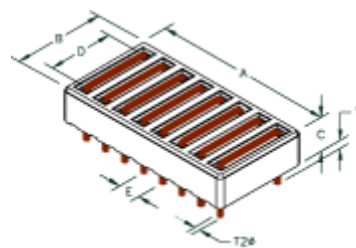


Figure #12

Drawing Figure

Figure
Number

1

Electrical Characteristics


NET Z @ 100 MHz nom	NET Z @ 300 MHz nom	DCR Max	Rated Current mA
83	-	0.01	6000

Physical Dimensions

A mm	B mm	B1 mm	C mm	C1 mm	D mm	E mm	G mm	H mm	A in	B in	B1 in	C in	C1 in	D in	E in	G in	H in
4.83	4.50	7.04	2.92	3.56	2.24	1.27	-	-	0.190	0.177	0.277	0.115	0.140	0.088	0.050	-	-

Wire Dimensions

T1 mm	T2 mm	T3 mm	T1 in	T2 in	T3 in
2.16	0.50	0.25	0.085	0.020	0.010

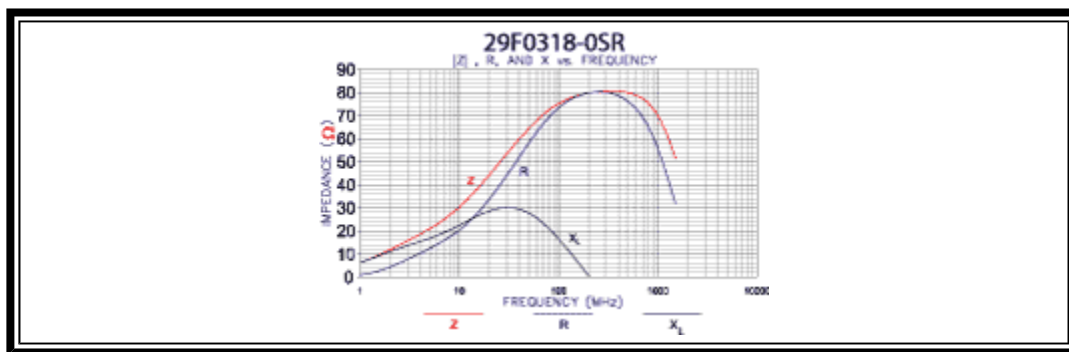

Specifications, which provide more details for the correct use of the described products, are available upon request. All specifications are subject to change without notice. For more information on any of the products listed above, please contact Steward customer service department at (800) 634-2673.

americas@steward.com

mexico@steward.com

europe@steward.com

asia@stew.

Copyright© 2004 Steward, Inc.

Last Updated: 2/25/2004