


## SB 15, 25, 35G SERIES

## High Current 15, 25, 35 AMPS. Single Phase Glass Passivated Bridge Rectifiers



Voltage Range



50 to 1000 Volts

Current



15.0/25.0/35.0 Amperes

## Features



- ✧ UL Recognized File # E-96005
- ✧ Metal case with an electrically isolated epoxy
- ✧ Rating to 1,000V PRV.
- ✧ High efficiency
- ✧ Mounting: thru hole for #8 screw
- ✧ High temperature soldering guaranteed: 260°C / 10 seconds at 5 lbs., ( 2.3 kg ) tension
- ✧ Leads solderable per MIL-STD-202 Method 208
- ✧ Isolated voltage from case to lead over 2000 volts

**SB35**

## SB-35M



## SB35-W



**Dimensions in inches and (millimeters)**

### Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

[illegible]

Notes: 1. Thermal Resistance from Junction to Case.

2. Suffix "W" - Wire Lead Structure/"M" - Terminal Location Face to Face.

SB1505G      SB1510G  
 RATINGS AND CHARACTERISTIC CURVES (SB2505G THRU SB2510G)  
 SB3505G      SB3510G

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

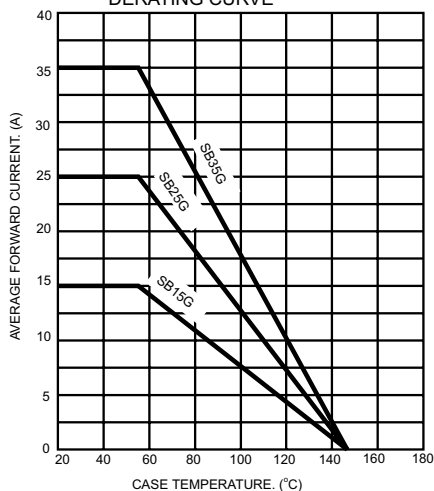


FIG.2- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT PER BRIDGE ELEMENT

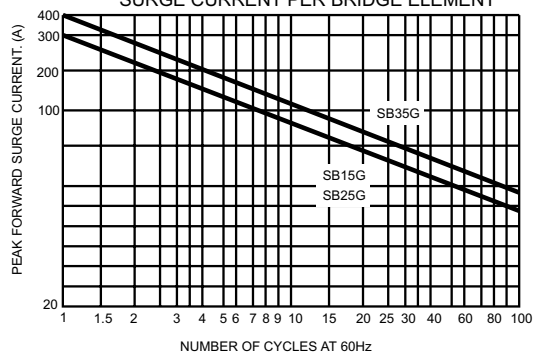


FIG.3- TYPICAL REVERSE CHARACTERISTICS PER BRIDGE ELEMENT

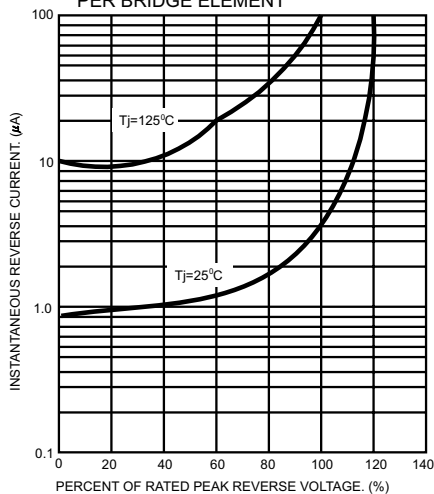


FIG.4- TYPICAL FORWARD CHARACTERISTICS

