

Item # 722-0002 VAC, Clip Flush Rectangular



VAC, Clip Flush Rectangular

The Redington Model 722 provides an AC Hour Meter with an operating range of 90-264VAC 50/60 Hz. You no longer require two separate meters, one for 115VAC and one for 230VAC. Models are available in the standard industry housings. Its quartz time base insures accurate long-term time keeping. The Totally Sealed case protects against the environment and provides years of reliable service. All applicable models are NEMA 4X,12 rated when mounted with optional gasket.

Specifications

Model No.	722
Mounting	Clip Flush-Rectangular
Reset	Non-reset
Termination	1/4 inch (6.3mm) spade terminals
Display	6 - digits, 0.125 inch (3.2mm) 99999.9 Hours - white on black Tenths - red on white
Display Height	0.125 Inch
Display Height	3.2 mm
No. of Digits	6
Records	99999.9 hours
Accuracy	± 0.02 over entire range
Input Voltage	90-240 VAC 50-60 Hz ± 10%
Power	Less than 0.6 watts
Operating Temperature	-40 to +185 °F
Operating Temperature	-40 to +85 °C
Case Material	Black Polymer
Weight	2 oz
Weight	57 gm

Panel Cutout	1.45 x 0.95 Inch
Panel Cutout	36.8 x 24.1 mm
Approvals	UL/CSA Recognized, CE Compliant
Environmental Protection	Totally sealed
Vibration	10-75 Hz
Stock Availability	Yes
Max. Panel Thickness	0.03 to 0.63 Inch
Max. Panel Thickness	0.76 to 16.00 mm
Accessory	5003-009 (NEMA 4X, 12 Gasket)



Description

The Redington Model 722 provides an AC Hour Meter with an operating range of 90-264VAC 50/60 Hz. You no longer require two separate meters, one for 115VAC and one for 230VAC. Models are available in the standard industry housings, 2-Hole Rectangular, Flush-Rectangular, Flush-Round and 3-Hole Round. Its quartz time base insures accurate long-term time keeping. The Totally Sealed case protects against the environment and provides years of reliable service. All models are NEMA 4X,12 rated when mounted with optional gasket.

Features

- Operating voltage 90-264VAC 50/60Hz
- Totally Sealed
- UL/cUL Recognized, CE & RoHS Compliant
- 6 Figure, 99999.9
- Quartz accuracy

Options

- Wire leads
- Gasket kit (for NEMA 4X, 12 rating)
- Custom lens
- Terminals up, down, straight

Specifications

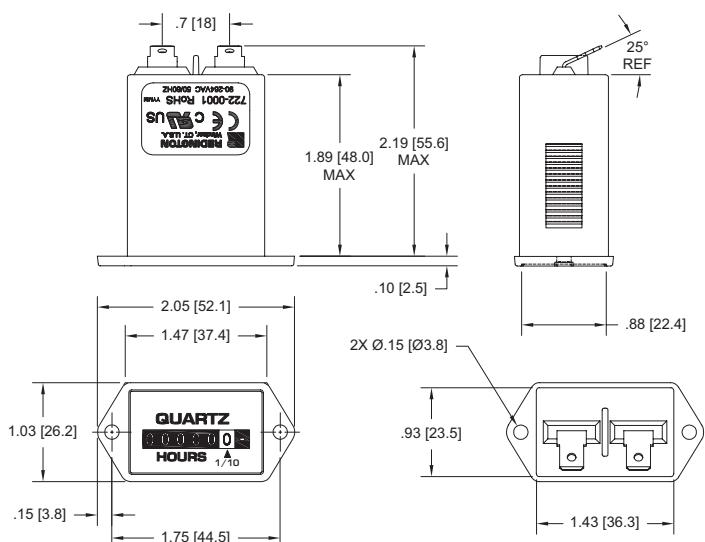
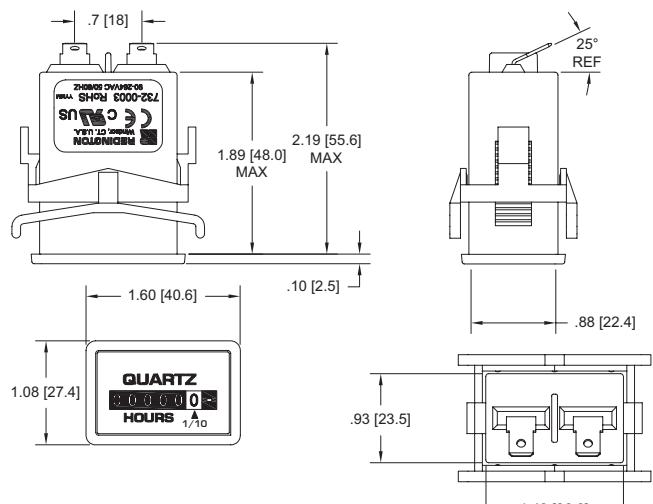
Figures:	6 - digits, 0.14" [3.6mm] 99999.9	Case Material:	Black polymer
	Hours and indicator - white on black	Lens Material:	Polymer
Reset:	Decimal - black on white	Agency Approvals:	UL/cUL Recognized, CE & RoHS Compliant, SAE & NEMA 4X, 12 Compliant
Non-reset		Environmental:	Totally Sealed
Voltage:	90-264VAC	Front Panel:	NEMA 4X, 12 rated with optional gasket
Frequency:	50/60Hz	Temperature:	-40°F to +185°F [-40°C to + 85°C]
Power:	1 watt max.	Humidity:	95% (SAE J1378)
Mounting:	Clip or mounting holes	Vibration:	10-80 Hz. 20g max. (SAE J1378)
Termination:	1/4" [6.3mm] spade terminals	Shock:	55g @ 9 - 13msec (SAE J1378)
Weight:	~2 oz [57 g]		
Accuracy:	± 0.02% over entire range		

Models

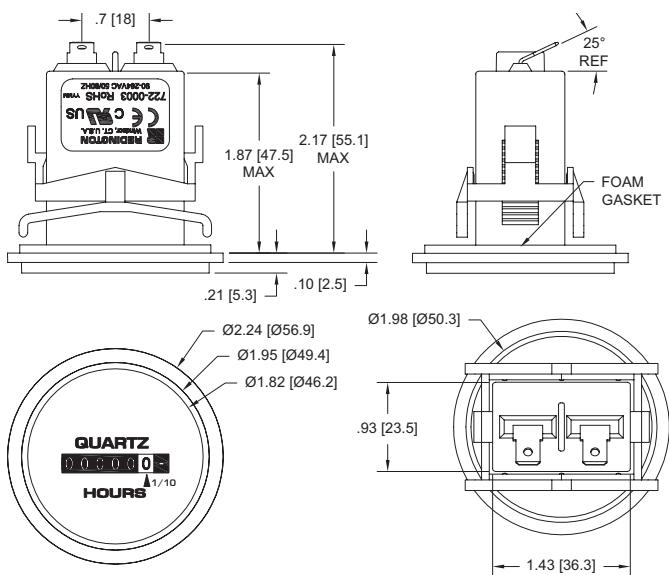
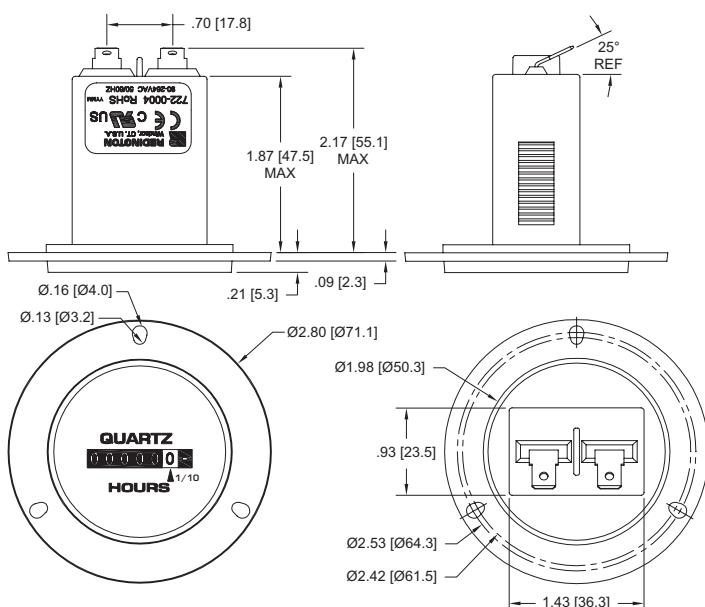
Description

722-0001	2-Hole Rectangular, 90-264VAC 50/60Hz, 1/4" [6.3mm] spade terminals, hours & 1/10's
722-0002	Flush-Rectangular, 90-264VAC 50/60Hz, 1/4" [6.3mm] spade terminals, hours & 1/10's
722-0003	Flush-Round, 90-264VAC 50/60Hz, 1/4" [6.3mm] spade terminals, hours & 1/10's
722-0004	3-Hole Round, 90-264VAC 50/60Hz, 1/4" [6.3mm] spade terminals, hours & 1/10's
5003-009	NEMA 4X, 12 Gasket for Model 722-0002
5003-010	NEMA 4X, 12 Gasket for Model 722-0001
5003-011	NEMA 4X, 12 Gasket for Model 722-0004
5003-008	NEMA 4X, 12 Gasket for Model 722-0003

* All items are normally in factory stock

**Model 722****Electromechanical****Totally Sealed Hour Meter****Dimensions****2-Hole****Flush-Rectangular**

Panel Opening: 1.45" X 0.95" [36.8 X 24.1]

Panel Opening: 1.45" X 0.95" [36.8 X 24.1]
Panel Thickness: 0.03 to 0.63 [0.76 to 16.00]**Flush-Round****3-Hole Round**Panel Opening: 2.0" [50.6]
Panel Thickness: 0.40 [10.2] Max.

Panel Opening: 2.0" [50.6]

Applications

Medical Equipment



Control Panels



Test Equipment



Generators



Office Equipment

