

UAK-BE/L6

Discontinued item

Order No.: 2748959

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2748959>

Base element with decoupling inductance 6 A, for accommodating surge protection plugs UAK for single-phase power supply units, for mounting on NS 32 and NS 35/7.5, housing width: 17.5 mm

Commercial data

GTIN (EAN)	 4 017918 140090
Note	Made-to-order
sales group	J037
Pack	10 pcs.
Customs tariff	85363010

Product notes

WEEE/RoHS-compliant since:
06/28/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.


Certificates / Approvals





GOST

Item	Designation	Description
Marking		
1051993	B-STIFT	Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm
2715212	ZB 5,8,LGS:FORTL.ZAHLEN	Zack marker strip, 10-section, printed horizontally: with consecutive numbers, 1-10, 11-20 etc. up to 991-1000, color: white
2715209	ZB 5,8:UNBEDRUCKT	Zack strip, unprinted, strips with 10 labels for individual labeling with M-PEN or CMS system, for terminal block width: 5.8 mm, color: White

Dimensioned drawing

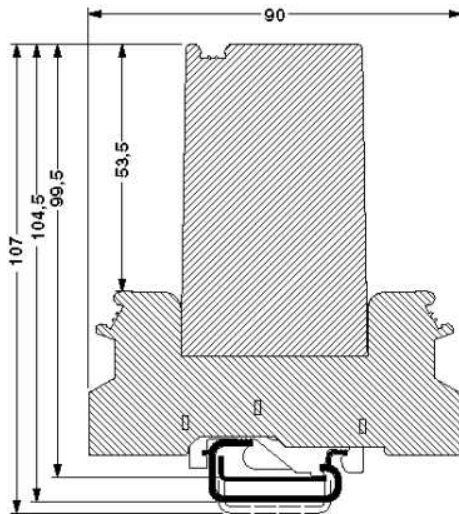

Circuit diagram

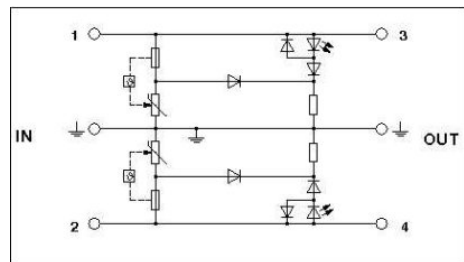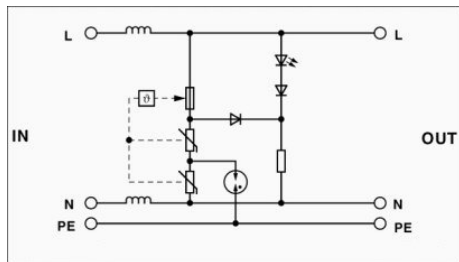

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact
Technical modifications reserved;