

LOC		DIST		REVISIONS						
AJ		16		P	LTR	DESCRIPTION		DATE	DWN	APVD
					A	REVISED PER EC 0514-0150-05		04OCT2005	REH	JL

- 1

ZINC PER QQ-Z-363.
- 2

POLYMETHYLPENTENE, GENERAL PURPOSE.
- 3

PHOSPHOR BRONZE PER QQ-B-750.
- 4



BRASS PER ASTM-B-453.
- 5

BRASS PER ASTM-B-16.
- 6


NICKEL PLATE PER QQ-N-290,
3.81 μm [.000150] MINIMUM THICK.
- 7

TIN PLATE PER ASTM-B-545,
3.81 μm [.000150] MINIMUM THICK.
- 8

GOLD PLATE PER ASTM-B-488,
0.76 μm [.000030] MINIMUM THICK.
9. SEE INSTRUCTION SHEET 408-2769.

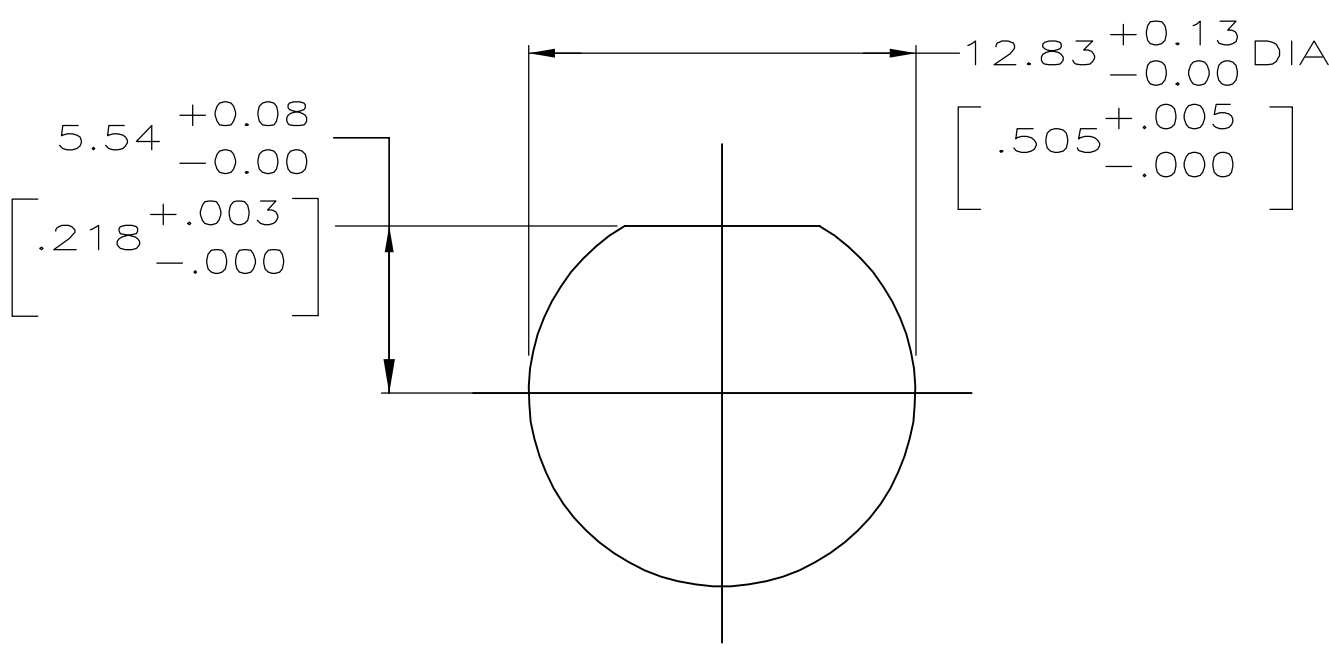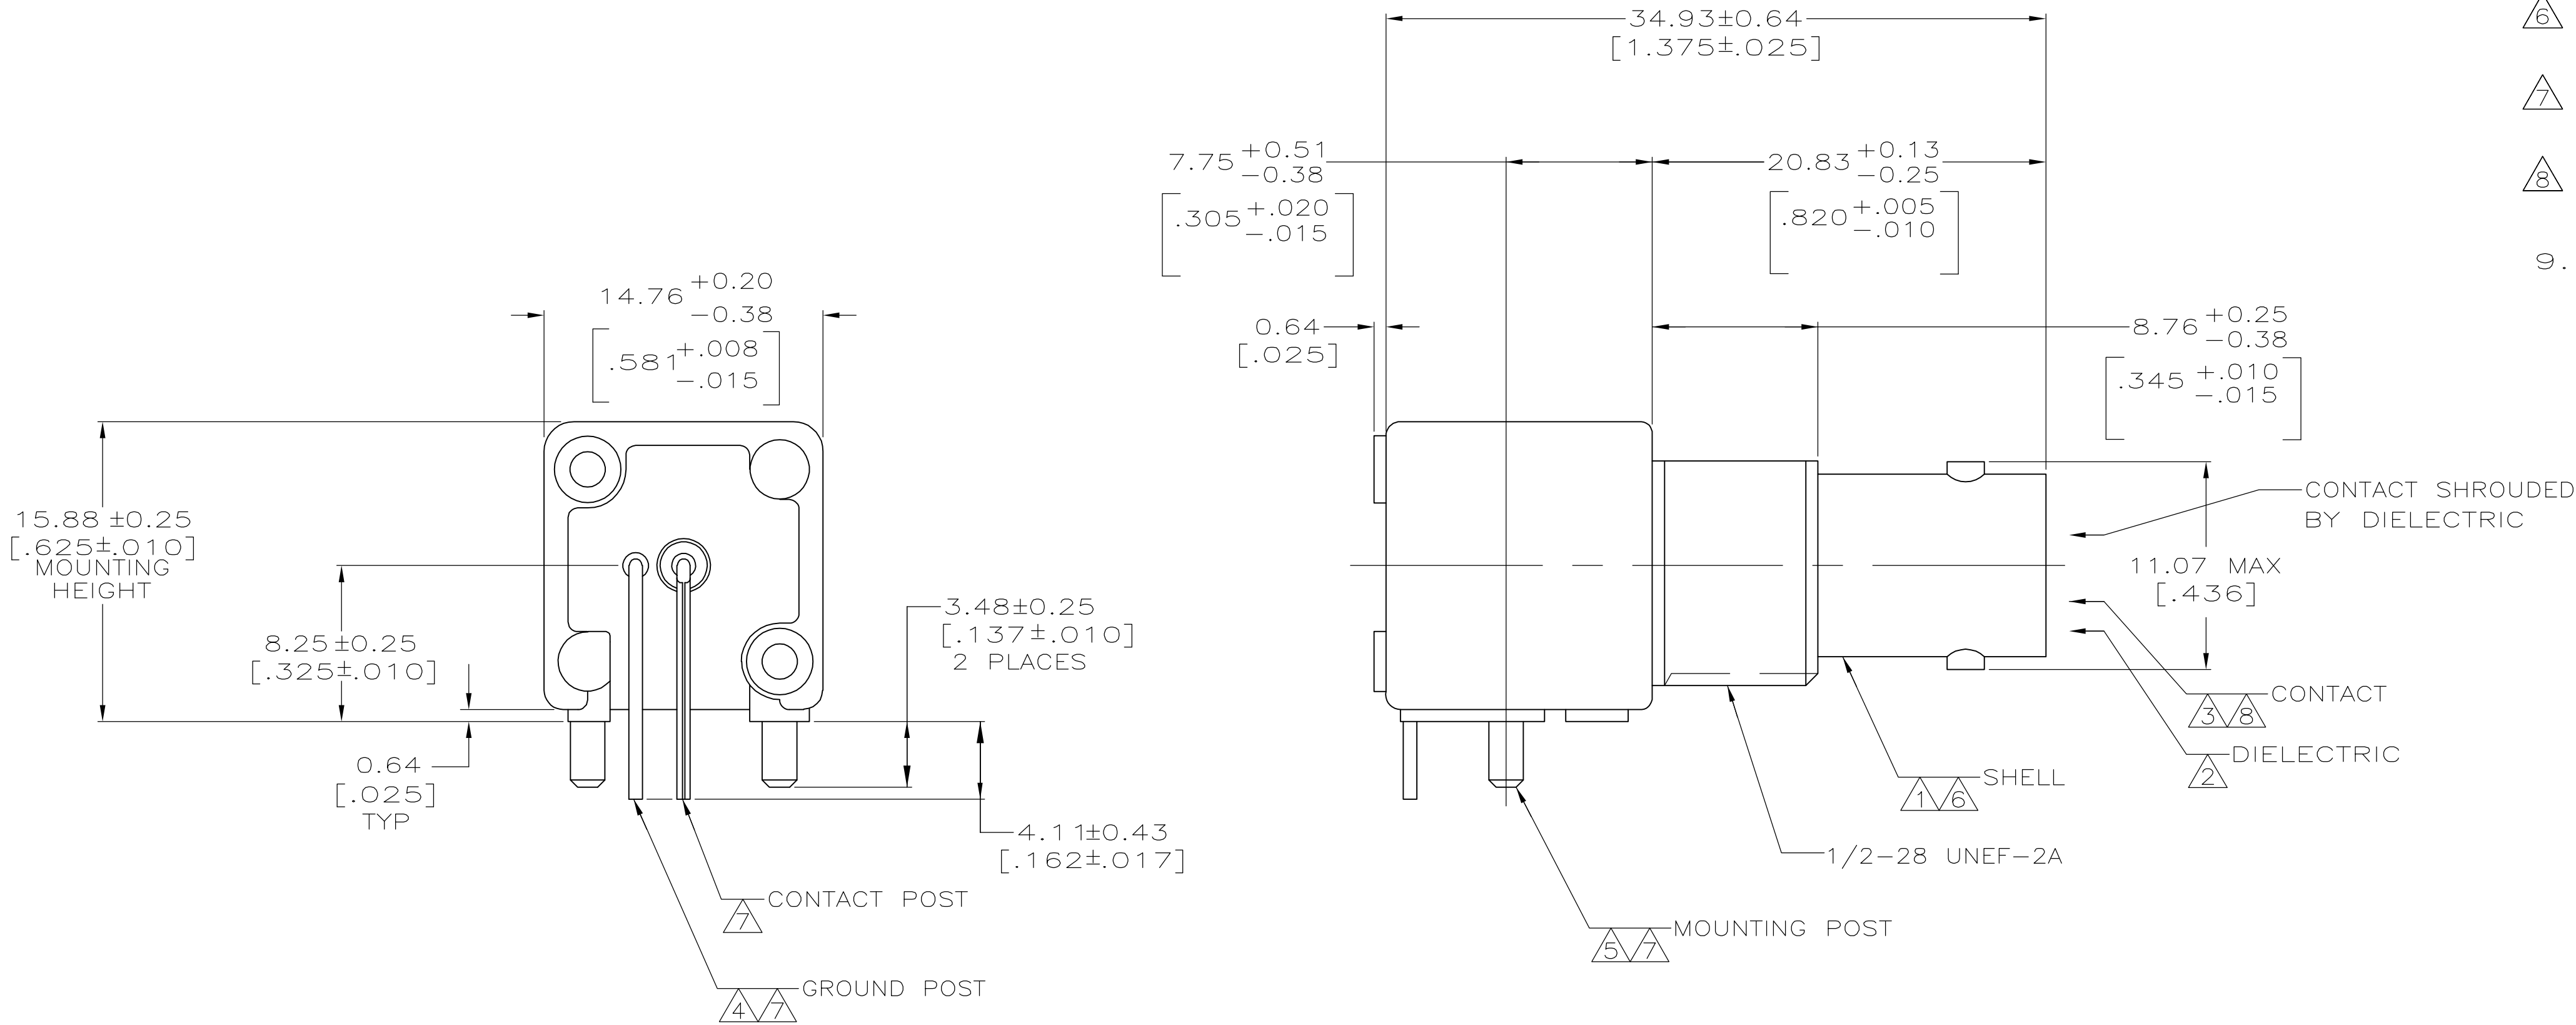

RECOMMENDED PANEL CUTOUT

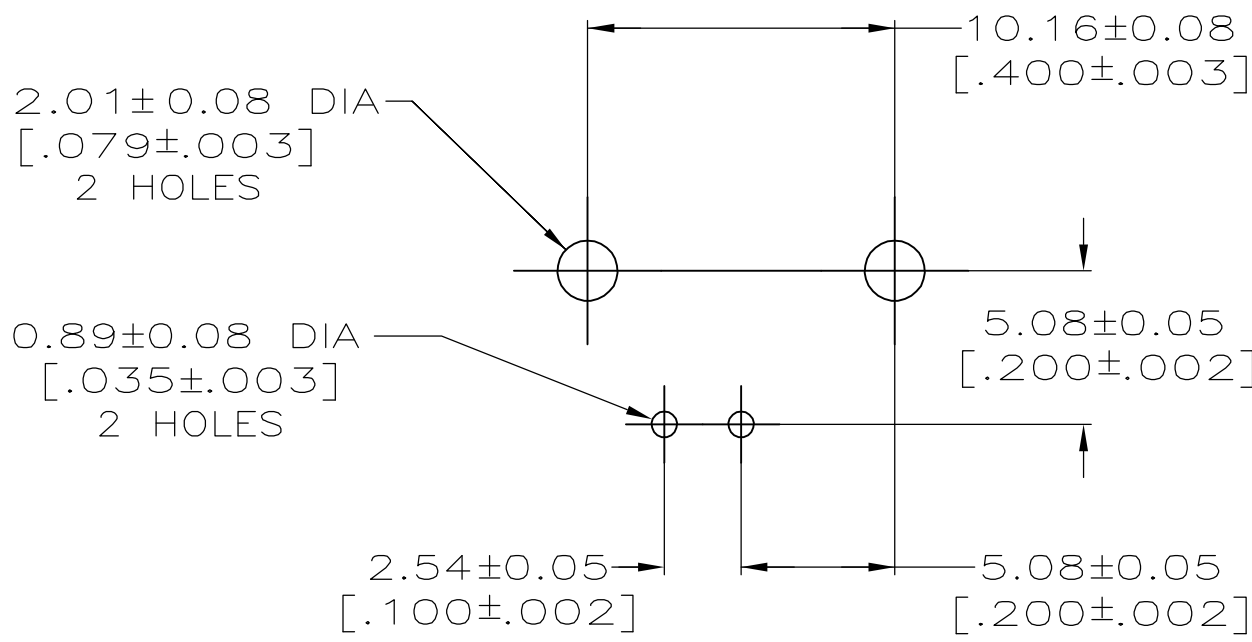

PCB CONFIGURATION

5414409-1

PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN J. ALCORTA - 26APR2005	tyco Electronics		Tyco Electronics Corporation	
			CHK J. HAVENER - 26APR2005			Harrisburg, PA 17105-3608	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J. LIPPERT - 26APR2005	NAME	JACK, RIGHT ANGLE, PCB	
		1. PLC ±		PRODUCT SPEC	75 OHM, SERIES BNC		
		2. PLC ±		108-12078			
		3. PLC ± 0.20 [0.008]		APPLICATION SPEC			
4. PLC ±		ANGLES ±		WEIGHT	SIZE	CAGE CODE	DRAWING NO.
MATERIAL SEE NOTES 1 - 5		FINISH SEE NOTES 6 - 8		—	A1	00779	©=5414409
CUSTOMER DRAWING				SCALE		4:1	SHEET 1 of 1
				REV		A	