

256MB - 32Mx64 SDRAM UNBUFFERED

FEATURES

- PC100 and PC133 compatible
- Burst Mode Operation
- Auto and Self Refresh capability
- LVTTTL compatible inputs and outputs
- Serial Presence Detect with EEPROM
- Fully synchronous: All signals are registered on the positive edge of the system clock
- Programmable Burst Lengths: 1, 2, 4, 8 or Full Page
- 3.3V $\pm$ 0.3V Power Supply
- 168 Pin DIMM JEDEC

DESCRIPTION

The W3DG6435V is a 32Mx64 synchronous DRAM module which consists of eight 32Mx8 SDRAM components in TSOP II package and one 2K EEPROM in an 8 pin TSSOP package for Serial Presence Detect which are mounted on a 168 Pin DIMM multilayer FR4 Substrate.

* This product is under development, is not qualified or characterized and is subject to change without notice.

PIN CONFIGURATIONS (FRONT SIDE/BACK SIDE)


PIN	FRONT	PIN	FRONT	PIN	FRONT	PIN	BACK	PIN	BACK	PIN	BACK
1	V _{SS}	29	DQM1	57	DQ18	85	V _{SS}	113	DQM5	141	DQ50
2	DQ0	30	CS0#	58	DQ19	86	DQ32	114	CS1#	142	DQ51
3	DQ1	31	DNU	59	V _{CC}	87	DQ33	115	RAS#	143	V _{CC}
4	DQ2	32	V _{SS}	60	DQ20	88	DQ34	116	V _{SS}	144	DQ52
5	DQ3	33	A0	61	NC	89	DQ35	117	A1	145	NC
6	V _{CC}	34	A2	62	*V _{REF}	90	V _{CC}	118	A3	146	*V _{REF}
7	DQ4	35	A4	63	CKE1	91	DQ36	119	A5	147	DNU
8	DQ5	36	A6	64	V _{SS}	92	DQ37	120	A7	148	V _{SS}
9	DQ6	37	A8	65	DQ21	93	DQ38	121	A9	149	DQ53
10	DQ7	38	A10/AP	66	DQ22	94	DQ39	122	BA0	150	DQ54
11	DQ8	39	BA1	67	DQ23	95	DQ40	123	A11	151	DQ55
12	V _{SS}	40	V _{CC}	68	V _{SS}	96	V _{SS}	124	V _{CC}	152	V _{SS}
13	DQ9	41	V _{CC}	69	DQ24	97	DQ41	125	CLK1	153	DQ56
14	DQ10	42	CLK0	70	DQ25	98	DQ42	126	*A12	154	DQ57
15	DQ11	43	V _{SS}	71	DQ26	99	DQ43	127	V _{SS}	155	DQ58
16	DQ12	44	DNU	72	DQ27	100	DQ44	128	CKE0	156	DQ59
17	DQ13	45	CS2#	73	V _{CC}	101	DQ45	129	CS3#	157	V _{CC}
18	V _{CC}	46	DQM2	74	DQ28	102	V _{CC}	130	DQM6	158	DQ60
19	DQ14	47	DQM3	75	DQ29	103	DQ46	131	DQM7	159	DQ61
20	DQ15	48	DNU	76	DQ30	104	DQ47	132	*A13	160	DQ62
21	*CB0	49	V _{CC}	77	DQ31	105	*CB4	133	V _{CC}	161	DQ63
22	*CB1	50	NC	78	V _{SS}	106	*CB5	134	NC	162	V _{SS}
23	V _{SS}	51	NC	79	CLK2	107	V _{SS}	135	NC	163	CLK3
24	NC	52	*CB2	80	NC	108	NC	136	*CB6	164	NC
25	NC	53	*CB3	81	WP***	109	NC	137	*CB7	165	**SA0
26	V _{CC}	54	V _{SS}	82	**SDA	110	V _{CC}	138	V _{SS}	166	**SA1
27	WE#	55	DQ16	83	**SCL	111	CAS#	139	DQ48	167	**SA2
28	DQM0	56	DQ17	84	V _{CC}	112	DQM4	140	DQ49	168	V _{CC}

PIN NAMES


A0 – A12	Address input (Multiplexed)
BA0-1	Select Bank
DQ0-63	Data Input/Output
CB0-7	Check bit (Data-in/Data-out)
CLK0-CLK3	Clock input
CKE0#	Clock Enable input
CS0#-CS2#	Chip select Input
RAS#	Row Address Strobe
CAS#	Column Address Strobe
WE#	Write Enable
DQM0-7	DQM
V _{CC}	Power Supply (3.3V)
V _{SS}	Ground
SDA	Serial data I/O
SCL	Serial clock
DNU	Do not use
NC	No Connect
WP	Write Protect

** These pins should be NC in the system which does not support SPD.

*** WP available on the WED3DG6335V-D2.



FUNCTIONAL BLOCK DIAGRAM

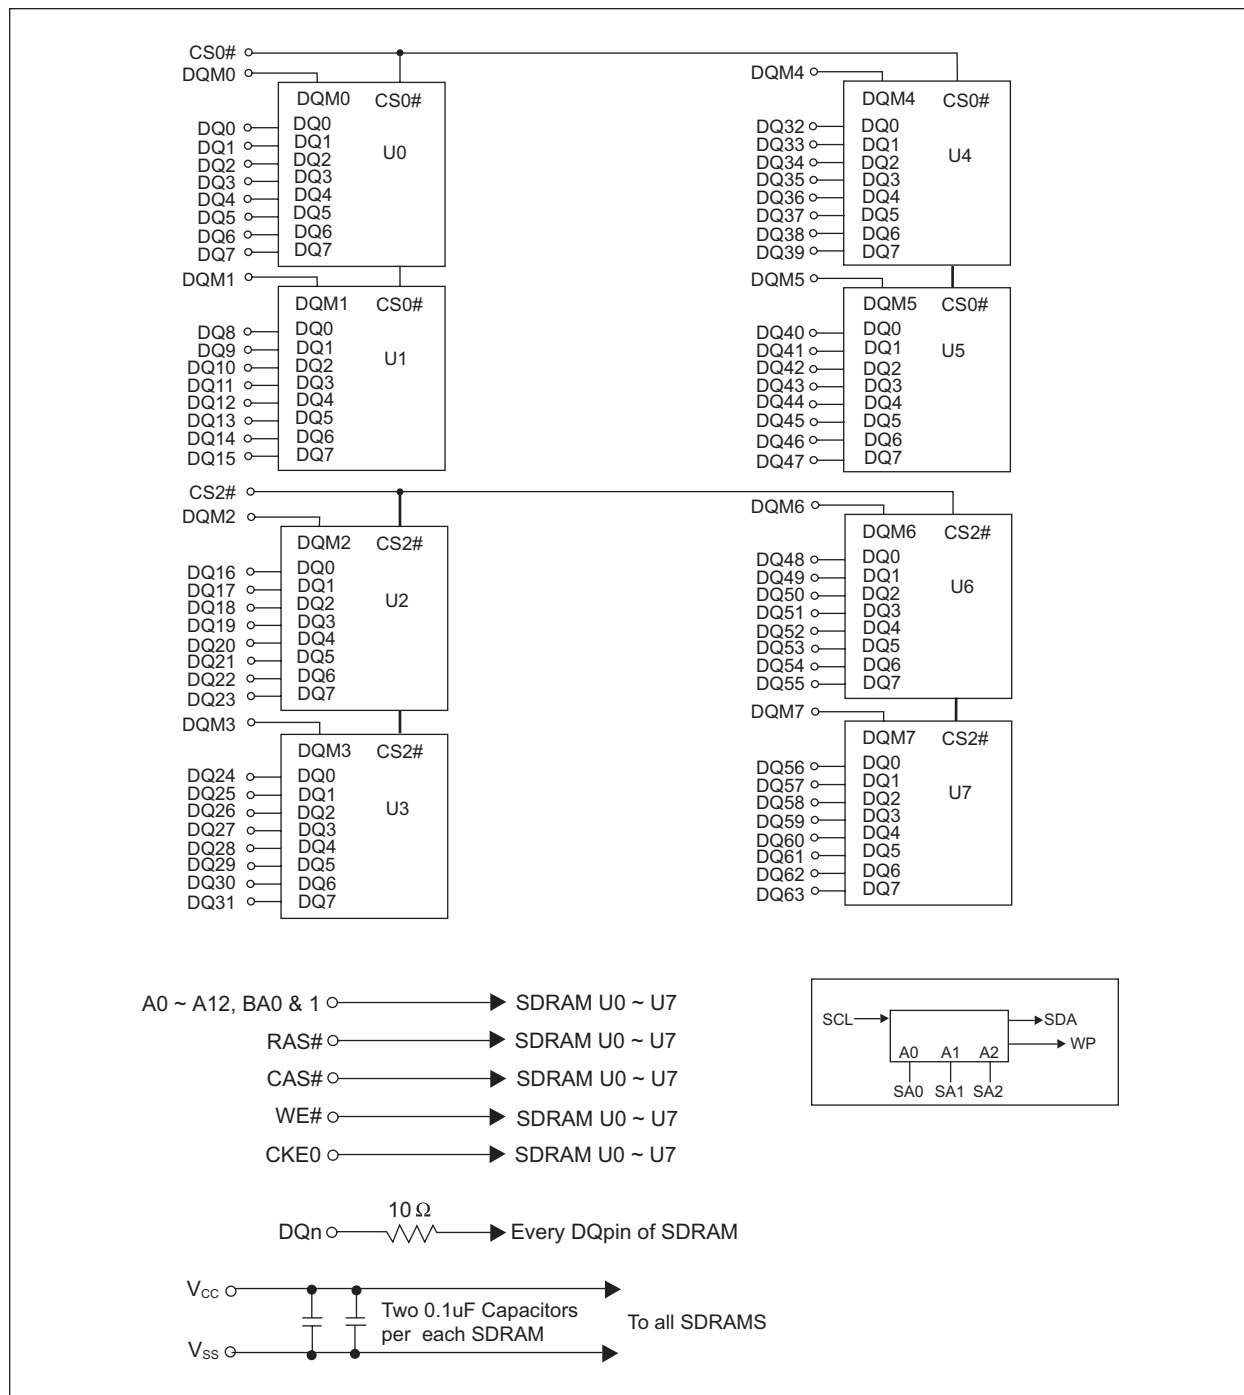



ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Value	Units
Voltage on any pin relative to V_{SS}	V_{IN}, V_{OUT}	-1.0 ~ 4.6	V
Voltage on V_{CC} supply relative to V_{SS}	V_{CC}, V_{CCQ}	-1.0 ~ 4.6	V
Storage Temperature	TSTG	-55 ~ +150	°C
Power Dissipation	PD	8	W
Short Circuit Current	IOS	50	mA

Note: Permanent device damage may occur if "ABSOLUTE MAXIMUM RATINGS" are exceeded.
Functional operation should be restricted to recommended operating condition.
Exposure to higher than recommended voltage for extended periods of time could affect device reliability.

RECOMMENDED DC OPERATING CONDITIONS

Voltage Referenced to: $V_{SS} = 0V$, $0^{\circ}C \leq T_A \leq +70^{\circ}C$

Parameter	Symbol	Min	Typ	Max	Unit	Note
Supply Voltage	V_{CC}	3.0	3.3	3.6	V	
Input High Voltage	V_{IH}	2.0	3.0	$V_{CCQ}+0.3$	V	1
Input Low Voltage	V_{IL}	-0.3	—	0.8	V	2
Output High Voltage	V_{OH}	2.4	—	—	V	$I_{OH} = -2mA$
Output Low Voltage	V_{OL}	—	—	0.4	V	$I_{OL} = -2mA$
Input Leakage Current	I_{LI}	-10	—	10	μA	3

Note:

- $V_{IH}(\max) = 5.6V$ AC. The overshoot voltage duration is $\leq 3ns$.
- $V_{IL}(\min) = -2.0V$ AC. The undershoot voltage duration is $\leq 3ns$.
- Any input $0V \leq V_{IN} \leq V_{CC}$
Input leakage currents include Hi-Z output leakage for all bi-directional buffers with Tri-State outputs.

CAPACITANCE

$T_A = 25^{\circ}C$, $f = 1MHz$, $V_{CC} = 3.3V$, $V_{REF} = 1.4V \pm 200mV$

Parameter	Symbol	Max	Unit
Input Capacitance (A0-A12)	C_{IN1}	45	pF
Input Capacitance (RAS#,CAS#,WE#)	C_{IN2}	45	pF
Input Capacitance (CKE0)	C_{IN3}	45	pF
Input Capacitance (CLK0)	C_{IN4}	10	pF
Input Capacitance (CS0#,CS2#)	C_{IN5}	25	pF
Input Capacitance (DQM0-DQM7)	C_{IN6}	8	pF
Input Capacitance (BA0-BA1)	C_{IN7}	45	pF
Data input/output capacitance (DQ0-DQ63)	C_{OUT}	9.5	pF



OPERATING CURRENT CHARACTERISTICS

$$V_{CC} = 3.3V, 0^{\circ}C \leq T_A \leq 70^{\circ}C$$

Parameters	Symbol	Conditions	Versions		Units	Note
			133	100		
Operating Current (One bank active)	I _{CC1}	Burst Length = 1 t _{RC} ≥ t _{RC(min)} I _{OL} = 0mA	800	800	mA	1
Precharge Standby Current in Power Down Mode	I _{CC2P}	CKE ≤ V _{IL(max)} , t _{CC} = 10ns	16		mA	
	I _{CC2PS}	CKE & CK ≤ V _{IL(max)} , t _{CC} = ∞	16		mA	
Precharge Standby Current in Non-Power Down Mode	I _{CC2N}	CKE ≥ V _{IH(min)} , CS ≥ V _{IH(min)} , t _{CC} = 10ns Input signals are charged one time during 20	160		mA	
	I _{CC2NS}	CKE ≥ V _{IH(min)} , CK ≤ V _{IL(max)} , t _{CC} = ∞ Input signals are stable	80		mA	
Active standby current in power- down mode	I _{CC3P}	CKE ≥ V _{IL(max)} , t _{CC} = 10ns	48		mA	
	I _{CC3PS}	CKE & CK ≤ V _{IL(max)} , t _{CC} = ∞	48			
Active standby in current non power-down mode	I _{CC3N}	CKE ≥ V _{IH(min)} , CS ≥ V _{IH(min)} , t _{CC} = 10ns Input signals are charged one time during 20ns	240		mA	
	I _{CC3NS}	CKE ≥ V _{IH(min)} , CK ≤ V _{IL(max)} , t _{CC} = ∞ input signals are stable	200		mA	
Operating current (Burst mode)	I _{CC4}	I _O = mA Page burst 4 Banks activated t _{CCD} = 2CK	880	880	mA	1
Refresh current	I _{CC5}	t _{RC} ≥ t _{RC(min)}	1760	1760	mA	2
Self refresh current	I _{CC6}	CKE ≤ 0.2V	24		mA	

Notes:

1. Measured with outputs open.
2. Refresh period is 64ms.



ORDERING INFORMATION


Part Number	Speed	CAS Latency	Height*
W3DG6435V10D2	100MHz	CL=2	30.48 (1.20")
W3DG6435V7D2	133MHz	CL=2	30.48 (1.20")
W3DG6435V75D2	133MHz	CL=3	30.48 (1.20")

Note: Modules are available in industrial temperature - 40°C to 85°C.


Part Number	Speed	CAS Latency	Height*
W3DG6335V10D2	100MHz	CL=2	30.48 (1.20")
W3DG6335V7D2	133MHz	CL=2	30.48 (1.20")
W3DG6335V75D2	133MHz	CL=3	30.48 (1.20")

Note: Available with "WP" Write Protect on pin 81.

PACKAGE DIMENSIONS

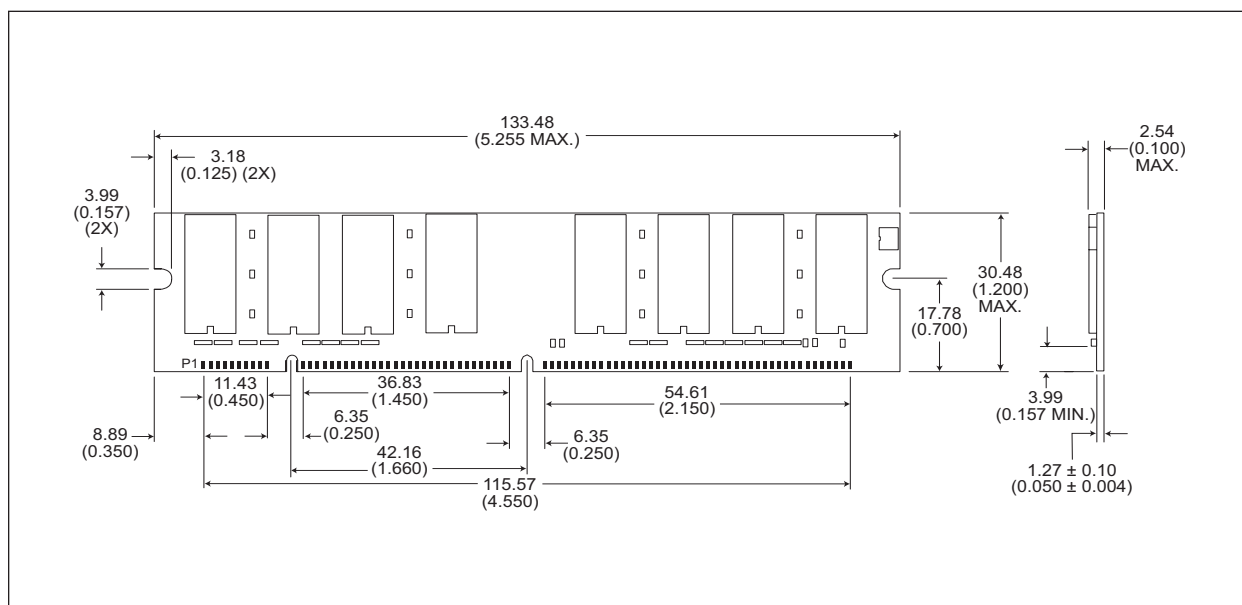

ALL DIMENSIONS ARE IN MILLIMETERS AND (INCHES)

**Document Title**

256MB - 32Mx64 SDRAM UNBUFFERED

Revision History

Rev #	History	Release Date	Status
Rev A	Created	12-18-01	Advanced
Rev B	B.1 Add "Part Number" to order info table on pg. 6 B.2 Changed module height on pg 6 to 1.1	2-14-02	Advanced
Rev C	Add "WP" Write Protect on Pin 81	4-10-02	Advanced
Rev D	Corrected mechanical drawing (1.2")	5-21-02	Advanced
Rev 0	0.1 Update CAP and I _{DD} specs 0.2 Changed from Advanced to Preliminary 0.3 Removed "ED" from part number	6-2004	Preliminary