

DC MOTOR SPEED CONTROLLER FOR CASSETTE TAPE RECORDER SYSTEM

The KIA6903P is a monolithic IC developed for speed control of general purpose DC motors. This IC consist of a reference voltage generator, current multiplier, comparator and start circuit. The IC controls the speed of a DC motor by detecting counter electromotive force from the DC motor.

FEATURES

- Wide Range of Working Power Supply Voltage.
($V_{CC}=3.5\sim 18V$)
- Very Large Starting Torque at the low Voltage.
- Large Allowable Loss due to Effective Utilization of Substrate Radiation.
- Usable for Various DC Motors by Means of Changing Constants of the External Components.

Applications



- Radio Cassette Tape Recorders

ABSOLUTE MAXIMUM RATINGS($T_a=25^{\circ}C$)

PARAMETERS	SYMBOL	LIMITS	UNIT	CONDITIONS
Supply Voltage	V_{CC}	18	V	-
Power Dissipation	P_D	1.4*	W	PCB:9cm ² , $T=1.0$

Note : Derated above $T_a=25^{\circ}C$ in the proportion of 11.2mW/ $^{\circ}C$.

BLOCK DIAGRAM

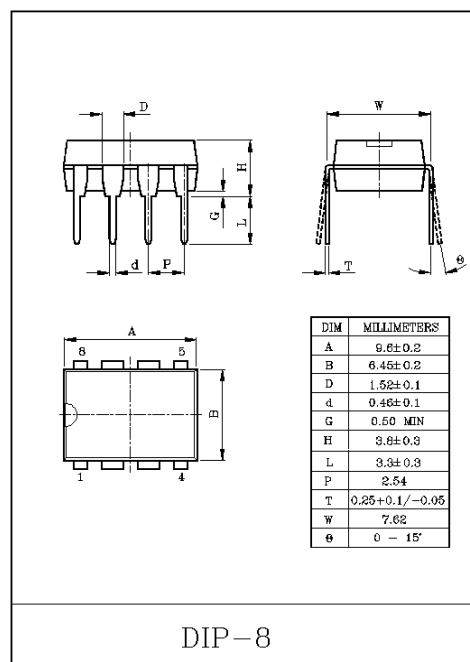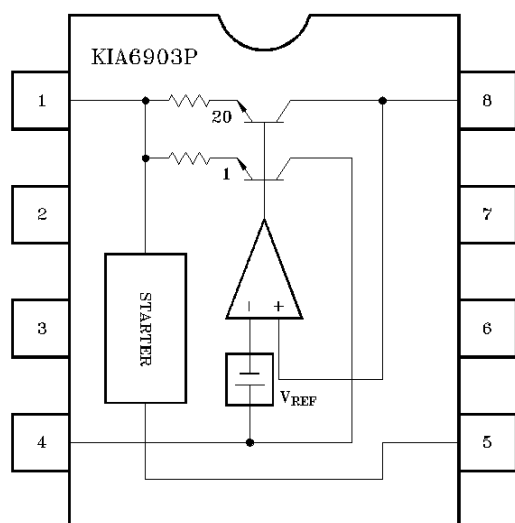

KIA6903P

ELECTRICAL CHARACTERISTICS (V_{CC}=12V, T_a=25℃)

CHARACTERISTICS	SYMBOL	TEST CIRCUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Bias Current	I ₄	Fig.1(d)	R _M =180Ω	0.5	0.8	1.2	mA
Output Saturation Voltage	V _{sat}	Fig.1(c)	V _{IN} =4.2V, R _M =4.4Ω	-	1.5	2.0	V
Reference Voltage	V _{REF}	Fig.1(a)	I _M =10mA	1.10	1.27	1.40	V
Current Ratio	K	Fig.1(b)	R _{M1} =44Ω, R _{M2} =33Ω	18	20	22	-
Reference Voltage Variance- Power Supply Voltage Variance	$\frac{\Delta V_{REF}}{V_{REF}} / \Delta V_{CC}$	Fig.1(a)	I _M =100mA, V _{CC} =6.3~18V	-	0.06	-	%/V
Current Ratio Variance- Power Supply Voltage Variance	$\frac{\Delta K}{K} / \Delta V_{CC}$	Fig.1(b)	I _M =100mA, V _{CC} =6.3~18V	-	0.4	-	%/V
Reference Voltage Variance- Motor Current Variance	$\frac{\Delta V_{REF}}{V_{REF}} / \Delta I_M$	Fig.1(a)	I _M =30~200mA	-	-0.02	-	%/mA
Current Ratio Variance- Motor Current Variance	$\frac{\Delta K}{K} / \Delta I_M$	Fig.1(b)	I _M =30~200mA	-	-0.02	-	%/mA
Reference Voltage Variance- Ambient Temperature Variance	$\frac{\Delta V_{REF}}{V_{REF}} / \Delta T_a$	Fig.1(a)	I _M =100mA, T _a =-25~75℃	-	0.01	-	%/℃
Current Ratio Variance- Ambient Temperature Variance	$\frac{\Delta K}{K} / \Delta T_a$	Fig.1(b)	I _M =100mA, T _a =-25~75℃	-	0.01	-	%/℃

TEST CIRCUIT

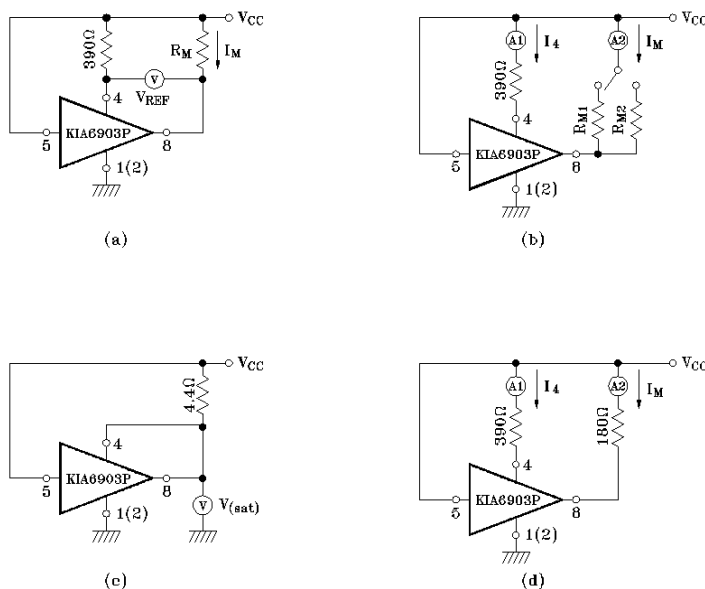


Fig.1

APPLICATION CIRCUIT

