
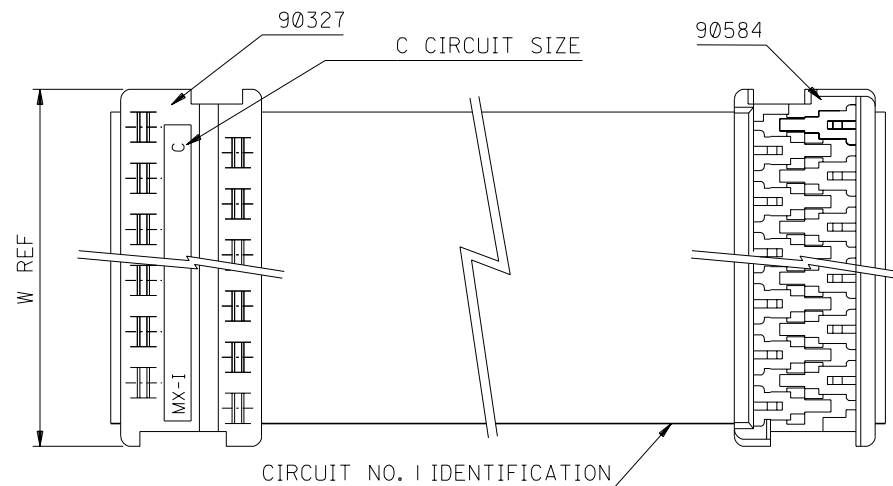


PART NO.
SEE CHART
SD-92318-001
Dwg. NO.

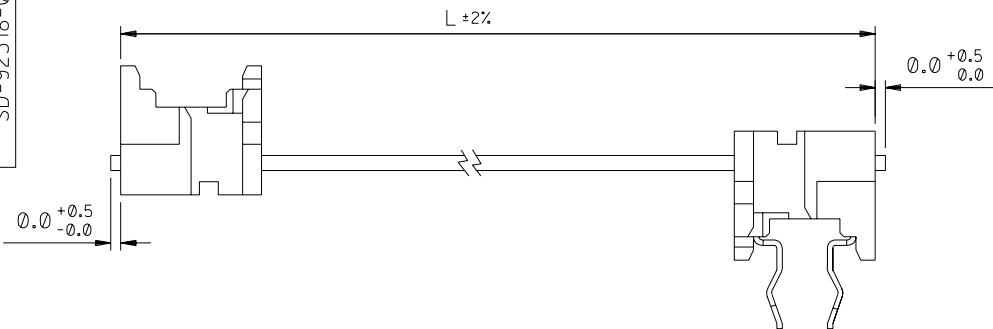

ORDERING INFORMATION

92318-****

CIRCUIT SIZE
LENGTH L IN CENTIMETRES

LENGTHS AVAILABLE FROM 6 CM TO 120 CM

e.g. 92318-1208 = 12 CIRCUIT
WITH LENGTH L OF 8 CM.

NOTE : FOR LENGTHS OF
100 CM , THE PART NO. IS 92318-***01
105 CM , THE PART NO. IS 92318-***02
110 CM , THE PART NO. IS 92318-***03
115 CM , THE PART NO. IS 92318-***04
120 CM , THE PART NO. IS 92318-***05

90327 CONNECTOR

CIRCUIT SIZE	DIMENSION W
4	7.59
6	10.13
8	12.67
10	15.21
12	17.75
14	20.29
16	22.83
18	25.37
20	27.91
22	30.45
24	32.99
26	35.53

90584 CONNECTOR

CIRCUIT SIZE	DIMENSION W
4	7.59
6	10.13
8	12.67
10	15.21
12	17.75
14	20.29
16	22.83
18	25.37
20	27.91
22	30.45
24	32.99
26	35.53

CABLE DETAILS:

28 AWG , 1.27 MM PITCH , 7 STRANDS WITH TINNED COPPER ,
GREY PVC INSULATION WITH A COLOURED POLARITY STRIPE
INDICATING CIRCUIT NO. 1 , UL 2651.

NOTES:

1. SEE PRODUCT SPECIFICATIONS PS-99020-0011.
2. SEE TERMINATION SPECIFICATION ES-99033-0001.
3. SEE TERMINATION SPECIFICATION ES-99033-0002.
4. SEE CABLE SPECIFICATION ES-99027-0006.
5. HARNESSES WILL BE 100% ELECTRICALLY TESTED FOR
SHORTS AND DISCONTINUITIES.

REF DIM ADDED
EC NO. 2003-0499
DRAWN: P.FINN 02/11/13
CHK: / /
APP: / /

QUALITY
SYMBOLS
MAJOR
CRITICAL
DESCRIPTION
REV

GENERAL TOLERANCES:
(UNLESS SPECIFIED)
mm INCH
4 PLACES ±0. ±.
3 PLACES ±0. ±.
2 PLACES ±0. ±.
1 PLACE ±0. ±.
ANGULAR: ± 1/2°
DRAFT WHERE APPLICABLE MUST
REMAIN WITHIN DIMENSIONS

SCALE
4 : 1
DESIGN UNITS
mm INCH
DRAWN BY & DATE
MCURRAN 98/06/24
CHECKED BY & DATE
AMcCANN 98/06/24
APPROVED BY & DATE
MWILHITE 98/06/24
CAD FILENAME

TITLE: PICO FLEX IDT TO BOARD-IN
STANDARD ASSEMBLIES
(Z-STYLE)
MOLEX INCORPORATED
MATERIAL NO.
DRAWING NO.
SHEET NO.
SIZE

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX
INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.