



Micro Commercial Components
20736 Marilla Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

MC78L08BP

Features

- Internal Short Circuit Current Limiting
- Internal Thermal Overload Protection
- No External Components Required

Maximum Ratings


Parameter	Symbol	Value	Unit
Input Voltage	V_1	30	V
Operating Junction Temperature	T_{OPR}	-20---+120	°C
Storage Temperature Range	T_{STG}	-55---+150	°C

**Electrical Characteristics ($V_1=14V$, $I_o=40mA$, $0^\circ C < T_j < 125^\circ C$,
 $C_1=0.33\mu F$, $C_o=0.1\mu F$, unless otherwise specified)**

Parameter	Sym	Min	Typ	Max	Test conditions
Output Voltage	V_o	7.7V	8.0V	8.3V	$T_j=25^\circ C$
		7.6V		8.4V	$10.5V \leq V_1 \leq 23V$, $I_o=1mA-40mA$
		7.6V		8.4V	$10.5V \leq V_1 \leq V_{MAX}$, $I_o=1mA-70mA$ (Note)
Load Regulation	ΔV_o		15mV	80mV	$I_o=1mA-100mA$, $T_j=25^\circ C$,
			8.0mV	40mV	$I_o=1mA-70mA$, $T_j=25^\circ C$,
Line regulation	ΔV_o		10mV 8.0mV	175mV 125mV	$10.5V \leq V_1 \leq 23V$, $T_j=25^\circ C$ $11V \leq V_1 \leq 23V$, $T_j=25^\circ C$
Quiescent Current	I_q ΔI_q		2.0mA	5.5mA 1.5mA	$11V \leq V_1 \leq 23V$
Quiescent Current Change	ΔI_q			0.1mA	$1mA \leq I_o \leq 40mA$
Output Noise Voltage	V_N		49uV		$10Hz \leq f \leq 100KHz$
Ripple Rejection	RR	39dB	70dB		$11V \leq V_1 \leq 23V$ $f=120Hz$, $T_j=25^\circ C$
Dropout Voltage	V_d		1.7V		$T_j=25^\circ C$


*Note: Bypass Capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators

Typical Application:

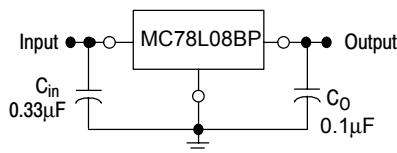

Three-Terminal Low Current Positive Voltage Regulator

TO-92

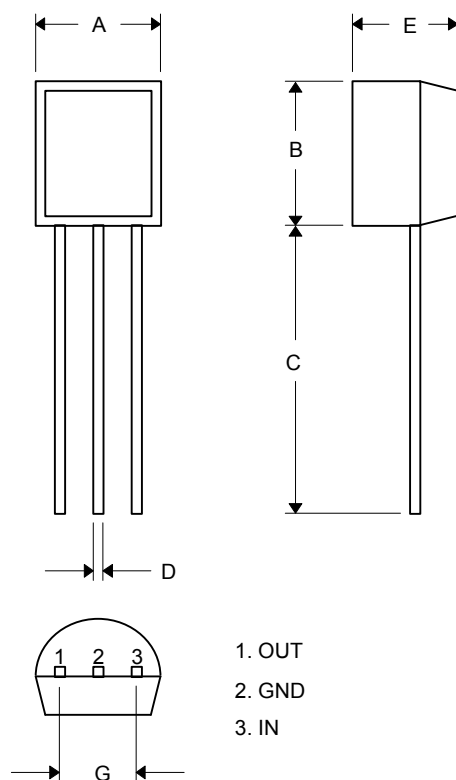

DIMENSIONS					
DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.175	.185	4.45	4.70	
B	.175	.185	4.46	4.70	
C	.500	---	12.7	---	
D	.016	.020	0.41	0.63	
E	.135	.145	3.43	3.68	
G	.095	.105	2.42	2.67	