
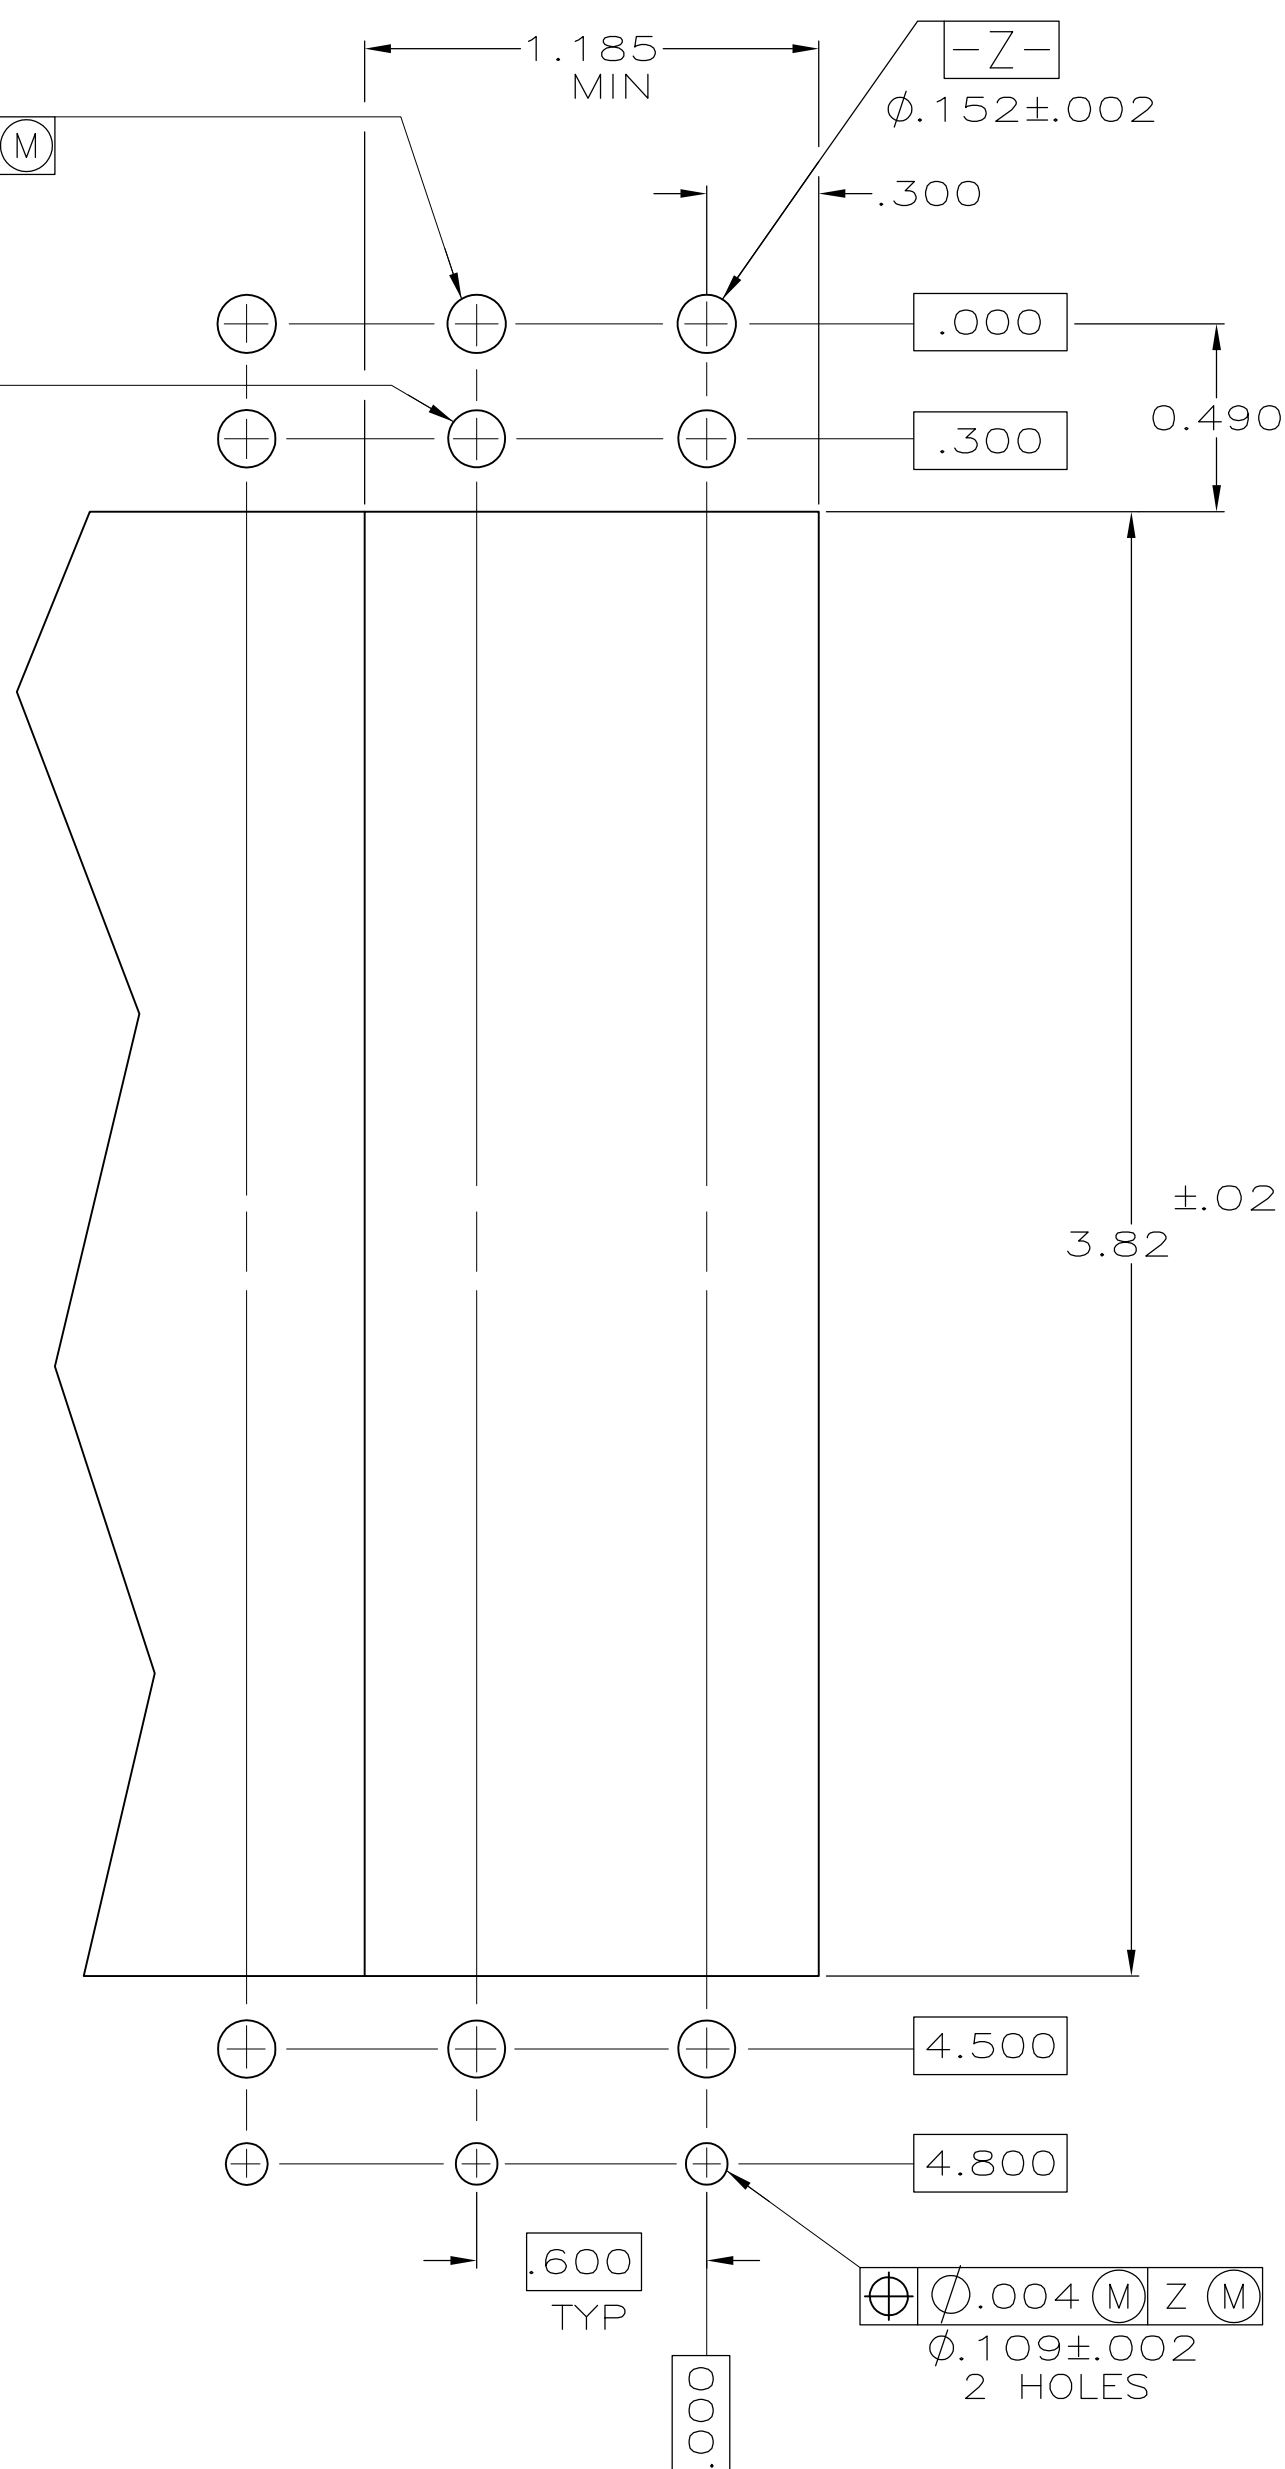


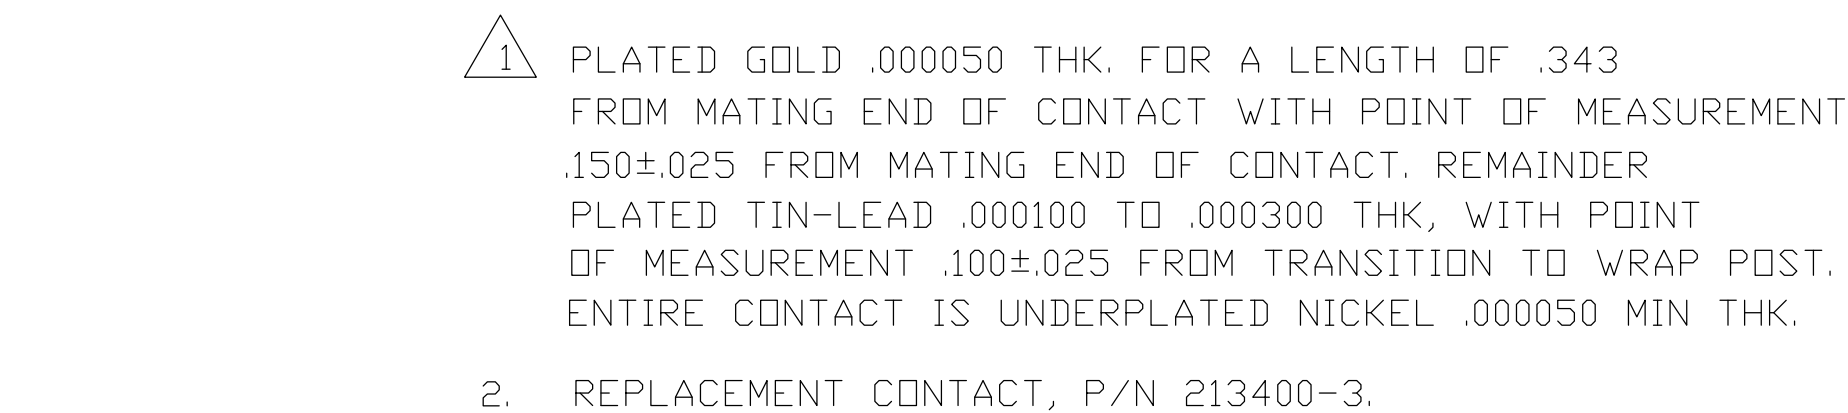

Top view of the connector showing pin layout, row identification (A-E), and column identification (1-13). Callouts include: MOLDED CAVITY AND ROW IDENTIFICATION, Ø.125 REF HOLE (THRU COVER) TYP, PARTIAL PIN COVER SHOWN, and Ø.250±.015,4 PLC.

QUANTITY FOR ASSY		THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG. 1-26-87 H.R. SHAFFER 1-26-87 K. AYER PRODUCT SPEC — APPLICATION SPEC — WEIGHT — CUSTOMER DRAWING		Tyco Electronics Corporation Harrisburg, PA 17105-3608 ASSEMBLY RECEPTACLE 75 POSITION, W.I.U. CONNECTOR SIZE, DATE, CODE, DRAWING NO. A-1 00779 ©-2153396 SCALE = SHEET 1 of 1 REV P	
DIMENSIONS: INCHES		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		DOWEL PINS 1/2 PLG ± — 1/2 PLG ± — 3/4 PLG ± .010 1/2 PLG ± — ANGLES ± — FINISH		RESTRICTED TO SEE CALL OUT SEE CALL OUT	