


Features

- * Low power consumption.
- * Suitable for pulsed operation.
- * Most suitable for use like audio panel indicator.
- * Fits 2mm hole in panels up to 4.5mm(0.177") thick.
- * Long life solid state reliability.

Package Dimensions

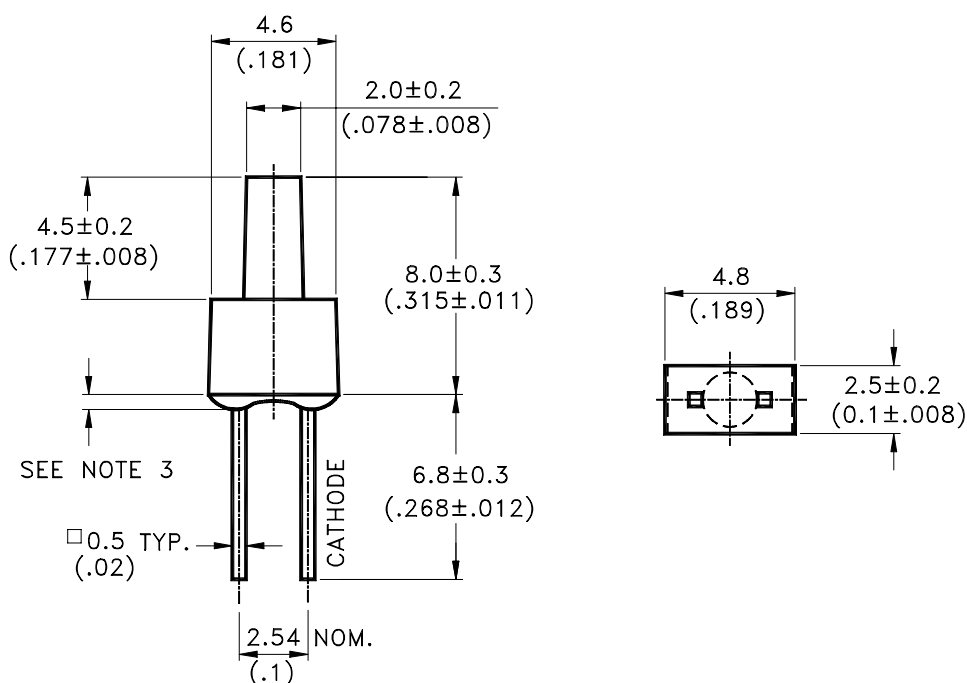

Part No.	Lens	Source
LTL-		Color
1234A	Green Diffused	Green

NOTES:

1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.25\text{mm}(.010")$ unless otherwise noted.
3. Protruded resin under flange is 1.0mm(.04") max.
4. Lead spacing is measured where the leads emerge from the package.
5. Specifications are subject to change without notice.



L I T E - O N E L E C T R O N I C S , I N C .

Property of Lite-On Only

Absolute Maximum Ratings at Ta=25°C

Parameter	Maximum Rating	Unit
Power Dissipation	100	mW
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	120	mA
Continuous Forward Current	30	mA
Derating Linear From 50°C	0.4	mA/°C
Reverse Voltage	5	V
Operating Temperature Range	-55°C to + 100°C	
Storage Temperature Range	-55°C to + 100°C	
Lead Soldering Temperature [1.6mm(.063") From Body]	260°C for 5 Seconds	

Electrical Optical Characteristics at Ta=25°C

Parameter	Symbol	Part No. LTL-	Min.	Typ.	Max.	Unit	Test Condition
Luminous Intensity	I _v	1234AP1	0.7	1.7		mcd	I _F = 10mA Note 1,4
Viewing Angle	2 $\theta_{1/2}$	1234AP1		120		deg	Note 2 (Fig.6)
Peak Emission Wavelength	λ_p	1234AP1		565		nm	Measurement @Peak (Fig.1)
Dominant Wavelength	λ_d	1234AP1		569		nm	Note 3
Spectral Line Half-Width	$\Delta \lambda$	1234AP1		30		nm	
Forward Voltage	V _F	1234AP1		2.1	2.6	V	I _F = 20mA
Reverse Current	I _R	1234AP1			100	μ A	V _R = 5V
Capacitance	C	1234AP1		35		pF	V _F = 0 , f = 1MHz

- NOTE: 1. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
2. $\theta_{1/2}$ is the off-axis angle at which the luminous intensity is half the axial luminous intensity.
3. The dominant wavelength, λ_d is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device.
4. I_v needs $\pm 15\%$ additinary for guaranteed limits.

Typical Electrical / Optical Characteristics Curves

(25°C Ambient Temperature Unless Otherwise Noted)

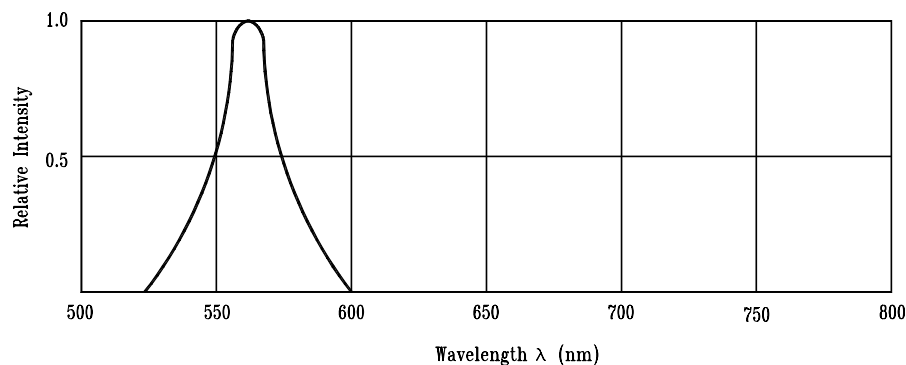


Fig.1 Relative Intensity vs. Wavelength




Fig.2 Forward Current vs. Forward Voltage




Fig.3 Forward Current Derating Curve




Fig.4 Relative Luminous Intensity vs. Forward Current

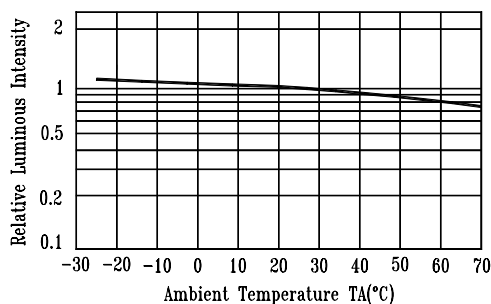


Fig.5 Luminous Intensity vs. Ambient Temperature




Fig.6 Spatial Distribution

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Lite-On:](#)

[LTL-1234A](#)