



LDP24AS

TRANSIL LOAD DUMP PROTECTION


FEATURES

- TRANSIENT VOLTAGE SUPPRESSOR DIODE ESPECIALLY DESIGNED FOR LOAD DUMP EFFECT PROTECTION
- HIGH SURGE CURRENT CAPABILITY :
40 A / 40 ms EXPONENTIAL WAVE
- COMPLIANT WITH MAIN STANDARDS SUCH AS:
-ISO / DTR 7637

DESCRIPTION

Transient voltage suppressor diode especially developed for sensitive circuit protection in automotive systems such as dash board, car radios etc.

Its high surge current capability and instantaneous response to transients provide an efficient protection against the load dump effect.

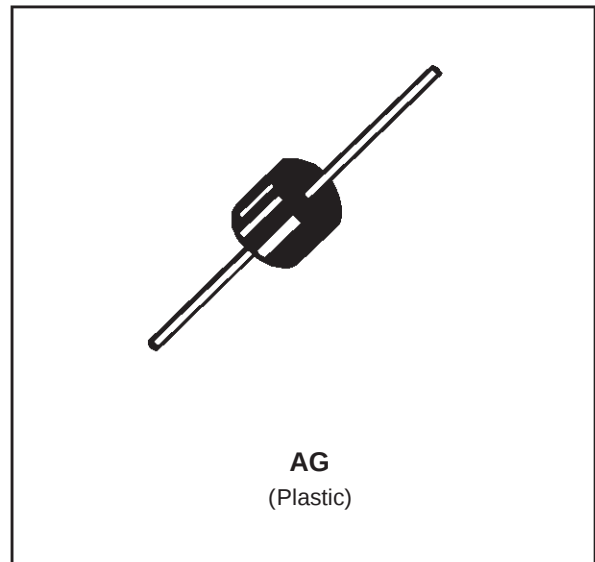

ABSOLUTE RATINGS (limiting values)

Symbol	Parameter		Value	Unit
V _{PP}	Peak pulse load dump overvoltage See note 1 - 2	T _{amb} = 85°C	120	V
P	Power dissipation on infinite heatsink	T _{amb} = 100°C	5	W
I _{FSM}	Non repetitive surge peak forward current.	T _j initial = 25°C t = 10 ms	200	A
T _{stg} T _j	Storage and junction temperature range.		- 65 to + 175 170	°C °C
T _L	Maximum lead temperature for soldering during 10 sec at 4 mm from case.		230	°C

THERMAL RESISTANCES

Symbol	Parameter		Value	Unit
R _{th} (j-l)	Junction-leads on infinite heatsink		15	°C/W
R _{th} (j-a)	Junction to ambient on printed circuit.	L _{lead} = 10 mm	50	°C/W

Note 1 :


For surges greater than the maximum values,
the diode will present a short-circuit Anode - Cathode.

Note 2 : Surge generator

LDP24AS

ELECTRICAL CHARACTERISTICS

Symbol	Parameter
V_{RM}	Stand-off voltage.
V_{BR}	Breakdown voltage.
V_{CL}	Clamping voltage.
I_{PP}	Peak pulse current.
αT	Temperature coefficient of V_{BR} .
C	Capacitance
$t_{clamping}$	Clamping time (0V to V_{BR}): $t_p = 1ps$
V_F	Peak forward voltage drop ($I_{FM} = 10A$) $V_F = 0.9$ Volt Typ.

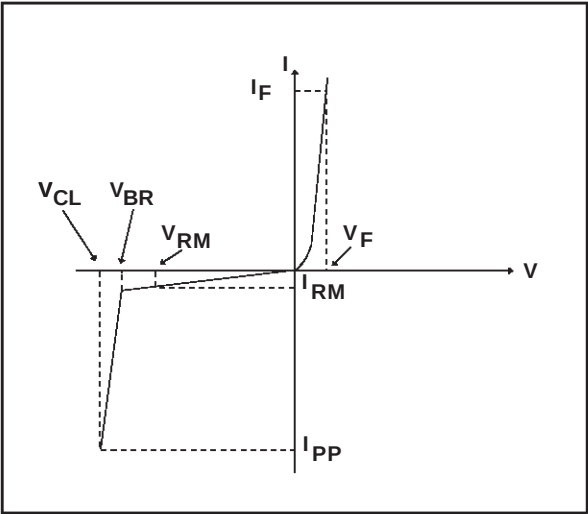

Symbol	Test Conditions	Min.	Typ.	Max.	Unit
I_{RM}	$T_C = -40^{\circ}C$ $T_C = 25^{\circ}C$ $T_C = 85^{\circ}C$ $V_{RM} = 24V$			10 50 300	μA
V_{BR}	$T_C = 25^{\circ}C$ $I_R = 1mA$	25		32	V
V_{CL}	$T_C = -40^{\circ}C$ $T_C = 25^{\circ}C$ $T_C = 85^{\circ}C$ $I_{PP} = 40A$ (Note 2)			36 38 40	V
αT	$T_C = 25^{\circ}C$			9.6	$10^{-4}/^{\circ}C$
C	F = 1MHz $V_R = 0V$		8000		pF

Note 2 : Surge generator

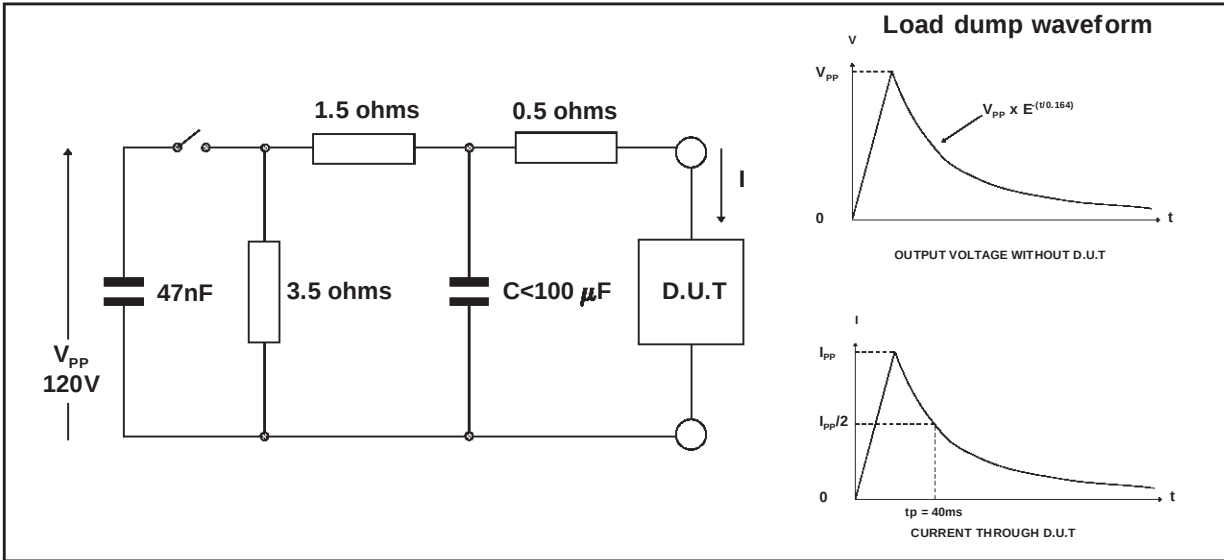


Figure 1 : Peak pulse power versus exponential pulse duration (T_j initial = 85°C).


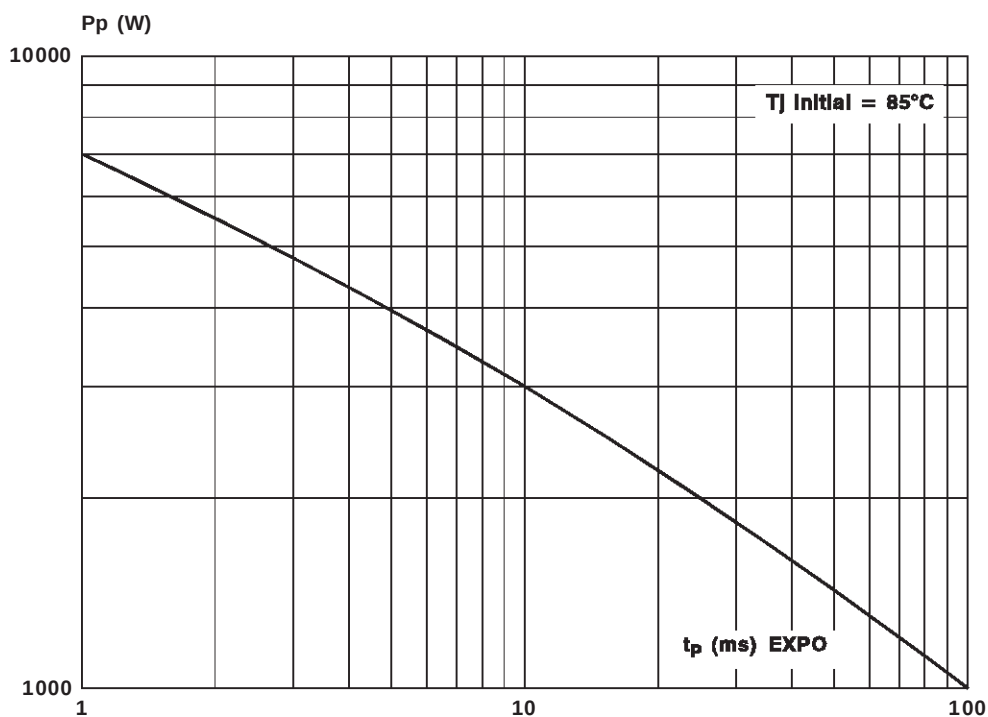


Figure 2 : Clamping voltage versus peak pulse current (T_j initial = 85°C).

exponential waveform

$t = 40$ ms-----

$t = 1$ ms_____

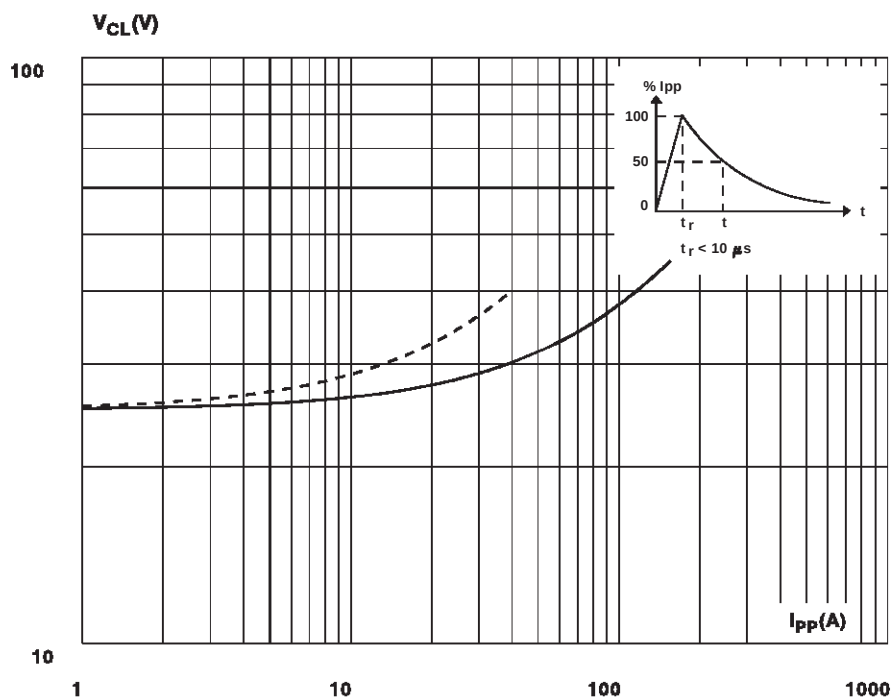

LDP24AS

Figure 3 : Peak pulse current versus exponential pulse duration (T_j initial = 85°C).

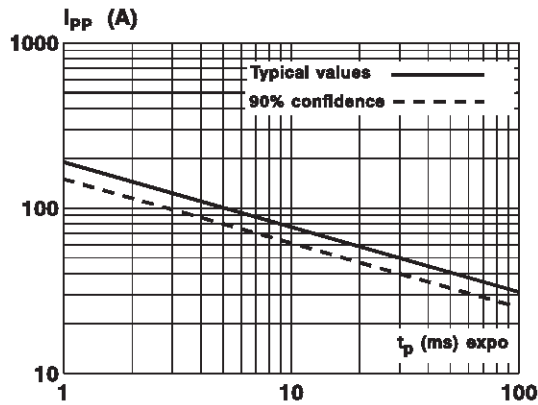


Figure 4 : Peak pulse power versus junction temperature.

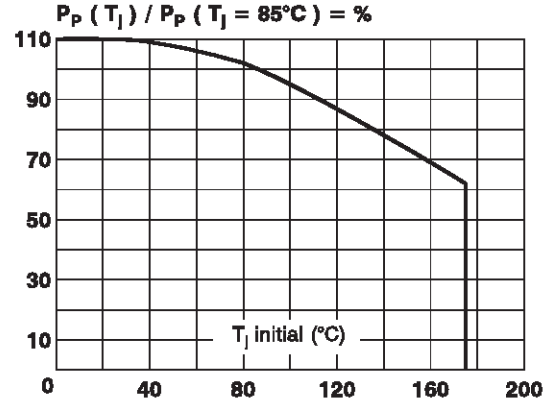


Figure 5 : Transient thermal impedance junction-ambient versus pulse duration (device mounted on PC Board with $L_{lead} = 10\text{mm}$).



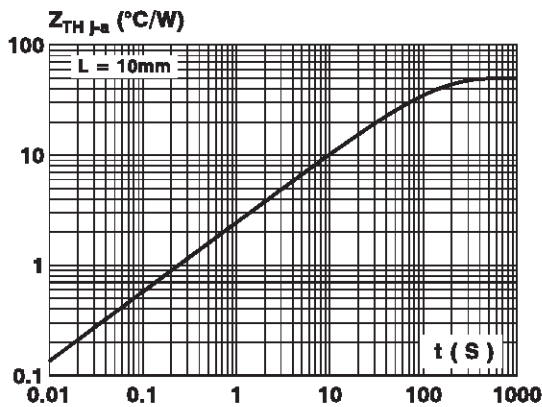


Figure 6 : Peak forward current versus peak forward voltage drop (typical values).

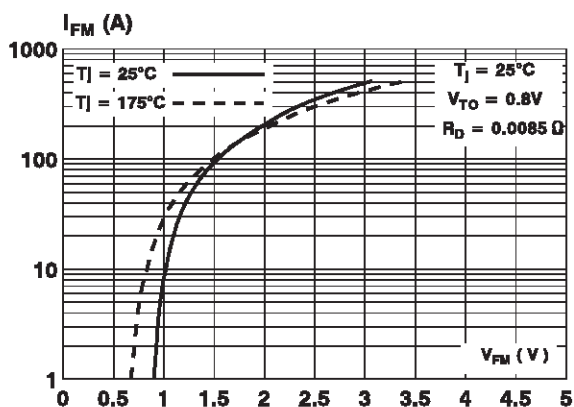


ORDER CODE

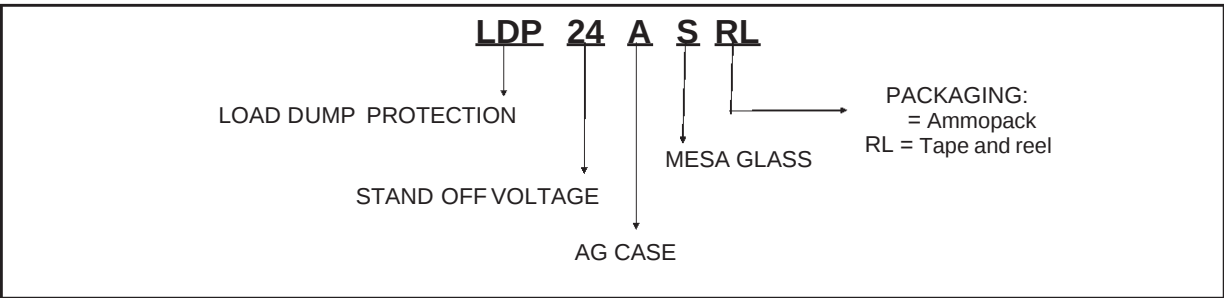

PACKAGE MECHANICAL DATA

AG (Plastic)

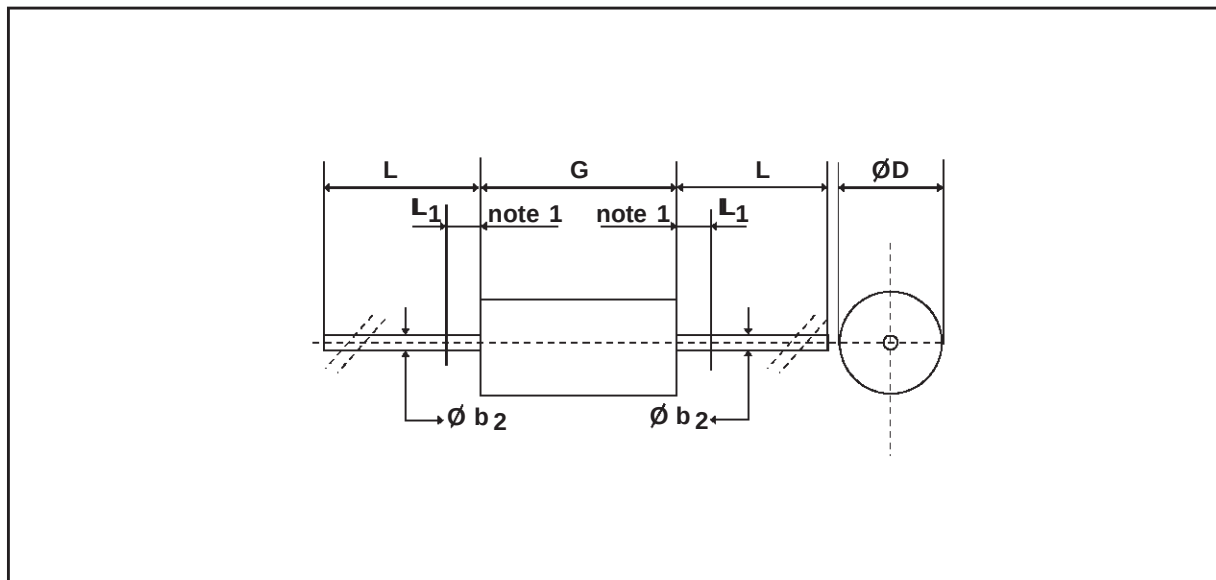

REF.	DIMENSIONS				NOTES
	Millimeters		Inches		
	Min.	Max.	Min.	Max.	
A		9		0.354	1- The lead is not controlled within zone L1. 2- The minimum axial length within which the device may be placed bent at right angles is 0.79" (20 mm).
B	20		0.787		
Ø C		8		0.315	
Ø D	1.35	1.45	0.053	0.057	
L1		1.27		0.050	

MARKING : Logo, Date Code, Type Code, Cathode Band.

Weight = 2.16 g.

Packaging : standard packaging is in tape and reel.

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics

© 1998 STMicroelectronics - Printed in Italy - All rights reserved.

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - France - Germany - Italy - Japan - Korea - Malaysia - Malta - Mexico - Morocco - The Netherlands - Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A.