

MS906C2

(200V / 20A)

LOW LOSS SUPER HIGH SPEED RECTIFIER

Features

- Surface-mount device
- Low V_F
- Super high speed switching
- High reliability by planer design

Applications

- High speed power switching

Maximum ratings and characteristics

- Absolute maximum ratings

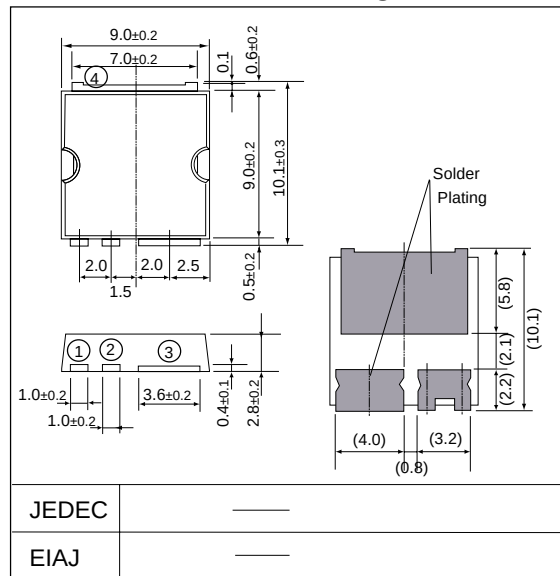
Item	Symbol	Conditions	Rating	Unit
Repetitive peak reverse voltage	V_{RRM}		200	V
Average output current	I_O	duty=1/2, $T_c=105^{\circ}\text{C}$ Square wave	20 *	A
Surge current	I_{FSM}	Sine wave 10ms , 1shot	80	A
Operating junction temperature	T_j		-40 to +150	$^{\circ}\text{C}$
Storage temperature	T_{stg}		-40 to +150	$^{\circ}\text{C}$

*Output current of centertap full wave connector


- Electrical characteristics ($T_a=25^{\circ}\text{C}$ Unless otherwise specified)







Item	Symbol	Conditions	Max.	Unit
Forward voltage drop	V_{FM}	$I_{FM}=10\text{A}$	0.95	V
Reverse current	I_{RRM}	$V_R=V_{RRM}$	200	μA
Reverse recovery time	t_{rr}	$I_F=0.1\text{A}$, $I_R=0.2\text{A}$	35	ns
Thermal resistance	$R_{th(j-c)}$	Junction to case	2.0	$^{\circ}\text{C/W}$

Outline drawings, mm



Connection diagram

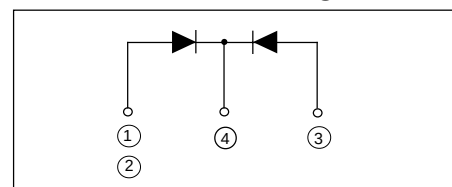

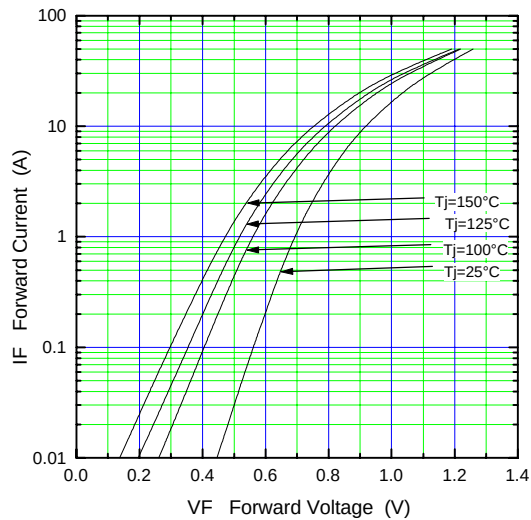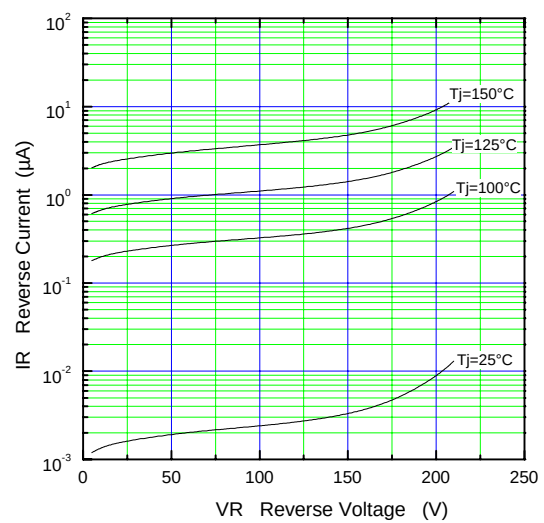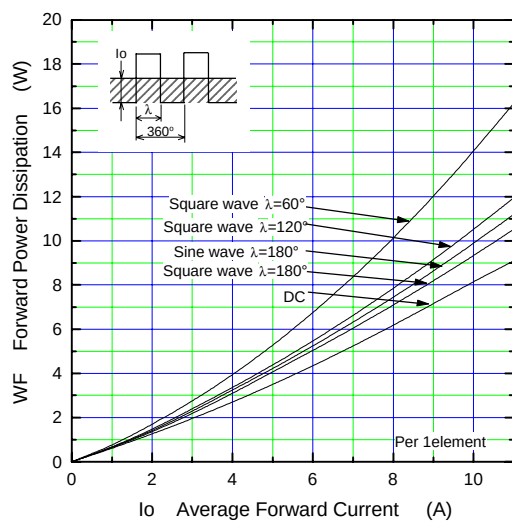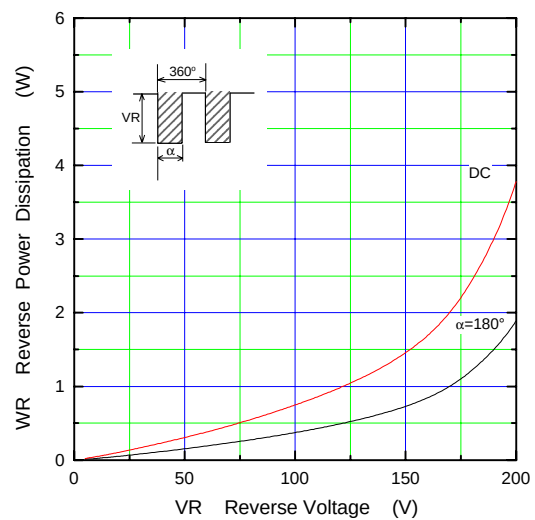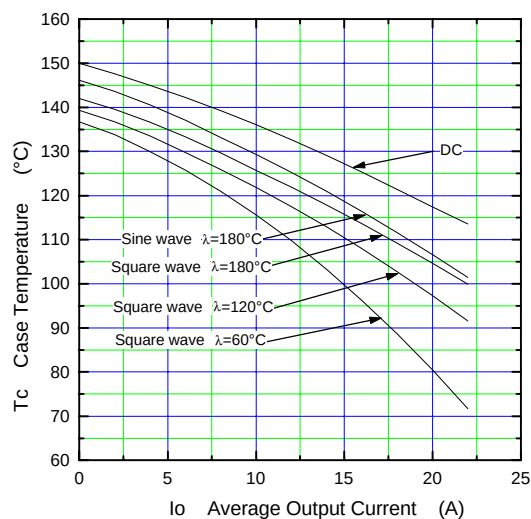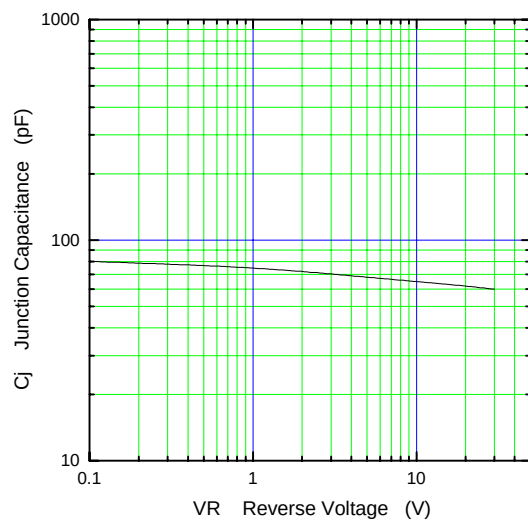■ CharacteristicsForward Characteristic (typ.)Reverse Characteristic (typ.)Forward Power DissipationReverse Power DissipationCurrent Derating (I_o - T_c)Junction Capacitance Characteristic (typ.)

λ : Conduction angle of forward current for each rectifier element
 I_o : Output current of center-tap full wave connection

