

# 2.4/4.9 GHz External Vehicle or Enclosure Direct Mount Antenna

Pulse Part Number SLPT2400/5900DMN



Pulse is proud to introduce the SLPT (Shadow Low Profile Transit) product line for Public Safety, WLAN, LTE and 3G/4G applications. These rugged, aesthetically pleasing antennas provide a smaller, slimmer option to our current LPT product line without sacrificing mechanical or electrical performance. The product line includes both NMO and tamper-proof direct mount products, which will support multiple cable and connector options.

SLPT antennas were designed to perform over the high-percentage bandwidth applications prevalent in the market today. As a new product line, these antennas were created specifically to serve emerging applications such as 700 MHz Public Safety, LTE, Smart Grid and WLAN. These value-oriented antennas provide a cost-effective, high-performance solution for LTE and 802.11n MIMO applications as well.

## Features

- Direct mount models
- Multiple and dual frequency products available
- Shorter, slimmer profile without sacrificing mechanical performance
- IP-67 rating when installed to compliant surface
- RoHS Compliant Product

## Applications

- Public Safety & LTE
- 802.11n Applications
- M2M and Smart Metering

# 2.4/4.9 GHz External Vehicle or Enclosure Direct Mount Antenna

Pulse Part Number SLPT2400/5900DMN

## Electrical Specifications

Frequency [MHz]	2400 - 2500 / 4900-5900
Nominal Impedance [ $\Omega$ ]	50
Gain [dBi avg]	4.3 / 5.5
VSWR	2.0:1
Polarization	Vertical
Horizontal Plane	Omni
Power Rating [W]	10

## Environmental Specifications


Operating Temperature [ $^{\circ}\text{C}$ ]	-40 to +85
Storage Temperature [ $^{\circ}\text{C}$ ]	-40 to +85
Relative Humidity [%]	100

## Mechanical Specifications

Radome Material	PC + ABS Plastic
Color	Black
Ingress Protection	IP-67
Weight [oz/g]	4.6 / 130.4
Dimensions [in/mm]	2.5 H x 1.5 $\varnothing$ base / 63.5 x 38.1 $\varnothing$ base
Mounting	Direct 3/4" (19.05 mm) hole
Connector	N Female

**NOTE:** Performance measurements are taken on an 18" (450 mm) diameter ground plane. A similar ground plane size is recommended for optimal performance.

Vertical Plane - 2.4 GHz

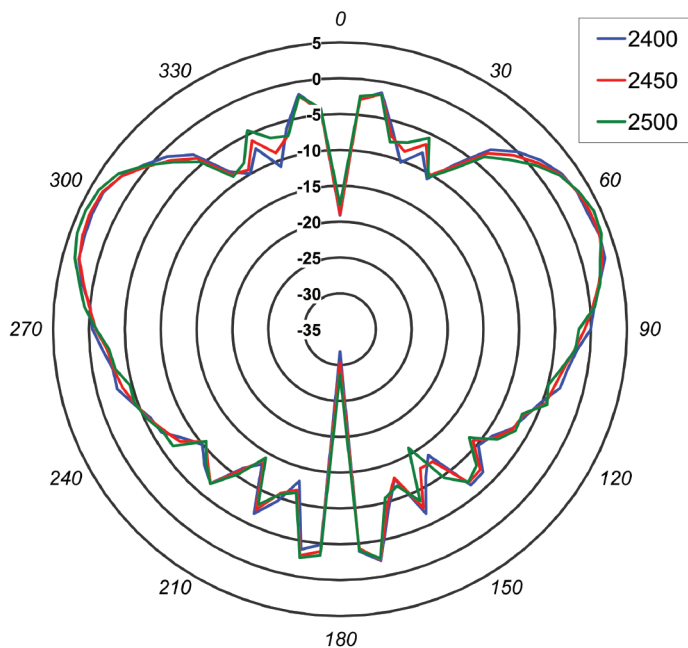

Vertical Plane - 4.9 GHz

