


300 mA very low dropout linear regulator IC



DFN4 1x1

Maturity status link

[LD39030](#)

Features

- Input voltage from 1.5 to 5.5 V
- Ultra low dropout voltage (300 mV typ. at 300 mA load)
- Very low quiescent current (20 μ A typ. at no load, 0.03 μ A typ. in off mode)
- Output voltage tolerance: $\pm 0.5\%$ (A version) or $\pm 2.0\%$ @ 25 °C (standard version)
- 300 mA guaranteed output current
- High PSRR (80 dB@1 kHz, 50 dB@100 kHz)
- Wide range of output voltages available on request: from 0.8 V up to 5.0 V in 50 mV step
- Logic-controlled electronic shutdown
- Internal soft-start
- Optional output voltage discharge feature
- Compatible with ceramic capacitor $C_{OUT} = 0.47\ \mu$ F
- Internal constant current and thermal protections
- Available in DFN4 1x1
- Operating temperature range: -40 °C to 125 °C

Applications

- Mobile phones
- Tablets
- Digital still cameras (DSC)
- Cordless phones and similar battery-powered systems
- Portable media players

Description

The **LD39030** high accuracy voltage regulator provides 300 mA of maximum current from an input voltage ranging from 1.5 V to 5.5 V, with a typical dropout voltage of 300 mV.


It is available in DFN4 1 x 1 package, allowing the maximum space saving.

The device is stabilized with a ceramic capacitor on the output. The ultra low drop voltage, low quiescent current and low noise features, together with the internal soft-start circuit, make the **LD39030** suitable for low power battery-operated applications.

An enable logic control function puts the **LD39030** in shutdown mode allowing a total current consumption lower than 0.1 μ A. Constant current and thermal protection are provided.

1 Diagram

Figure 1. Block diagram

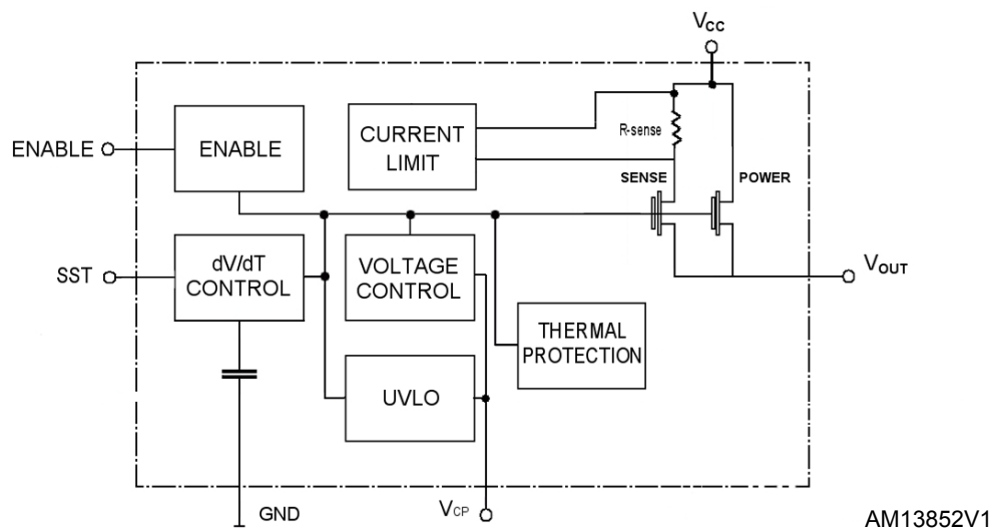

Note: The output discharge MOSFET is optional.

2 Pin configuration

Figure 2. Pin connection (top view)


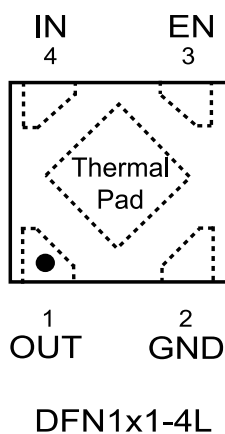


Table 1. Pin description

Pin n° DFN4 1x1	Symbol	Function
1	OUT	Output voltage
2	GND	Common ground
3	EN	Enable pin logic input: Low = shutdown, High = active
4	IN	Input voltage
Thermal pad	GND	Connect to GND on the PCB

3 Typical application

Figure 3. Typical application circuits

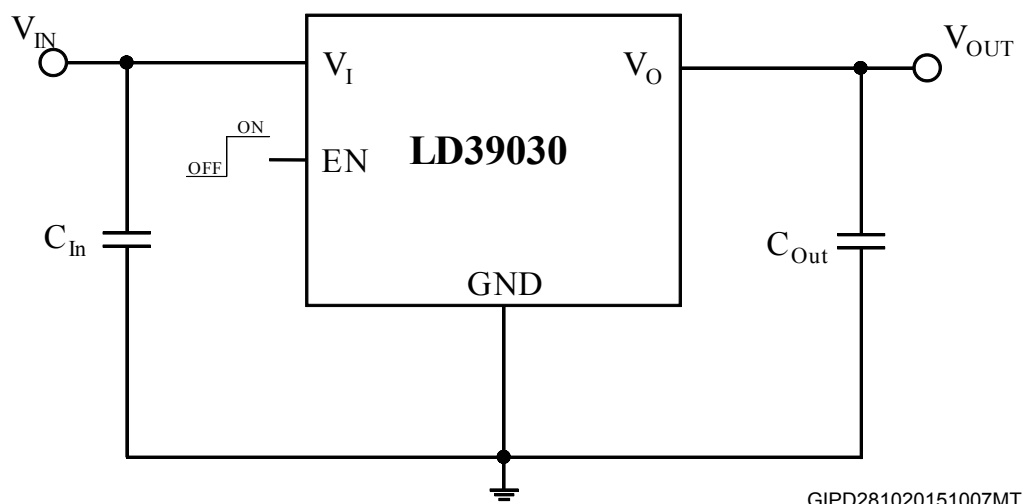

4 Maximum ratings

Table 2. Absolute maximum ratings

Symbol	Parameter	Value	Unit
V_{IN}	Input voltage	- 0.3 to 7	V
V_{OUT}	Output voltage	- 0.3 to $V_{IN} + 0.3$	V
V_{EN}	Enable input voltage	- 0.3 to 7	V
I_{OUT}	Output current	Internally limited	mA
P_D	Power dissipation	Internally limited	mW
T_{STG}	Storage temperature range	- 40 to 150	°C
T_{OP}	Operating junction temperature range	- 40 to 125	°C

Note: Absolute maximum ratings are those values beyond which damage to the device may occur. Functional operation under these conditions is not implied. All values are referred to GND.

Table 3. Thermal data

Symbol	Parameter	Value	Unit
R_{thJA}	Thermal resistance junction-ambient	250	°C/W

Table 4. ESD Performance

Symbol	Parameter	Test conditions	Value	Unit
ESD	ESD Protection voltage	HBM	4	kV
		MM	400	V
		CDM	500	V

5 Electrical characteristics

$T_J = 25\text{ }^{\circ}\text{C}$, $V_{IN} = V_{OUT(NOM)} + 1\text{ V}$, $C_{IN} = C_{OUT} = 1\text{ }\mu\text{F}$, $I_{OUT} = 1\text{ mA}$, $V_{EN} = V_{IN}$, unless otherwise specified.

Table 5. Electrical characteristics

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
V_{IN}	Operating input voltage		1.5		5.5	V
V_{OUT}	V_{OUT} accuracy (LD39030)	$I_{OUT} = 1\text{ mA}$, $T_J = 25\text{ }^{\circ}\text{C}$	-2		2	%
		$I_{OUT} = 1\text{ mA}$, $-40\text{ }^{\circ}\text{C} < T_J < 125\text{ }^{\circ}\text{C}$	-3		3	%
V_{OUT}	V_{OUT} accuracy (LD39030A)	$I_{OUT} = 1\text{ mA}$, $T_J = 25\text{ }^{\circ}\text{C}$	-0.5		0.5	%
		$I_{OUT} = 1\text{ mA}$, $-40\text{ }^{\circ}\text{C} < T_J < 125\text{ }^{\circ}\text{C}$	-1.5		1.5	%
ΔV_{OUT}	Static line regulation ⁽¹⁾	$V_{OUT(NOM)} + 1\text{ V} \leq V_{IN} \leq 5.5\text{ V}$, $I_{OUT} = 10\text{ mA}$		0.02		%V
		$-40\text{ }^{\circ}\text{C} < T_J < 125\text{ }^{\circ}\text{C}$			0.2	
ΔV_{OUT}	Static load regulation	$I_{OUT} = 0\text{ mA}$ to 300 mA		18		mV
		$-40\text{ }^{\circ}\text{C} < T_J < 125\text{ }^{\circ}\text{C}$			0.01	%/mA
V_{DROP}	Dropout voltage	$I_{OUT} = 30\text{ mA}$, $V_{OUT} = 2.8\text{ V}$		35		mV
		$I_{OUT} = 300\text{ mA}$, $V_{OUT} = 2.8\text{ V}$		330		
		$-40\text{ }^{\circ}\text{C} < T_J < 125\text{ }^{\circ}\text{C}$				
e_N	Output noise voltage	10 Hz to 100 kHz, $I_{OUT} = 10\text{ mA}$		45		$\mu\text{VRMS/V}$
SVR	Supply voltage rejection	$V_{IN} = V_{OUT(NOM)} + 1\text{ V} \pm V_{RIPPLE}$ $V_{RIPPLE} = 0.2\text{ V}$ Freq. = 1 kHz $I_{OUT} = 30\text{ mA}$		80		dB
		$V_{IN} = V_{OUT(NOM)} + 1\text{ V} \pm V_{RIPPLE}$ $V_{RIPPLE} = 0.2\text{ V}$ Freq. = 100 kHz $I_{OUT} = 30\text{ mA}$		55		
I_Q	Quiescent current	$I_{OUT} = 0\text{ mA}$		20	40	μA
		$I_{OUT} = 300\text{ mA}$		130		
$I_{Standby}$	Standby Current	V_{IN} input current in OFF MODE: $V_{EN} = \text{GND}$		0.03	1	μA
I_{SC}	Short circuit current	$R_L = 0$		480		mA
R_{ON}	Output voltage discharge MOSFET	(only on LD39030DT, LD39030ADT)		100		Ω
V_{EN}	Enable input logic low	$V_{IN} = 1.5\text{ V}$ to 5.5 V			0.4	V

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
V_{EN}		$-40\text{ }^{\circ}\text{C} < T_J < 125\text{ }^{\circ}\text{C}$				V
	Enable input logic high	$V_{IN} = 1.5\text{ V to } 5.5\text{ V}$ $-40\text{ }^{\circ}\text{C} < T_J < 125\text{ }^{\circ}\text{C}$	1			
I_{EN}	Enable pin input current	$V_{EN} = V_{IN}$			100	nA
$T_{ON}^{(2)}$	Turn on time			100		μs
T_{SHDN}	Thermal shutdown			160		$^{\circ}\text{C}$
	Hysteresis			20		
C_{OUT}	Output capacitor	Capacitance (see)Figure 17. Stability area vs. (C_{OUT} , ESR)	0.47		22	μF

1. Not applicable for $V_{OUT(NOM)} > 4.5\text{ V}$

2. Turn-on time is time measured between the enable input just exceeding V_{EN} high value and the output voltage just reaching 95 % of its nominal value

6 Application information

6.1 Soft-start function

The LD39030 has an internal soft start circuit. By increasing the startup time up to 100 μ s, without the need of any external soft start capacitor, this feature is able to keep the regulator inrush current at startup under control.

6.2 Output discharge function

The LD39030 integrates a MOSFET connected between Vout and GND. This transistor is activated when the EN pin goes to low logic level and has the function to quickly discharge the output capacitor when the device is disabled by the user.

The device is available with or without auto-discharge feature.

See [Section 9: Ordering information](#) for more details.

6.3 Input and output capacitors

The LD39030 requires external capacitors to assure the regulator control loop stability.

Any good quality ceramic capacitor can be used but, the X5R and the X7R are suggested since they guarantee a very stable combination of capacitance and ESR over temperature.

Locating the input/output capacitors as closer as possible to the relative pins is recommended.

The LD39030 requires an input capacitor with a minimum value of 1 μ F.

This capacitor must be located as closer as possible to the input pin of the device and returned to a clean analog ground.

The control loop of the LD39030 is designed to work with an output ceramic capacitor.

This capacitor must meet the requirements of minimum capacitance and equivalent series resistance (ESR), as shown in [Figure 17. Stability area vs. \(C_{OUT}, ESR\)](#). To assure stability, the output capacitor must maintain its ESR and capacitance in the stable region, over the full operating temperature range.

The LD39030 shows stability with a minimum effective output capacitance of 220 nF.

However, to keep stability in all operating conditions (temperature, input voltage and load variations), a minimum output capacitor of 0.47 μ F is recommended.

The suggested combination of 1 μ F input and output capacitors offers a good compromise among the stability of the regulator, optimum transient response and total PCB area occupation.

7 Typical characteristics

($C_{IN} = C_{OUT} = 1 \mu F$, V_{EN} to V_{IN} , $T_J = 25^\circ C$ unless otherwise specified)

Figure 4. Output voltage vs. temperature ($I_{OUT} = 1 \text{ mA}$)

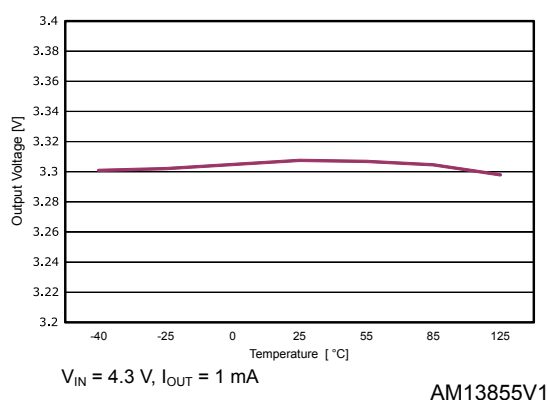


Figure 5. Output voltage vs. temperature ($I_{OUT} = 200 \text{ mA}$)

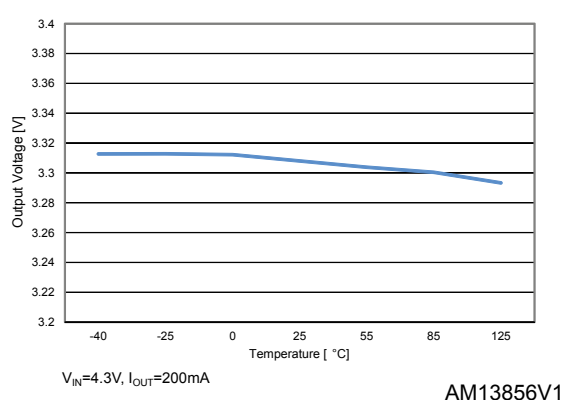


Figure 6. Line regulation vs. temperature

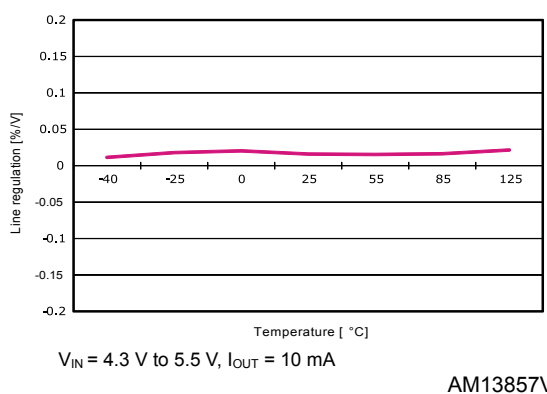


Figure 7. Load regulation vs. temperature

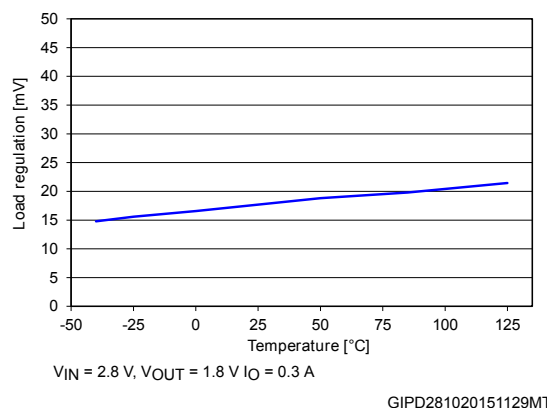


Figure 8. Quiescent current vs. temperature ($I_{OUT} = 0 \text{ mA}$)

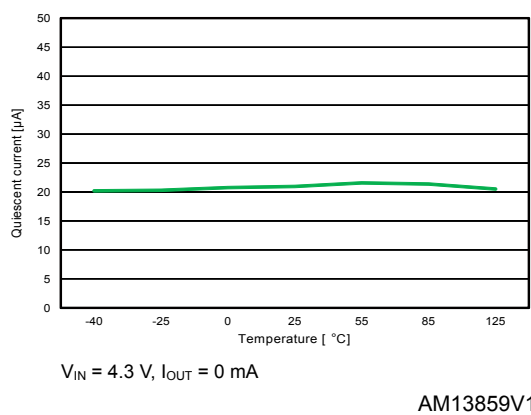


Figure 9. Quiescent current vs. temperature ($I_{OUT} = 200 \text{ mA}$)

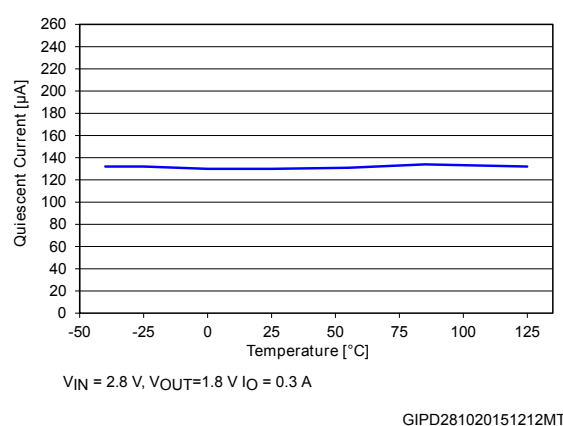
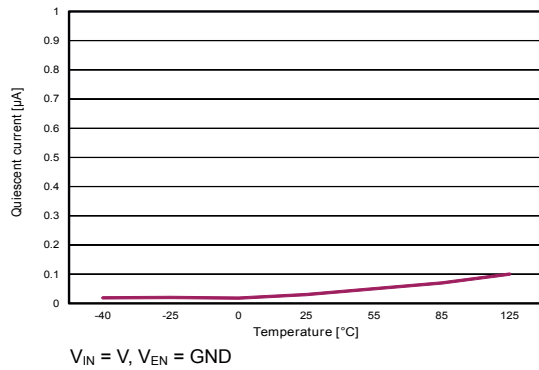
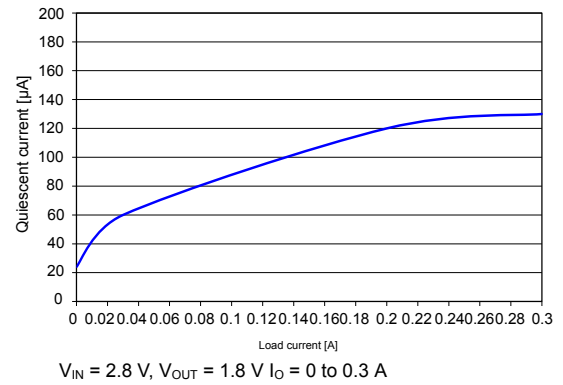
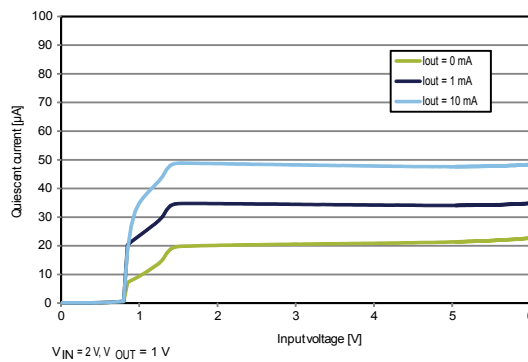


Figure 10. Shutdown current vs. temperature


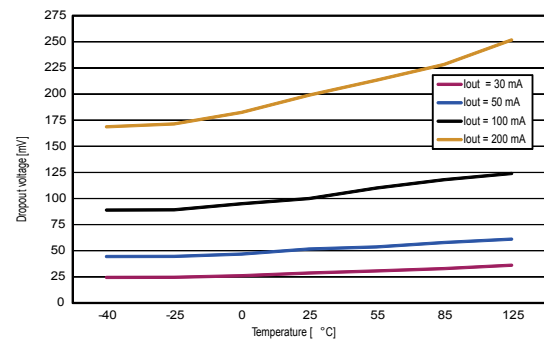
AM13861V1

Figure 11. Quiescent current vs. load current


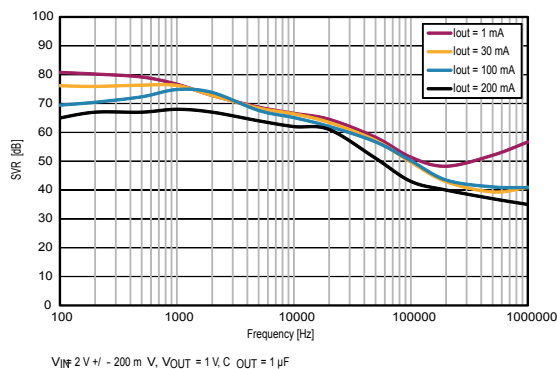
GIPD281020151230MT

Figure 12. Quiescent current vs. input voltage


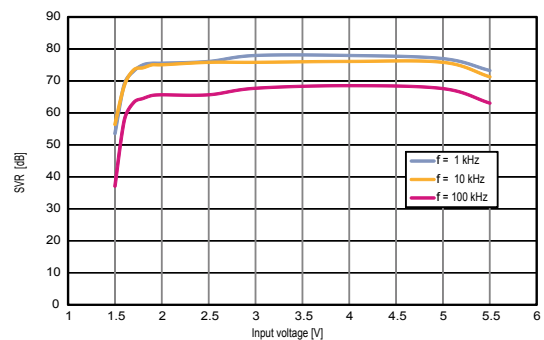
AM13863V1

Figure 13. Dropout voltage vs. temperature


AM13864V1

Figure 14. Supply voltage rejection vs. frequency


AM13865V1

Figure 15. Supply voltage rejection vs. input voltage


AM13866V1

Figure 16. Output noise spectral density

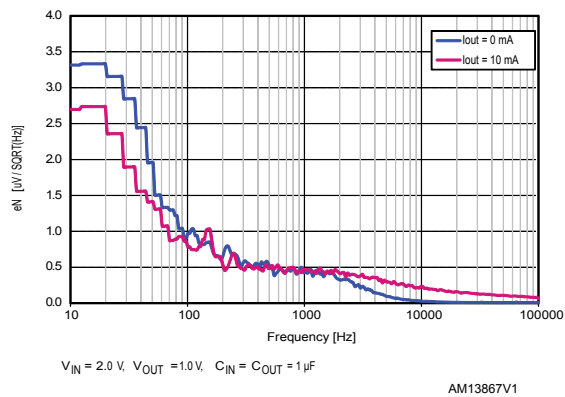


Figure 17. Stability area vs. (C_{OUT} , ESR)

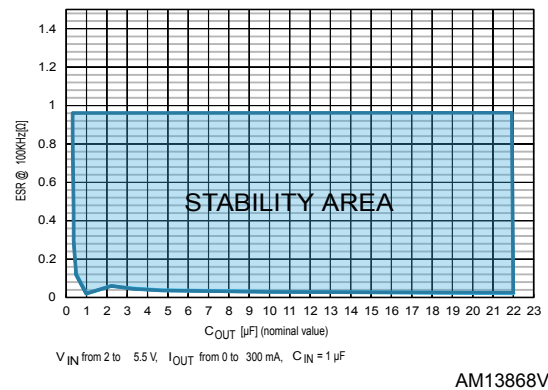


Figure 18. Enable startup ($V_{OUT} = 1\text{ V}$)

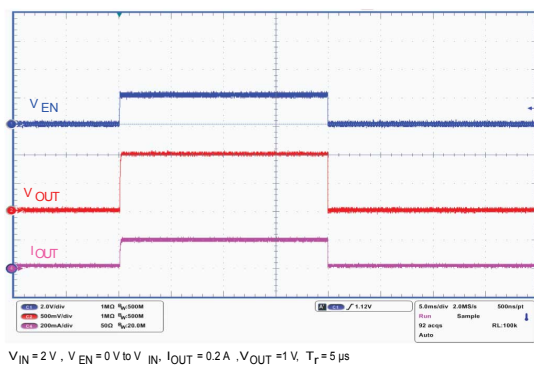


Figure 19. Enable startup ($V_{OUT} = 5\text{ V}$)

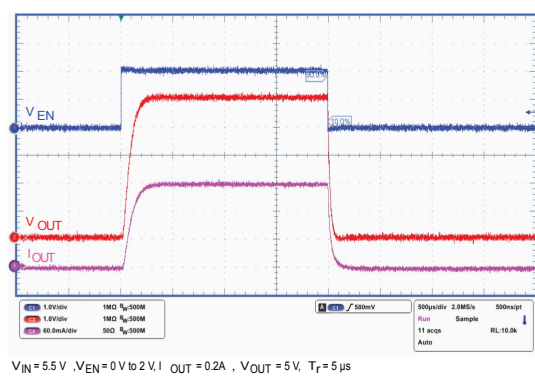


Figure 20. Turn-on time ($V_{OUT} = 1\text{ V}$)

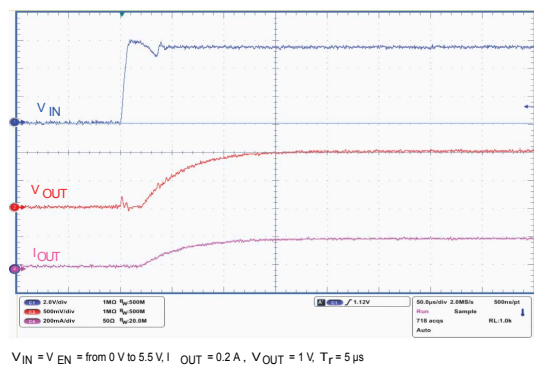


Figure 21. Turn-off time ($V_{OUT} = 1\text{ V}$)

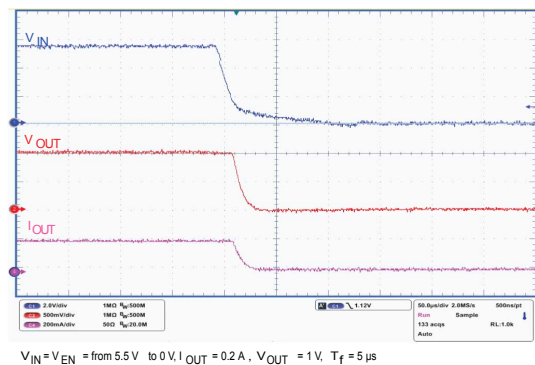
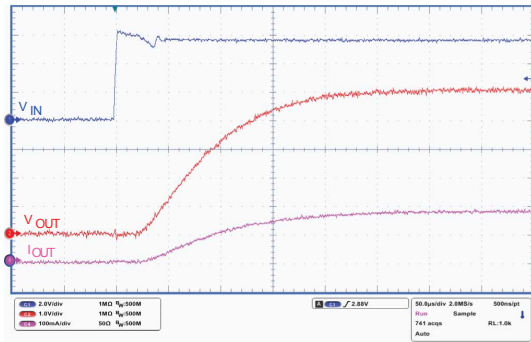
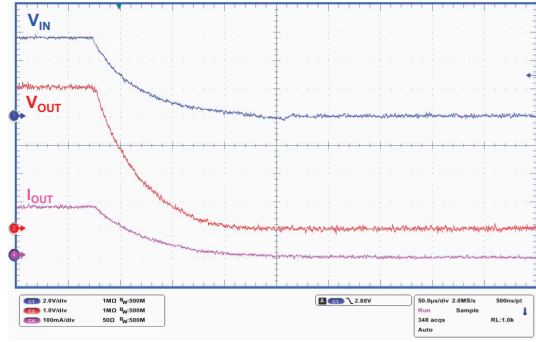
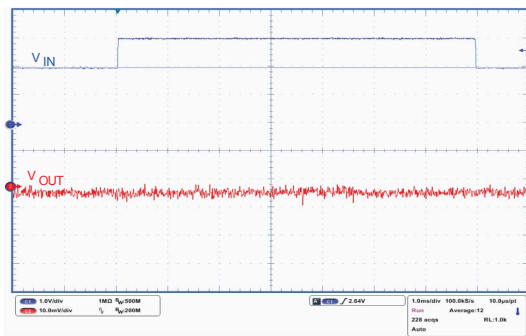


Figure 22. Turn-on time ($V_{OUT} = 5\text{ V}$)

 $V_{IN} = V_{EN}$ = from 0 V to 5.5 V, $I_{OUT} = 0.2\text{ A}$, $V_{OUT} = 5\text{ V}$, $T_r = 5\text{ }\mu\text{s}$

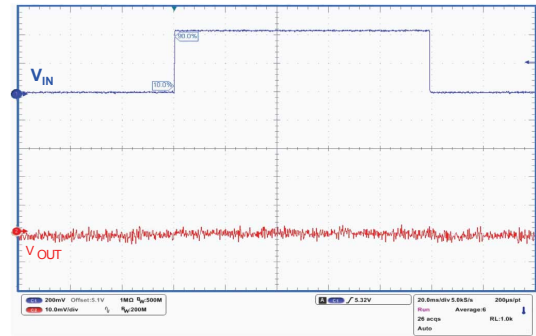
AM13873V1

Figure 23. Turn-off time ($V_{OUT} = 5\text{ V}$)

 $V_{IN} = V_{EN}$ = from 5.5 V to 0 V, $I_{OUT} = 0.2\text{ A}$, $V_{OUT} = 5\text{ V}$, $T_f = 5\text{ }\mu\text{s}$

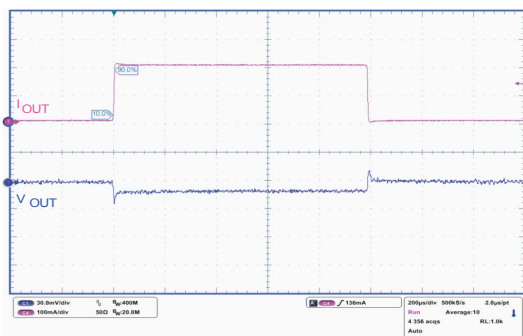
AM13874V1

Figure 24. Line transient ($V_{OUT} = 1\text{ V}$)

 $V_{IN} = V_{EN}$ = from 2 V to 3 V, $I_{OUT} = 10\text{ mA}$, $V_{OUT} = 1\text{ V}$, $T_r = T_f = 5\text{ }\mu\text{s}$

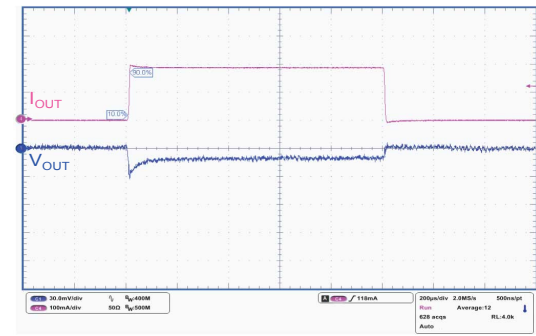
AM13875V1

Figure 25. Line transient ($V_{OUT} = 5\text{ V}$)

 $V_{IN} = V_{EN}$ = from 5.1 V to 5.5 V, $I_{OUT} = 10\text{ mA}$, $V_{OUT} = 5\text{ V}$, $T_r = T_f = 5\text{ }\mu\text{s}$

AM13876V1

Figure 26. Load transient ($V_{OUT} = 1\text{ V}$)

 $V_{IN} = V_{EN} = 2\text{ V}$, I_{OUT} = from 0 to 0.2 A, $V_{OUT} = 1\text{ V}$, $t_r = t_f = 5\text{ }\mu\text{s}$

AM13877V1

Figure 27. Load transient ($V_{OUT} = 5\text{ V}$)

 $V_{IN} = V_{EN} = 5.5\text{ V}$, I_{OUT} = from 0 to 0.2 A, $V_{OUT} = 5\text{ V}$, $t_r = t_f = 5\text{ }\mu\text{s}$


AM13878V1

8 Package information

In order to meet environmental requirements, ST offers these devices in different grades of **ECOPACK** packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions and product status are available at: www.st.com. ECOPACK is an ST trademark.

8.1 DFN4 1x1 package info

Figure 28. DFN4 1x1 package outline

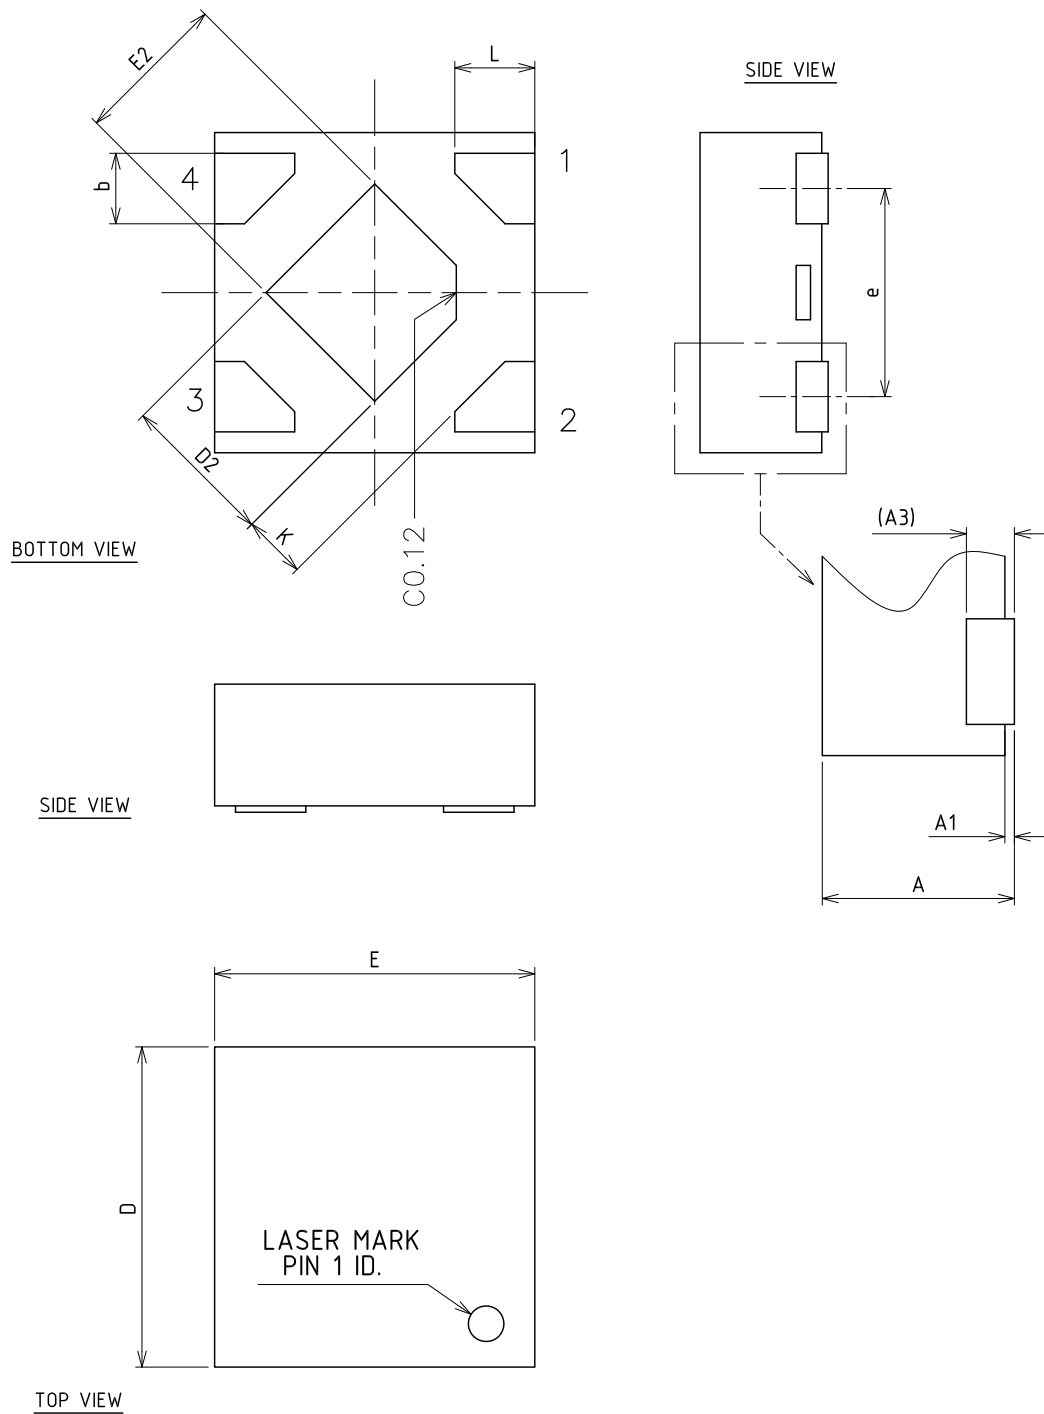

8405587_A

Table 6. DFN4 1x1 mechanical data

Dim.	mm		
	Min.	Typ.	Max.
A	0.34	0.37	0.40
A1	0	0.02	0.05
A3		0.10	
b	0.17	0.22	0.27
D	0.95	1.00	1.05
D2	0.43	0.48	0.53
E	0.95	1.00	1.05
E2	0.43	0.48	0.53
e		0.65	
L	0.20	0.25	0.30
K	0.15		

Technical drawing of a mechanical part, likely a cross-section of a shaft or a similar component. The drawing shows a central rectangular area with a diagonal line indicating a section cut. The dimensions are as follows:

- Overall width: 1.08
- Overall height: 0.95
- Top horizontal dimensions: 0.33, 0.42, 0.33
- Bottom horizontal dimensions: 0.33, 0.42, 0.33
- Left vertical dimensions: 0.3, 0.35, 0.3
- Right vertical dimensions: 0.3, 0.35, 0.3
- Internal vertical dimensions: 0.12, 0.15
- Internal horizontal dimensions: 0.12, 0.15
- Section cut line: 0.56
- Section cut angle: $0.1 \times 45^\circ$
- Section cut label: 1
- Section cut label: 2
- Section cut label: 3
- Section cut label: 4
- Section cut label: A
- Section cut label: B


1) This footprint is able to ensure insulation up to 10 Vrms (according to CEI IEC 664-1)

2) The device must be positioned within

$\oplus$	0.02	A	B
----------	------	---	---

page 16/24

Figure 30. DFN4 1x1 tape outline

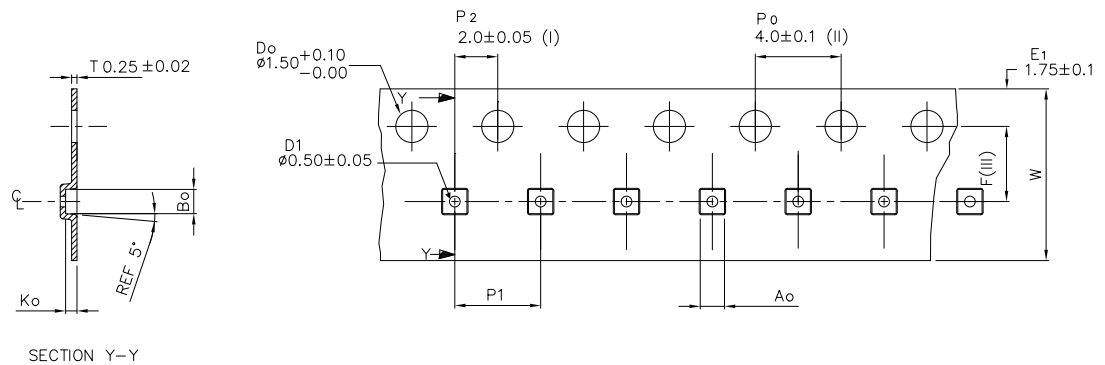

A ₀	1.13 +/−0.05
B ₀	1.13 +/−0.05
K ₀	0.53 +/−0.05
F	3.50 +/−0.05
P ₁	4.00 +/−0.10
W	8.00 +0.3/−0.1

- (I) Measured from centreline of sprocket hole to centreline of pocket.
- (II) Cumulative tolerance of 10 sprocket holes is ± 0.20 .
- (III) Measured from centreline of sprocket hole to centreline of pocket.
- (IV) Other material available.
- (V) Typical SR of form tape Max. 10° OHM/SR

ALL DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE STATED.



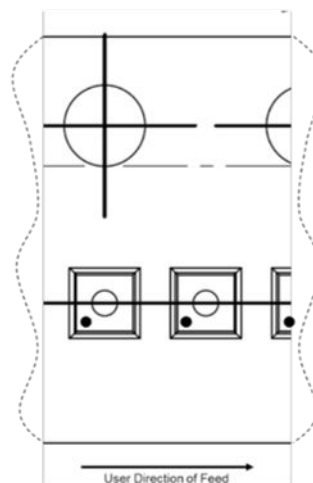


Figure 31. DFN4 1x1 reel outline

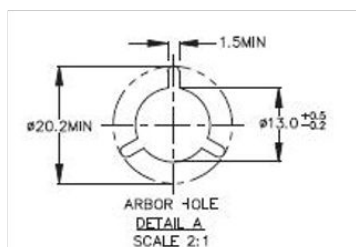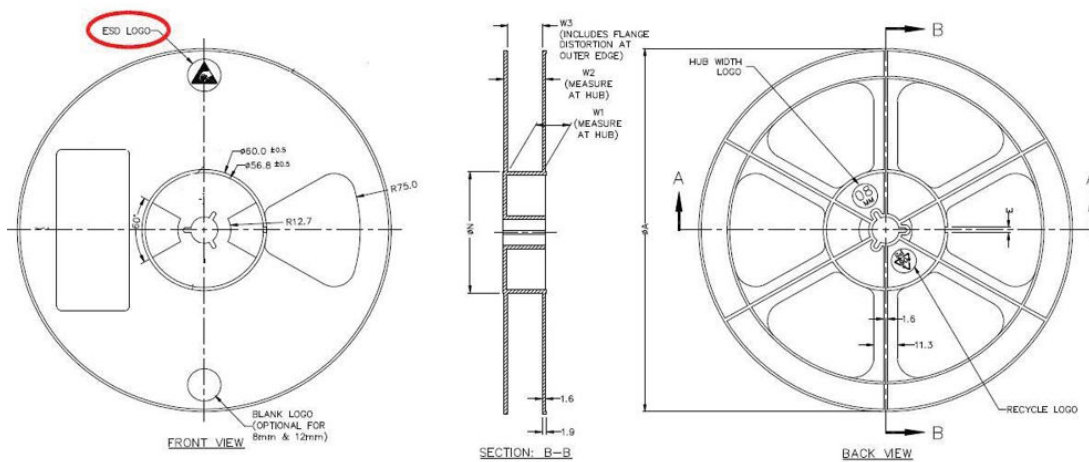

Tape width (mm)	A max.	N min.	W1 max.	W2 max.	W3 min. / max.
8	180	60	8.4	14.4	7.9 / 10.9

9 Ordering information

Table 7. Order code

Order code	Output voltage (V)	Auto-discharge	Tolerance %	Marking
LD39030DTPU105R	1.05	YES	2	XQ
LD39030DTPU12R	1.2	Yes	2	X5
LD39030ADTPU12R			0.5	W5
LD39030DTPU18R	1.8	Yes	2	X7
LD39030ADTPU18R	1.8	Yes	0.5	W7
LD39030ADTPU225R	2.25	Yes	0.5	WZ
LD39030DTPU25R ⁽¹⁾	2.5	Yes	2	XA
LD39030ADTPU25R ⁽¹⁾			0.5	WA
LD39030DTPU28R	2.8	Yes	2	XC
LD39030ADTPU28R			0.5	WC
LD39030DTPU30R ⁽¹⁾	3.0	Yes	2	XF
LD39030ADTPU30R ⁽¹⁾			0.5	WF
LD39030DTPU33R	3.3	Yes	2	XJ

1. Available on request.

Revision history

Table 8. Document revision history

Date	Revision	Changes
16-Nov-2015	1	Initial release.
18-May-2016	2	Updated <i>Section 9: "Ordering information"</i> . Minor text changes.
30-Aug-2016	3	Updated Ordering information. Minor text changes.
17-May-2018	4	Updated: V _{OUT} parameter Table 5. Electrical characteristics and Section 9: Ordering information .
29-May-2024	5	Updated Table 7

Contents

1	Diagram	2
2	Pin configuration	3
3	Typical application.....	4
4	Maximum ratings	5
5	Electrical characteristics.....	6
6	Application information.....	8
6.1	Soft-start function	8
6.2	Output discharge function	8
6.3	Input and output capacitors	8
7	Typical characteristics	9
8	Package information.....	13
8.1	DFN4 1x1 package info	14
9	Ordering information	19
	Revision history	20

List of tables

Table 1.	Pin description	3
Table 2.	Absolute maximum ratings	5
Table 3.	Thermal data	5
Table 4.	ESD Performance	5
Table 5.	Electrical characteristics	6
Table 6.	DFN4 1x1 mechanical data	15
Table 7.	Order code	19
Table 8.	Document revision history	20

List of figures

Figure 1.	Block diagram	2
Figure 2.	Pin connection (top view)	3
Figure 3.	Typical application circuits	4
Figure 4.	Output voltage vs. temperature ($I_{OUT} = 1 \text{ mA}$)	9
Figure 5.	Output voltage vs. temperature ($I_{OUT} = 200 \text{ mA}$)	9
Figure 6.	Line regulation vs. temperature	9
Figure 7.	Load regulation vs. temperature	9
Figure 8.	Quiescent current vs. temperature ($I_{OUT} = 0 \text{ mA}$)	9
Figure 9.	Quiescent current vs. temperature ($I_{OUT} = 200 \text{ mA}$)	9
Figure 10.	Shutdown current vs. temperature	10
Figure 11.	Quiescent current vs. load current	10
Figure 12.	Quiescent current vs. input voltage	10
Figure 13.	Dropout voltage vs. temperature	10
Figure 14.	Supply voltage rejection vs. frequency	10
Figure 15.	Supply voltage rejection vs. input voltage	10
Figure 16.	Output noise spectral density	11
Figure 17.	Stability area vs. (C_{OUT} , ESR)	11
Figure 18.	Enable startup ($V_{OUT} = 1 \text{ V}$)	11
Figure 19.	Enable startup ($V_{OUT} = 5 \text{ V}$)	11
Figure 20.	Turn-on time ($V_{OUT} = 1 \text{ V}$)	11
Figure 21.	Turn-off time ($V_{OUT} = 1 \text{ V}$)	11
Figure 22.	Turn-on time ($V_{OUT} = 5 \text{ V}$)	12
Figure 23.	Turn-off time ($V_{OUT} = 5 \text{ V}$)	12
Figure 24.	Line transient ($V_{OUT} = 1 \text{ V}$)	12
Figure 25.	Line transient ($V_{OUT} = 5 \text{ V}$)	12
Figure 26.	Load transient ($V_{OUT} = 1 \text{ V}$)	12
Figure 27.	Load transient ($V_{OUT} = 5 \text{ V}$)	12
Figure 28.	DFN4 1x1 package outline	14
Figure 29.	DFN4 1x1 recommended footprint	16
Figure 30.	DFN4 1x1 tape outline	17
Figure 31.	DFN4 1x1 reel outline	18

IMPORTANT NOTICE – READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgment.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, refer to www.st.com/trademarks. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2024 STMicroelectronics – All rights reserved