

ALUMINUM ELECTROLYTIC CAPACITORS

nichicon

HZ

Ultra Low Impedance,
For PC motherboard
series



Smaller



Low Impedance



Anti-Solvent
Feature


- Lower impedance than HN series.
- Compliant to the RoHS directive (2002/95/EC).

Products which are scheduled to be discontinued.
Not recommended for new designs

HZ

Low Impedance


HN

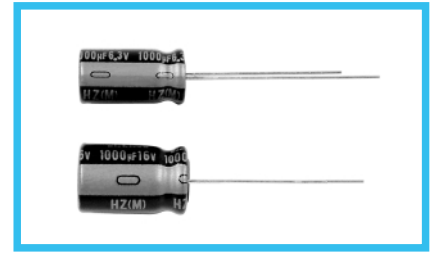


Specifications

Item	Performance Characteristics				
Category Temperature	-25 to +105°C				
Rated Voltage Range	6.3 to 16V				
Rated Capacitance Range	470 to 3300µF				
Capacitance Tolerance	±20% (120Hz, 20°C)				
Leakage Current	After 2 minutes' application of rated voltage, leakage current is less than 0.03CV				
Tangent of loss angle (tan δ)	For capacitance of more than 1000µF, add 0.02 for every increase of 1000µF				
	Rated voltage (V)	6.3	10	16	120Hz 20°C
	tan δ (MAX.)	0.22	0.19	0.16	
Stability at Low Temperature	Rated voltage (V)	6.3	10	16	120Hz
	Impedance ratio ZT / Z20 (MAX.)	Z-25°C / Z+20°C	3	3	3
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after D.C. bias plus rated ripple current is applied for 2000 hours at 105°C, the peak voltage shall not exceed the rated voltage.				
Marking	Printed with gold color letter on black sleeve.				

Radial Lead Type

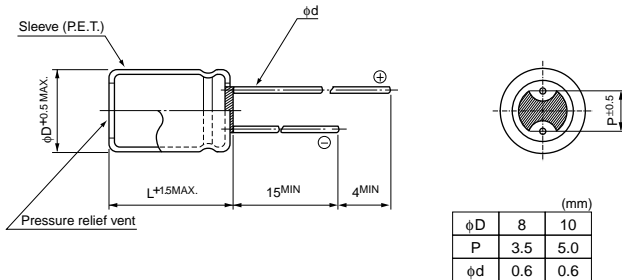

Type numbering system (Example : 6.3V 1800µF)

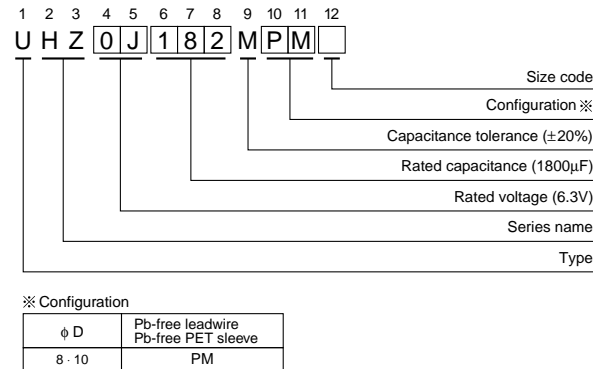

Standard Ratings

V (Code)		6.3 (0J)			10 (1A)			16 (1C)		
Cap. (µF)	Item	Case size φD × L (mm)	Impedance (mΩ) MAX. 20°C / 100kHz	Rated ripple (mArms) 105°C / 100kHz	Case size φD × L (mm)	Impedance (mΩ) MAX. 20°C / 100kHz	Rated ripple (mArms) 105°C / 100kHz	Case size φD × L (mm)	Impedance (mΩ) MAX. 20°C / 100kHz	Rated ripple (mArms) 105°C / 100kHz
470	471									
680	681				▲ 10 × 12.5	12	2288	▲ 10 × 12.5	12	2280
820	821				10 × 12.5	12	2280	10 × 12.5	12	2280
1000	102	▲ 10 × 12.5	12	2280	● 10 × 16	10	2960	● 10 × 16	10	2960
1200	122	8 × 15	14	2210	10 × 16	10	2960	10 × 16	10	2960
1500	152	▲ 10 × 16	10	2960	10 × 16	10	2960	10 × 16	10	2960
1800	182	8 × 20	9	2880	▲ 8 × 20	9	2880	8 × 20	9	2880
2200	222	10 × 16	10	2960	10 × 20	7	3770	10 × 20	7	3770
2700	272	10 × 20	7	3770	10 × 25	6.5	4140	10 × 25	6.5	4140
3300	332	10 × 25	6.5	4690						

Please refer to page 20, 21, 22 about the formed or taped product spec.
Please refer to page 4 for the minimum order quantity.

- ▲ : In this case, [6] will be put at 12th digit of type numbering system.
- : In this case, [3] will be put at 12th digit of type numbering system.
- : In this case, [9] will be put at 12th digit of type numbering system.

CAT.8100A-1