


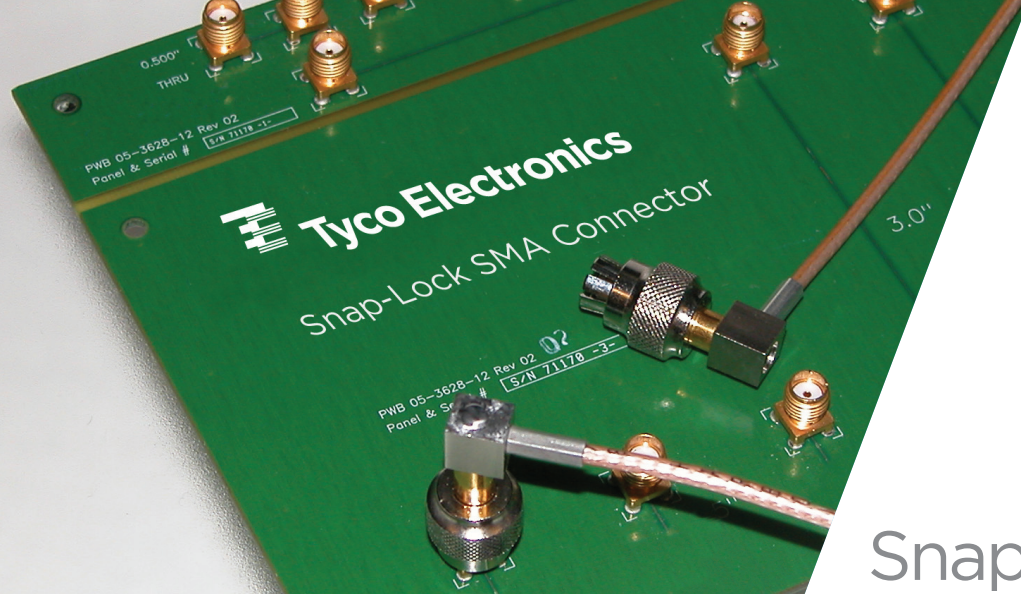

Snap-Lock SMA Series

DESCRIPTION

Snap-on version of popular SMA Series Connector.

- Snap-on interface facilitates assembly
- Same dependable performance as standard SMA connection


APPLICATIONS

- Mobile Base station filters and cable assemblies
- Telephony applications, Wireless LAN
- Instrumentation and remote measuring equipment
- Mil Aero, SatCom, Radar

KEY FEATURES

- Similar performance and applications to standard SMA Series
- Mates with standard SMA threaded jacks
- Time saving and user friendly snap on/off mating
- Excellent performance to 6 GHz
- No torquing of connector required
- Free rotation of mated connection
- Higher packaging density can be achieved
- Backwards compatibility with existing systems

Tyco Electronics Snap-Lock SMA is fully intermatable with standard SMA jacks and Tyco Electronics SMA bulkhead jacks.

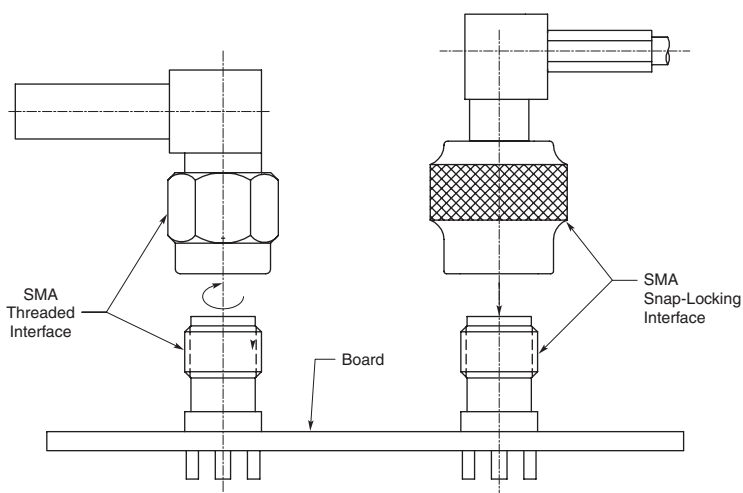

- Product Specification/Design Objectives: 108-2268
- Snap-Lock SMA Sample Kit: 3-1773447-5

ELECTRICAL

- Characteristic Impedance: 50 Ohms
- Frequency Range: DC to 6 GHz
- VSWR:
 - Straight Plug (RG316 cable or equivalent)
1.25 max. DC — 6 GHz
 - Right-Angle Plug (RG316 cable or equivalent)
1.38 max. DC — 6 GHz
- Rated Voltage: 335 VAC rms, 60 Hz (at sea level)
- Dielectric Withstanding Voltage: 1000 VAC rms, 60 Hz (at sea level)
- Insulation Resistance: 5000 Megohms min.
- Contact Resistance:
 - 3 milliohms max. (center contact)
 - 2 milliohms max. (outer contact)

MECHANICAL

- Engagement Force: 15 lbs. max. (cable applied plugs)
- Disengagement Force: 1 lb. min. (cable applied plugs)
- Interface Retention Force: 15 lbs. min.
- Mating: Mates with standard SMA thread length of $.200 \pm .005$
- Durability: 500 cycles min.
- Vibration: EIA-364-28, Method VII
- Shock: EIA-364-27, Method H
- Cable Retention: 20 lbs. min. (cable dependent)

ENVIRONMENTAL


- Operating Temperature: -65°C to +165°C (cable dependent)
- Thermal Shock: EIA-364-32, 5 cycles, -65°C and +85°C
- Humidity: EIA-364-31, Method II, Condition B
- Mixed Flowing Gas: EIA-364-65, Class IIA

MATERIAL AND FINISH



Part Description	Material	Plating Finish
• Outer Contact	Copper Alloy	Gold
• Outer Sleeve		
Cable Plug	Brass	Nickel
Adapter	Stainless Steel	Passivate
• Center Contact		
Cable Plug	Brass	Gold
Adapter	Copper Alloy	Gold
• Inner Locking Collar	Copper Alloy	Nickel
• Insulator	PTFE	
• Retaining Ring (Adapter Only)	Carbon Steel	Nickel

Flexible Cable — Crimp Attachment

Straight Cable Plug

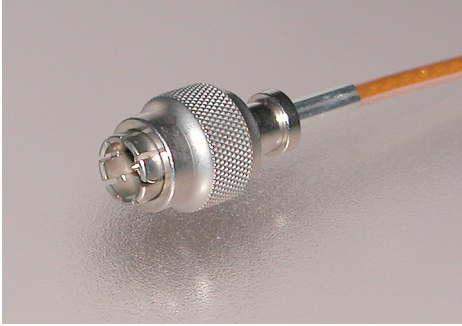


Part Number	Cable
1408541-1	RG-316 or equivalent

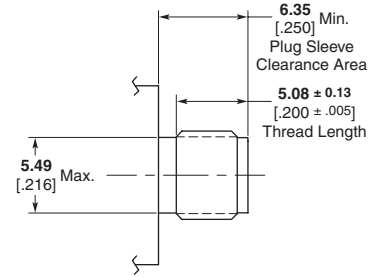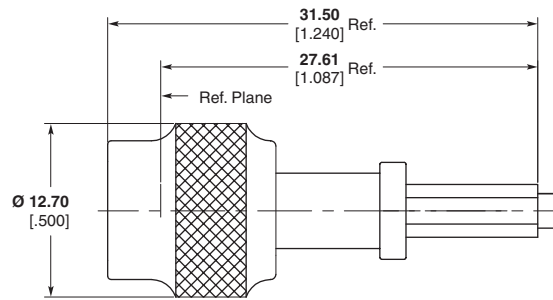



Mating Part Detail

Note: Product is designed and qualified to mate with gold plated SMA jacks.

Right-Angle Cable Plug

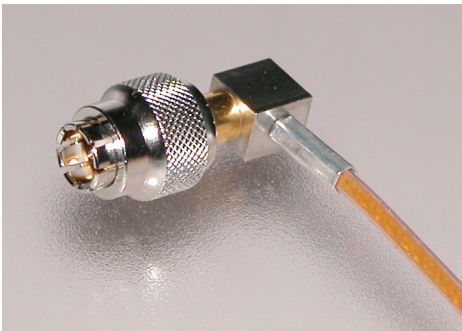

Part Number	Cable
1274694-1	RG-316 or equivalent

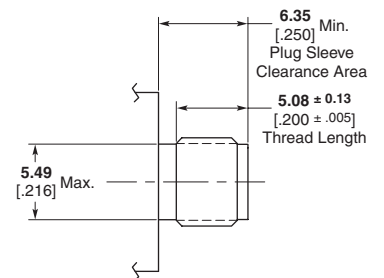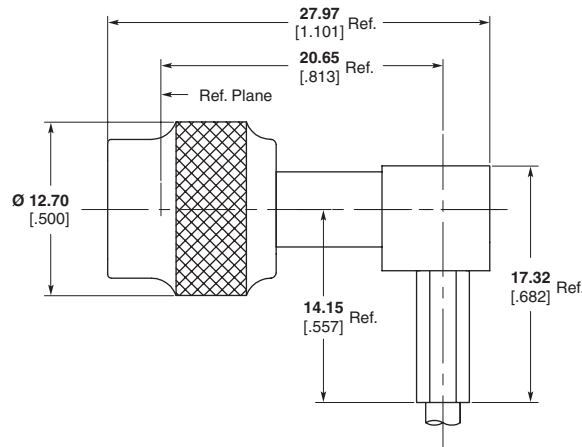


Mating Part Detail

Note: Product is designed and qualified to mate with gold plated SMA jacks.


Dimensions are millimeters over inches unless otherwise specified.

Adapters — Between Series

Snap-Lock SMA Plug to SMA Series Jack

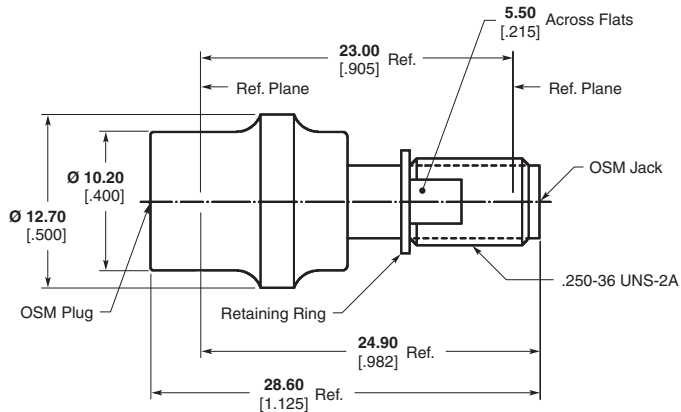

Part Number
1053780-1

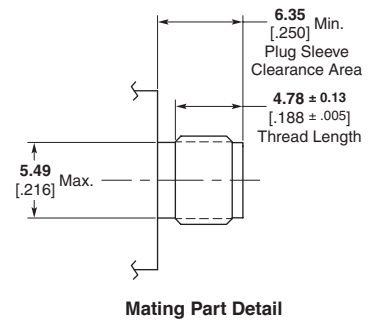

Dimensions are millimeters over inches unless otherwise specified.

Technical Support

Internet:
<http://tycoelectronics.com/products/rfcoax>

Email:
product.info@tycoelectronics.com

US Product Manager — David Gravina

Phone: 781-278-5229

Email: gravinad@tycoelectronics.com

Europe Product Manager — Patrick Duquerroy

Phone: (49) 61824538

Email: pduquerroy@tycoelectronics.com

USA: 1-800-522-6752

Canada: 1-905-470-4425

Mexico: 01-800-733-8926

C. America: 52-55-1106-0803

South America: 55-112103-6000

Hong Kong: 852-2735-1628

Japan: 81-44-844-8013

UK: +44 (0) 800-267-666

© Copyright 2007 by Tyco Electronics Corporation. All International Rights Reserved.

TE LOGO and TYCO ELECTRONICS are trademarks.

Other products, logos, and company names mentioned herein may be trademarks of their respective owners.

06/07 3-1773447-4