

# FDB12N50U

## N-Channel MOSFET, FRFET

500V, 10A, 0.8Ω

### Features



- $R_{DS(on)} = 0.65\Omega$  (Typ.) @  $V_{GS} = 10V$ ,  $I_D = 5A$
- Low gate charge (Typ. 21nC)
- Low  $C_{rss}$  (Typ. 11pF)
- Fast switching
- 100% avalanche tested
- Improved dv/dt capability
- RoHS compliant



### Description

These N-Channel enhancement mode power field effect transistors are produced using Fairchild's proprietary, planar stripe, DMOS technology.

This advance technology has been especially tailored to minimize on-state resistance, provide superior switching performance, and withstand high energy pulse in the avalanche and commutation mode. These devices are well suited for high efficient switching mode power supplies and active power factor correction.



### MOSFET Maximum Ratings $T_C = 25^\circ\text{C}$ unless otherwise noted\*

| Symbol         | Parameter                                                                    | Ratings                                   | Units |
|----------------|------------------------------------------------------------------------------|-------------------------------------------|-------|
| $V_{DSS}$      | Drain to Source Voltage                                                      | 500                                       | V     |
| $V_{GSS}$      | Gate to Source Voltage                                                       | $\pm 30$                                  | V     |
| $I_D$          | Drain Current                                                                | -Continuous ( $T_C = 25^\circ\text{C}$ )  | A     |
|                |                                                                              | -Continuous ( $T_C = 100^\circ\text{C}$ ) |       |
| $I_{DM}$       | Drain Current                                                                | - Pulsed (Note 1)                         | A     |
| $E_{AS}$       | Single Pulsed Avalanche Energy                                               | (Note 2)                                  | mJ    |
| $I_{AR}$       | Avalanche Current                                                            | (Note 1)                                  | A     |
| $E_{AR}$       | Repetitive Avalanche Energy                                                  | (Note 1)                                  | mJ    |
| dv/dt          | Peak Diode Recovery dv/dt                                                    | (Note 3)                                  | V/ns  |
| $P_D$          | Power Dissipation                                                            | ( $T_C = 25^\circ\text{C}$ )              | W     |
|                |                                                                              | - Derate above $25^\circ\text{C}$         | W/°C  |
| $T_J, T_{STG}$ | Operating and Storage Temperature Range                                      | -55 to +150                               | °C    |
| $T_L$          | Maximum Lead Temperature for Soldering Purpose, 1/8" from Case for 5 Seconds | 300                                       | °C    |

\*Drain current limited by maximum junction temperature

### Thermal Characteristics

| Symbol          | Parameter                               | Ratings | Units |
|-----------------|-----------------------------------------|---------|-------|
| $R_{\theta JC}$ | Thermal Resistance, Junction to Case    | 0.75    | °C/W  |
| $R_{\theta JA}$ | Thermal Resistance, Junction to Ambient | 62.5    |       |

**Package Marking and Ordering Information**  $T_C = 25^\circ\text{C}$  unless otherwise noted

| Device Marking | Device         | Package | Reel Size | Tape Width | Quantity |
|----------------|----------------|---------|-----------|------------|----------|
| FDB12N50U      | FDB12N50UTM_WS | D2-PAK  | 330mm     | 24mm       | 800      |

**Electrical Characteristics**

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Units |
|--------|-----------|-----------------|------|------|------|-------|
|--------|-----------|-----------------|------|------|------|-------|

**Off Characteristics**

|                                      |                                           |                                                                          |     |     |           |                    |
|--------------------------------------|-------------------------------------------|--------------------------------------------------------------------------|-----|-----|-----------|--------------------|
| $BV_{DSS}$                           | Drain to Source Breakdown Voltage         | $I_D = 250\mu\text{A}$ , $V_{GS} = 0\text{V}$ , $T_J = 25^\circ\text{C}$ | 500 | -   | -         | V                  |
| $\frac{\Delta BV_{DSS}}{\Delta T_J}$ | Breakdown Voltage Temperature Coefficient | $I_D = 250\mu\text{A}$ , Referenced to $25^\circ\text{C}$                | -   | 0.7 | -         | $V/^\circ\text{C}$ |
| $I_{DSS}$                            | Zero Gate Voltage Drain Current           | $V_{DS} = 500\text{V}$ , $V_{GS} = 0\text{V}$                            | -   | -   | 25        | $\mu\text{A}$      |
|                                      |                                           | $V_{DS} = 400\text{V}$ , $T_C = 125^\circ\text{C}$                       | -   | -   | 250       |                    |
| $I_{GSS}$                            | Gate to Body Leakage Current              | $V_{GS} = \pm 30\text{V}$ , $V_{DS} = 0\text{V}$                         | -   | -   | $\pm 100$ | nA                 |

**On Characteristics**

|              |                                      |                                                    |     |      |     |          |
|--------------|--------------------------------------|----------------------------------------------------|-----|------|-----|----------|
| $V_{GS(th)}$ | Gate Threshold Voltage               | $V_{GS} = V_{DS}$ , $I_D = 250\mu\text{A}$         | 3.0 | -    | 5.0 | V        |
| $R_{DS(on)}$ | Static Drain to Source On Resistance | $V_{GS} = 10\text{V}$ , $I_D = 5\text{A}$          | -   | 0.65 | 0.8 | $\Omega$ |
| $g_{FS}$     | Forward Transconductance             | $V_{DS} = 40\text{V}$ , $I_D = 5\text{A}$ (Note 4) | -   | 11   | -   | S        |

**Dynamic Characteristics**

|              |                               |                                                                                  |   |      |      |    |
|--------------|-------------------------------|----------------------------------------------------------------------------------|---|------|------|----|
| $C_{iss}$    | Input Capacitance             | $V_{DS} = 25\text{V}$ , $V_{GS} = 0\text{V}$<br>$f = 1\text{MHz}$                | - | 1050 | 1395 | pF |
| $C_{oss}$    | Output Capacitance            |                                                                                  | - | 140  | 190  | pF |
| $C_{rss}$    | Reverse Transfer Capacitance  |                                                                                  | - | 11   | 17   | pF |
| $Q_{g(tot)}$ | Total Gate Charge at 10V      | $V_{DS} = 400\text{V}$ , $I_D = 10\text{A}$<br>$V_{GS} = 10\text{V}$ (Note 4, 5) | - | 21   | 30   | nC |
| $Q_{gs}$     | Gate to Source Gate Charge    |                                                                                  | - | 6    | -    | nC |
| $Q_{gd}$     | Gate to Drain "Miller" Charge |                                                                                  | - | 9    | -    | nC |

**Switching Characteristics**

|              |                     |                                                                             |   |    |     |    |
|--------------|---------------------|-----------------------------------------------------------------------------|---|----|-----|----|
| $t_{d(on)}$  | Turn-On Delay Time  | $V_{DD} = 250\text{V}$ , $I_D = 10\text{A}$<br>$R_G = 25\Omega$ (Note 4, 5) | - | 35 | 80  | ns |
| $t_r$        | Turn-On Rise Time   |                                                                             | - | 45 | 100 | ns |
| $t_{d(off)}$ | Turn-Off Delay Time |                                                                             | - | 60 | 130 | ns |
| $t_f$        | Turn-Off Fall Time  |                                                                             | - | 35 | 80  | ns |

**Drain-Source Diode Characteristics**

|                 |                                                          |                                             |   |     |     |    |
|-----------------|----------------------------------------------------------|---------------------------------------------|---|-----|-----|----|
| I <sub>S</sub>  | Maximum Continuous Drain to Source Diode Forward Current |                                             | - | -   | 10  | A  |
| I <sub>SM</sub> | Maximum Pulsed Drain to Source Diode Forward Current     |                                             | - | -   | 40  | A  |
| V <sub>SD</sub> | Drain to Source Diode Forward Voltage                    | V <sub>GS</sub> = 0V, I <sub>SD</sub> = 12A | - | -   | 1.6 | V  |
| t <sub>rr</sub> | Reverse Recovery Time                                    | V <sub>GS</sub> = 0V, I <sub>SD</sub> = 12A | - | 60  | -   | ns |
| Q <sub>rr</sub> | Reverse Recovery Charge                                  | dI <sub>F</sub> /dt = 100A/μs (Note 4)      | - | 0.1 | -   | μC |

**Notes:**

1. Repetitive Rating: Pulse width limited by maximum junction temperature
2.  $L = 9\text{mH}$ ,  $I_{AS} = 10\text{A}$ ,  $V_{DD} = 50\text{V}$ ,  $R_G = 25\Omega$ , Starting  $T_J = 25^\circ\text{C}$
3.  $I_{SD} \leq 10\text{A}$ ,  $di/dt \leq 200\text{A}/\mu\text{s}$ ,  $V_{DD} \leq BV_{DSS}$ , Starting  $T_J = 25^\circ\text{C}$
4. Pulse Test: Pulse width  $\leq 300\mu\text{s}$ , Duty Cycle  $\leq 2\%$
5. Essentially Independent of Operating Temperature Typical Characteristics

## Typical Performance Characteristics

Figure 1. On-Region Characteristics

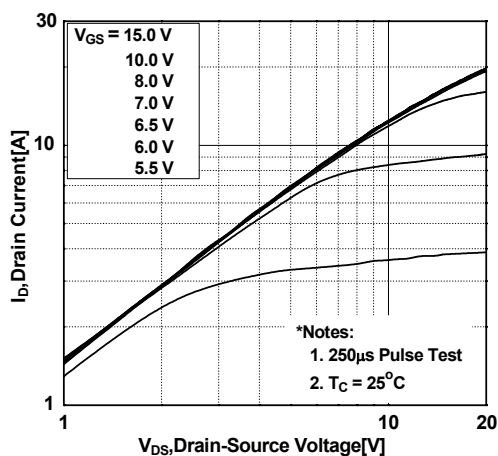


Figure 2. Transfer Characteristics

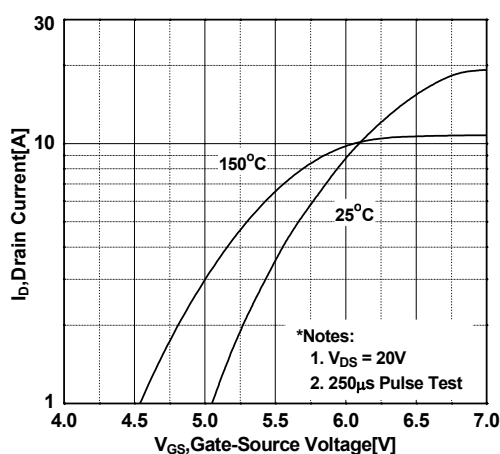


Figure 3. On-Resistance Variation vs. Drain Current and Gate Voltage

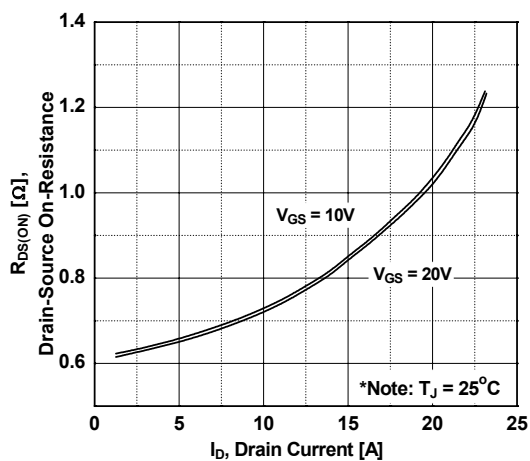


Figure 4. Body Diode Forward Voltage Variation vs. Source Current and Temperature

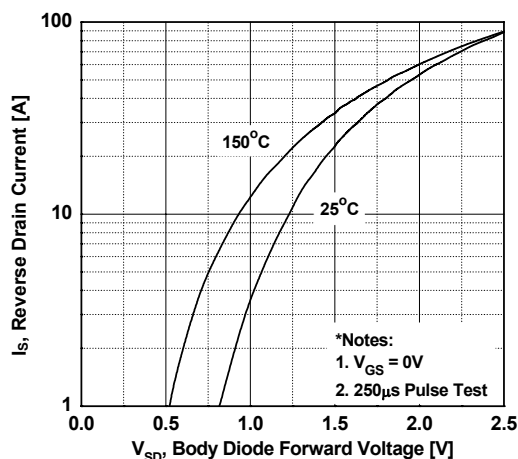


Figure 5. Capacitance Characteristics



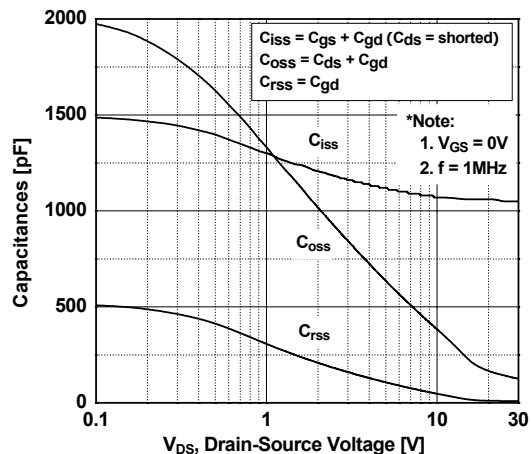


Figure 6. Gate Charge Characteristics

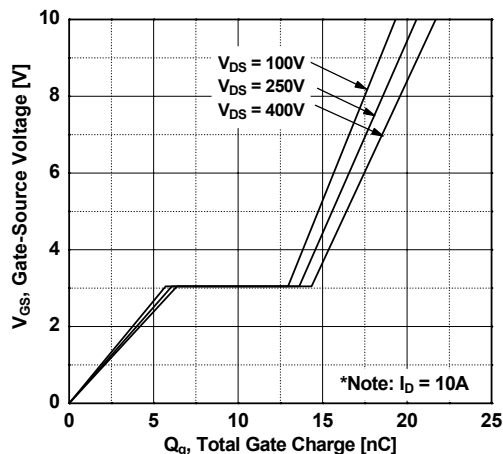


## Typical Performance Characteristics (Continued)


**Figure 7. Breakdown Voltage Variation vs. Temperature**

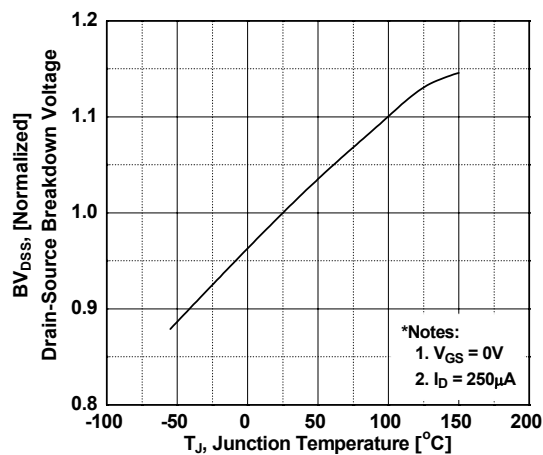


**Figure 8. Maximum Safe Operating Area**

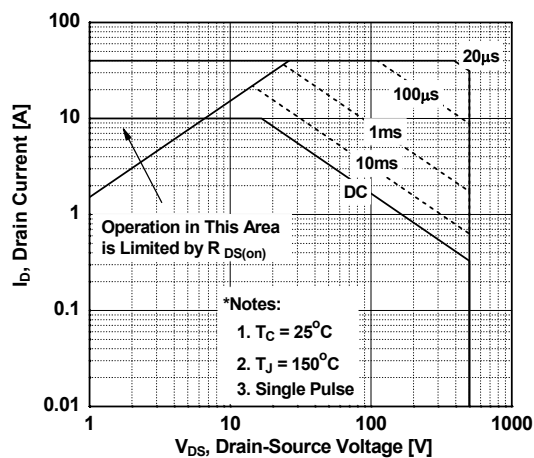


**Figure 9. Maximum Drain Current vs. Case Temperature**

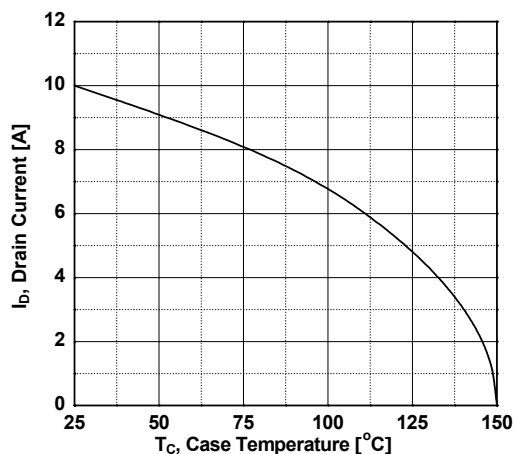


**Figure 10. Transient Thermal Response Curve**

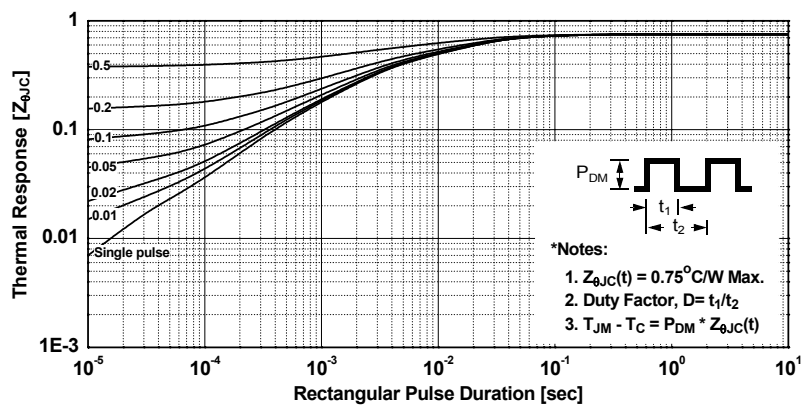


Gate Charge Test Circuit & Waveform

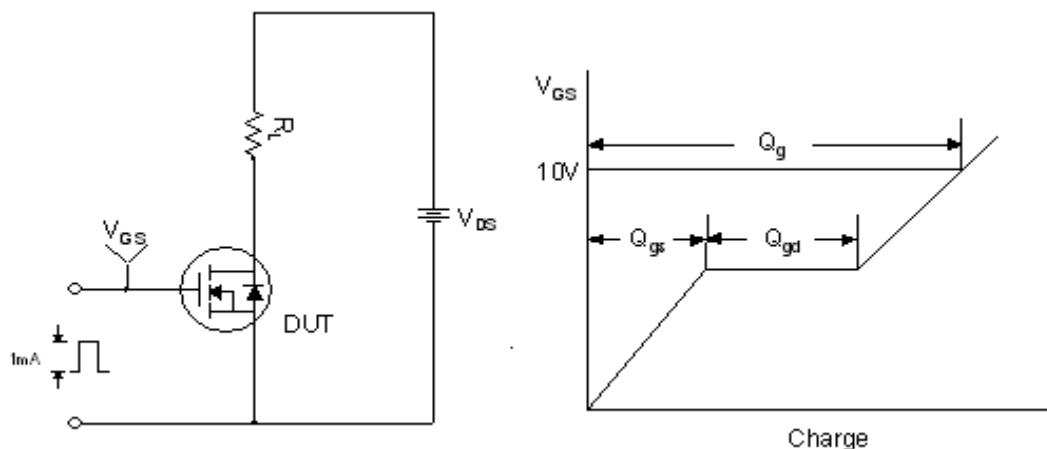



Resistive Switching Test Circuit & Waveforms

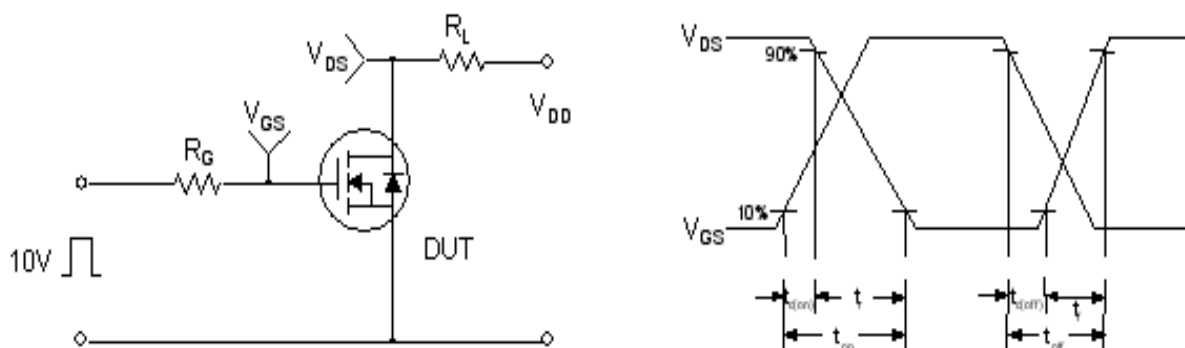

Unclamped Inductive Switching Test Circuit & Waveforms





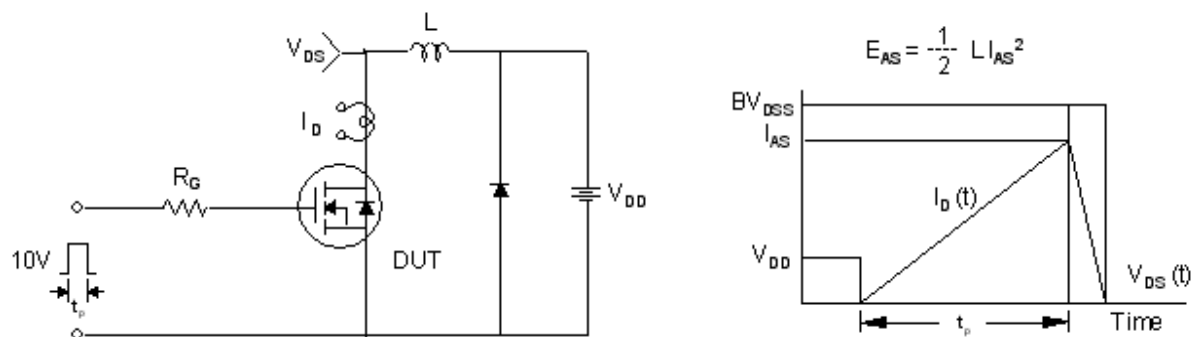


# Peak Diode Recovery dv/dt Test Circuit & Waveforms

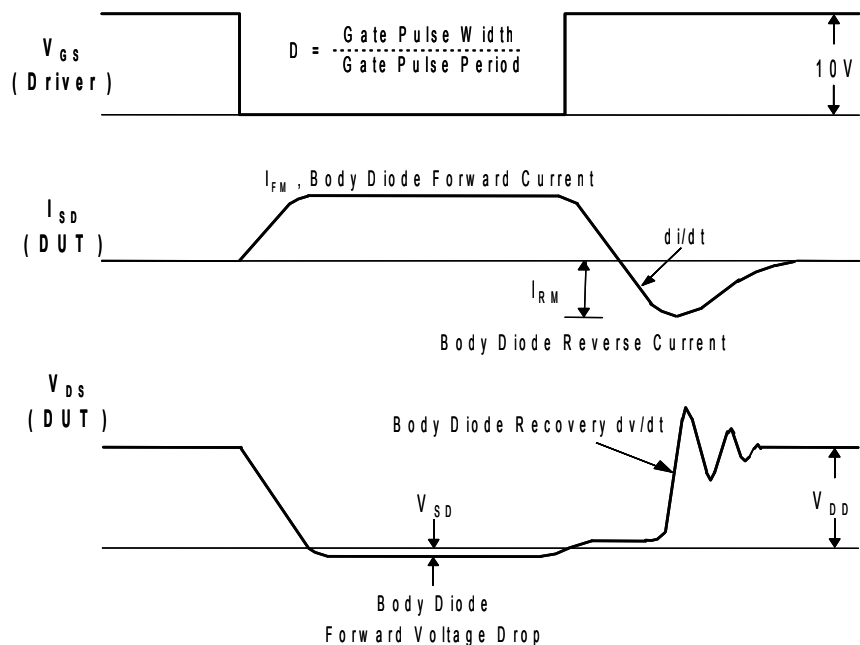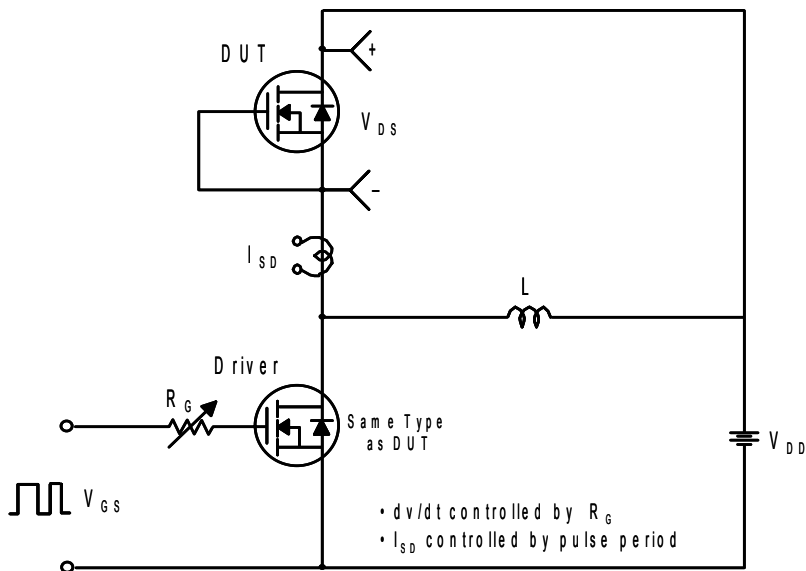

# Mechanical Dimensions

## D2-PAK

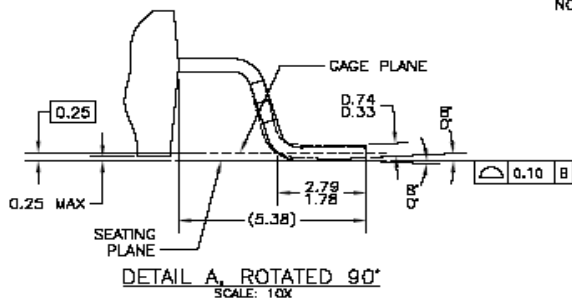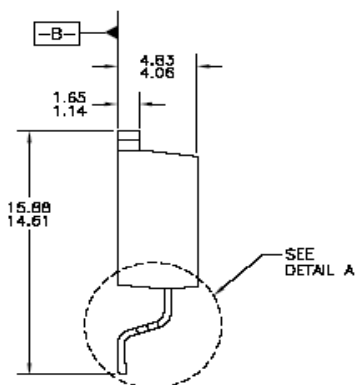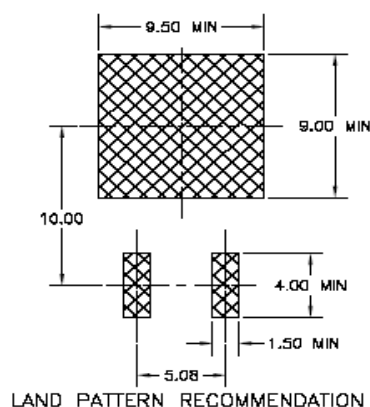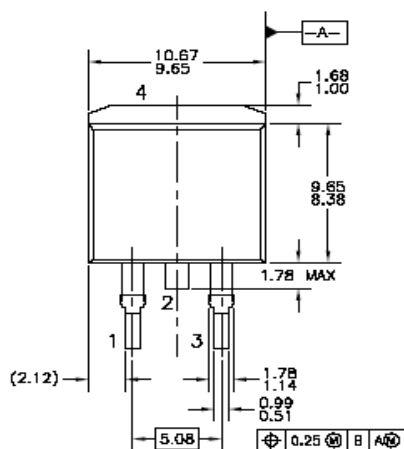

- NOTES: UNLESS OTHERWISE SPECIFIED
- ALL DIMENSIONS ARE IN MILLIMETERS.
  - REFERENCE JEDEC, TO-263, ISSUE D, VARIATION AB, DATED JULY 2003.
  - DIMENSIONING AND TOLERANCING PER ANSI Y14.5M - 1982.
  - LOCATION OF THE PIN HOLE MAY VARY (LOWER LEFT CORNER, LOWER CENTER AND CENTER OF THE PACKAGE).
  - PRESENCE OF TRIMMED CENTER LEAD IS OPTIONAL.

TO283AD2REV0

Dimensions in Millimeters



## TRADEMARKS

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

|                                                                                   |                                                                                   |                                                                                   |                                                                                     |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| ACE <sup>®</sup>                                                                  | FPS <sup>™</sup>                                                                  | PDP-SPM <sup>™</sup>                                                              | The Power Franchise <sup>®</sup>                                                    |
| Build it Now <sup>™</sup>                                                         | F-PFS <sup>™</sup>                                                                | Power-SPM <sup>™</sup>                                                            | <b>the power</b><br>franchise                                                       |
| CorePLUS <sup>™</sup>                                                             | FRFET <sup>®</sup>                                                                | PowerTrench <sup>®</sup>                                                          | TinyBoost <sup>™</sup>                                                              |
| CorePOWER <sup>™</sup>                                                            | Global Power Resource <sup>SM</sup>                                               | Programmable Active Droop <sup>™</sup>                                            | TinyBuck <sup>™</sup>                                                               |
| CROSSVOLT <sup>™</sup>                                                            | Green FPS <sup>™</sup>                                                            | QFET <sup>®</sup>                                                                 | TinyLogic <sup>®</sup>                                                              |
| CTL <sup>™</sup>                                                                  | Green FPS <sup>™</sup> e-Series <sup>™</sup>                                      | QS <sup>™</sup>                                                                   | TINYOPTO <sup>™</sup>                                                               |
| Current Transfer Logic <sup>™</sup>                                               | GTO <sup>™</sup>                                                                  | Quiet Series <sup>™</sup>                                                         | TinyPower <sup>™</sup>                                                              |
| EcoSPARK <sup>®</sup>                                                             | IntelliMAX <sup>™</sup>                                                           | RapidConfigure <sup>™</sup>                                                       | TinyPWM <sup>™</sup>                                                                |
| EfficientMax <sup>™</sup>                                                         | ISOPLANAR <sup>™</sup>                                                            | Saving our world 1mW at a time <sup>™</sup>                                       | TinyWire <sup>™</sup>                                                               |
| EZSWITCH <sup>™</sup> *                                                           | MegaBuck <sup>™</sup>                                                             | SmartMax <sup>™</sup>                                                             | μSerDes <sup>™</sup>                                                                |
|  | MICROCOUPLER <sup>™</sup>                                                         | SMART START <sup>™</sup>                                                          |  |
|  | MicroFET <sup>™</sup>                                                             | SPM <sup>®</sup>                                                                  | UHC <sup>®</sup>                                                                    |
| Fairchild <sup>®</sup>                                                            | MicroPak <sup>™</sup>                                                             | STEALTH <sup>™</sup>                                                              | Ultra FRFET <sup>™</sup>                                                            |
| Fairchild Semiconductor <sup>®</sup>                                              | MillerDrive <sup>™</sup>                                                          | SuperFET <sup>™</sup>                                                             | UniFET <sup>™</sup>                                                                 |
| FACT Quiet Series <sup>™</sup>                                                    | MotionMax <sup>™</sup>                                                            | SuperSOT <sup>™</sup> -3                                                          | VCX <sup>™</sup>                                                                    |
| FACT <sup>®</sup>                                                                 | Motion-SPM <sup>™</sup>                                                           | SuperSOT <sup>™</sup> -6                                                          | VisualMax <sup>™</sup>                                                              |
| FAST <sup>®</sup>                                                                 | OPTOLOGIC <sup>®</sup>                                                            | SuperSOT <sup>™</sup> -8                                                          |                                                                                     |
| FastvCore <sup>™</sup>                                                            | OPTOPLANAR <sup>®</sup>                                                           | SuperMOS <sup>™</sup>                                                             |                                                                                     |
| FlashWriter <sup>®</sup> *                                                        |  |  |                                                                                     |

\* EZSWITCH<sup>™</sup> and FlashWriter<sup>®</sup> are trademarks of System General Corporation, used under license by Fairchild Semiconductor.

## DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

## LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

## PRODUCT STATUS DEFINITIONS

### Definition of Terms

| Datasheet Identification | Product Status         | Definition                                                                                                                                                                                               |
|--------------------------|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Advance Information      | Formative or In Design | This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.                                                                       |
| Preliminary              | First Production       | This datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design. |
| No Identification Needed | Full Production        | This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.                                               |
| Obsolete                 | Not In Production      | This datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.                                                    |

Rev. I34