
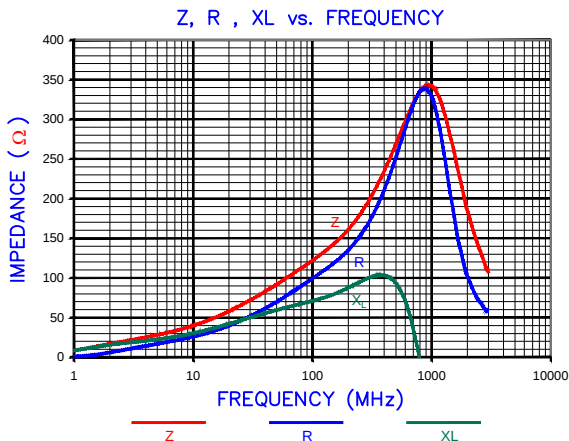



PHYSICAL DIMENSIONS:

A	11.38	[.448]	$\pm$	0.18	[.007]
B	11.38	[.448]	$\pm$	0.18	[.007]
C	9.32	[.367]	$\pm$	0.18	[.007]
D	7.62	[.300]	$\pm$	0.10	[.004]
E	2.54	[.100]	$\pm$	0.13	[.005]
T ₁	3.43	[.135]	$\pm$	0.25	[.010]
T ₂	0.64	[.025]	$\pm$	TYP.	

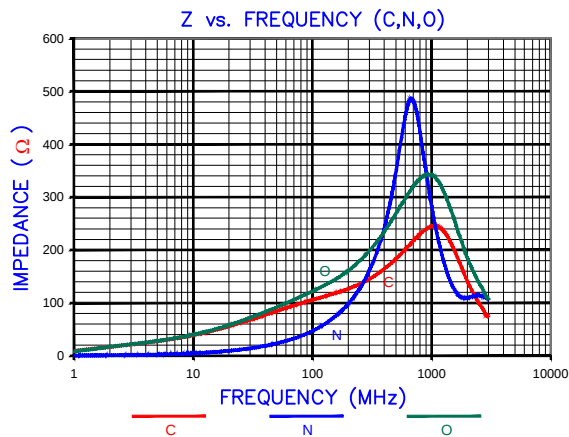


CM4545Z131B-10

RoHS

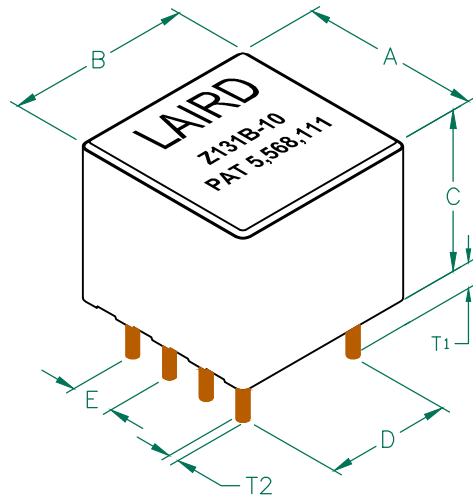

EQUIVALENT CIRCUIT



UNCONTROLLED DOCUMENT


ELECTRICAL CHARACTERISTICS:

Z @ 100MHz (Ω)	DCR (Ω)	Rated Current
Nominal	130	
Minimum	98	
Maximum	163	0.01

NOTES: UNLESS OTHERWISE SPECIFIED

1. BULK PACKED, 910 per CASE.
2. COMPONENTS SHOULD BE ADEQUATELY PREHEATED BEFORE SOLDERING.
3. TERMINATION FINISH IS 100% TIN.
4. THIS PART HAS NO PIN POLARITY.
5. OPERATION TEMPERATURE (INCLUDING SELF-HEATING):
-40 ~ +125°C.

HOLE PATTERN FOR WAVE SOLDERING

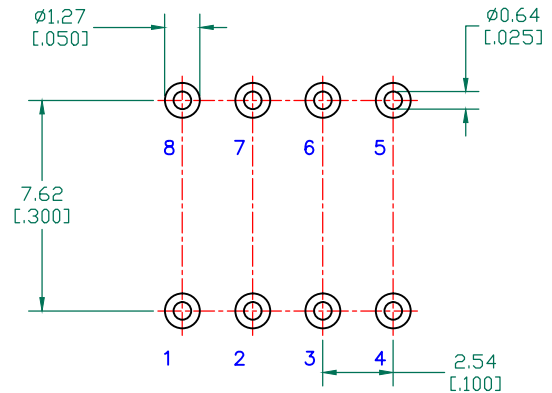

DIMENSIONS ARE IN mm [INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.			
D	ADD NOTE 5	08/30/12	QIU	PROJECT/PART NUMBER: CM4545Z131B-10 DATE: 06/01/04 CAD # CM4545Z131B-10-D-1 SCALE: NTS TOOL # H0448-600			
C	UPDATE COMPANY LOGO AND KAPTON LABEL ADD EQUIV. CIRCUIT	11/05/08	JRK				
B	UPDATE COMPANY LOGO	12/07/07	JRK				
A	ORIGINAL DRAFT	06/01/04	JRK				
REV	DESCRIPTION	DATE					
				REV	D	DRAWN BY:	JRK
				SHEET: 1 of 2			