



DIMENSIONS

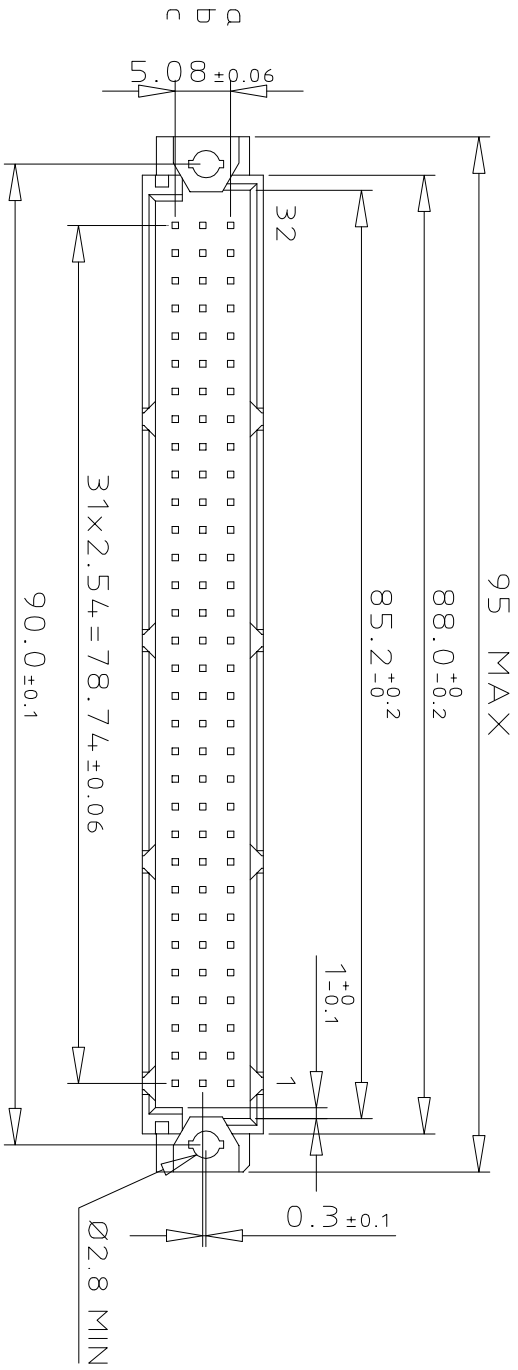


TERMINATION

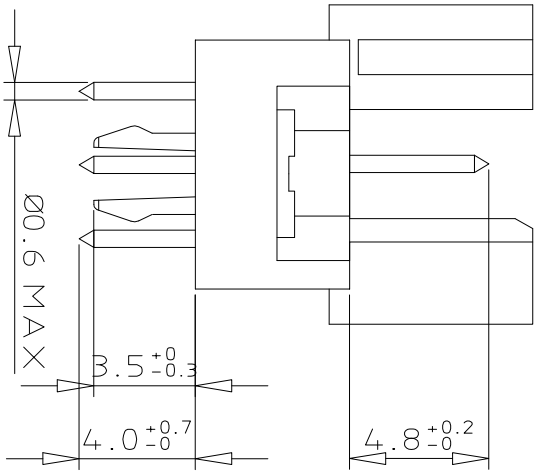

ORDERING INFORMATION

SERIES	8609	3	96	7	8	14	7	4	5	ELF
ROWS FITTED WITH CONTACTS										
Row a	b	c								
Row a - c										
NO. OF CONTACTS										
TYPE OF INSULATOR										
3 ROW MALE INSULATOR										
METHOD OF MOUNTING										
REVERSE MOUNTING - STYLE R										
TERMINATION										
STRAIGHT SPILL										
OPTIONS										
NO. OPTION										
WITH HARPOONS										
PERFORMANCE CLASS										
DIN 41612 CLASS 3										
DIN 41612 CLASS 2										
DIN 41612 CLASS 1										
AS PER MIL C 55302 / JSS 50808										
PITCH PER ROW										
254 mm										
LEAD FREE VERSION										

PCB LAYOUT

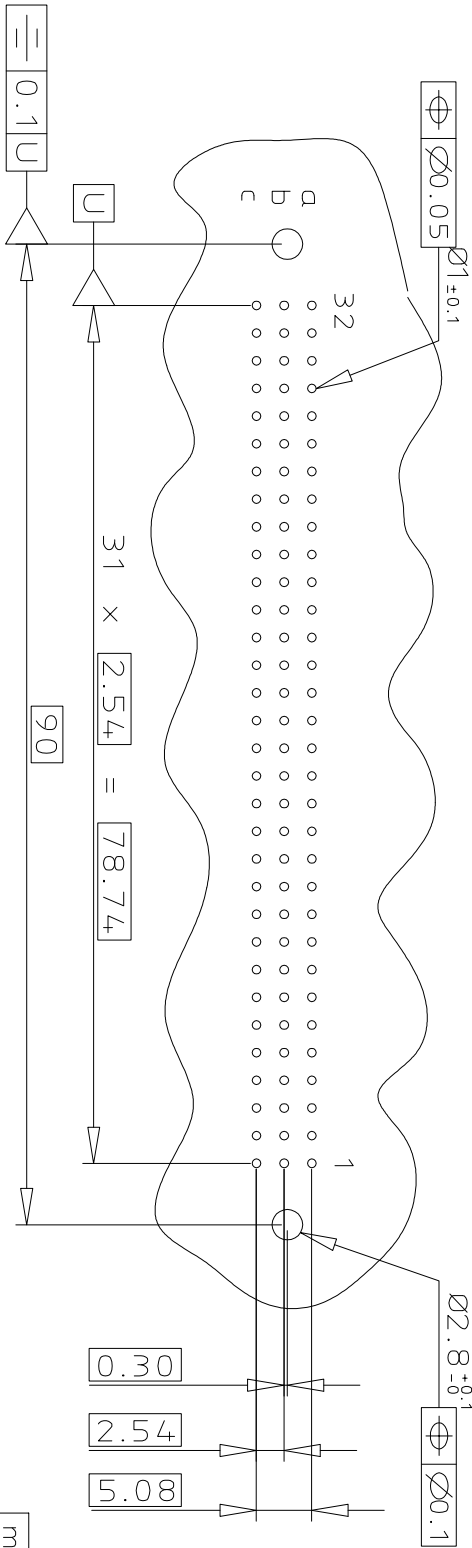

GENERAL CHARACTERISTICS & ROHS INFO

REFER DRAWING C-8609-0000A

mat'l. code	surface	tolerance	projection	product family
SEE DWG C-8609-0000A	ISO 1302	ISO 406 ISO 1101		8609
ltr	ecn	no	dr	ddte
A	104-0063	MINI	2004-09-17	angles
B	105-0089	MINI	2005-05-19	linear
C	105-0174	MINI	2005-09-27	0°±2°
D	106-0061	MINI	2006-05-31	dr
E	108-0142	KR	2008-10-17	engr
F	108-0146	KR	2008-10-21	chr
		qpdp	KESAVAN R	2008-10-21
sheet index	revision	F	1	