

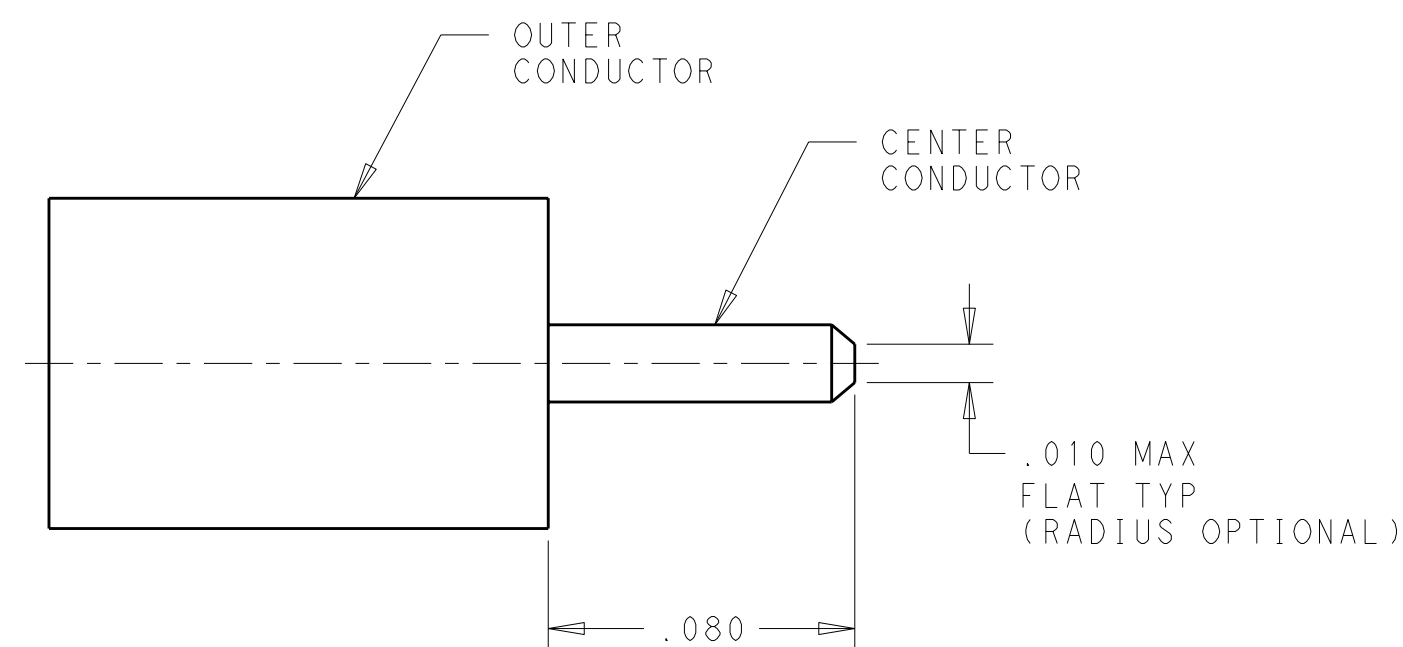


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-		C	REV PER ECO 12-008848	5-10-12	CT	WM

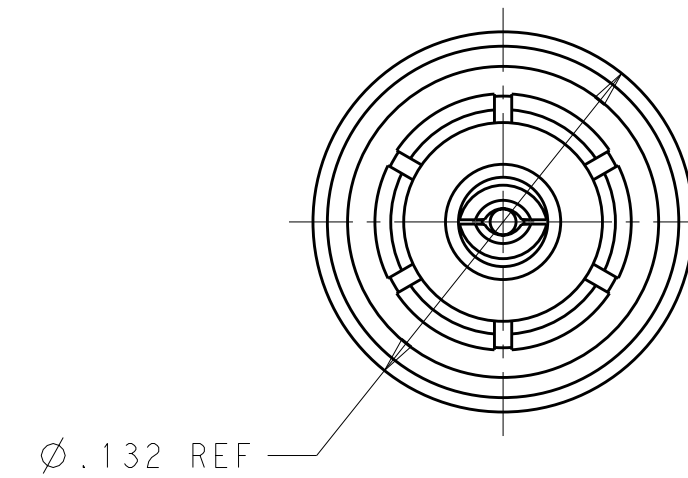

INSULATOR - TEFLON (PTFE) ROD, PER ASTM D1710

△ 2 FINISH:
BODY & CENTER CONTACT - GOLD PLATE PER ASTM B488,
OVER NICKEL PLATE , PER SAE-AMS-QQ-N-290

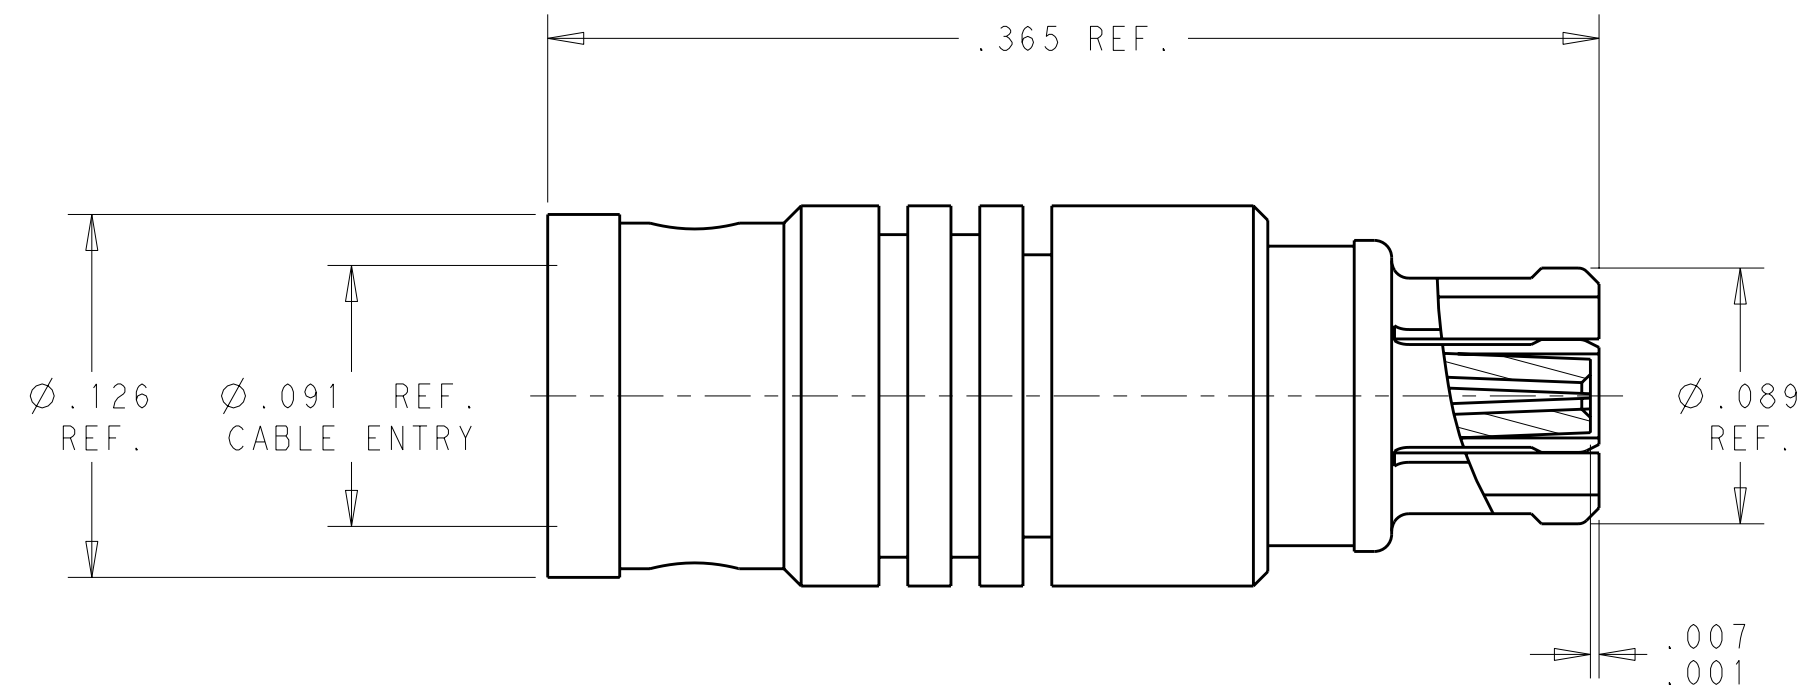

CABLE PREPARATION FOR Ø.086 SEMI-RIGID & CONFORMABLE CABLES

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S T Morley	12SEPT2007		TE Connectivity	
		CHK S T Morley	03SEP2010			
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD S T Morley	NAME SMPM STRAIGHT CABLE JACK (F) DIRECT SOLDER ATTACHMENT FOR .086 DIA. CABLES		
			PRODUCT SPEC			
			-			
			APPLICATION SPEC			
			-			
MATERIAL	FINISH	WEIGHT	-	SIZE	CAGE CODE	DRAWING NO
				A2	00779	C-1996328
CUSTOMER DRAWING			SCALE	SHEET	OF	REV
			15.1	1	1	C