

MICRO SWITCH


A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
PRINCETON, ILLINOIS

FED. MFR. CODE 91929

SWITCH - ENCLOSED

5 ML7

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

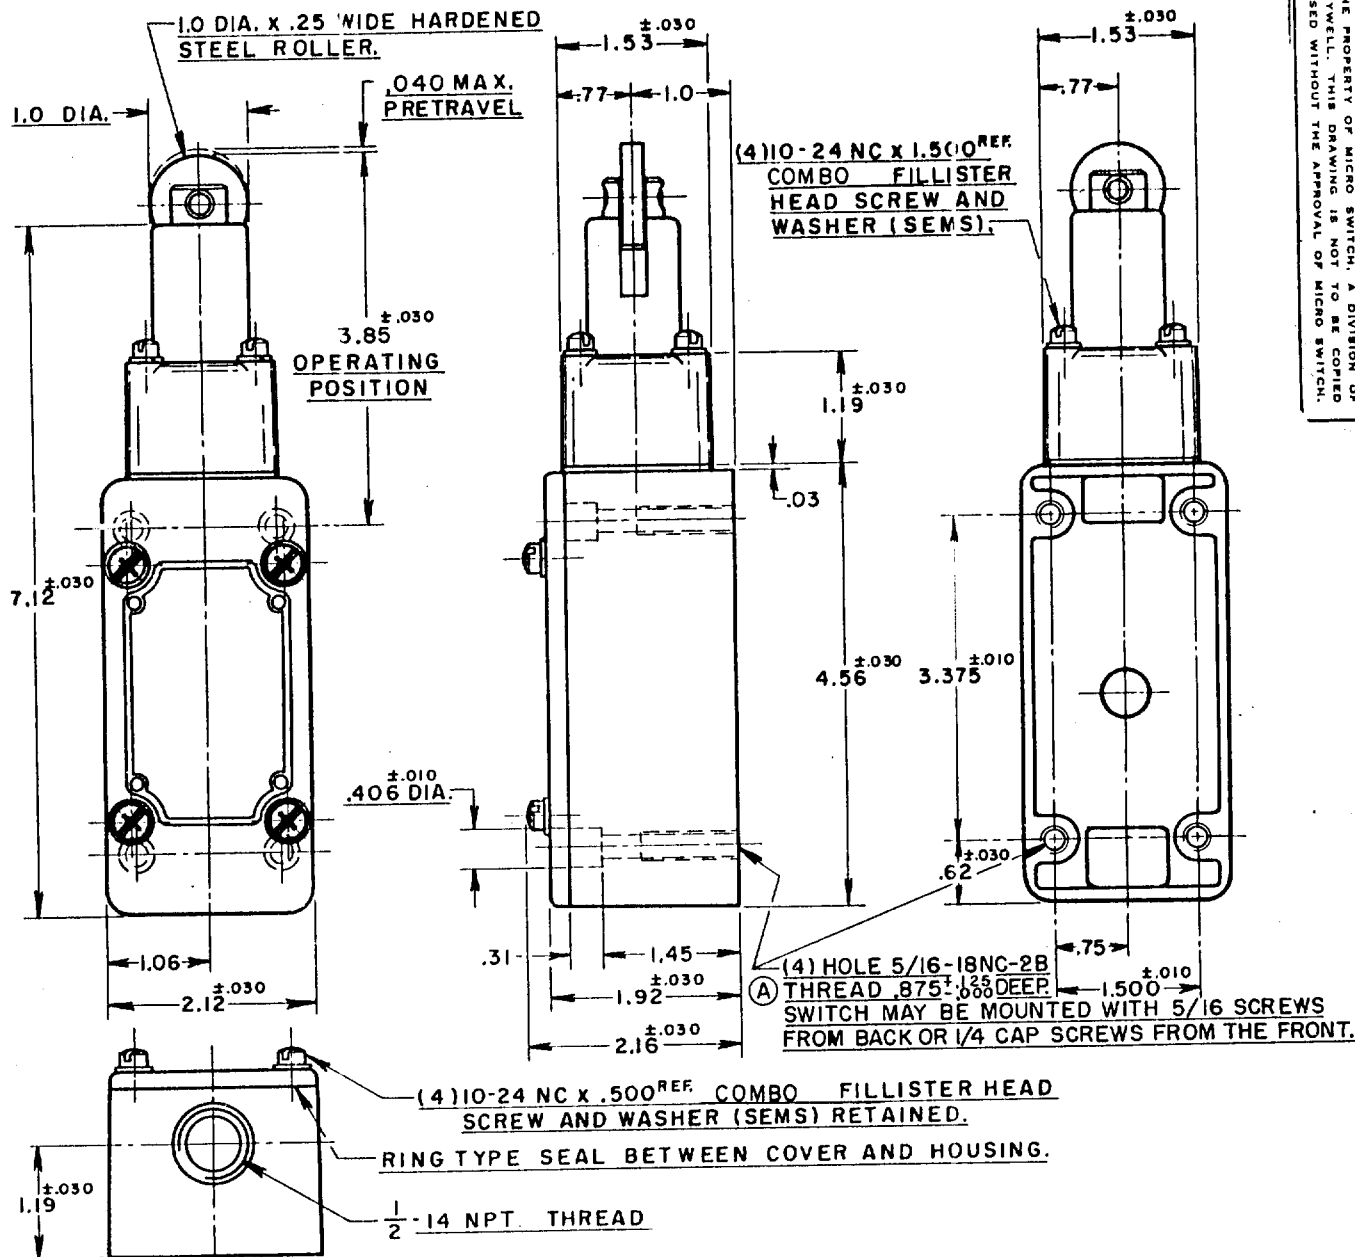

NOTE -

- 1-ROLLER ASSEMBLY MAY BE RE-ASSEMBLED 90° FROM POSITION SHOWN.
- 2-IT IS ESSENTIAL TO PREVENT ENTRANCE OF HARMFUL AGENTS THRU THE CONDUIT OPENING TO OBTAIN THE FULL BENEFIT OF THE SEALED CONSTRUCTION PROVIDED IN THIS UNIT.
- 3-SWITCH WILL PERFORM SATISFACTORILY IN TEMPERATURES TO MINUS 30° F.
- 4-BASIC SWITCHING ELEMENT LISTED BY UNDERWRITERS' LABORATORIES, INC.

CHARACTERISTICS (TENTATIVE)

OPERATING FORCE --- 6 LBS. APPROX.

RELEASE FORCE --- 4 LBS. APPROX.

DIFFERENTIAL TRAVEL --- .020 MAX.

OVERTRAVEL --- .475 MIN.

SWITCH-BASIC REPLACEMENT DT-2R711-A7

ELECTRICAL DATA

CONTACT ARRANGEMENT
D. P. D. T.

BREAK DISTANCE
.020 MIN.



10 A-125 OR 250 VAC
0.3 A-125 VDC; 0.15 A-250 VDC

SCALE 1/2 TO 1

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±.1

WEIGHT

5 ML7

M

DRAWING NUMBER

6

ISSUE

4

REVISIONS

CO11247

O. M. W.

MAR 58

CO14233

M B F

DEC 59

CO38549

R E R

APR 77

CO55051-B

J A P

DEC 84

CO74287

G J W

APR 93

CNT

57

57

57

57

57

57

57

57

57

57

57

57

57

57

57

57

57

57