



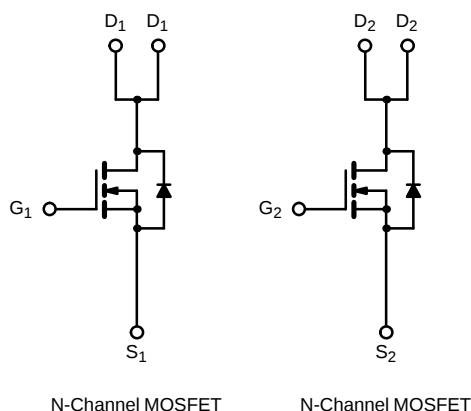

Dual N-Channel 2.5-V (G-S) MOSFET

PRODUCT SUMMARY

V_{DS} (V)	$r_{DS(on)}$ (Ω)	I_D (A)
20	0.03 @ $V_{GS} = 4.5$ V	± 6
	0.04 @ $V_{GS} = 2.5$ V	± 5.2



ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)

Parameter		Symbol	Limit	Unit
Drain-Source Voltage		V_{DS}	20	V
Gate-Source Voltage		V_{GS}	± 10	
Continuous Drain Current ($T_J = 150^\circ\text{C}$) ^a	$T_A = 25^\circ\text{C}$	I_D	± 6	A
	$T_A = 70^\circ\text{C}$		± 4.8	
Pulsed Drain Current		I_{DM}	± 20	
Continuous Source Current (Diode Conduction) ^a		I_S	1.7	
Maximum Power Dissipation ^a	$T_A = 25^\circ\text{C}$	P_D	2.0	W
	$T_A = 70^\circ\text{C}$		1.3	
Operating Junction and Storage Temperature Range		T_J, T_{stg}	-55 to 150	$^\circ\text{C}$

THERMAL RESISTANCE RATINGS

Parameter	Symbol	Limit	Unit
Maximum Junction-to-Ambient ^a	R_{thJA}	62.5	$^\circ\text{C/W}$

Notes

a. Surface Mounted on FR4 Board, $t \leq 10$ sec.







SPECIFICATIONS (T_J = 25° C UNLESS OTHERWISE NOTED)						
Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Static—0.6						
Gate Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = 250 μA	0.6			V
Gate-Body Leakage	I _{GSS}	V _{DS} = 0 V, V _{GS} = ±8 V			±100	nA
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} = 20 V, V _{GS} = 0 V			–1	μA
		V _{DS} = 20 V, V _{GS} = 0 V, T _J = 55° C			–5	
On-State Drain Current ^a	I _{D(on)}	V _{DS} ≥ 5 V, V _{GS} = 4.5 V	20			A
Drain-Source On-State Resistance ^a	r _{DS(on)}	V _{GS} = 4.5 V, I _D = 6 A		0.023	0.03	Ω
		V _{GS} = 2.5 V, I _D = 5.2 A		0.028	0.04	
Forward Transconductance ^a	g _{fs}	V _{DS} = 10 V, I _D = 6 A		24		S
Diode Forward Voltage ^a	V _{SD}	I _S = 1.7 A, V _{GS} = 0 V		0.75	1.2	V
Dynamic^b						
Total Gate Charge	Q _g	V _{DS} = 10 V, V _{GS} = 4.5 V, I _D = 6 A		21	40	nC
Gate-Source Charge	Q _{gs}			2.9		
Gate-Drain Charge	Q _{gd}			6.5		
Turn-On Delay Time	t _{d(on)}	V _{DD} = 10 V, R _L = 10 Ω I _D ≈ 1 A, V _{GEN} = 4.5 V, R _G = 6 Ω		30	60	ns
Rise Time	t _r			70	140	
Turn-Off Delay Time	t _{d(off)}			70	140	
Fall Time	t _f			30	60	
Source-Drain Reverse Recovery Time	t _{rr}	I _F = 1.7 A, di/dt = 100 A/μs		70	100	

Notes






- Pulse test; pulse width ≤ 300 μs, duty cycle ≤ 2%.
- Guaranteed by design, not subject to production testing.



TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)

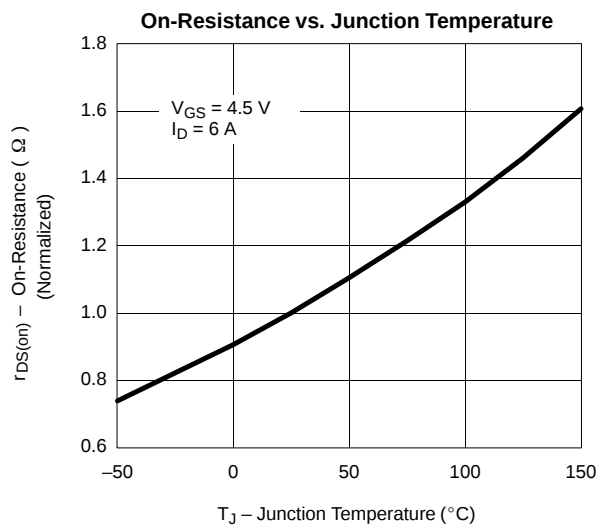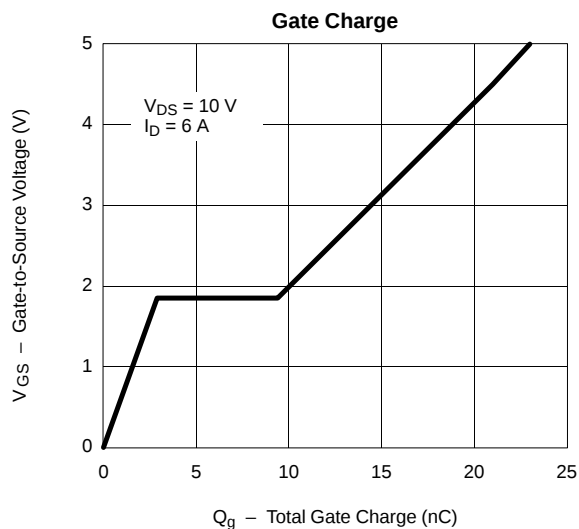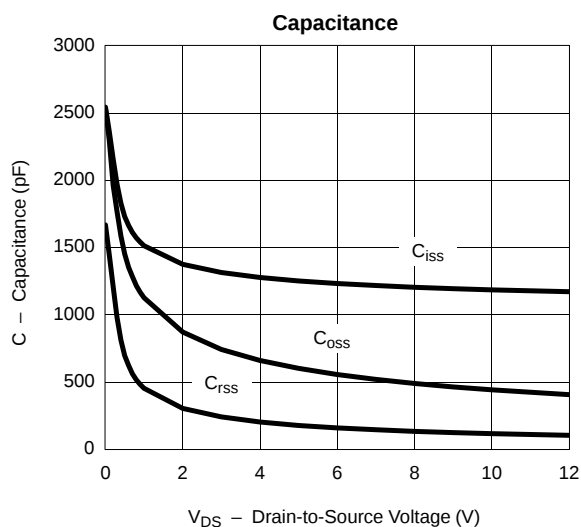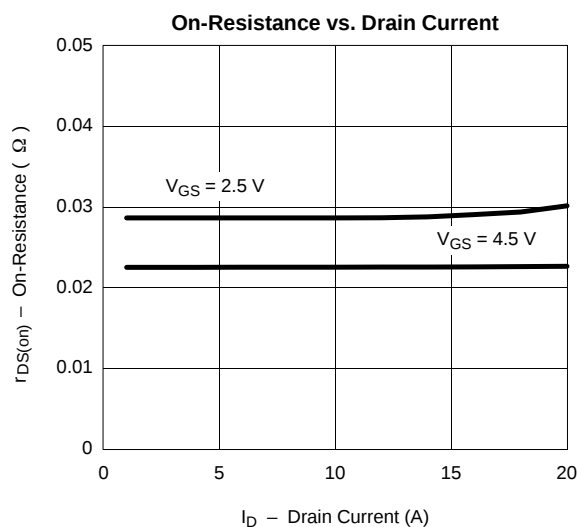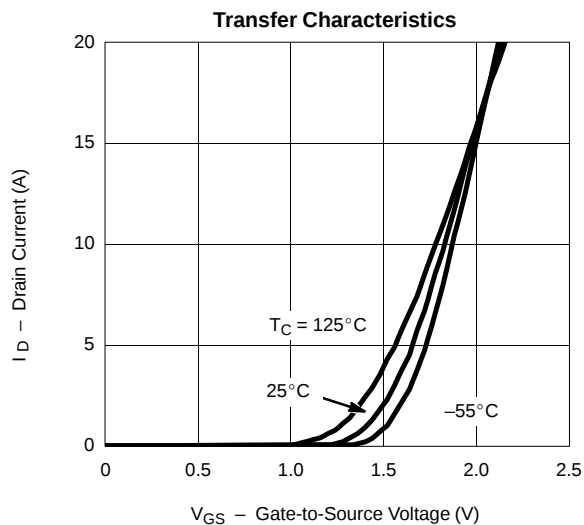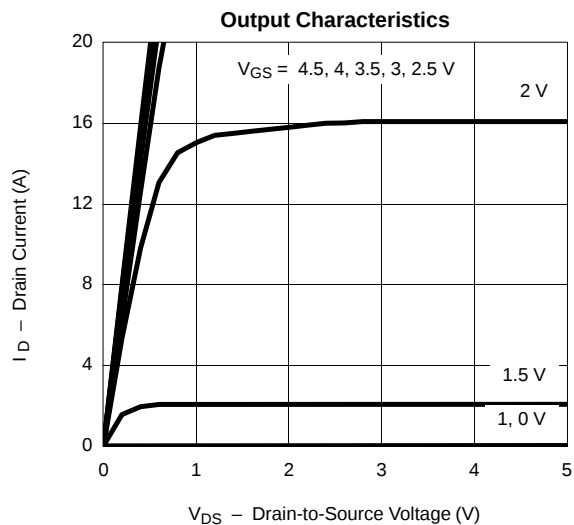

TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)

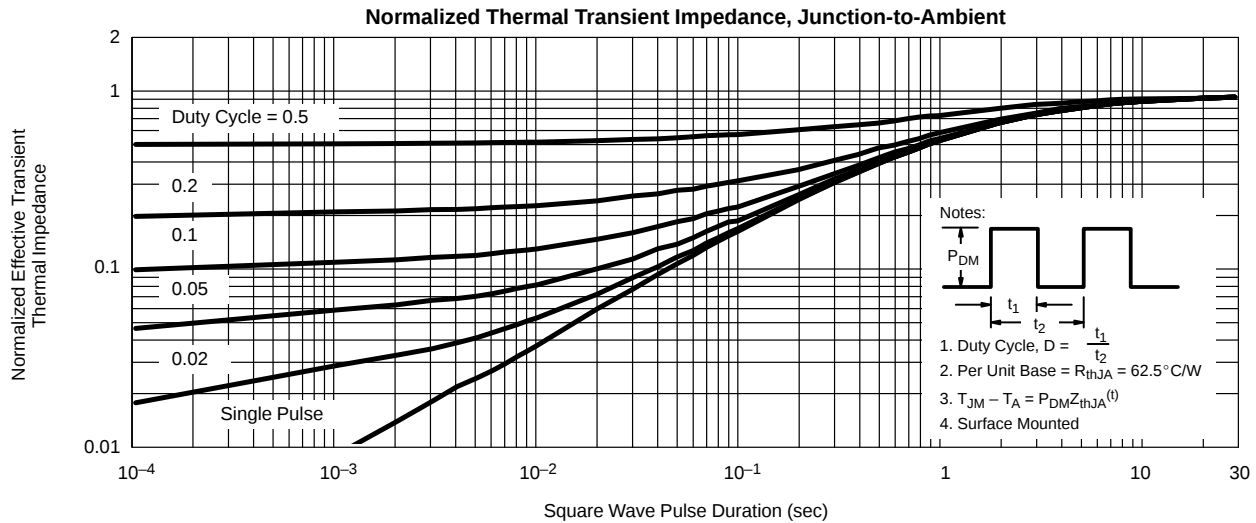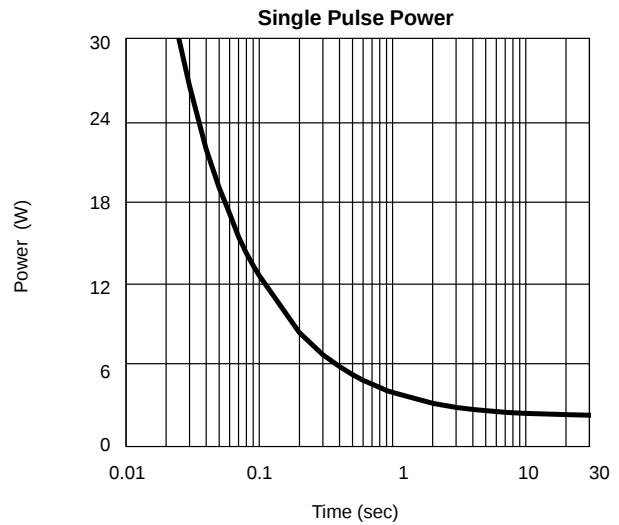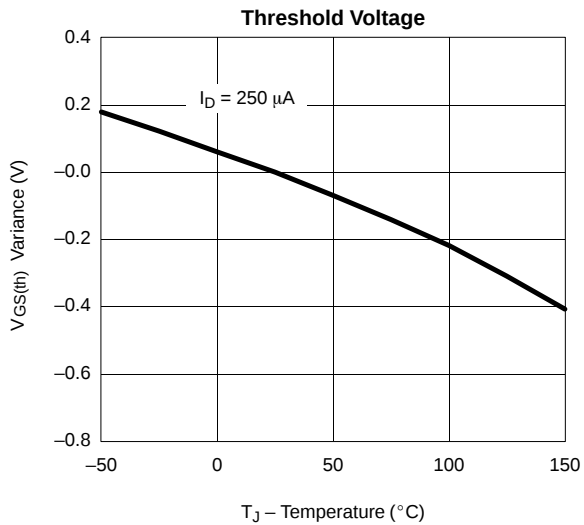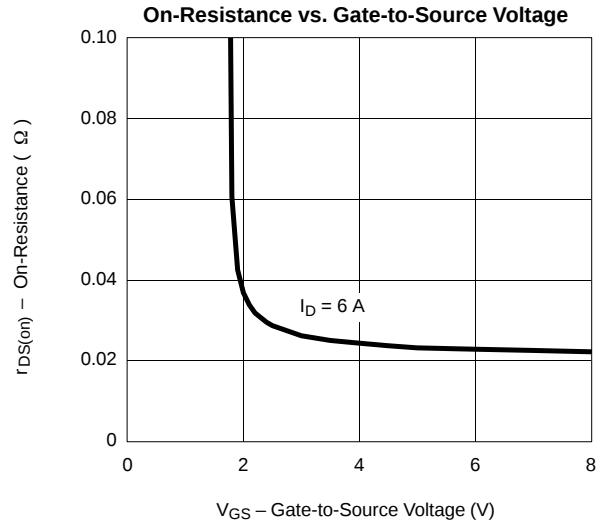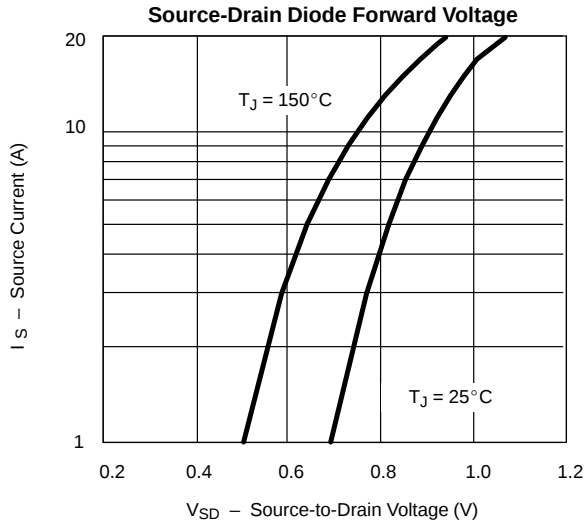

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Vishay:](#)
[SI9926DY](#)