

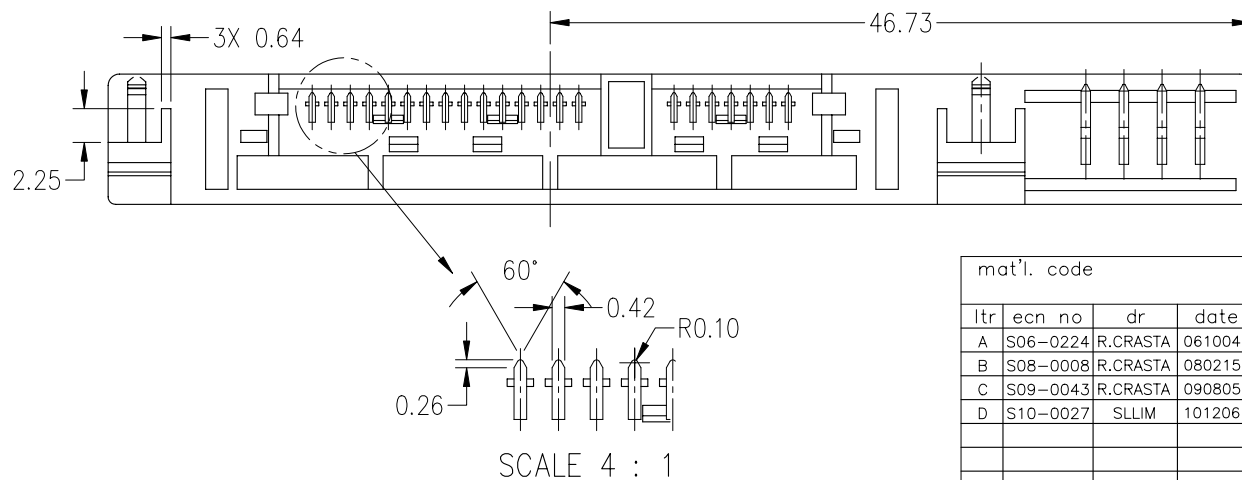
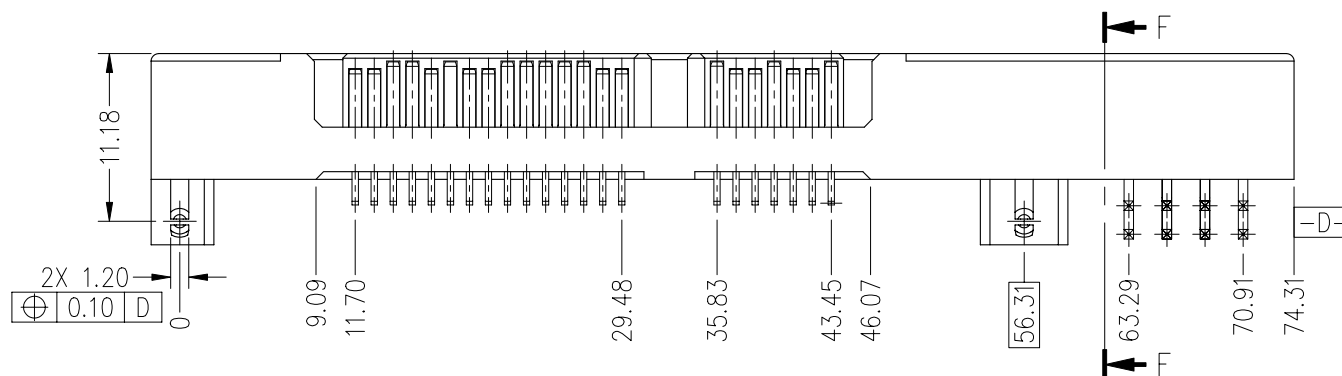

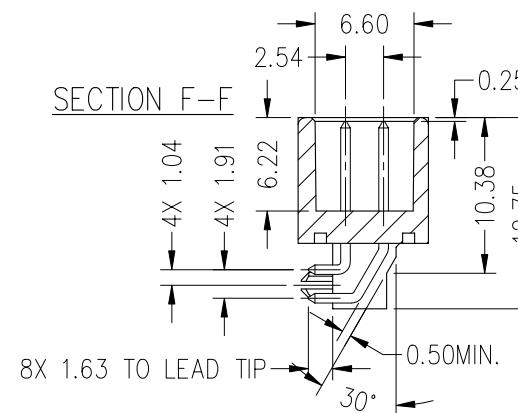
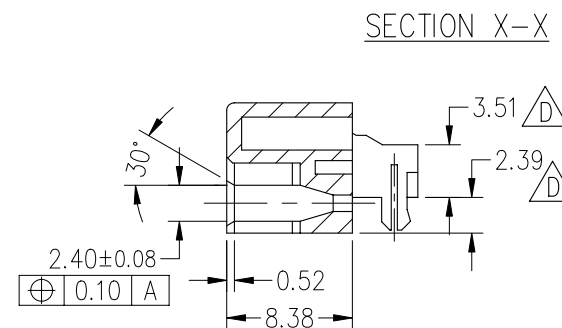
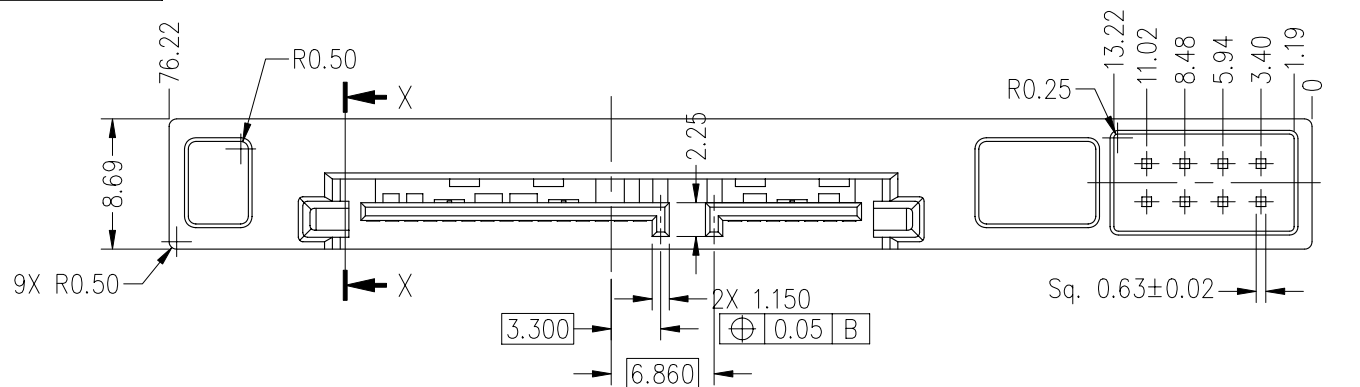
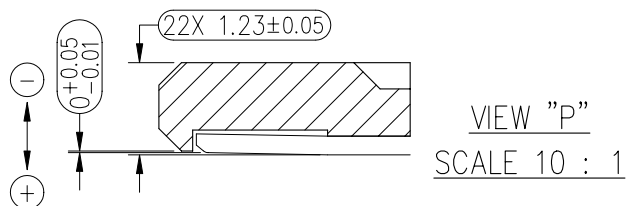


PRODUCT NO
SEE TABLE

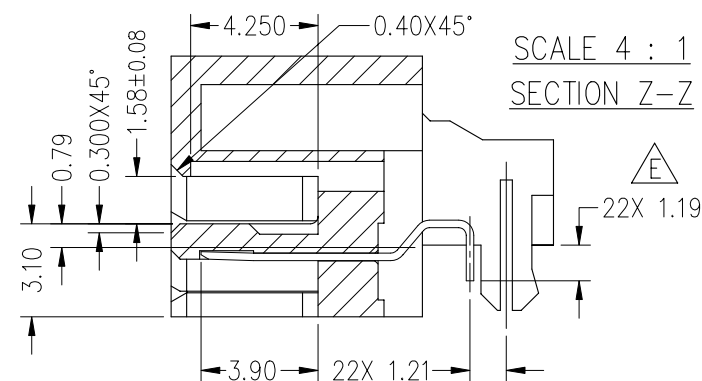

mat'l. code				tolerances unless otherwise specified			projection	product family	
ltr	ecn no	dr	date	angles	linear		mm	SATA PLUG	
A	S06-0224	R.CRASTA	061004			±.25		SATA COMBO PLUG	
B	S08-0008	R.CRASTA	080215			±.13			
C	S09-0043	R.CRASTA	090805	±3°		±.050	scale 2:1	10068973	
D	S10-0027	SLLIM	101206	dr	R.CRASTA	060630			
				enrg	R.CRASTA	090805		sheet 1 of 4	
				chr	R.CRASTA	090805		size A4	
				appd	JOEY NG	090805		type Product Customer Drawing	
sheet index		revision	D	D	D	D			
		sheet	1	2	3	4			

[illegible]

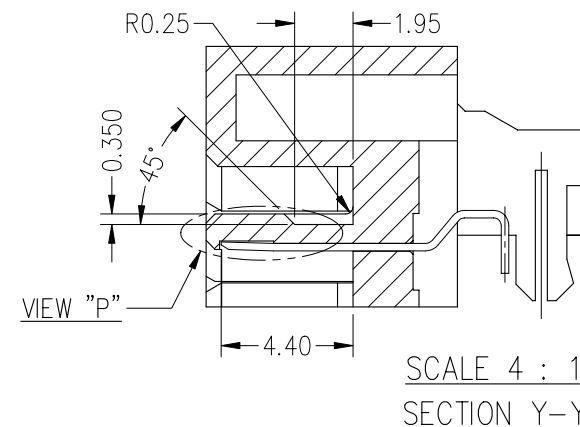

FCIconnect.com

Copyright FCI



D

form: A4

1

2 3

4

5

6

A

B






C

A

B

C

D

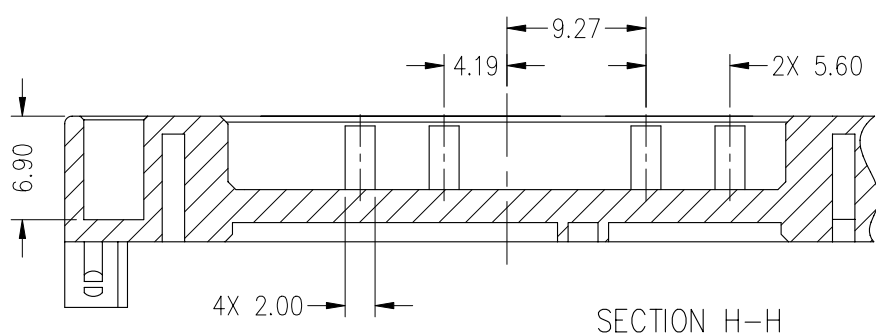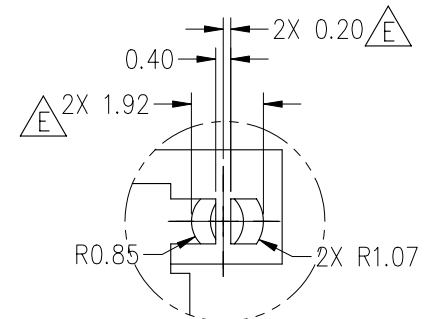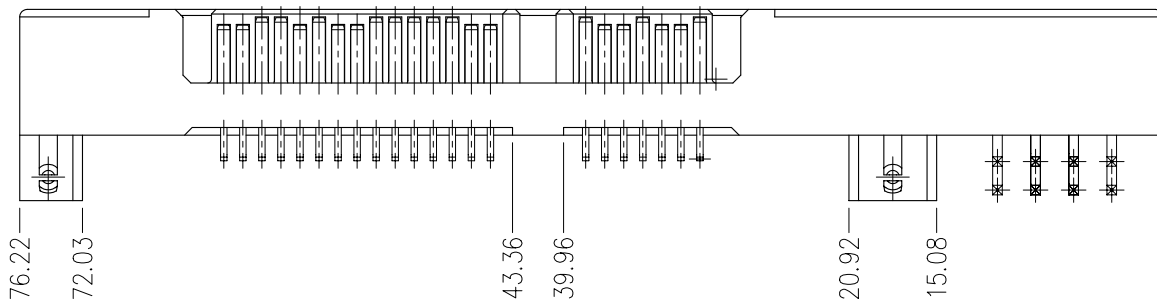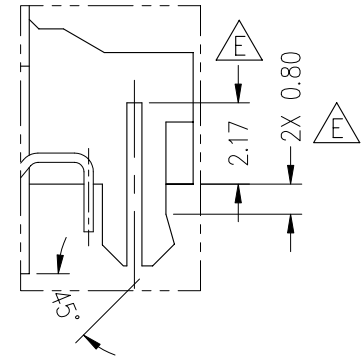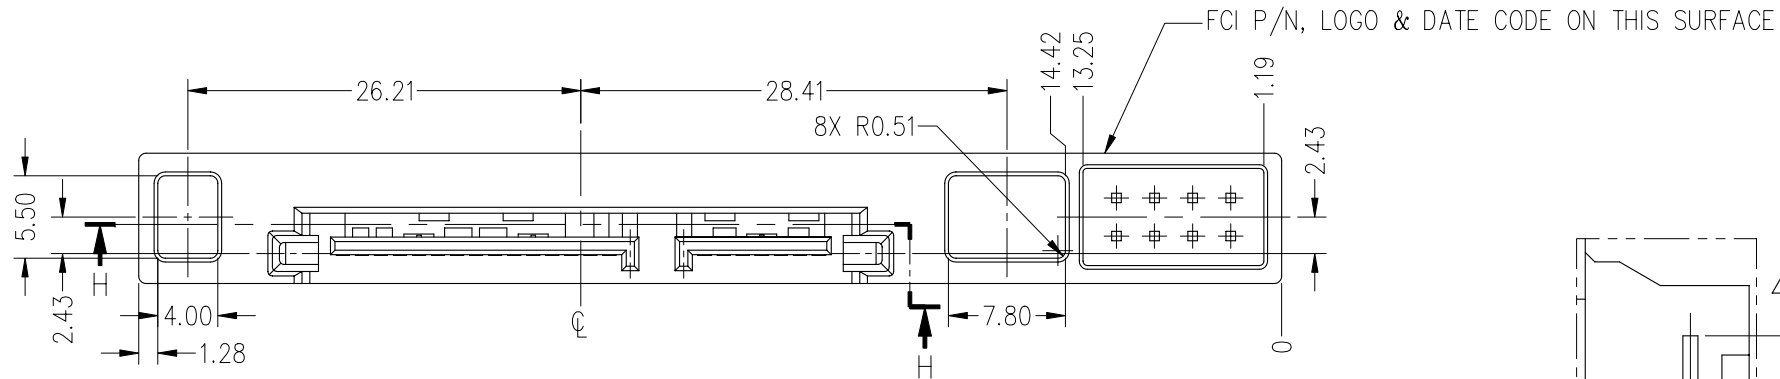

SECTION H-H

mat'l. code				tolerances unless otherwise specified			projection	product family		
ltr	ecn no	dr	date	angles	linear	-----		SATA PLUG		
D				---	---	-----	mm	title		
						-----	scale 2:1	SATA COMBO PLUG		
				dr	R.CRASTA	060630		dwg no		sheet 3 of 4
				enr	R.CRASTA	090805		10068973		size
				chr	R.CRASTA	090805				A4
				appd	JOEY NG	090805		type		Product Customer Drawing
sheet index		revision sheet								


PDM: Rev:D

STATUS:Released

Printed: Jan 22, 2011

6

PRODUCT NO	WD P/N	REMARKS
10068973-001LF	2041-701090-000	LEAD FREE
10068973-002LF	2041-701090-000	ZYTEL HTN
10068973-003LF	2041-701090-000	LCP

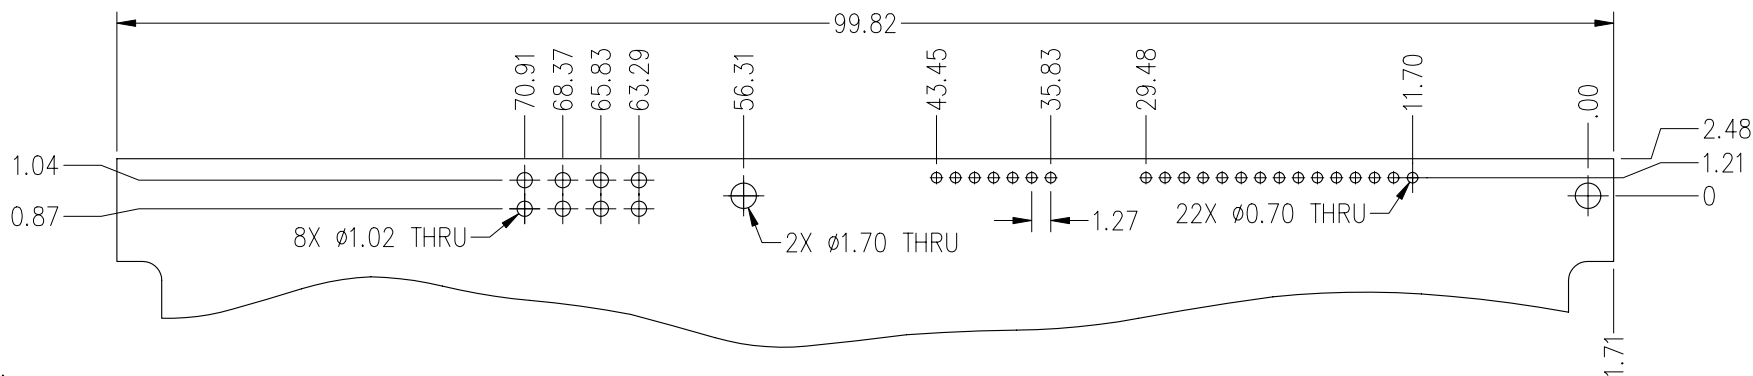

NOTES :

1 MATERIAL:

HOUSING: HIGH TEMP. PLASTIC (BLACK) UL 94V-0.
 SATA TERMINAL : BRASS C2680-H THICKNESS 0.25MM
 FINISH: 5u" MIN. AU FLASH OVER 50u" NICKEL.
 SOLDER TAIL : 50u" MIN. TIN (100%) OVER 50u" MIN. NICKEL.
 JUMPER PIN : PH. BRONZE OR BRASS.
 FINISH (MATING AREA) : 4u" MIN. AU FLASH OVER 50u" NICKEL.

2. PACKAGING: 90 PCS PER TRAY, 900 PCS PER BOX.

3. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

4. THIS HOUSING WILL WITHSTAND EXPOSURE TO 260°C TEMPERATURE FOR 10 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN.

5. PRODUCT SPECIFICATIONS: GS-12-194.

6 A SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW OR NOTE WHICH HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION.

RECOMMENDED PCB LAYOUT

mat'l. code				tolerances unless otherwise specified			projection	product family		
ltr	ecn no	dr	date	angles	linear	mm	mm	SATA PLUG		
D								title		
								SATA COMBO PLUG		
							scale 2:1	dwg no		
								sheet 4 of 4		
								10068973		
								A4		
								type		
								Product Customer Drawing		
sheet index	revision sheet									