

PSU

Din Rail



Features:

- AC/DC Power Module
- Universal Input 85V AC to 264V AC
- High Efficiency Up To 86%
- Short Circuit Protection
- Internal Input Filter

Model List:

Part Number	Input Voltage	Output Wattage	Output Voltage	Output Current	Eff. (typ.)	Eff. (min.)
Single Output Models						
DRAN30-05	85 to 264V AC	30W	+ 5V DC	6,000mA	79%	77%
DRAN30-12			+ 12VDC	2,500mA	84%	82%
DRAN30-24			+ 24VDC	1,250mA	86%	83%

Specification:

All Specifications Typical At Nominal Line, Full Load, 25°C Unless Otherwise Noticed

Characteristics	Conditions	Min.	Typ.	Max.	Unit
Isolation voltage	Input / Output	3,000			V AC
Isolation resistance	Input / Output, @ 500VDC	100			MΩ
Ambient temperature	Operating at Vi nom	-10		+ 71	°C
Derating	Vi nom, from +61 C to +71 C			2.5	% / C
Storage temperature	Non operational	-25		+ 85	°C
Relative humidity	Vi nom, Io nom	20		90	% RH
Dimension	L90 × W40.5 × D115				mm
Cooling	Free air convection				
Case material	Plastic				

Input Specifications:

Characteristics	Conditions	Min.	Typ.	Max.	Unit
Rated input voltage	Io nom	100		240	V AC
Input voltage range	Ta min ... Ta max, Io nom	80		264	
		90		375	V DC
Line frequency	Vi nom, Io nom	47		63	Hz
Inrush current	Io nom	Vi : 115V AC		20	A
		Vi : 230V AC		40	

Specification:


All Specifications Typical At Nominal Line, Full Load, 25°C Unless Otherwise Noticed

Characteristics	Conditions		Min.	Typ.	Max.	Unit
Output voltage accuracy	Vi nom, Io min ...Io nom				±1	%
Minimum load	Vi nom		0			
Line regulation	Io nom, Vi min ...Vi max				0.5	
Load regulation	Vi nom, Io min ...Io nom					
Turn on time	After AC is applied to input at full resistive load				1,000	ms
Voltage fall time	Io nom, Vo = 95% to 10% rated voltage				150	
Voltage rise time	At full resistive load					
Hold up time	Io nom	Vi : 115V AC	20			
		Vi : 230V AC	30			
Ripple & noise	Vi nom, Io nom, BW = 20MHz				50	mV
Voltage trim range	Vi nom, Wo =30W max	5V model	5		5.5	V DC
		12V model	12		14	
		24V model	24		28	
DC ON indicator threshold at start up	Vi nom, Io nom	5V model	4			
		12V model	9.6			
		24V model	19.2			
Efficiency	Vi nom, Io nom, Po / Pi		Up to 86% , see model list			


Control And Protection:

Characteristics	Conditions		Min.	Typ.	Max.	Unit
Rated over load protection	Vi nom		110		140	%
Over voltage protection	Vi nom, Io nom	12V model	6		6.8	V DC
		12V model	15		16.5	
		24V model	30		33	
Output short circuit	Vi nom, Io nom		Fold forward			

Circuit Schematic:

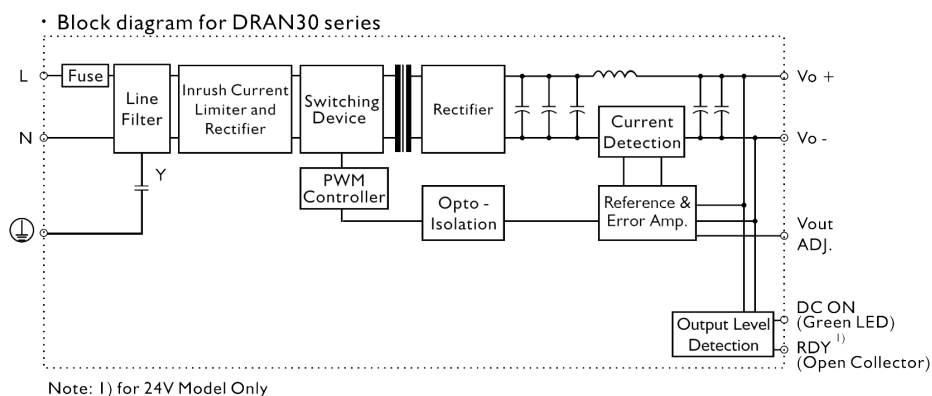

Mechanism & Pin Configuration:

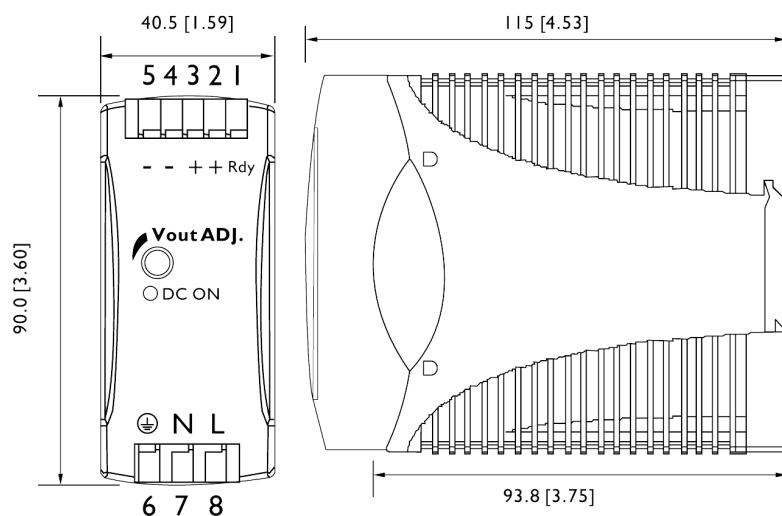

CONSTRUCTION

Easy snap-on mounting onto the DIN-Rail (TS35/7.5 or TS35/15), unit sits safely and firmly on the rail; no tools required even to remove

INSTALLATION

Ventilation / Cooling
Normal convection
All sides 25mm free space
For cooling recommended
Connector size range
Solid: 0.2-2.0mm² (AWG24-14)
(use copper conductors only)

Dimensions: Millimeters (Inches)


Physical Characteristics:

Case Size	90 × 40.5 × 115 mm 3.6 × 1.59 × 4.53"
Case Material	Plastic
Weight	290g


Pin Assignment

PIN NO.		Designation	Description
1	OUT	RDY	DC OK output for relay (not connect except 24V model)
2		+	Positive output terminal
3		+	Positive output terminal
4		-	Negative output terminal
5		-	Negative output terminal
6		$\oplus$	Ground this terminal to minimize high-frequency emissions
7	IN	N	Input terminals (neutral conductor, no polarity at DC input)
8		L	Input terminals (phase conductor, no polarity at DC input)
	OTHER	Vout ADJ.	Trimmer-potentiometer for Vout adjustment
		DC ON	Operation indicator LED

Fig. I Rdy connection

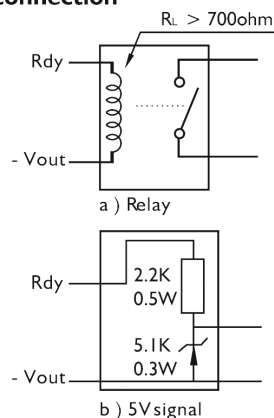

DERATING

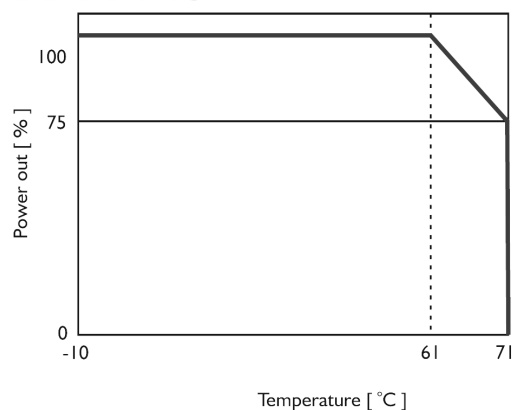

Part Number Table

Description	Part Number
PSU, Din Rail, 30W, 5V	DRAN30-05
PSU, Din Rail, 30W, 12V	DRAN30-12
PSU, Din Rail, 30W, 24V	DRAN30-24

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.