


DIMENSIONS


POSITIONS	A		B		C		D		E		F	
	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH
15	30.81	1.213	24.99	0.984	16.92	0.666	16.33	0.643	2.29	0.090	19.20	0.756
26	39.20	1.543	33.30	1.311	25.25	0.994	24.70	0.972	2.29	0.090	27.70	1.091
44	53.05	2.088	47.04	1.852	38.96	1.534	38.40	1.512	2.29	0.090	41.10	1.618
62	69.40	2.732	63.50	2.500	55.42	2.182	54.80	2.158	2.41	0.095	57.30	2.256

REVISIONS				
REV.	ECO. NO	DESCRIPTION	DATE	BY
A	2398	INITIAL RELEASE	07/01/2011	LH
B	2576	UPDATE PART NUMBER CODING	05/10/2012	LH
C	2637	ADD WIRE SIZE NOTE 3	07/19/2012	LH

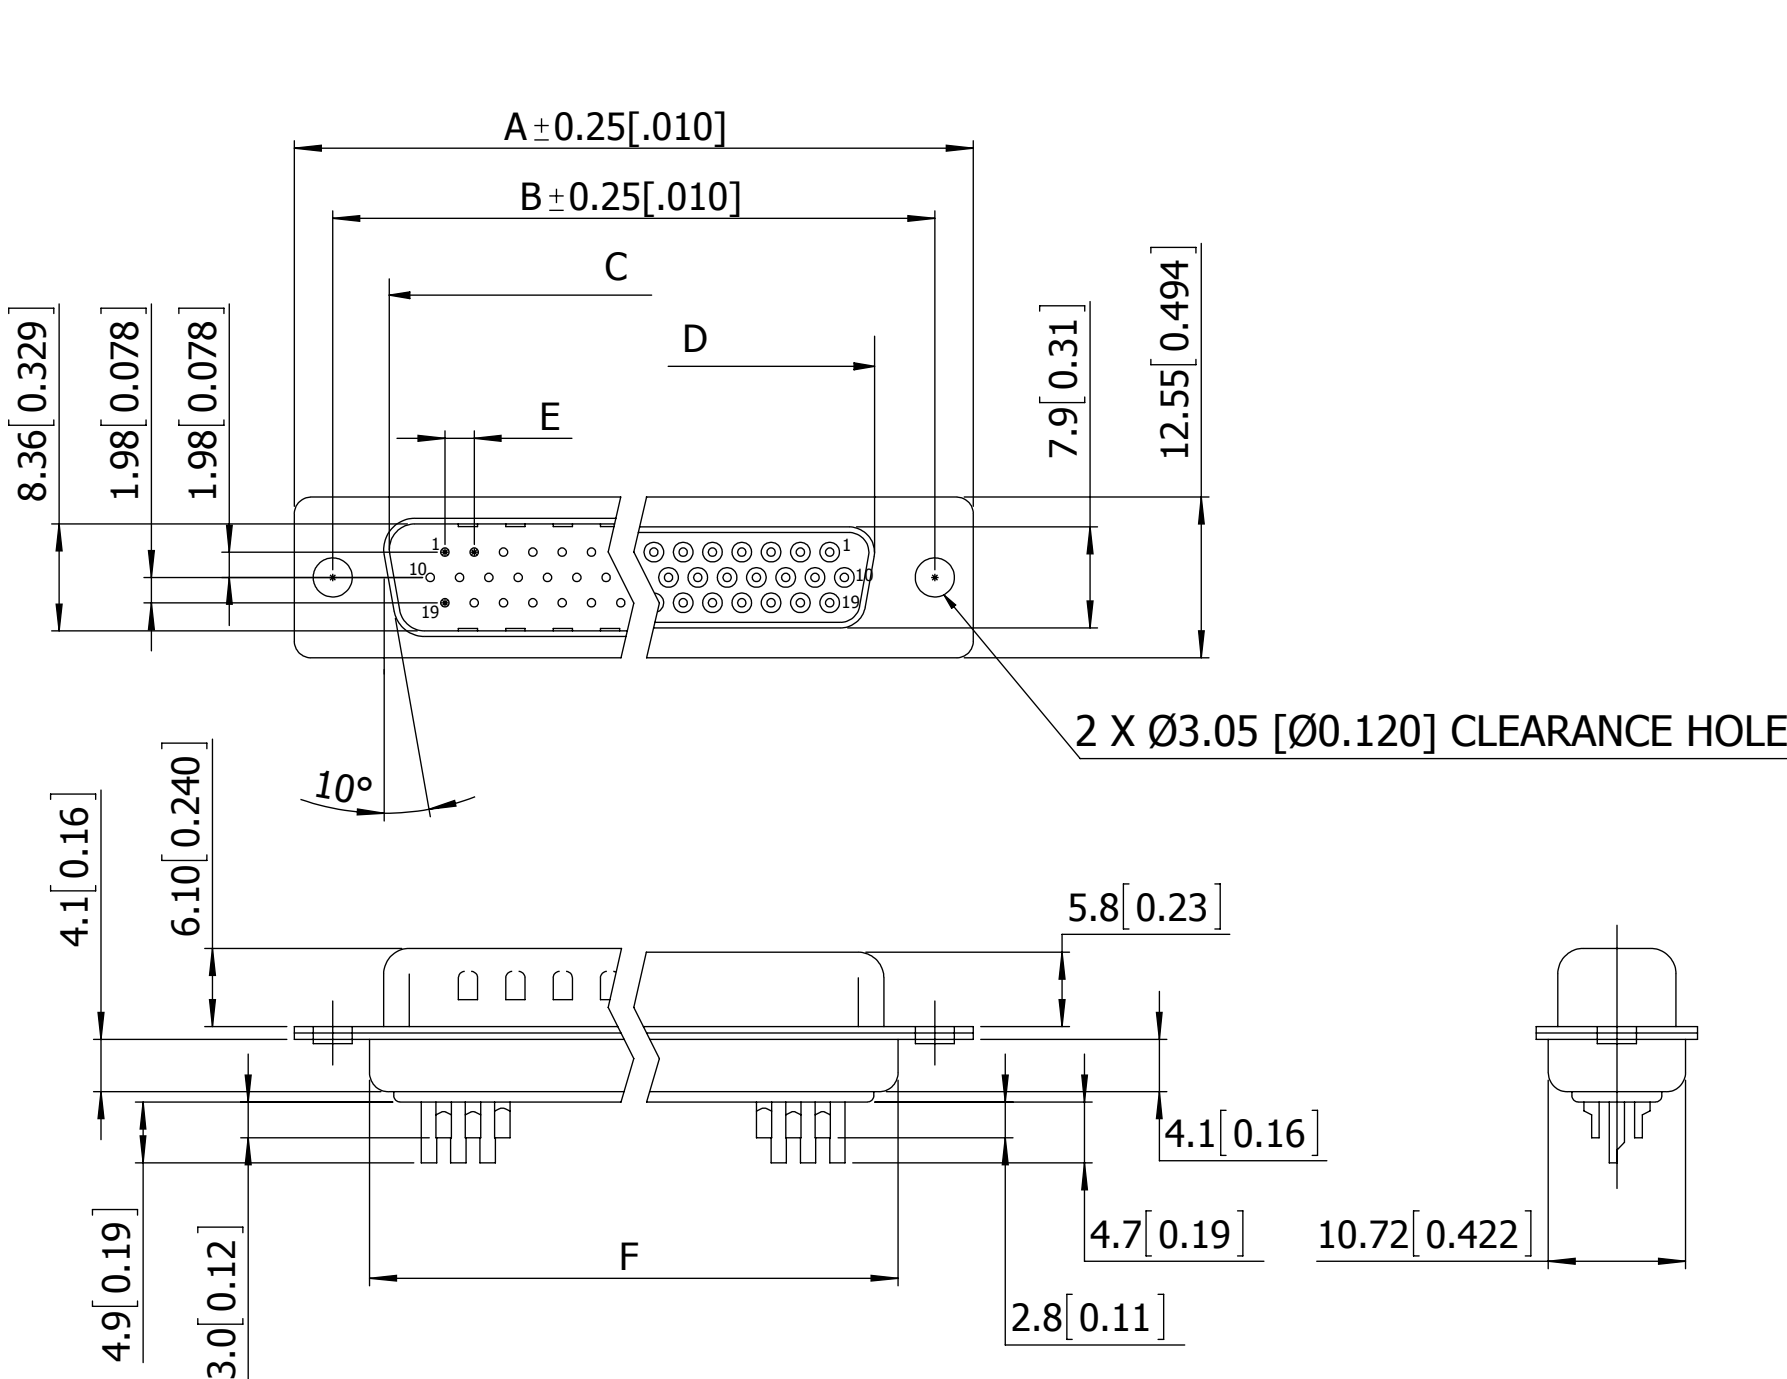

15,26,44,62 POSITIONS


(PN EXAMPLE: SDS104-PRW2-M15-SN00-1)

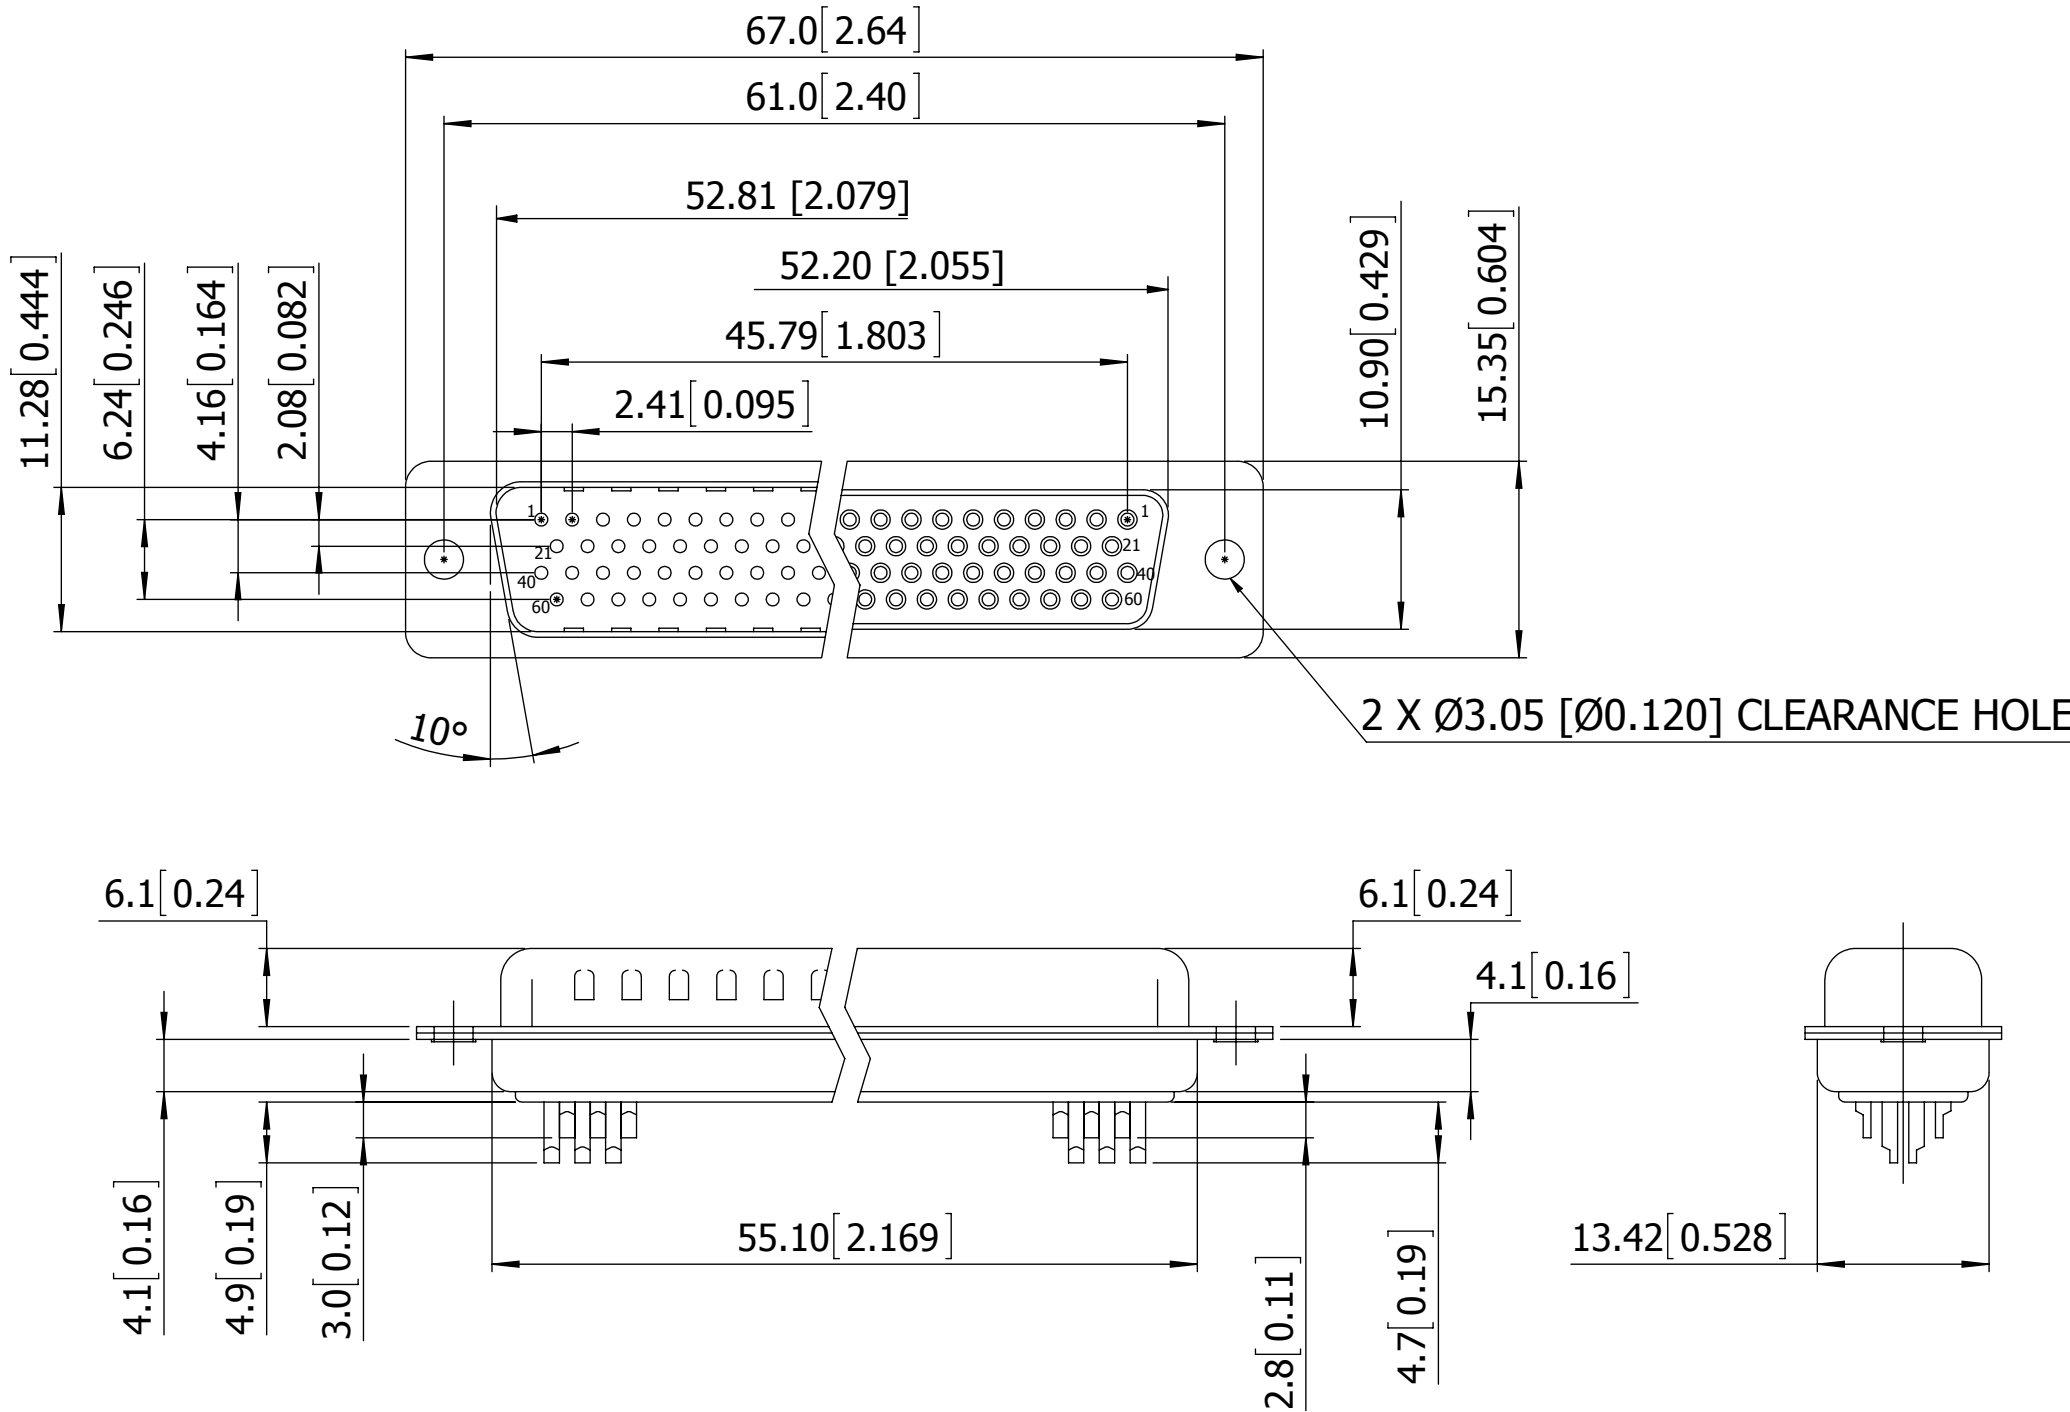

78 POSITIONS

(PN EXAMPLE: SDS104-PRW2-M78-SN00-1)

- NOTES:
- MATERIAL
INSULATOR : GLASS-FILLED THERMOPLASTIC PBT, UL94V-0
CONTACT: BRASS
SHELL : SPCC, .000100" TIN OVER .000050" MIN. COPPER (STANDARD, SEE PAGE 3)
CLINCH NUT : BRASS, NICKEL PLATED
SCREWLOCK : STEEL, NICKEL PLATED
OPERATING TEMPERATURE : -55°C TO +105°C
 - ELECTRICAL
CONTACT RESISTANCE : 20 MILLIOHMS MAX AT 1 AMP DC
INSULATION RESISTANCE : 1000 MAGOHMS AT 500 VDC
DIELECTRIC WITHSTANDING VOLTAGE : 1000 VAC/RMS 60Hz FOR 1 MINUTE
CURRENT RATING : 3 AMPS
VOLATGE RATING : 250 VAC/RMS 60Hz
 - ACCEPTS WIRE SIZE: 22 AWG MAX




RoHS COMPLIANT


UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MM [INCHES]		DRAWN	DATE	NAME		
			07/01/2011	LH		
TOLERANCES: ANGULAR: ± 3° DECIMALS X.=± 0.38 [.015] X.=± 0.25 [.010] .XX=± 0.13 [.005]		THE INFORMATION HEREIN CONTAINS PROPRIETARY INFORMATION OF SULLINS ELECTRONICS AND IS NOT TO BE REPRODUCED, USED OR DISCLOSED TO OTHERS FOR ANY PURPOSE EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY AN OFFICER OF SULLINS ELECTRONICS.			TITLE 104 SERIES D-SUB H.D. SOLDER CUP TYPE	
					PART NUMBER SDS104-PR _ _ _ _ _ N _ _ _	
				SIZE C	CAGE CODE 54453	DWG. NO. 11800
				SCALE: 1:15	SHEET 1 OF 3	
				REV C		

h: POSITION OF CLINCH NUT


h: 0

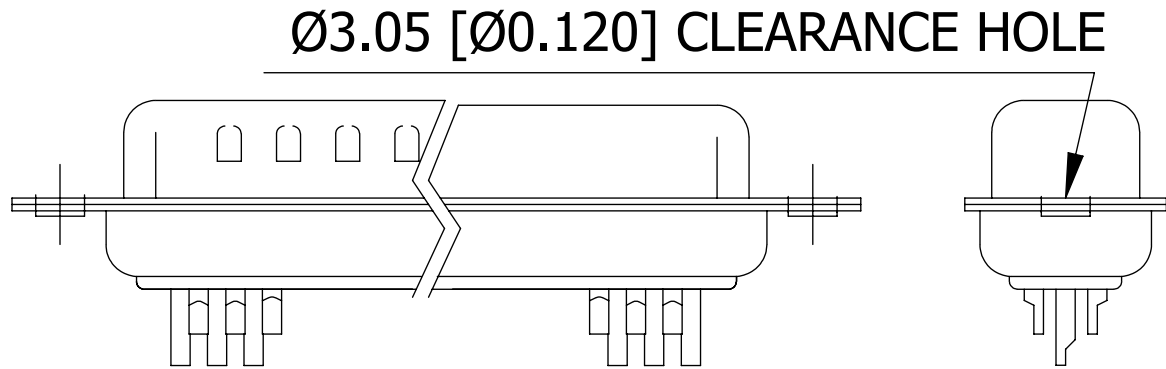


h: 1

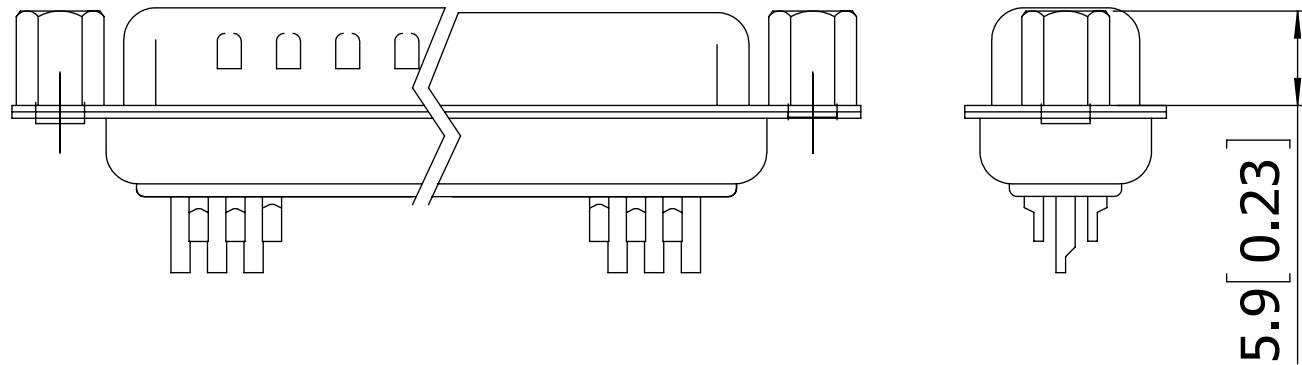


h: 2

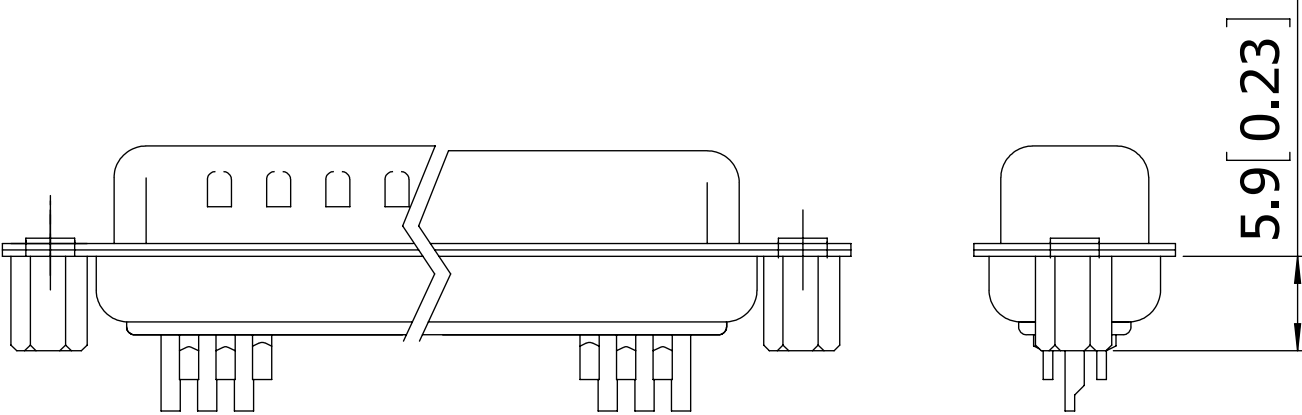

CONSULT SALES OR
FACTORY FOR OTHER
MOUNTING STYLE OPTIONS



RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MM [INCHES]		DRAWN	DATE	NAME		
			07/01/2011	LH		
TOLERANCES: ANGULAR: $\pm 3^{\circ}$ DECIMALS X = ± 0.38 [.015] X = ± 0.25 [.010] .XX = ± 0.13 [.005]		THE INFORMATION HEREIN CONTAINS PROPRIETARY INFORMATION OF SULLINS ELECTRONICS AND IS NOT TO BE REPRODUCED, USED OR DISCLOSED TO OTHERS FOR ANY PURPOSE EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY AN OFFICER OF SULLINS ELECTRONICS.			TITLE 104 SERIES D-SUB H.D. SOLDER CUP TYPE	
					PART NUMBER SDS104-PR _ _ _ _ _ N _ _	
		SIZE	CAGE CODE	DWG. NO.	REV	
		C	54453	11800	C	
SCALE: 1:8		SHEET 2 OF 3				

E

—

—

—

1

FILE NAME: T1800, SDS104-PR