


## 5 GHz Terrace Diversity Antenna




### 5 GHz DIRECTIONAL IN-BUILDING TERRACE DIVERSITY ANTENNA

The widespread use of cellular phones and wireless network applications inside buildings has increased the need for antenna systems that can provide considerable gain over traditional dipole antennas.

Laird Technologies' in-building wireless antennas are particularly applicable in environments where aesthetics and wide angle coverage are necessary for successful wireless deployment. Their surprisingly small size allow the antennas to be hidden almost anywhere, providing an invisible solution for most applications.

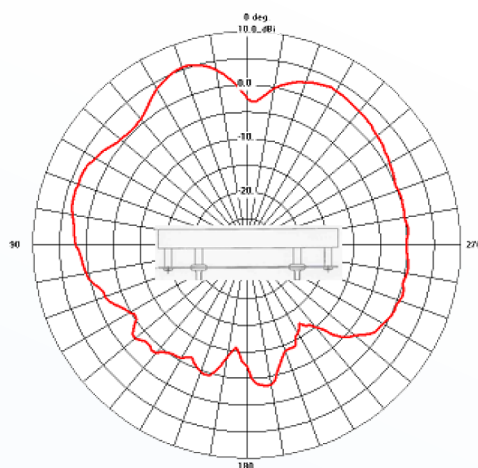

Azimuth Plane  
5.57 GHz

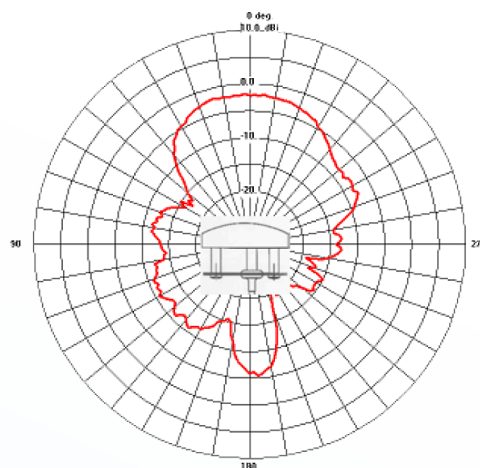

Elevation Plane  
5.57 GHz

global solutions: local support™

Americas: +1.847.839.6907  
IAS-AmericasEastSales@lairdtech.com

Europe: +1.32.80.7866.12  
IAS-EUSales@lairdtech.com

Asia: +1.65.6.243.8022  
IAS-AsiaSales@lairdtech.com

[www.lairdtech.com](http://www.lairdtech.com)

# IDD5250

## 5 GHz Terrace Diversity Antenna

| MODEL #        | REFERENCE # | PLENUM RATED COAX | CONNECTOR       |
|----------------|-------------|-------------------|-----------------|
| IDD5250-RS36   | CAF94585    | 36" White RG-316  | RP-SMA x 2      |
| IDD5250-RSRA36 | CAF94649    | 36" White RG-316  | RP-SMA R.A. x 2 |

| SPECIFICATIONS                |                     |
|-------------------------------|---------------------|
| Element Type                  | Microstrip          |
| Frequency Range               | 4.9 – 6 GHz         |
| Peak Gain                     | 5 dBi               |
| Polarization <sup>1</sup>     | Linear              |
| Impedance                     | 50 ohms             |
| Maximum Input Power           | 50 watts            |
| VSWR (Min. Performance)       | 2.0:1               |
| Dimensions (L x W x H)        | 12.2 x 4.3 x 2.7 cm |
| Housing                       | ABS                 |
| Operating/Storage Temperature | -40° to +70°C       |



### MOUNTING OPTIONS

- Wall-mount bracket and screws, Dual-Lock®, and L-bracket included
- Indoor Optional Brackets: 2" Indoor Pan/Tilt Mount (IMI-02C) and 5" Indoor Pan/Tilt Mount (IMI-05C)

ANT-DS-IDD5250 0609

Any information furnished by Laird Technologies, Inc. and its agents is believed to be accurate and reliable. Responsibility for the use and application of Laird Technologies materials rests with the end user, since Laird Technologies and its agents cannot be aware of all potential uses. Laird Technologies makes no warranties as to the fitness, merchantability or suitability of any Laird Technologies materials or products for any specific or general uses. Laird Technologies shall not be liable for incidental or consequential damages of any kind. All Laird Technologies products are sold pursuant to the Laird Technologies' Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2009 Laird Technologies, Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Technologies Logo, and other marks are trade marks or registered trade marks of Laird Technologies, Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird Technologies or any third party intellectual property rights.