

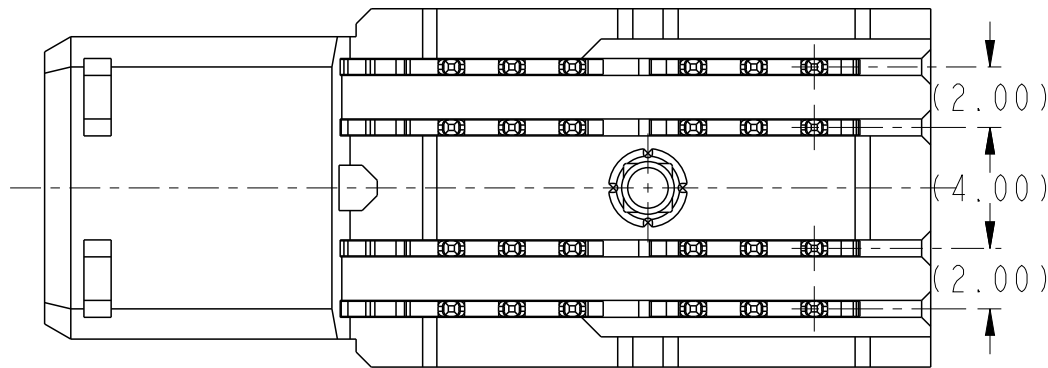
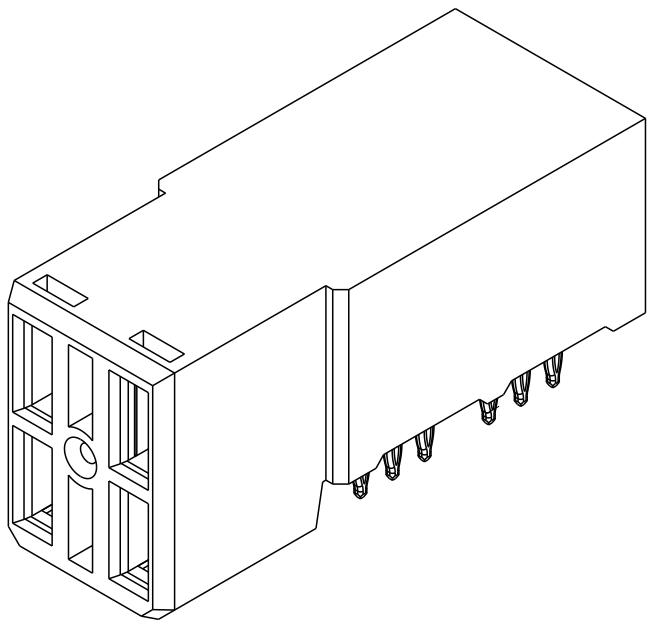
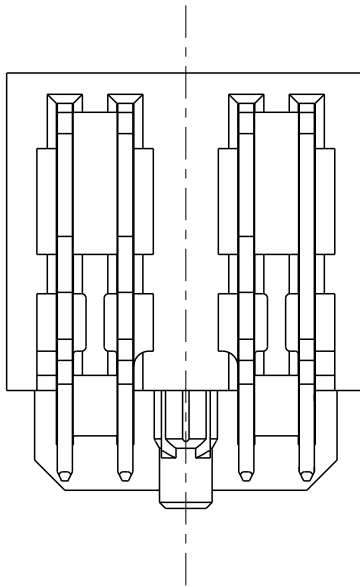
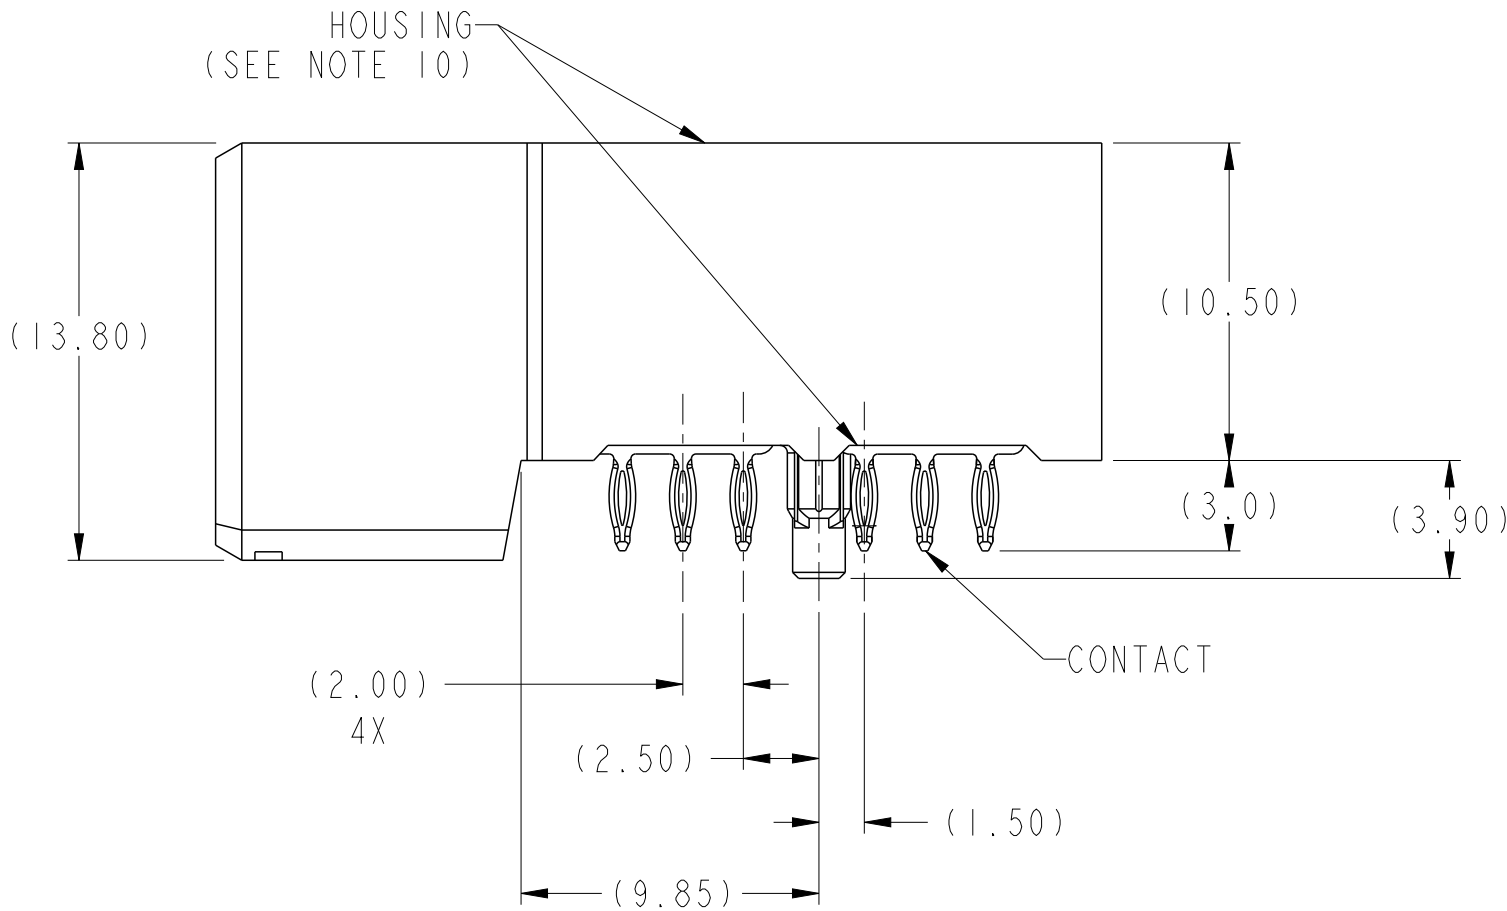
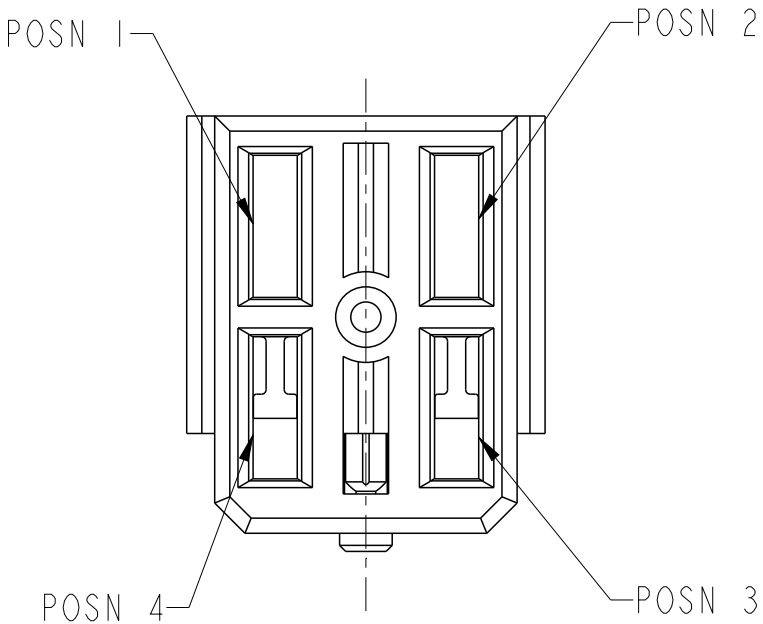


PRODUCT NUMBER ("LF" DENOTES LEAD-FREE)	CONTACT PLATING NOTE	CONTACT DEPTH (SEE SECTION A-A)				ROHS COMPATIBILITY
		POSN 1	POSN 2	POSN 3	POSN 4	
I0124620-4444P00LF	2a	LONG	LONG	LONG	LONG	SEE NOTE 8
I0124620-5555P00LF	2a	SHORT	SHORT	SHORT	SHORT	SEE NOTE 8
I0124620-4555P00LF	2a	LONG	SHORT	SHORT	SHORT	SEE NOTE 8
I0124620-5455P00LF	2a	SHORT	LONG	SHORT	SHORT	SEE NOTE 8
I0124620-5545P00LF	2a	SHORT	SHORT	LONG	SHORT	SEE NOTE 8
I0124620-5554P00LF	2a	SHORT	SHORT	SHORT	LONG	SEE NOTE 8
I0124620-4554P00LF	2a	LONG	SHORT	SHORT	LONG	SEE NOTE 8
I0124620-5455P00	2b	SHORT	LONG	SHORT	SHORT	NA

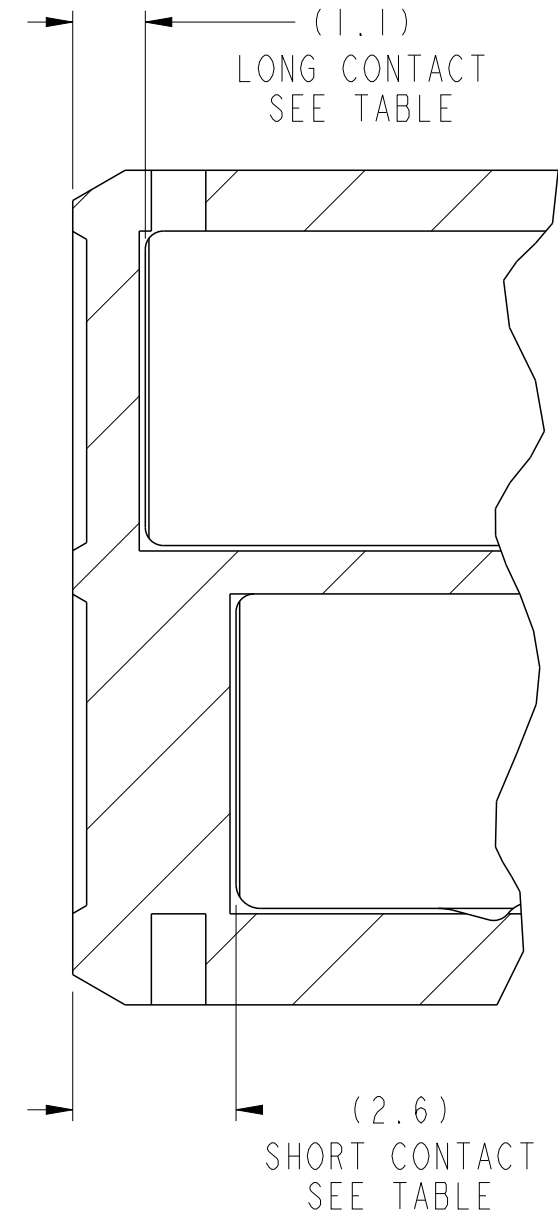

spec ref	GS-12-220	dr	Lin-Soe Ngwe	2013/03/07	projection	MM	size	A2	scale	4:1
tolerance std	ASME Y14.5	eng	Jackie Chen	2015/08/12	chr	-	ecn no	ELX-DG-21647-1	rel level	Released
surface	✓	appr	Pei-Ming Zheng	2015/08/17	product family	2mm High Power	dwg no	I0124620	rev	E
ASME Y14.5	linear	angular	0°	±2°	www.fci.com	cat. no.	-	Product - Customer Drw	sheet 1 of 2	

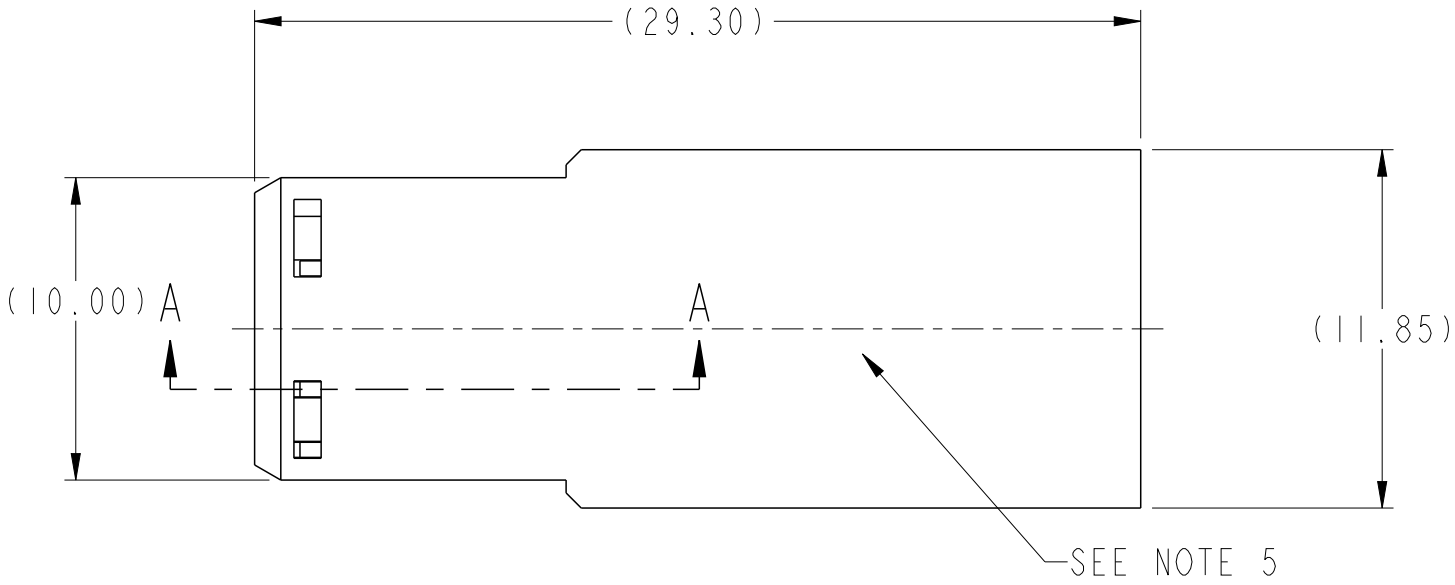