

# Sealed Vehicle Rocker (SVR)



**EATON**

*Powering Business Worldwide*



TABLE OF CONTENTS	Page
Description	2
Specifications	2 – 3
Additional Options	3
How to Order	4 – 5
Circuit Descriptions	6 – 7
Dimensions	8 – 10
Icons	11

## Description

The Sealed Vehicle Rocker (SVR) switch from Eaton's electrical business now offers an above panel actuator style in addition to the below panel and paddle actuators. Designed to meet the severe environmental requirements of the construction and agricultural vehicle markets, the SVR is sealed at the front and back of the switch, and meets the rigorous sealing requirements of IP68. The small switch footprint minimizes the space taken on switch panels. SVR switches are assembled into panels by pressing the switch through the top of the panel, and are held in place by retention tabs molded

into the body of the switch; mounting hardware or special tools are not necessary.

The SVR is offered in single- and double-pole switch circuits, with 2- and 3-position momentary and maintained circuits available. Switch and illumination circuits are terminated with 2.8 mm (0.11 inch) tin-plated copper alloy spade terminals. The SVR connector can be loaded with the appropriate terminals and/or wire seals to accomplish sealing at the back end of the switch.

## Specifications

### Electrical Life

- **Standard plating:** 50,000 operations at 12 amperes at either 12 or 24 Vdc. Life cycle testing conducted using both inductive and resistive loads.
- **Gold plating:** 250,000 (maintained circuits) / 50,000 (momentary circuits) operations at 10 mA at either 12 or 24 Vdc.

### Mechanical Life

- **Maintained circuits:** 250,000 operations minimum.
- **Momentary circuits:** 50,000 operations minimum.

### Dielectric Strength

1500 volts rms minimum.



Below (left) and above (right) panel rocker switch styles

### Operate Force

4.4 – 13.2 N (1 – 3 lbs.) depending on circuit configuration and actuator style.

### Operating Temperature Range

-40°C to +85°C

### Storage Temperature Range

-40°C to +85°C

### Circuits

1- or 2-pole, 2- or 3-position, with momentary and maintained capabilities.

### Standard Circuit Options

- ON – NONE – ON
- ON – OFF – ON
- ON\* – OFF – ON\*
- ON\* – OFF – ON
- ON – ON – ON
- ON\* – NONE – ON
- ON\* – ON – ON\*
- ON\* – ON – ON

(\* = Momentary. See circuit schematics on Page 6.)



Below panel rocker switch with daylight white icon and red LED



Above panel rocker switch with two white snap-in lenses and amber LED

### Contact Material

- **Movable:** Copper alloy with silver alloy contact surface.
- **Stationary:** Silver-plated copper alloy with silver alloy contact surface.
- **Gold-plated:** Contacts are available for low level electrical loads.

### Plastic Component UL® Ratings

- **Base material:** UL94 V-O
- **Frame material:** UL94 H-B
- **Sub-actuator material:** UL94 V-O
- **Actuator material:**
  - UL94 H-B (below panel rocker button and paddle actuator)
  - UL94 V-O (above panel rocker button)

### Mounting Means

Snap-in mounting using four flexible plastic retainers integral with switch frame.

### Mounting Hole

Standard panel cutout of 36.8 x 21.1 mm (1.45 x 0.83 inches). (See panel opening drawing on Page 8.)



Below panel rocker switch with daylight white icons (left) and above panel rocker switch with two snap-in lenses (right)

#### Panel Thickness

1.0 to 4.0 mm (0.04 to 0.16 inches). Best results obtained between 1.5 to 3.0 mm (0.06 to 0.12 inches).

#### Sealing

SVR design includes a sealed contact chamber with dust and water resistance to IP68. The harness connection can also be sealed by using AMP wire seals Catalog Numbers 828905-1 (14 – 16 gauge) or 828904-1 (18 – 20 gauge) to seal the wires to the connector. For an application where a connector cavity is not being used, it can be sealed with AMP sealing plug Catalog Number 828922-1.

The above panel version may also be sealed to the panel using panel seal Catalog Number 32-2245. (See drawing on Page 8.)

#### Actuator


The SVR switch family includes three styles of actuators: above panel, below panel and paddle. Switch performance and specifications are the same for all actuator styles. Black is standard, but other colors are also available. Matte finish is standard on all actuator styles, matching the finish on the bezels and all other visible SVR switch features and accessories. All actuators can be ordered either pre-assembled to the switch or as separate part numbers.

#### Actuator Styles

- Above panel rocker button offers new styling and a larger surface area. Eaton can offer assistance with unique designs of above panel actuators for applications where differentiation is desired.
- Below panel rocker button is the same two-faced European styling that has been offered for SVR since its initial release. Indicator style matches the below panel rocker button style.
- Paddle actuator allows toggle-type actuation of the SVR switch.

#### Backlighting

- Each switch can accommodate up to two LEDs which can be connected to be

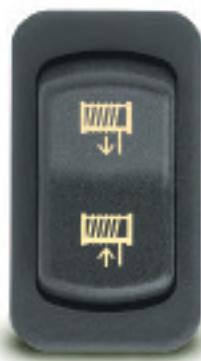

Below panel rocker switch with daylight white icon

either circuit dependent or independent. (See illumination circuit schematics on Page 7.)

- Standard LED color is amber, with red, green and blue also available. Long life (100,000 hours) LEDs are standard.
- Standard LED voltages are 12 and 24 Vdc.
- The below panel rocker button style includes a single-piece back-lit actuator with laser-etched icons in either daylight white or deadfront styles. Without illumination, the icon is either daylight white or deadfront, but will change to the color of the chosen light source when illuminated. (See picture examples on Page 7.)

#### Snap-in Lenses

- Above and below panel rocker buttons are available with or without one or two translucent lenses (above panel) or transparent lenses (below panel). Five standard lens colors are available: white, red, green, blue and amber.

#### Icons

- Icon areas are provided on each end of the rocker button. Icons may be illuminated or non-illuminated, and are pad-printed in a contrasting color either directly on the rocker button or the lens. (See examples of icons on Page 11.)

## Additional Options

- Additional colors of actuators, mounting bezels and lenses.
- Special circuits.
- Special ratings.
- Pad printing on the below panel switch bezel.
- Low current capabilities.
- Custom back-lit icons.
- Gang-mount system including end bezel Catalog Number 17-22146 and center bezel 17-22152. (See drawing on Page 10.)

- Palm Guard (below panel switch only) at either or both ends of the switch frame. (See drawing on Page 9.)
- Indicators with insertable lenses. (See drawing on Page 9.)
- Polarized lock-on connector Catalog Number 25-13936. (See drawing on Page 10.)
- Panel plug with connector retention feature Catalog Number 17-22145. (See drawing on Page 10.)
- Non-illuminated below panel paddle actuator. (See drawing on Page 9 and picture below.)

**Note:** Contact your Eaton sales representative for additional information on options.

#### Catalog Part Number

The SVR part numbering system allows all product features to be captured in a 15-digit part number (switch and actuator). (See How to Order tables on Pages 4 and 5.)



Paddle actuator switch (below panel only)






## How to Order

To determine the complete SVR part number for an above panel rocker switch with actuator.

### ABOVE PANEL ROCKER SWITCH

S    AC    M    2X    D    G    AQ    X    XX    X    X

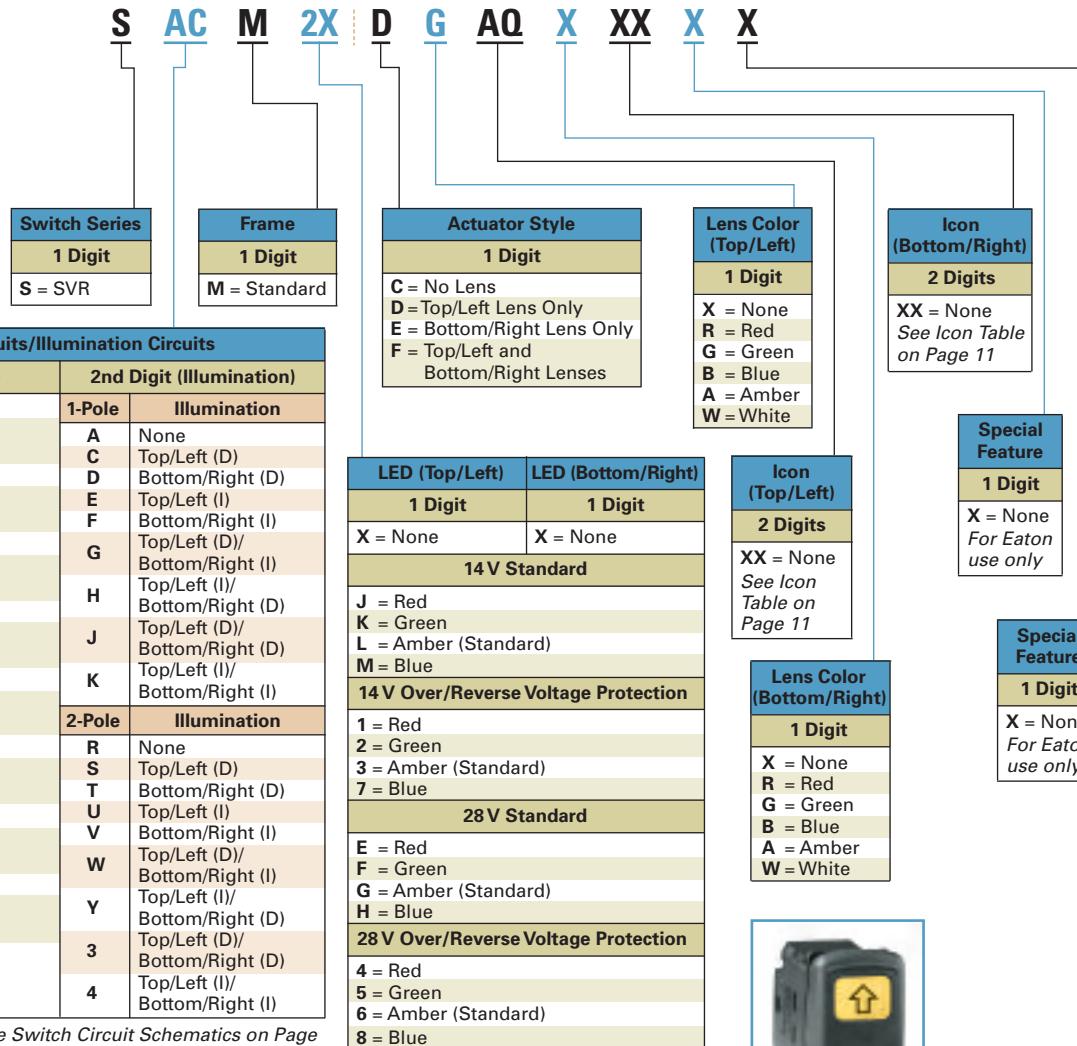

<sup>①</sup> Double-pole only. (See Switch Circuit Schematics on Page 6 and Illumination Circuit Schematics on Page 7.)

\* = Momentary. (I) = Independent. (D) = Dependent.

#### LED Wavelengths:

Red = ~ 630 nm    Amber = ~ 592 nm  
Green = ~ 526 nm    Blue = ~ 472 nm



Above panel rocker switch with two white snap-in lenses and amber LED

#### Example

SACM2XDGAQXXXX — Above Panel Switch with Actuator Assembled — 1-pole ON – NONE – ON with single 14 volt green dependent LED with over/reverse voltage protection on top, Actuator with green snap-in lens on top and AQ icon pad-printed in white.

#### Notes


Standard color for pad printing RED, GREEN and BLUE lens will be WHITE.  
Standard color for pad printing AMBER and WHITE lens will be BLACK.

Icons to be centered on lens.

Icon orientation per Icon Selection Table; alternate orientation will require a new 2-digit icon assignment. (See Icon Selection Table on Page 11.)

# How to Order

To determine the complete SVR part number for a below panel rocker switch with actuator.

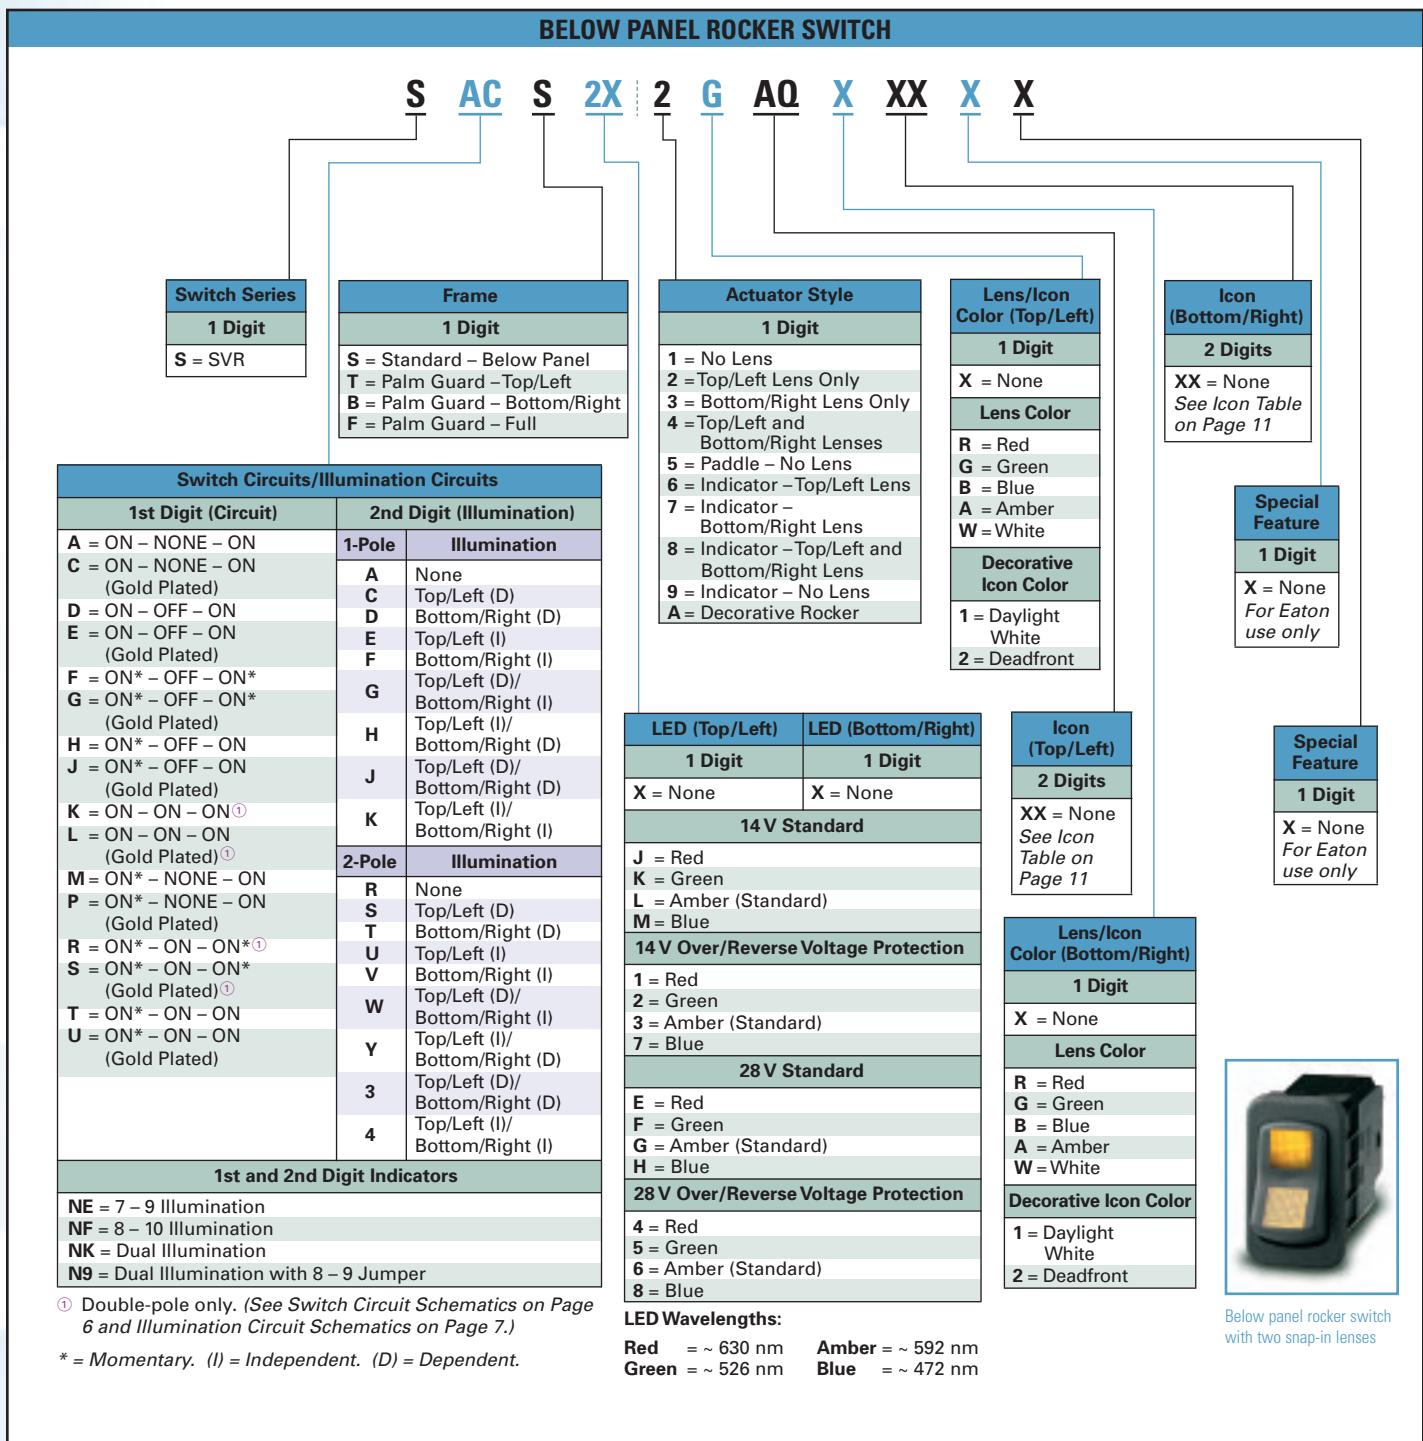

## Example

SACS2X2GAQXXXX — Below Panel Switch with Actuator Assembled — 1-pole ON – NONE – ON circuit in standard frame with green 14 volt dependent over/reverse voltage protected LED in top position, Actuator with green snap-in lens in top position and AQ icon pad-printed in white.

SNESEX6RCQXXXX — Below Panel Indicator — Single red snap-in lens in top location with white pad-printed CQ icon and 28 volt red LED.

## Notes

Standard color for pad printing RED, GREEN and BLUE lens will be WHITE.

Standard color for pad printing AMBER and WHITE lens will be BLACK.

Icons to be centered on lens.

Icon orientation per Icon Selection Table; alternate orientation will require a new 2-digit icon assignment. (See Icon Selection Table on Page 11.)





## Electrical Circuit Descriptions

### SWITCH CIRCUIT SCHEMATICS

CODE	SINGLE-POLE SCHEMATIC (Shown in Top/Left Actuated Position)	TOP/LEFT ACTUATED	CENTER	BOTTOM/RIGHT ACTUATED	DOUBLE-POLE SCHEMATIC (Shown in Top/Left Actuated Position)	TOP/LEFT ACTUATED	CENTER	BOTTOM/RIGHT ACTUATED
A C(GOLD)		ON	NONE	ON		ON	NONE	ON
		2-3	-	2-1		2-3 5-6	-	2-1 5-4
D E(GOLD)		ON	OFF	ON		ON	OFF	ON
		2-3	-	2-1		2-3 5-6	-	2-1 5-4
F G(GOLD)		MOM ON	OFF	MOM ON		MOM ON	OFF	MOM ON
		2-3	-	2-1		2-3 5-6	-	2-1 5-4
H J(GOLD)		MOM ON	OFF	ON		MOM ON	OFF	ON
		2-3	-	2-1		2-3 5-6	-	2-1 5-4
K L(GOLD)	DOUBLE-POLE ONLY					ON	ON	ON
						2-3 5-6	5-4-2-3	5-4-2-1
M P(GOLD)		MOM ON	NONE	ON		MOM ON	NONE	ON
		2-3	-	2-1		2-3 5-6	-	2-1 5-4
R S(GOLD)	DOUBLE-POLE ONLY					MOM ON	ON	MOM ON
						2-3 5-6	5-4-2-3	5-4-2-1
T U(GOLD)		MOM ON	ON	ON		MOM ON	ON	ON
		2-3	2-1	2-1		2-3 5-6	2-1 5-4	2-1 5-4

### Circuit

The SVR switch is capable of 1- or 2-pole configurations with 2- or 3-position maintained, momentary, or a combination of actuations. The addition of jumpers between switch terminals expands the circuit possibilities.

Contact your Eaton sales representative for more specific information about SVR standard and custom circuit options.

# Illumination Circuit Descriptions

## ILLUMINATION CIRCUIT SCHEMATICS

SINGLE-POLE CODE	DOUBLE-POLE CODE	SCHEMATIC ①	ILLUMINATION CODE	SCHEMATIC ①
A	R	NONE		
C	S		9	
D	T			
E	U			
F	V			
G	W			
H	Y			
J	3			
K	4			

① LED for terminals 7 – 9 is at top/left side of switch.  
LED for terminals 8 – 10 is at bottom/right of switch.

DECORATIVE ICON COLOR EXAMPLES	
NON-ILLUMINATED	
Deadfront	
Daylight White	
ILLUMINATED	
Deadfront	
Daylight White	

## Illumination

Long life LEDs provide backlighting illumination for the SVR switch. Backlighting can be either independent of or dependent on the switch circuits, or a combination of both. Standard LED color is amber, with red, green and blue also available. LED protection circuitry is available to protect the LED from overvoltage and reverse voltage conditions.

Contact your Eaton sales representative for more specific information about standard and custom circuit options.



Above panel rocker switch with two green snap-in lenses






## Dimensions

APPROXIMATE MM (INCHES)


### ABOVE PANEL ROCKER SWITCH WITH ACTUATOR

T/L = Top/Left  
B/R = Bottom/Right

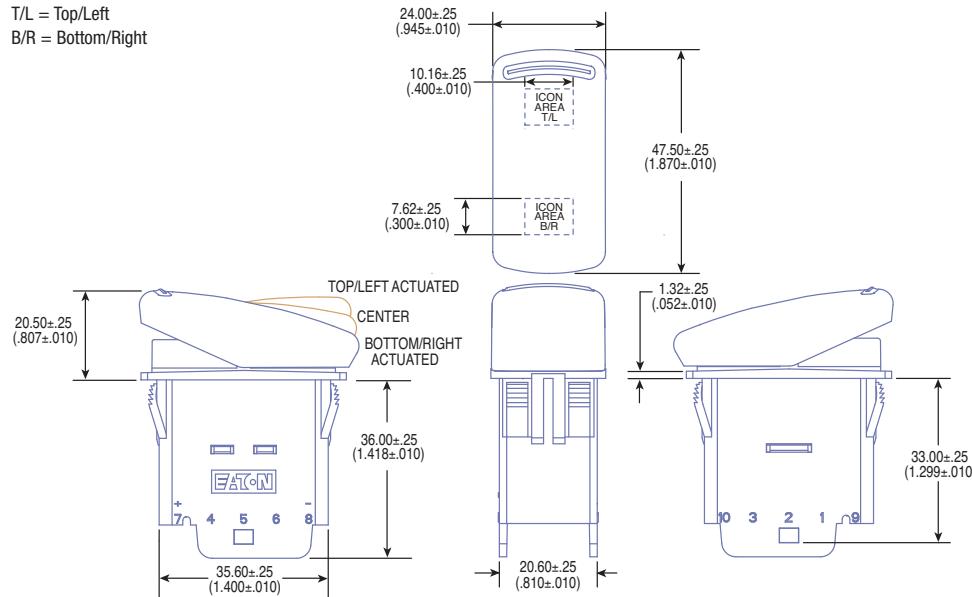


### PANEL SEAL GASKET

Catalog Number 32-2245

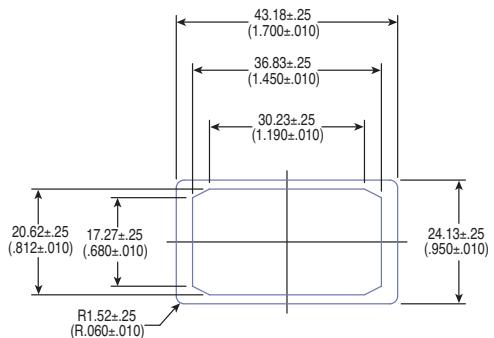

### PANEL OPENING (ABOVE & BELOW)

Note: Recommended panel thickness 1.0 – 4.0 mm (0.04 – 0.16 inches). Best results obtained between 1.5 – 3.0 mm (0.06 – 0.12 inches).

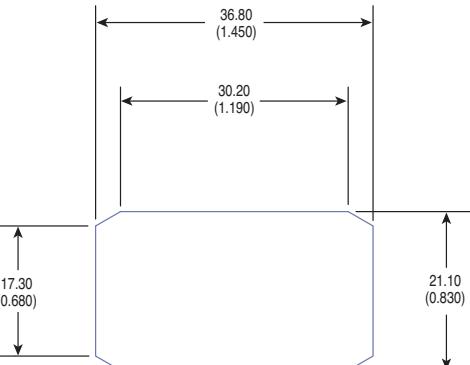

# Dimensions

APPROXIMATE MM (INCHES)

BELOW PANEL ROCKER SWITCH WITH ACTUATOR	PADDLE ACTUATOR (BELOW PANEL ONLY)
<p>T/L = Top/Left B/R = Bottom/Right</p>	

INDICATOR (BELOW PANEL ONLY)
<p>T/L = Top/Left B/R = Bottom/Right</p>



## Icon Selection Table

ICON	CODE	ICON	CODE	ICON	CODE	ICON	CODE	ICON	CODE
♪	AA	🌵	AR	☰☰☰	BI	♊♊	DN	↑↓⚙️	HY
🔋	AB	💡	AS	➡️	BJ	♨️	DQ	🌀	KR
🐰	AC	🌧	AT	➡️	BK	☀️	DR	⚙️	LX
🐢	AD	▶️	AU	⬇️	BL	🌀	DS	➡️➡️	MV
🔒	AE	⚠️	AV	3	BP	START	DX	➡️➡️	MW
🔓	AF	💡	AW	1	BQ	STOP	DY	⌚	NF
STOP	AG	⚠️⚠️	AX	⬇️	BR	⌚	EI	🚫	NG
⬇️	AH	🚫	AY	⚙️	BS	⚠️	FC	F	NJ
☀️	AJ	⚠️	BA	⌚	BZ	⌚	FF	N	NK
⚡	AK	☀️	BB	⚠️	CF	⬆️	GH	➡️➡️	PA
⚡	AL	⚡	BC	(P)	CP	⬇️	GI	⬇️	QE
⚡	AM	—	BE	🔔	CQ	⚠️	GU	⬇️	QL
⚡	AN	⌚	BF	⚠️	CS	⚠️	HA	⬆️	RW
✖️	AP	⌚	BG	○	CV	✖️✖️✖️	HM	⬇️	RX
✖️	AQ	➡️➡️	BH	⬇️	CW	✖️✖️✖️	HN	🐰	SB

**Note:** Other standard icons are available. Contact your Eaton sales representative for a complete listing of standard icons.






## Accessories Dimensions

APPROXIMATE MM (INCHES)

### GANG-MOUNT SYSTEM


End: Catalog Number **17-22146**

Center: Catalog Number **17-22152**

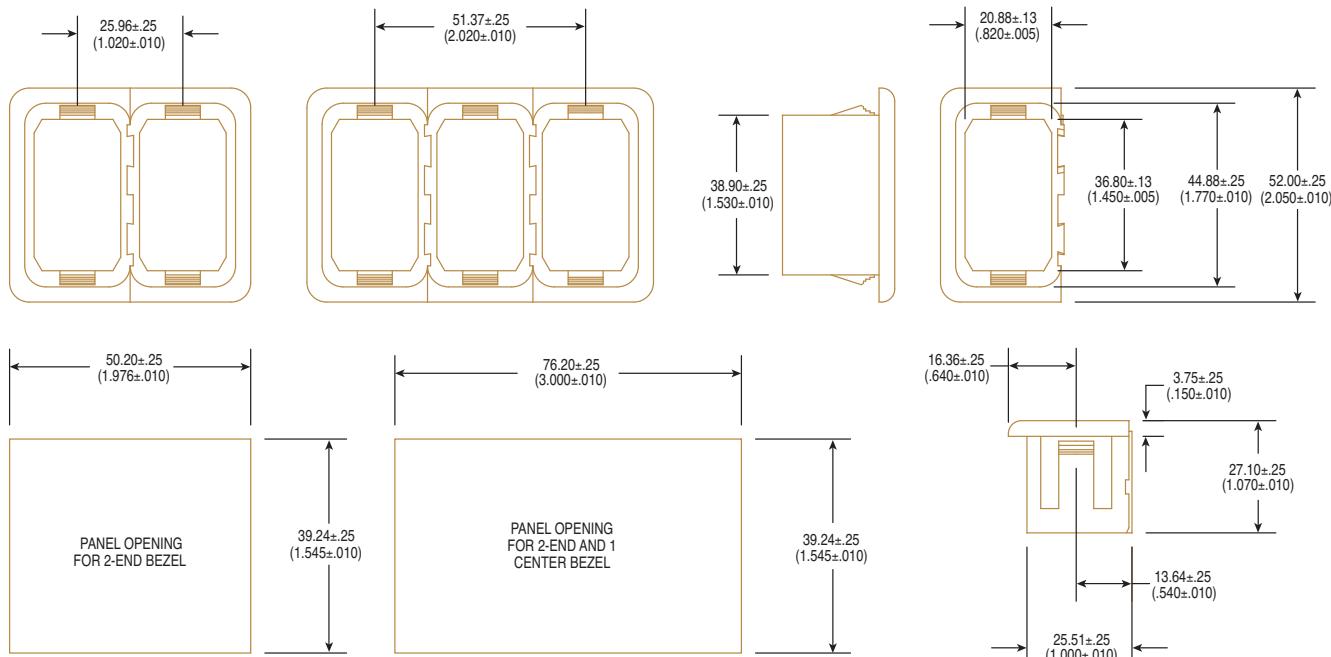

### PANEL PLUG

Catalog Number **17-22145**

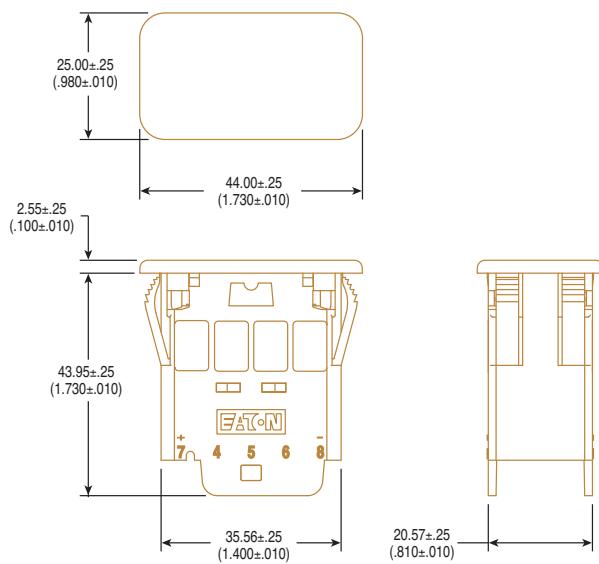

### CONNECTOR

Catalog Number:  
**25-13936**

AMP Terminal  
Catalog Numbers:


- **927766-3**  
(14 – 16 gauge)
- **927770-3**  
(18 – 20 gauge)

AMP Wire Seal  
Catalog Numbers:

- **828905-1**  
(14 – 16 gauge)
- **828904-1**  
(18 – 20 gauge)

AMP Sealing Plug  
Catalog Number:

- **828922-1**

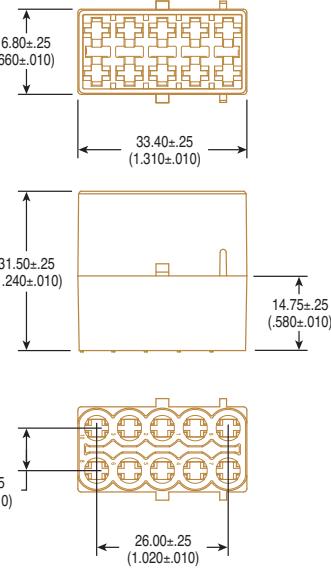

Eaton Corporation is a diversified power management company ranked among the largest Fortune 500 companies. The electrical group is Eaton's largest division and is a global leader in electrical control, power distribution, power quality, automation, and monitoring products and services. Eaton's global electrical product lines, including Cutler-Hammer®, MGE Office Protection Systems™, Powerware®, Holec®, MEM®, Santak and Moeller, provide customer-driven PowerChain Management® solutions to serve the power system needs of the industrial, institutional, government, utility, commercial, residential, IT, mission critical and OEM markets worldwide.

PowerChain Management solutions help enterprises achieve sustainable and competitive advantages through proactive management of the power system as a strategic, integrated asset throughout its life cycle. With Eaton's distribution, generation and power quality equipment; full-scale engineering services; and information management systems, the power system is positioned to deliver powerful results: greater reliability, operating cost efficiencies, effective use of capital, enhanced safety, and risk mitigation.

**Eaton Corporation**  
Electrical Group  
1000 Cherrington Parkway  
Moon Township, PA 15108  
United States  
877-ETN-CARE (877-386-2273)  
Eaton.com

© 2008 Eaton Corporation  
All Rights Reserved  
Printed in USA  
Publication No. BR07002001E / Z5382 / ETNREV  
December 2008



PowerChain  
Management®

PowerChain Management is a registered trademark of Eaton Corporation.

All other trademarks are property of their respective owners.