
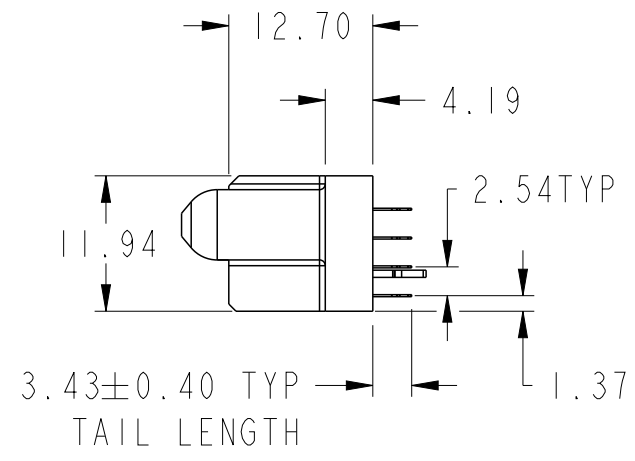
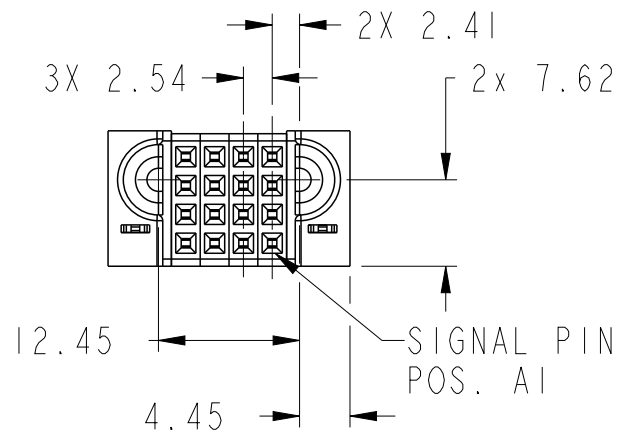
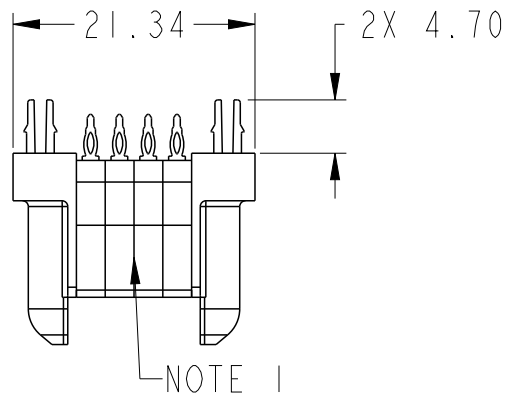
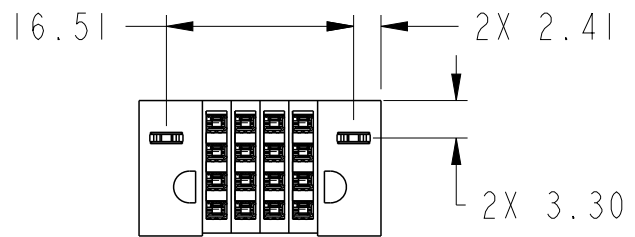


PRODUCT NUMBER SEE SHEET 2



spec ref				dr Peng-Bing Fu		2013/01/29		projection 	MM 	size A3		scale 3:2				
tolerance std ASME Y14.5	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng Peng-Bing Fu		2013/05/08				ecn no -						
				chr -		-										
				appr Pei-Ming Zheng		2013/05/08		product family PowerBlade+				rel level Released				
surface 	linear	0.X		±0.50			title 16S VT PF RECEPTACLE				dwg no 10106269-0004001		rev A			
		0.XX		±0.25												
		0.XXX		±0.10												
ASME Y14.5		angular	0°		±2°		www.fci.com		cat. no.				Product - Customer Drw		sheet 1 of 3	

NOTES:

- 1) "FCI", PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE.
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
 - HOUSING - GLASS FILLED WITH HIGH TEMP THERMOPLASTIC, UL94V-0.
 - SIGNAL CONTACT - COPPER ALLOY.
 - POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY.
- 3) PLATING SPECIFICATION REFER TO FCI 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENIONS WERE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15 ± 0.025MM DRILLED HOLE PLATED WITH 0.00762MM MIN Sn
OVER 0.0254-0.0762MM Cu PLATING TO ACHIEVE A 1.02 ± 0.07MM HOLE.
- 8) PRODUCT SPECIFICATION REFER TO FCI GS-12-658.
APPLICATION SPECIFICATION REFER TO FCI GS-20-141.
PRODUCT PACKAGED IN TRAYS, REFER TO FCI GS-14-1502.
- 9) THE VOID CORING IN BETWEEN POWER MODULES, SIGNAL
MODULES AND END MODULES ARE OPTIONAL AND THE SHAPE
MAY BE DIFFERENT FOR OPTIMIZE THE MOLDING PROCESS. THE
VOID CORING WILL NOT EFFECT TO PRODUCT FUNCTION.

dr	Peng-Bing Fu	2013/01/29	projection	MM	size	A3	scale	1:1
eng	Peng-Bing Fu	2013/05/08						
chr	-	-			ecn no	-		
appr	Pei-Ming Zheng	2013/05/08	product family		PowerBlade+	rel level	Released	
	title 16S VT PF RECEPTACLE				dwg no 10106269-0004001	rev A		
www.fci.com	cat. no.		Product - Customer Drw			sheet 3 of 3		



Copyright FCI.