



**X
O
B
L**

ENCLOSURE CATALOGUE

Version 3.5 GB



WEB GUIDE
DESIGNERS HELP TOOL

FIBOX

C O N T E N T S

www.fibox.com

FIBOX COMPANY PRESENTATION.....	2
FIBOX IS ON THE WEB FOR YOU.....	3
QUALITY.....	4
CUSTOMISING.....	6



FIBOX MNX

SMALL TO MEDIUM SIZE ENCLOSURES

PC / ABS 52 x 50 x 40 mm – 300 x 230 x 110 mm

P / AL 50 x 45 x 31,5 mm – 600 x 310 x 180 mm



FIBOX EURONORD

FIBOX MNX PC / F / PCM / ABS.....	7-14
-----------------------------------	------

FIBOX PICCOLO PC / ABS.....	15-18
-----------------------------	-------

FIBOX EURONORD PC / ABS / ALUMINIUM / POLYESTER.....	19-28
--	-------



FIBOX MCE

MODULAR COMPONENT ENCLOSURES

200 x 116 x 105 mm – 580 x 306 x 145 mm

FIBOX MCE CONTROL / FEM / ISO.....	29-38
------------------------------------	-------



FIBOX SOLID

MEDIUM TO LARGE SIZE ENCLOSURES

190 x 190 x 130 mm – 760 x 560 x 250 mm

FIBOX SOLID PC / ABS / SM / HINGED COVER	39-44
--	-------

FIBOX EK.....	45-54
---------------	-------



FIBOX CAB

FIBOX CAB PC/ABS hinged door with key lock.....	55-59
---	-------

FIBOX CAB PC/ABS hinged door with latches.....	55-59
--	-------

FIBOX QUICK with quick turn screw cover.....	60-61
--	-------

FIBOX SPACE LINK with large flange openings.....	62-66
--	-------




FIBOX CARDMASTER

ENCLOSURES FOR ELECTRONICS AND INSTRUMENTATION

FIBOX CARDMASTER 3 PC / ABS.....	67-70
----------------------------------	-------

FIBOX EX for hazardous areas.....	71-76
-----------------------------------	-------

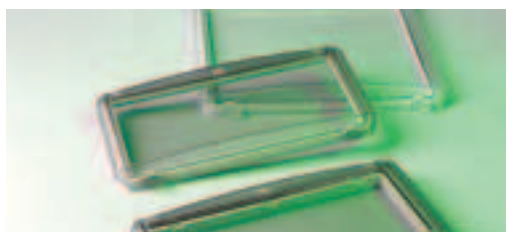

FIBOX WINDOWS

INSPECTION WINDOWS.....	77-80
-------------------------	-------

**Production:**

Fibox Oy Ab
Jorvaksenniitty, P.O. Box 16
FIN-02421 JORVAS, Finland
Tél. +358 9 2955 31 - Fax +358 9 2955 3200
E-mail : info@fibox.fi, sales@fibox.fi

Fibox Ltd. Korea
1381-2, Juan-Dong, Nam-Gu
Incheon, Post No 402-853
Republic of Korea
Tél. +82 32 81 46 742 - Fax +82 32 81 46 077
E-mail : fibox@kornet.net

Customer service:

FIBOX Ltd.
3 Primrose Hill Industrial Park
Orde Wingate Way, Stockton on Tees
Cleveland TS19 0BJ, England
Tél. +44 1642 6044 00 - Fax +44 1642 6046 00
E-mail : sales@fibox.co.uk

FIBOX AB
Enhagsslingan 3
S-187 40 TABY, Sweden
Tél. +46 8 792 26 70 - Fax +46 8 792 01 64
E-mail : info@fibox.se

Fibox Oy Ab
Jorvaksenniitty, P O Box 16
FIN-02421 JORVAS, Finland
Tél. +358 9 2955 351 - Fax +358 9 2955 3500
E-mail : info@fibox.fi, sales@fibox.fi

Fibox Inc.
810 Cromwell Park Drive
Suite R, Glen Burnie
MD 21061, USA
Tél. +1 410 760 9696 - Fax +1 410 760 8686
Call toll-free
USA 1 888 342 6987 / 1888 FIBOX US
E-mail : sales@fiboxusa.com

FIBOX A/S
Kuldysen 13
DK-2630 Tåstrup, Danmark
Tél. +45 437 18055
Fax +45 437 18035
E-mail : fibox@fibox.dk

FIBOX FRANCE Sarl
28 rue Paul Henri Spaak
Parc de l'Esplanade
F-77400 Saint Thibault Des Vignes
Tél. +33-1-60 21 17 17 - Fax +33-1-60 21 17 18
E-mail : service.client@fibox.fr

FIBOX GmbH - FSC Germany
Möllberger strasse 18
D-32602 Vlotho, Germany
Tél. +49 5733 87 160 - Fax +49 5733 87 1610
E-mail : info@fibox.de

FIBOX GmbH - Switzerland
Industriearéal Jenny
CH-8866 Ziegelbrücke
Tél. +41 55 617 2080 - Fax +41 55 617 2089
E-mail : info@fibox.ch

Fibox Ltd. Korea
1381-2, Juan-Dong, Nam-Gu
Incheon, Post No 402-853
Republic of Korea
Tél. +82 32 81 46 742 - Fax +82 32 81 46 077
E-mail : fibox@kornet.net

Fibox Shanghai Ltd.
2A, 2. etage, Block No. 55-56, 461 Hongcao Road
Shanghai 200233, China
Tél. +86 216 495 9922 - Fax +86 216 495 9667
E-mail : fibox@kornet.net

FIBOX Sp. z o.o.
ul. Dzieciola 19
04-988 Warsaw, Poland
Tél. +48 22 872 9498 - Fax +48 22 872 9698
E-mail : info@fibox.pl

FIBOX COMPANY PRESENTATION

Fibox enclosures are manufactured in modern factories located in the Helsinki, Finland metropolitan area and in Incheon, the Republic of Korea.

35 YEARS EXPERIENCE IN THERMOPLASTIC ENCLOSURES

In 1966, FIBOX introduced the first modular enclosures moulded from polycarbonate plastic. These enclosures began a new era in electrical panel building. From the beginning, a commitment to continuous product improvement and an on going product development has fuelled a dramatic and rapid growth for the company.

FIBOX, a privately-owned Finnish company, is one of the largest enclosure manufacturers in the world, and is the market leader in thermoplastic enclosures used for protecting electrical and electronic components operating in hostile environments.

Whatever your application, the FIBOX enclosure family features the widest range of high quality enclosures for the packaging and protection of electrical and electronic components and systems. Enclosures can be delivered in standard off the shelf configurations or customised to your exact specifications. Fibox Oy Ab earned the ISO 9001:2000 Quality Certification for all its operations in 1992.

Fibox voluntarily submits its products for third party testing and evaluation, and currently has many third party listings including, UL, CSA, KEMA, FIMKO, DNV, LR, etc. The company enclosures are rated EN 60529 even up to IP 68. In addition, nearly all products are rated for use in hazardous areas.

CONTINUOUS PRODUCT DEVELOPMENT

The FIBOX enclosure range features over 500 different standard enclosures made of polycarbonate, ABS, polyester fibre-glass and aluminium. Fibox is the industry leader in developing both new products and new technologies for moulding thermoplastic enclosures. At Fibox, we consider moulding technology an essential part of product development.

For example, the new FIBOX MNX enclosure is the first to utilise direct injection of the enclosure gasket material during the body moulding process. This new process ensures precision moulding of the gasket guaranteeing superior enclosure protection ratings. Fibox is the only manufacturer applying this technology to enclosures.

Another example is FIBOX's emphasis on multiple slide technology for mould construction. While much more costly, this type of mould provides our OEM customers cost effective alternatives for modifying standard enclosures to meet their specific needs.

But more important than technical leadership, is the FIBOX commitment to understanding the needs of its customers. All our products are designed in close cooperation with our customers. We use input from our global customer base to produce new enclosure ranges, useful accessories and on-going product improvements and enhancements.

MORE INFORMATION

e-mail: info@fibox.fi

www.fibox.com

FIBOX's policy is to continually improve its products.

Specifications in this Enclosure Catalogue are subject to change without notice.

FIBOX is on the WEB for YOU

Find Fibox support services on the world wide web.

Visit our multi-language WEB site. As a global, multinational company, our home page is available in English, French, German, Swedish, Korean and Finnish.

No time for drawing enclosures?

At **www.fibox.com**, Fibox lends a helping hand to designers with CAD format drawings which can be easily downloaded. Select only the drawings you need for your selected enclosure and complete your design quickly. Save time with drawings available in both inches and millimetres.

Need technical specifications, accessories or agency approvals?

At **www.fibox.com**, you can obtain the technical information you need to complete your design. Select your enclosure, and print a PDF file with a photo, dimensional drawing (in metric and inches), part numbers, ordering codes, technical data and regulatory agency approvals. There is even a list of correct accessories, ready for you to print. Select only the information you want and need!

The world changes and so do we.

At **www.fibox.com**, you can see the latest Fibox products and services. As a leader in injection moulding for the electrical and electronics industries, there is always something new at Fibox. Visit our WEB site to keep abreast of new products and services, the latest in customising options, or our growing list of accessories. Our electronic newsletter will introduce you to new products, new applications and new services, plus add a personal touch as you get to know Fibox around the world.

Need technical or promotional material?

At **www.fibox.com**, you can request our catalogue, full colour data sheets, press releases, manufacturers declarations, CD-ROM and much more. Just click the envelope and specify what you need.

Your thoughts, please!

Give us feedback. Tell us what you like and what you don't like! Contact us via **www.fibox.com**, or E-mail us at **info@fibox.fi**. We are committed to continually improving our service to you. Please help us by sharing your opinions with us.

YOU surf to US and let US serve YOU



FIBOX®

FIBOX
MNX

FIBOX
PICCOLO

FIBOX
EURONORD

FIBOX
MCE CONTROL

FIBOX
MCE FEM

FIBOX
MCE ISO

FIBOX
SOLID

FIBOX
EK

FIBOX
CAB

FIBOX
QUICK

FIBOX
SPACE LINK

FIBOX
CARDMASTER

FIBOX
EX

FIBOX
WINDOWS

FIBOX QUALITY CREATES CUSTOMER ADVANTAGE

Fibox has developed a sophisticated quality system to assure our customers of the reliability and consistency of our products and our service. All aspects of our operations, from design and development through to production and product delivery, are documented to ensure superior performance. Performance you can rely on.

Fibox is an ISO 9001 certified manufacturer and was awarded its certificate by Bureau Veritas Quality International in 1992. This approval covers specifications defined by ISO 9001:2000.



THE FIBOX QUALITY POLICY

The Fibox approach to quality is documented in the Fibox Quality Policy manual.

THE FIBOX QUALITY SYSTEM

The Fibox quality system applies not only to product quality and safety, but availability of product, accuracy of shipments, technical support and customer service. The continued success of this program is assured by regular internal and independent external audits.



NEMA/UL CLASSIFICATIONS OF PROTECTION

The National Electrical Manufacturers Association (NEMA) is a US Manufacturers Organisation which actively promotes standardised product specifications for electrical apparatus.

NEMA performance criteria and test methods are used by Underwriters' Laboratories as guidelines for investigation and listing of electrical enclosures.

Approximate IP equivalents in parentheses

NEMA 1:	Indoor use primarily to provide a degree of protection against contact with the enclosed equipment and against a limited amount of falling dirt. (IP30)
2:	Indoor use to provide a degree of protection against limited amounts of falling water and dirt. (IP31)
3:	Outdoor use to provide a degree of protection against windblown dust, rain, and sleet; undamaged by the formation of ice on the enclosure. (IP64)
3R:	Outdoor use to provide a degree of protection against falling rain and sleet; undamaged by the formation of ice on the enclosure. (IP32)
3S:	Outdoor use to provide a degree of protection against windblown dust, rain and sleet; external mechanisms remain operable while ice laden.
4:	Indoor or outdoor use to provide a degree of protection against splashing water, windblown dust and rain, hose directed water; undamaged by the formation of ice on the enclosure. (IP66)
4X:	Indoor or outdoor use to provide a degree of protection against splashing water, windblown dust and rain, hose directed water; undamaged by the formation of ice on the enclosure, resists corrosion. (IP66)
6:	Indoor or outdoor use to provide a degree of protection against the entry of water during temporary submersion at a limited depth; undamaged by the formation of ice on the enclosure.
6P:	Indoor and outdoor use to provide a degree of protection against the entry of water during prolonged submersion at a limited depth.
11:	Indoor use to provide by oil immersion a degree of protection of the enclosed equipment against the corrosive effects of corrosive liquids and gases.
12,12K:	Indoor use to provide a degree of protection against dust, falling dirt and dripping noncorrosive liquids. (IP65)
13:	Indoor use to provide a degree of protection against dust and spraying of water, oil and noncorrosive coolants. (IP65)

THE IP AND IK CLASSIFICATIONS

Ingress protection class of enclosures is given in the form of IP classification, a two digit coding which is shown below. Fibox has tested the enclosures according to IEC 529 or the newer EN 60529 4:1992. The latter requires the second digit to be tested from class 6 upwards separately to each level of class, thus the double marking IP 66 / IP 67 indicates that the actual tests have been made for both levels.

The European standard for empty enclosures, EN 50298:98 includes the IK impact test. This test is described in EN 50102, and as Fibox enclosures are tested to EN 50298:98, the data for impact resistance are available as well.

FIRST NUMBER Protection against solid objects		SECOND NUMBER Protection against liquids		IK CODE Protection against mechanical impacts	
IP	TEST	IP	TEST	IK	TEST
0	 no protection	0	 no protection	00	 no protection
1	 protected against solid objects up to 50 mm e.g. accidental touch by hands.	1	 protected against vertically falling drops of water.	01-05	 impact < 1 joule
2	 protected against solid objects up to 12 mm e.g. fingers.	2	 protected against direct sprays of water up to 15° from the vertical.	06	 impact 1 joule
3	 protected against solid objects over 2.5 mm (tools+ small wires).	3	 protected against sprays to 60° from the vertical.	07	 impact 2 joule
4	 protected against solid objects over 1 mm (tools+ small wires).	4	 protected against water sprayed from all directions - limited ingress permitted.	08	 impact 5 joule
5	 protected against dust - limited ingress permitted (no harmful deposit).	5	 protected against low pressure jets of water from all directions - limited ingress permitted.	09	 impact 10 joule
6	 totally protected against dust.	6	 protected against strong jets of water e.g. for use on shipdecks - limited ingress permitted.	10	 impact 20 joule
		7	 protected against the effects of immersion between 15 cm and 1 m.		
		8	 protected against long periods of immersion under pressure.		

CUSTOMISATION SERVICES

Fibox is a leading innovator, designer and manufacturer of enclosures. Our products are marketed in over 40 countries world wide. We provide superior, cost effective solutions for protecting electrical and electronic equipment operating in hostile environments.

To increase the range and flexibility of our package solutions, Fibox has developed a comprehensive range of services, permitting cost effective customisation for specific applications.

The two most important of these are machining services and customised tooling.


Our sophisticated CNC machinery can supply enclosures with holes, cutouts and openings to your specification. This solution is best suited for small to medium volumes of enclosures.

For large OEM volumes, our sophisticated, multiple slide tooling permits cost effective modification of any side of the enclosure. In this way, the OEM can have his custom product based upon a standard Fibox enclosure. The OEM will save both money and development time, enabling him to concentrate on product sales.


The www.fibox.com web site provides you the fastest route for choosing Fibox enclosures and accessories. Our interactive program guides you to the correct enclosure and accessories for your application. Technical data and drawing files (DWG, IGS, and DXF) allow the engineer to design and customise quickly.

See also page 14.


Fibox can customise your enclosures making them completely ready for your application.




Machining services




Customised tooling




Coloured enclosures



Painted enclosures



EMC shielding




Printed enclosures



FIBOX MNX

FIBOX MNX

PC
ABS
PCM
F

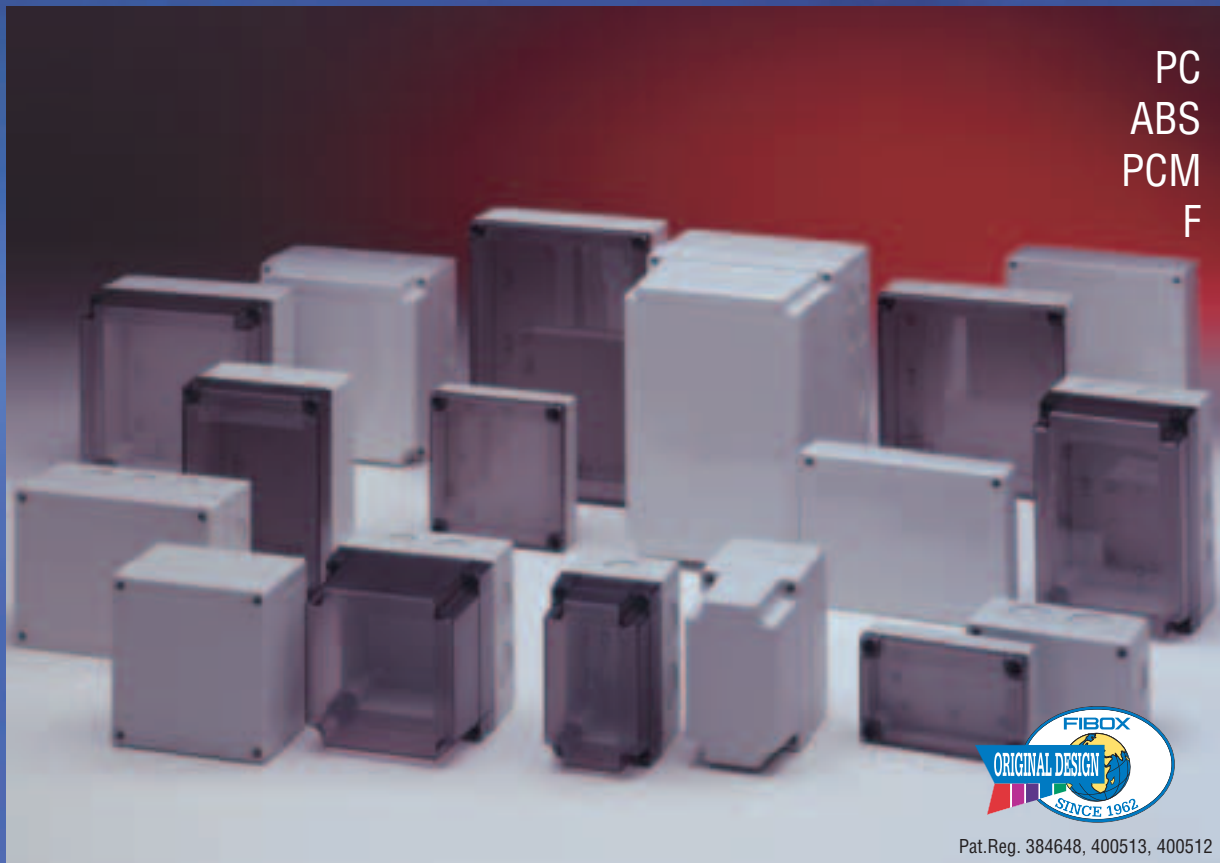


Pat.Reg. 384648, 400513, 400512



MNX PC



MNX ABS


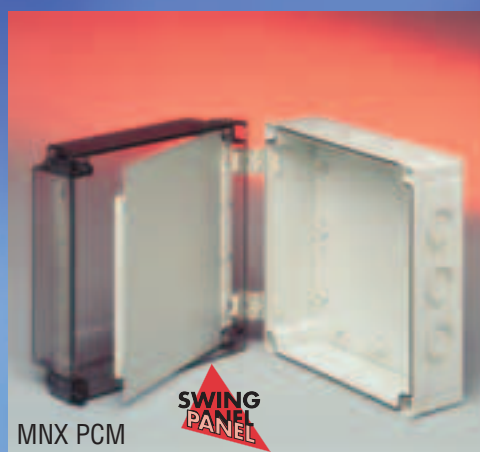


MNX PCM

The FIBOX MNX range of enclosures represents the culmination of 35 years experience in enclosure design and manufacture. Unique tooling defines a new "State of the Art" for injection moulding. The FIBOX MNX polycarbonate and ABS range has been designed to house and protect electrical and electronic components in hostile environments. Three body depths, and up to 4 cover choices per body size, create over 240 variations.


Covers are available opaque or transparent "smoked grey". A wide selection of accessories is available including a hinged "Swing Out" inner panel, the "Swing Panel".

FIBOX MNX PC

FIBOX MNX POLYCARBONATE PC: IP 66/67 and IP 66, IK 08	Z mm	C mm	Including: Enclosure cover with cover screws and wing heads for cover screws, base with mounting plate screws and gasket.				B x A
			ORDER SYMBOL		ORDER SYMBOL		L x S
			Grey cover		Smoked transparent cover		mm
PC 95 L / PC 95 H Y x X 100 mm 100 mm 	35 50 60 75	28.8 45.6 53.8 70.6	PC 95/35 LG PC 95/50 LG PC 95/60 HG PC 95/75 HG		PC 95/35 LT PC 95/50 LT PC 95/60 HT PC 95/75 HT		B x A 70 x 45 L x S 83.5 x 83.5
PC 100 L Y x X 130 mm 80 mm 	35 50 75 100	24.1 41.0 61.0 90.9	PC 100/35 LG PC 100/50 LG PC 100/75 LG PC 100/100 LG		PC 100/35 LT PC 100/50 LT PC 100/75 LT PC 100/100 LT		B x A 90 x 40 L x S 113.5 x 63.5
PC 100 H Y x X 130 mm 80 mm 	60 75 100 125	44.5 61.0 86.3 111.3	PC 100/60 HG PC 100/75 HG PC 100/100 HG PC 100/125 HG		PC 100/60 HT PC 100/75 HT PC 100/100 HT PC 100/125 HT		B x A 90 x 40 L x S 113.5 x 63.5
PC 125 L Y x X 130 mm 130 mm 	35 50 75 100	24.0 40.9 65.9 90.9	PC 125/35 LG PC 125/50 LG PC 125/75 LG PC 125/100 LG		PC 125/35 LT PC 125/50 LT PC 125/75 LT PC 125/100 LT		B x A 90 x 90 L x S 113.5 x 113.5
PC 125 H Y x X 130 mm 130 mm 	60 75 100 125	44.4 61.0 86.2 111.3	PC 125/60 HG PC 125/75 HG PC 125/100 HG PC 125/125 HG		PC 125/60 HT PC 125/75 HT PC 125/100 HT PC 125/125 HT		B x A 90 x 90 L x S 113.5 x 113.5
PC 150 L Y x X 180 mm 130 mm 	35 50 75 100 125	23.6 41.0 65.9 90.9 115.5	PC 150/35 LG PC 150/50 LG PC 150/75 LG PC 150/100 LG PC 150/125 LG		PC 150/35 LT PC 150/50 LT PC 150/75 LT PC 150/100 LT PC 150/125 LT		B x A 140 x 90 L x S 163.5 x 113.5
PC 150 H Y x X 180 mm 130 mm 	60 75 100 125 150	44.0 61.3 86.3 111.3 135.9	PC 150/60 HG PC 150/75 HG PC 150/100 HG PC 150/125 HG PC 150/150 HG		PC 150/60 HT PC 150/75 HT PC 150/100 HT PC 150/125 HT PC 150/150 HT		B x A 140 x 90 L x S 163.5 x 113.5
PC 175 H Y x X 180 mm 180 mm 	60 75 100 125 150	44.0 61.0 86.3 111.0 135.9	PC 175/60 HG PC 175/75 HG PC 175/100 HG PC 175/125 HG PC 175/150 HG		PC 175/60 HT PC 175/75 HT PC 175/100 HT PC 175/125 HT PC 175/150 HT		B x A 140 x 140 L x S 163.5 x 163.5
PC 200 H Y x X 255 mm 180 mm 	63 75 100 150	47.5 61.2 86.3 135.9	PC 200/63 HG PC 200/75 HG PC 200/100 HG PC 200/150 HG		PC 200/63 HT PC 200/75 HT PC 200/100 HT PC 200/150 HT		B x A 215 x 140 L x S 238.5 x 163.5
PC 200 XH	88 100 125 175	71.5 86.8 111.9 161.5	PC 200/88 XHG PC 200/100 XHG PC 200/125 XHG PC 200/175 XHG		PC 200/88 XHT PC 200/100 XHT PC 200/125 XHT PC 200/175 XHT		

External height **Y** External width **X** External depth **Z** Free internal mounting height **C** Mounting plate assembly **B** x **A** Wall mounting **L** x **S**

L (low base) = enclosure with the low 25 mm base, H (high base) = enclosure with the high 50 mm base, XH (extra high base) = enclosure with the extra high 75 mm base, T = smoked transparent cover with black cover screws and black wing heads, G = grey cover with grey cover screws and grey wing heads.

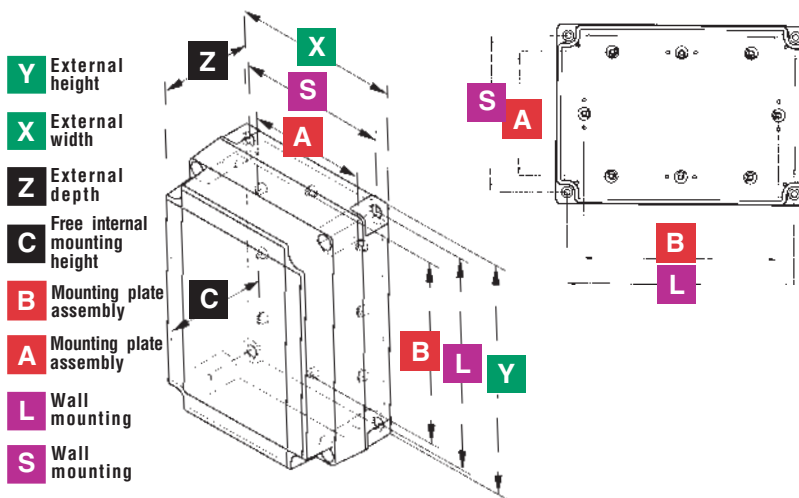

SYMBOLS AND ABBREVIATIONS

PC 100 / 60 L G	
PC	Smooth sides
ABS	Smooth sides
PCM	Sides with metric knock-outs
100	Size (length + width/2)
60	Total height = base + cover
L	Base height L= Low 25 mm H= High 50 mm XH= Extra high 75 mm
G	Cover G = Grey T = Smoked grey transparent

FIBOX MNX F COVER FOR MEMBRANE KEYBOARDS

Please order separately: cover II 150/10 GF or II 175/10 GF, appropriate enclosure base (see chart below) and cover screw set. For 150L bases use MBS LL -screw set and for 150H and 175H bases MBS LH set. Screw sets include 4 x grey cover screws, 4 x grey wing heads and 4 x mounting plate screws.



Y x X mm	Z mm	C mm	ORDER SYMBOL/ Base	PRODUCT	B x A L x S mm
180 x 130	35	23,6	PC 150L	PC low base	140 x 90 163.5 x 113.5
			A 150L	Low ABS base	
180 x 130	60	44,0	PC 150H	PC base	140 x 90 163.5 x 113.5
			PCM 150	PC base with metric knock-outs	
			A 150H	ABS base	
180 x 180	60	44,0	PC 175H	PC base	140 x 140 163.5 x 163.5
			PCM 175	PC base with metric knock-outs	
			A 175H	ABS base	



FIBOX MNX PCM WITH METRIC KNOCK-OUTS

Amount of metric knock-outs in FIBOX MNX PCM:

Y x X mm	ORDER SYMBOL	KNOCK-OUT OPENINGS Long side Number of openings x metric size	KNOCK-OUT OPENINGS Short side Number of openings x metric size
100 x 100	PCM 95	2 x M20	-
130 x 80	PCM 100	2 x M32/M20	1 x M25/M16
130 x 130	PCM 125	2 x M32/M20	2 x M25/M16
180 x 130	PCM 150	3 x M25/M16	2 x M32/M20
180 x 180	PCM 175	3 x M32/M20	3 x M25/M16
255 x 180	PCM 200	3 x M25/M16 + 2 x M32/M20	3 x M32/M20
255 x 180	PCM 200X	8 x M20, 1 x /M50/M32	2 x M32/M20, 1 x M20

For more information, please see next page.




FIBOX MNX PCM WITH METRIC KNOCK-OUTS

FIBOX MNX POLYCARBONATE PC: IP 66/67 and IP 66, IK 08	Z mm	C mm	Including: Enclosure cover with cover screws and wing heads for cover screws, base with mounting plate screws and gasket.				B x A
			ORDER SYMBOL		ORDER SYMBOL		L x S
			Grey cover		Smoked transparent cover		mm
PCM 95 Y x X 100 mm 100 mm 	60 75	53.8 70.6	PCM 95/60 G PCM 95/75 G		PCM 95/60 T PCM 95/75 T		B x A 70 x 45 L x S 83.5 x 83.5
PCM 100 Y x X 130 mm 80 mm 	60 75 100 125	44.5 61.0 86.3 111.3	PCM 100/60 G PCM 100/75 G PCM 100/100 G PCM 100/125 G		PCM 100/60 T PCM 100/75 T PCM 100/100 T PCM 100/125 T		B x A 90 x 40 L x S 113.5 x 63.5
PCM 125 Y x X 130 mm 130 mm 	60 75 100 125	44.4 61.0 86.2 111.3	PCM 125/60 G PCM 125/75 G PCM 125/100 G PCM 125/125 G		PCM 125/60 T PCM 125/75 T PCM 125/100 T PCM 125/125 T		B x A 90 x 90 L x S 113.5 x 113.5
PCM 150 Y x X 180 mm 130 mm 	60 75 100 125 150	44.0 61.0 86.3 111.3 135.9	PCM 150/60 G PCM 150/75 G PCM 150/100 G PCM 150/125 G PCM 150/150 G		PCM 150/60 T PCM 150/75 T PCM 150/100 T PCM 150/125 T PCM 150/150 T		B x A 140 x 90 L x S 163.5 x 113.5
PCM 175 Y x X 180 mm 180 mm 	60 75 100 125 150	44.0 61.0 86.3 111.3 135.9	PCM 175/60 G PCM 175/75 G PCM 175/100 G PCM 175/125 G PCM 175/150 G		PCM 175/60 T PCM 175/75 T PCM 175/100 T PCM 175/125 T PCM 175/150 T		B x A 140 x 140 L x S 163.5 x 163.5
PCM 200 Y x X 255 mm 180 mm 	63 75 100 150	47.5 61.2 86.3 135.9	PCM 200/63 G PCM 200/75 G PCM 200/100 G PCM 200/150 G		PCM 200/63 T PCM 200/75 T PCM 200/100 T PCM 200/150 T		B x A 215 x 140
PCM 200 X Y x X 255 mm 180 mm 	88 100 125 175	71.5 86.8 111.9 161.5	PCM 200/88 XG PCM 200/100 XG PCM 200/125 XG PCM 200/175 XG		PCM 200/88 XT PCM 200/100 XT PCM 200/125 XT PCM 200/175 XT		L x S 238.5 x 163.5

External height **Y**External width **X**External depth **Z**Free internal mounting height **C**Mounting plate assembly **B** x **A**Wall mounting **L** x **S**

Enclosure with the high 50 mm base. X (extra high base) = enclosure with the extra high 75 mm base,
 T= smoked transparent cover with black cover screws and black wing heads, G= grey cover with grey cover screws and grey wing heads.

FIBOX MNX ABS

FIBOX MNX ABS ABS: IP 66/67 and IP 66, IK 07	Z mm	C mm	Including: Enclosure cover with cover screws and wing heads for cover screws, base with mounting plate screws and gasket.				B x A
			ORDER SYMBOL		ORDER SYMBOL		L x S
			Grey cover		Smoked transparent cover		mm
ABS 95 L / ABS 95 H Y x X 100 mm 100 mm 	35 50 60 75	28.8 45.6 53.8 70.6	ABS 95/35 LG ABS 95/50 LG ABS 95/60 HG ABS 95/75 HG		ABS 95/35 LT ABS 95/50 LT ABS 95/60 HT ABS 95/75 HT		B x A 70 x 45 L x S 83.5 x 83.5
ABS 100 L Y x X 130 mm 80 mm 	35 50 75 100	24.1 41.0 61.0 90.9	ABS 100/35 LG ABS 100/50 LG ABS 100/75 LG ABS 100/100 LG		ABS 100/35 LT ABS 100/50 LT ABS 100/75 LT ABS 100/100 LT		B x A 90 x 40 L x S 113.5 x 63.5
ABS 100 H Y x X 130 mm 80 mm 	60 75 100 125	44.5 61.0 86.3 111.3	PC 100/60 HG PC 100/75 HG PC 100/100 HG PC 100/125 HG		ABS 100/60 HT ABS 100/75 HT ABS 100/100 HT ABS 100/125 HT		B x A 90 x 40 L x S 113.5 x 63.5
ABS 125 L Y x X 130 mm 130 mm 	35 50 75 100	24.0 40.9 65.9 90.9	ABS 125/35 LG ABS 125/50 LG ABS 125/75 LG ABS 125/100 LG		ABS 125/35 LT ABS 125/50 LT ABS 125/75 LT ABS 125/100 LT		B x A 90 x 90 L x S 113.5 x 113.5
ABS 125 H Y x X 130 mm 130 mm 	60 75 100 125	44.4 61.0 86.2 111.3	ABS 125/60 HG ABS 125/75 HG ABS 125/100 HG ABS 125/125 HG		ABS 125/60 HT ABS 125/75 HT ABS 125/100 HT ABS 125/125 HT		B x A 90 x 90 L x S 113.5 x 113.5
ABS 150 L Y x X 180 mm 130 mm 	35 50 75 100 125	23.6 41.0 65.9 90.9 115.5	ABS 150/35 LG ABS 150/50 LG ABS 150/75 LG ABS 150/100 LG ABS 150/125 LG		ABS 150/35 LT ABS 150/50 LT ABS 150/75 LT ABS 150/100 LT ABS 150/125 LT		B x A 140 x 90 L x S 163.5 x 113.5
ABS 150 H Y x X 180 mm 130 mm 	60 75 100 125 150	44.0 61.3 86.3 111.3 135,9	ABS 150/60 HG ABS 150/75 HG ABS 150/100 HG ABS 150/125 HG ABS 150/150 HG		ABS 150/60 HT ABS 150/75 HT ABS 150/100 HT ABS 150/125 HT ABS 150/150 HT		B x A 140 x 90 L x S 163.5 x 113.5
ABS 175 H Y x X 180 mm 180 mm 	60 75 100 125 150	44.0 61.0 86.3 111.0 135.9	ABS 175/60 HG ABS 175/75 HG ABS 175/100 HG ABS 175/125 HG ABS 175/150 HG		ABS 175/60 HT ABS 175/75 HT ABS 175/100 HT ABS 175/125 HT ABS 175/150 HT		B x A 140 x 140 L x S 163.5 x 163.5
ABS 200 H Y x X 255 mm 180 mm 	63 75 100 150	47.5 61.2 86.3 135.9	ABS 200/63 HG ABS 200/75 HG ABS 200/100 HG ABS 200/150 HG		ABS 200/63 HT ABS 200/75 HT ABS 200/100 HT ABS 200/150 HT		B x A 215 x 140 L x S 238.5 x 163.5
ABS 200 XH	88 100 125 175	71.5 86.8 111.9 161.5	ABS 200/88 XHG ABS 200/100 XHG ABS 200/125 XHG ABS 200/175 XHG		ABS 200/88 XHT ABS 200/100 XHT ABS 200/125 XHT ABS 200/175 XHT		

External height **Y** External width **X** External depth **Z** Free internal mounting height **C** Mounting plate assembly **B** x **A** Wall mounting **L** x **S**

L (low base) = enclosure with the low 25 mm base, H (high base) = enclosure with the high 50 mm base, XH (extra high base) = enclosure with the extra high 75 mm base, T= smoked transparent cover with black cover screws and black wing heads, G= grey cover with grey cover screws and grey wing heads.


FIBOX MNX PC/ABS


TECHNICAL INFORMATION

PROPERTY	POLYCARBONATE (PC)	ABS	CONFORMITY TO STANDARDS (UL, CSA, CE, Lloyds, BV, FI)
Ingress Protection (EN 60529)	IP66/IP 67 and IP66	IP66/67 and IP66	USA Enclosures for Electrical Equipment PC: UL Type 1, 4, 4X, 6 (12 and 13) (UL 50/508) ABS: NEMA 1, 4, 4X, 6 (12 and 13)
Impact Resistance (EN 50102)	IK 08	IK 07	Canada Industrial Control Equipment Enclosures for Electrical Equipment/ULc
Temperature Range Celsius (short term)	-40°...120°C	-40°...80°C	Europe Enclosures for Switch Gear and Control Gear Assemblies EN 50298:1998
Temperature Range Fahrenheit (short term)	-40°...250°F	-40°...175°F	Europe Safety of Information Technology Equipment EN 60950
Temperature Range Celsius (continuous)	-40°...80°C	-40°...60°C	
Temperature Range Fahrenheit (continuous)	-40°...175°F	-40°...140°F	
Electrical Insulation	Totally insulated 	Totally insulated 	Australia Enclosures for switch gear and control gear AS 3132-1991
Light Grey Parts Colour	RAL 7035	RAL 7035	
Transparent Clear PC Cover	Industry Grey	Industry Grey	
Cover Screws	Smoked Grey	Smoked Grey	
Cover Screws	Black or Grey	Black or Grey	
Gasket	Polyamide (PA)	Polyamide (PA)	
Gasket	PUR/TPE	PUR/TPE	
Enclosure Flammability Rating	UL94-5V	UL94HB	UL 746 C 5 in. vertical flame test
Glow Wire Test	960°C	650°C	IEC 695-2-1, Self-extinguishing
Non-toxicity	Halogen Free	Halogen Free	
UV resistance	UL 508		
UV resistance	720 hours in "Weatherometer"		
Chemical Resistance *	Good	Good	

Data subject to change without notice. *Consult separate raw material data for more detailed information

ACCESSORIES

Product	Order symbol	Size mm	
MNX front plate 	FP A 100/130 FP A 125/130 FP A 150/180 FP A 175/180 FP A 200/180	120 x 62 120 x 112 170 x 112 170 x 162 237 x 170	
MNX front plate hinge series, 2 pcs  incl. screws	HFP 130 HFP 180	130 180	
Mounting plate 	MIV 95 MIV 100 MIV 125 MIV 150 MIV 175 MIV 200	66 x 80 98 x 48 98 x 98 148 x 98 148 x 148 223 x 148	
Mounting rail DIN 35 	B-3 MIV 5 MIV 10 MIV 15 MIV 20	35 x 80 35 x 50 35 x 100 35 x 150 35 x 225	
Mounting rail DIN 15 	MIN 5 MIN 10 MIN 15 MIN 20	15 x 50 15 x 100 15x 150 15 x 225	
Mounting foot kit, 4 pcs. incl. screws 	FP 22046		
Inspection windows 	L02 L04 L06 L08 L10	60 x 77 96 x 77 130 x 77 162 x 77 199 x 77	

Product	Order symbol	Size mm	
Plastic hinges (2 pcs)  incl. mounting screws	TH A		
MNX sealing plug, grey 	DP 14553		
MNX sealing plug, black 	DP 14553B		
Water plug 	MB 12189		
Cover plug 	MB 14560		
Ventilation device 	MB 10631		
Cover screws 	SS 14550L SS 14551H SS 14550BL SS 14551BH		
Wing heads for cover screws 	MB 14552 MB 14552B		
Mounting plate screws 	MR ZN 2.9x6.5 KN 3.9x9.5	2.9 x 6.5 3.9 x 9.5	

POLYCARBONATE AND ABS ENCLOSURE

MULTI PURPOSE MOUNTING PODS

The 50 mm (H) base features 3 levels for component mounting. The highest level provides component clearance under the Printed Circuit Board. The middle level is ideal for DIN rail mounting. The lowest level permits snap-in mounting of PCB's.

VERSATILE COVERS

Grey opaque or smoked transparent polycarbonate covers provide a stylish finish to any installed equipment. Tooling may be cost effectively changed to customise covers for volume OEM applications.

FIBOX MNX PCM

Enclosure features metric knock-outs moulded in place for easy wiring.

Please ask for Fibox mounting and machining service for terminal blocks and cable glands.

**SWING
PANEL**

FUNCTIONAL COVER SCREWS

The enclosure is supplied with corrosion free plastic cover screws. A wing head screw can be snapped in place for opening without tools. Grey covers are supplied with grey screws. Smoked transparent covers are supplied with black screws.

HINGED INNER PANEL


For instrumentation mounting, aluminum inner panels can be hinged right or left. Unique brackets allow mounting in either base or cover. The brackets permit mounting at variable depths.

RUGGED HINGE

An optional corrosion free hinge is available. Mounted on the outside, fixing screws are hidden by decorative covers.


MEMBRANE KEY-BOARD RECESS

The cover features a slightly recessed area ideal for overlays and membrane key pads. Special cover available for sizes 150 and 175, see page 9.

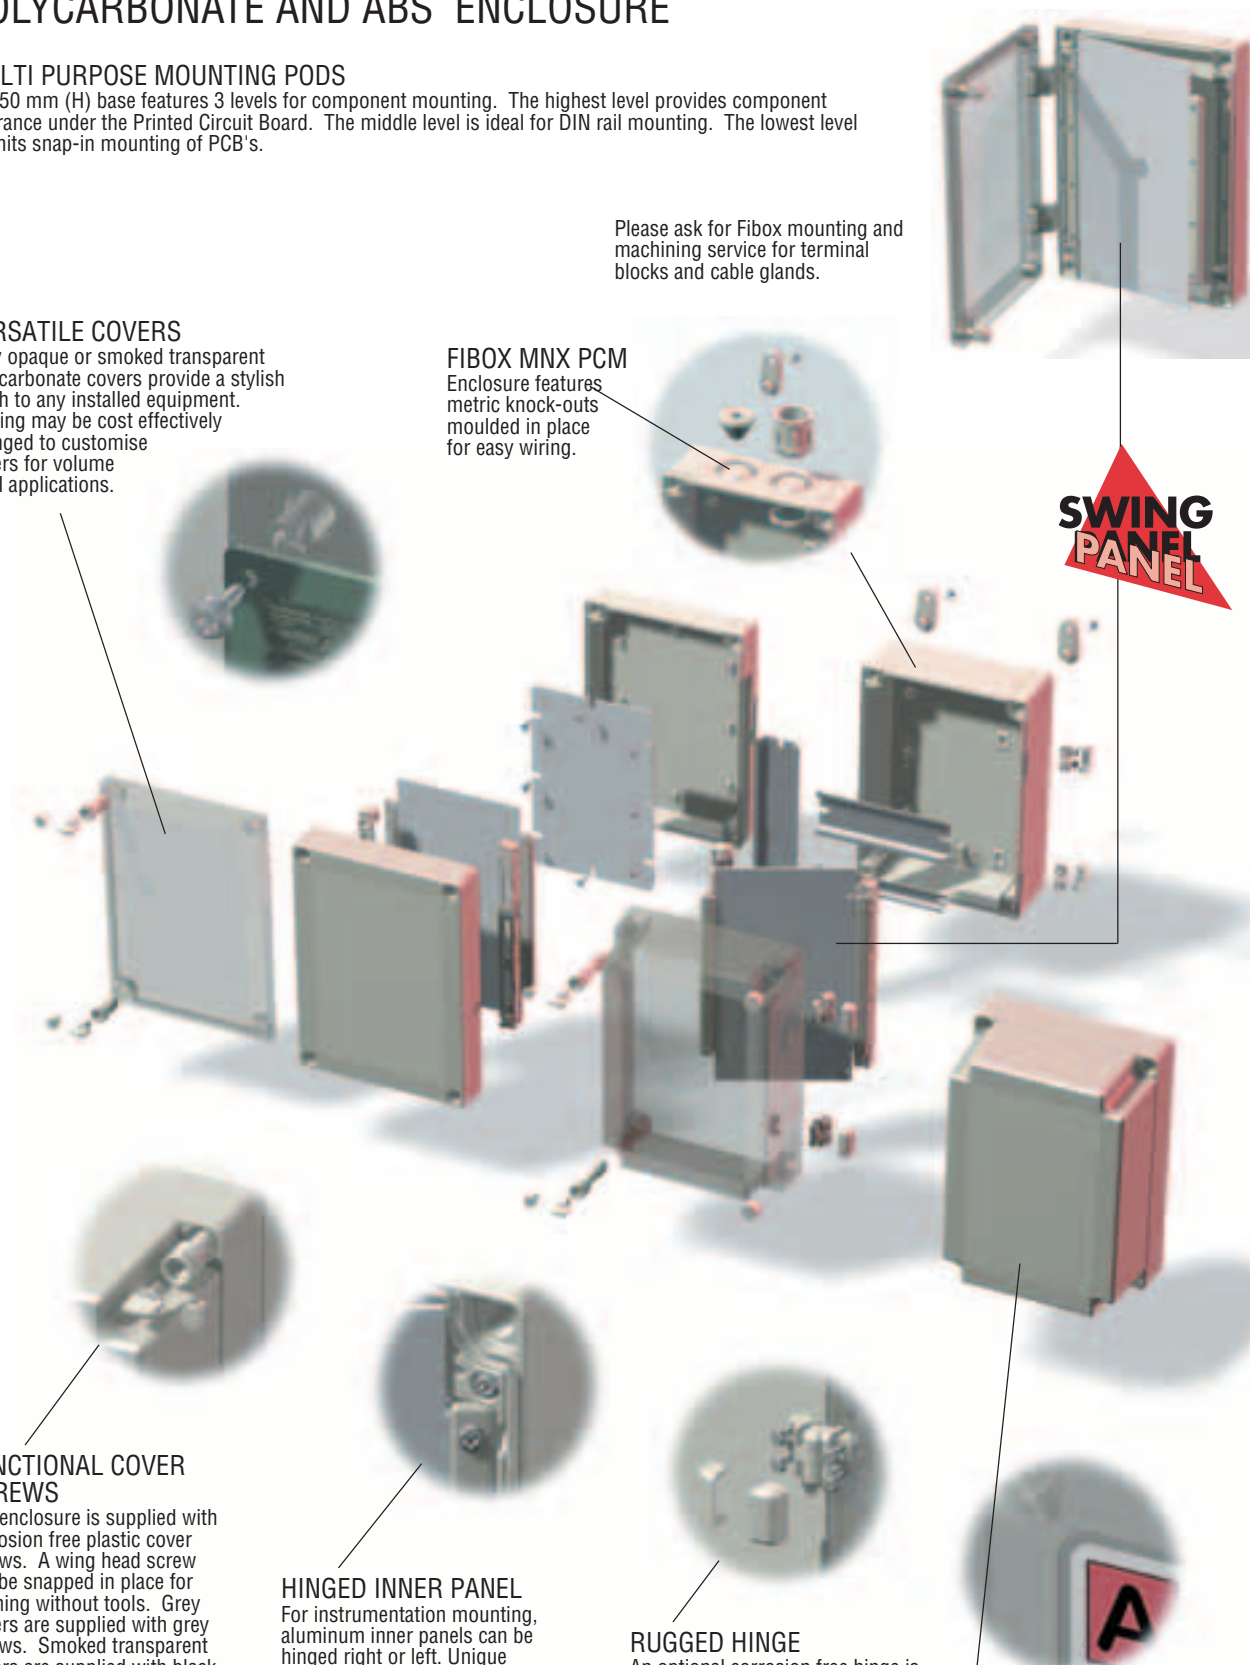

FIBOX CUSTOMIZING SERVICES

FIBOX MACHINING SERVICES




To increase the range and flexibility of our enclosure solutions, Fibox has developed a comprehensive range of services, permitting cost effective customisation for specific applications. The two most important of these are machining services and customised tooling.


Our sophisticated CNC machinery can supply enclosures with holes, cutouts and openings to your specification. This solution is best suited for small to medium volumes of enclosures. Fibox knowledge of enclosure materials ensures that the machining method is compatible with the chosen enclosure material.



Prior to machining a production run, Fibox requires customer approved drawings. Either the customer or Fibox can create these drawings. Enclosure specifications and technical data are available on our latest CD-ROM or on the WEB WWW.FIBOX.COM. CAD support drawings are available in IGES, DWG and DXF formats adaptable to your design system requirements.

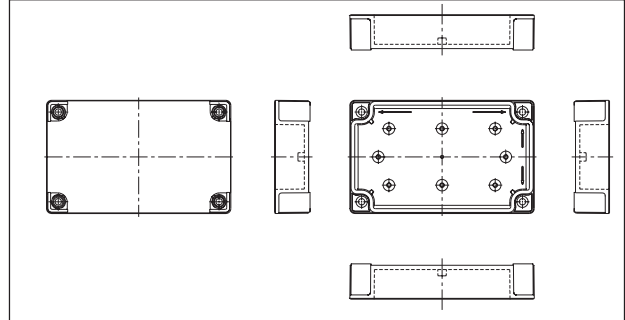


CUSTOMISED TOOLING



For large volume OEM requirements, it is often possible to customise the moulding of a standard product to meet the OEM's specific needs. Provided the mould is a sophisticated multiple slide mould, any enclosure side may be customised without requiring an entirely new mould. It is important that the OEM consult with Fibox early in your design process to determine what, if any, mould change restrictions exist.

Altering an existing Fibox mould can be a very cost effective alternative to creating a custom mould. In essence, you lease a high volume, standard product mould with minimal initial tooling cost. This can shorten product development times and permit customising even those products with projected short life cycles. Your new product reaches the market sooner.

COLOURED PLASTIC ENCLOSURES



Fibox offers custom moulding of standard enclosures in customer specified colours. Standard colour specifications are based upon the RAL system, however custom colour matching is possible.

The type of plastic has significant impact on colour match, colour consistency and cost. Please consult your Fibox representative for guidance.


Custom colour molding becomes economical in volumes over 1000 pieces, but lower volumes are possible. Cost adders are based upon increased raw material costs, plus the cost to prepare moulds prior to production and then clean the moulds after production. These mould preparation costs are highly volume dependent.

PAINTED ENCLOSURES



Painting enclosures is recommended for plastic enclosures when volumes do not justify custom moulding. Critical colour matching, if required, is also easier to accomplish with paint. Paint type is dependent upon the choice of enclosure material. Please consult your Fibox representative for guidance.

EMC - PLASTIC ENCLOSURES



Plastic enclosures can be prepared to provide EMC shielding. Various methods are available, but painting the internal surface with Ni conductive paint is the preferred method. This coating, combined with a conductive gasket material such as CHO-SEAL 1350, can provide significant shielding levels. Proper selection of materials is very application specific. Please consult your Fibox representative for guidance.

PRINTED ENCLOSURES



Silk screen printing is recommended for enclosure batches of less than 1000 pieces. This method is mainly suitable for flat surfaces, and can be used for large areas.

Tampo printing is the best solution for volumes greater than 1000 pieces. It is suitable for printing on both flat and curved surfaces of limited size. Tampo printing is also ideal for tight spots like the inside surface of the enclosure.

FIBOX

PICCOLO

FIBOX PICCOLO



PC
ABS
EMC
PBPC
SABS



PICCOLO EMC



PICCOLO PUSH BUTTONS



PICCOLO SIGNAL


The FIBOX PICCOLO range of enclosures is specifically designed for housing push buttons, terminal blocks, motor starters and electronic devices. They are also ideal for mounting and protecting process control sensors and switches. There are six basic sizes and a choice of two cover depths. Push Button configurations are available as standard. FIBOX PICCOLO is available in polycarbonate or ABS.

The enclosures are rated EN 60529 IP66/IP67.



FIBOX PICCOLO

FIBOX PICCOLO PC: IP66 / IP67, IK 08 ABS: IP66 / IP67, IK 07	Z mm	C mm	Including: Enclosure base, cover with PUR gasket, 4 cover screws, and mounting screws.				B x A
			ORDER SYMBOL		ORDER SYMBOL		L x S
			Grey cover		Transparent cover		mm
PICCOLO B Y x X 110 mm 80 mm 	65	52	PC B 65 G		PC B 65 T		B
	85	72	PC B 85 G		PC B 85 T		75
	65	52	ABS B 65 G		ABS B 65 T		L x S
	85	72	ABS B 85 G		ABS B 85 T		90 x 60
PICCOLO C Y x X 140 mm 80 mm 	65	52	PC C 65 G		PC C 65 T		B
	85	72	PC C 85 G		PC C 85 T		105
	65	52	ABS C 65 G		ABS C 65 T		L x S
	85	72	ABS C 85 G		ABS C 85 T		120 x 60
PICCOLO D Y x X 170 mm 80 mm 	65	52	PC D 65 G		PC D 65 T		B
	85	72	PC D 85 G		PC D 85 T		135
	65	52	ABS D 65 G		ABS D 65 T		L x S
	85	72	ABS D 85 G		ABS D 85 T		150 x 60
PICCOLO F Y x X 230 mm 80 mm 	65	52	PC F 65 G		PC F 65 T		B
	85	72	PC F 85 G		PC F 85 T		195
	65	52	ABS F 65 G		ABS F 65 T		L x S
	85	72	ABS F 85 G		ABS F 85 T		210 x 60
PICCOLO H Y x X 170 mm 140 mm 	95	81.7	PC H 95 G		PC H 95 T		B x A
	95	81.7	ABS H 95 G		ABS H 95 T		130 x 100
PICCOLO M Y x X 230 mm 140 mm 	95	81.7	PC M 95 G		PC M 95 T		B x A
	95	81.7	ABS M 95 G		ABS M 95 T		190 x 100
	125	111.7	PC MH 125 G		PC MH 125 T		S x L
	125	111.7	ABS MH 125 G		ABS MH 125 T		212 x 122

External height **Y**External width **X**External depth **Z**Free internal mounting height **C**Mounting plate assembly **B** x **A**Wall mounting **L** x **S**

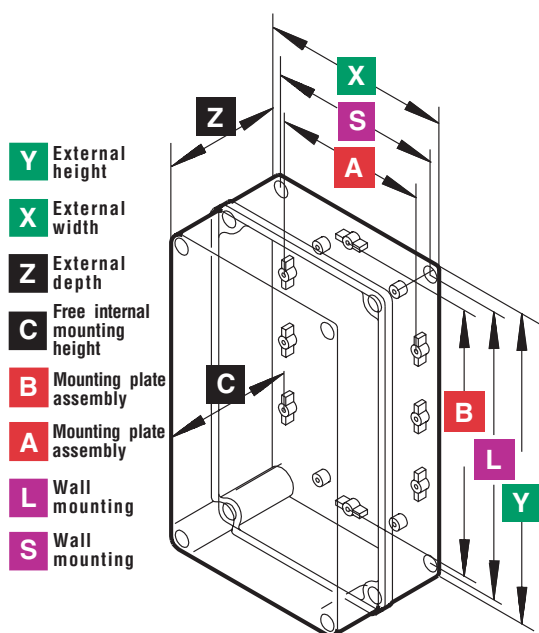

FP 22040
fastening lug measures

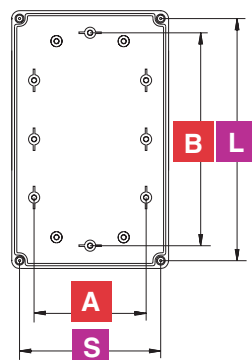

SYMBOLS AND ABBREVIATIONS

PC B 65 T

— Cover G = Grey
T = Smoked grey
Y = colour of the enclosure

— Total height = base + cover

— Enclosure size

- Enclosure range/type

PC polycarbonate smooth sides

ABS ABS grey, smooth sides

SABS ABS signal Y=yellow smooth
sides

EMC polycarbonate, painted for EMC-shielding, smooth sides


PBPC EMC-shielding, smooth sides
polycarbonate, push buttons
in cover 1 = one hole

1M = one hole minia-
ture size

PICCOLO EMC, PICCOLO YELLOW AND PICCOLO PUSH BUTTONS


FIBOX PICCOLO EMC POLYCARBONATE ENCLOSURE			
ORDER SYMBOL		DIMENSIONS mm	
EMC PC B 65 G		110 x 80 x 65	REMOVING PRODUCT
EMC PC C 65 G		140 x 80 x 65	
EMC PC D 65 G		170 x 80 x 65	
EMC PC F 65 G		230 x 80 x 65	
EMC PC H 95 G		170 x 140 x 95	
EMC PC M 95 G		230 x 140 x 95	

A standard PICCOLO EMC shielded plastic enclosure family for fulfilling the newest European regulations of electromagnetic compatibility. Five different standard sizes available ex stock with 40 to 60 db attenuation through reliable Ni-coating inside the enclosure.



FIBOX PICCOLO BUSH BUTTON ENCLOSURES			
PBPC B 85 G 1	ø 30.5 MM	110 x 80 x 85	
PBPC D 85 G 2		170 x 80 x 85	
PBPC F 85 G 3		230 x 80 x 85	
PBPC H 95 G 4		170 x 140 x 95	
PBPC M 95 G 6		230 x 140 x 95	
PBPC B 85 G 1M	ø 22.5 MM	110 x 80 x 85	
PBPC C 85 G 2M		140 x 80 x 85	
PBPC D 85 G 3M		170 x 80 x 85	
PBPC F 85 G 4M		230 x 80 x 85	

Choose PICCOLO PB Polycarbonate enclosures to house 30.5 mm or 22.5 mm pushbuttons in corrosive environments. Piccolo PB enclosures feature high impact resistance, stylish design, and light grey colour.



FIBOX PICCOLO SIGNAL ABS ENCLOSURE			
SABS B 65 Y		110 x 80 x 65	REMOVING PRODUCT
SABS C 65 Y		140 x 80 x 65	
SABS D 65 Y		170 x 80 x 65	
SABS F 65 Y		230 x 80 x 65	
SABS H 95 Y		170 x 140 x 95	
SABS M 95 Y		230 x 140 x 95	

Bright Yellow PICCOLO enclosure with black cover screws for places where visible safety is needed.




FIBOX PICCOLO


TECHNICAL INFORMATION

PROPERTY	POLYCARBONATE (PC)	ABS	CONFORMITY TO STANDARDS (UL, CSA, CE, Lloyds, BV, FI)
Ingress Protection (EN 60529)	IP66/IP67	IP66/67	USA Enclosures for Electrical Equipment PC: UL Type 1, 4X, 6, 12 and 13 (UL 50/508) ABS: NEMA 1, 4, 4X, 6, 12 and 13
Impact Resistance (EN 50102)	IK 08	IK 07	Canada Industrial Control Equipment Enclosures for Electrical Equipment/ULc
Temperature Range (short term)	Celsius -40°...120°C Fahrenheit -40°...250°F	-40°...80°C -40°...175°F	Europe Enclosures for Switch Gear and Control Gear Assemblies EN 50298:1998
Temperature Range (continuous)	Celsius -40°...80°C Fahrenheit -40°...175°F	-40°...60°C -40°...140°F	Europe Safety of Information Technology Equipment EN 60950
Electrical Insulation	Totally insulated 	Totally insulated 	Australia Enclosures for switch gear and control gear AS 3132-1991
Light Grey Parts Colour	RAL 7035 Industry Grey	RAL 7035 Industry Grey	
Transparent Clear PC Cover	Clear Transparent	Clear Transparent	
Cover Screws	RAL 7035	RAL 7035	
Cover Screws	Polyamide (PA)	Polyamide (PA)	
Gasket	PUR	PUR	
Enclosure Flammability Rating	UL94-5V	UL94HB	UL 746 C 5 in. vertical flame test
Glow Wire Test	960°C	650°C	IEC 695-2-1, Self-extinguishing
Non-toxicity	Halogen Free	Halogen Free	
UV resistance	UL 508 720 hours in "Weatherometer"		
Chemical Resistance *	Good	Good	

Data subject to change without notice. * Consult separate raw material data for more detailed information


ACCESSORIES

Product	Order symbol	Size mm	
Mounting plate 	B-MP C-MP D-MP F-MP H-MP M-MP	80 x 54 110 x 54 140 x 54 200 x 54 125 x 94 185 x 94	
Mounting rail DIN 35 	B-3 CHM-3 DH-3 FM-3	35 x 80 35 x 110 35 x 140 35 x 200	
Inspection windows 	L02 L04 L06 L08 L10	60 x 77 96 x 77 130 x 77 162 x 77 199 x 77	
Ventilation device 	MB 10631		
Hinges 	TH A		
Hinges, 1 pair incl. screws 	PA 22039		

Product	Order symbol	Size mm	
Mounting foot kit, 2 pcs incl. screws 	FP 22040		
Mounting foot kit, 4 pcs incl. screws 	FP 22046		
Screw sets 	MB S-20 KN MB S-40 KN MB S-20 BKN MB S-40 BKN		
Cover screws 	Grey S-20 S-40 Black S-20B S-40B	0.8 1.6 0.8 1.6	20 40 20 40
Mounting screw 	KN 3.9 x 9.5		

CUSTOMISATION

Enclosures can be machined, painted, screen printed and preassembled to meet your customisation requirements. Fibox's service centre offers complete CNC machining, hinge mounting, screen printing, assembly and much more. Our wide selection of enclosures and accessories can be customised to create a unique enclosure meeting your application requirements.



FIBOX


EURONORD

PC
ABS
ALUMINIUM
POLYESTER

FIBOX EURONORD





FIBOX EURONORD ALUMINIUM

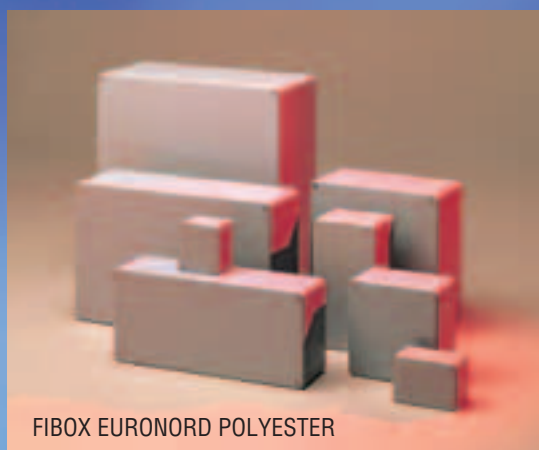

FIBOX EURONORD POLYESTER




The FIBOX EURONORD range of enclosures is specifically designed for housing DIN-rail mounted terminal blocks. Additionally, these enclosures are excellent for packaging sensors for process control applications. FIBOX EURONORD enclosures are available moulded from polycarbonate, ABS or polyester (GRP). FIBOX EURONORD enclosures are also available in cast aluminium. The enclosures are rated EN 60529 IP 66/67.

FIBOX EURONORD II

FIBOX EURONORD II PC: IP66 / IP67, IK 08/IK 07 ABS: IP66 / IP67, IK 07	Z x C	GREY COVER AND TRANSPARENT COVER	
	B x A L x S mm	ORDER SYMBOL	
050504 Y x X 52 mm 50 mm 	Z / C 40 x 30 B 16.4 L x S 40 x 38	PC 050504 AB 050504	
050705 Y x X 65 mm 50 mm 	Z / C 45 x 35 B 38 L x S 53 x 38	PCT 050705 PC 050705 AB 050705	
080807 Y x X 82 mm 80 mm 	Z / C 65 x 53.5 B x A 58 x 43.5 L x S 70 x 50	PCT 080807 PC 080807 AB 080807	
081206 Y x X 120 mm 80 mm 	Z / C 55 x 42 B x A 81.5 x 58.0 L x S 108 x 50	PCT 081206 PC 081206 AB 081206	
081607 Y x X 160 mm 80 mm 	Z / C 65 x 54 B x A 121.5 x 58 L x S 148 x 50	PCT 081607 PC 081607 AB 081607	
081610 Y x X 160 mm 80 mm 	Z / C 95 x 84 B x A 121.5 x 58 L x S 148 x 50	PCT 081610 PC 081610 AB 081610	
121207 Y x X 122 mm 120 mm 	Z / C 65 x 54 B x A 98 x 83.5 L x S 110 x 90	PCT 121207 PC 121207 AB 121207	
121210 Y x X 122 mm 120 mm 	Z / C 95 x 84 B x A 98 x 83.5 L x S 110 x 90	PCT 121210 PC 121210 AB 121210	
121609 Y x X 160 mm 120 mm 	Z / C 90 x 78 B x A 90.5 x 120 L x S 148 x 88	PCT 121609 PC 121609 AB 121609	
122008 Y x X 200 mm 120 mm 	Z / C 75 x 62 B x A 160.5 x 90.5 L x S 188 x 89	PCT 122008 PC 122008 AB 122008	
152008 Y x X 201 mm 151 mm 	Z / C 80 x 68.5 B x A 160 x 118 L x S 189 x 118	PCT 152008 PC 152008 AB 152008	
162509 Y x X 250 mm 160 mm 	Z / C 90 x 78 B x A 201.5 x 138.5 L x S 238 x 130	PCT 162509 PC 162509 AB 162509	

External height **Y** External width **X** External depth **Z** Free internal mounting height **C** Mounting plate assembly **B** x **A** Wall mounting **L** x **S**

Including: Enclosure body, cover with PUR gasket, cover screws, and mounting screws. T= smoked transparent cover G= grey cover

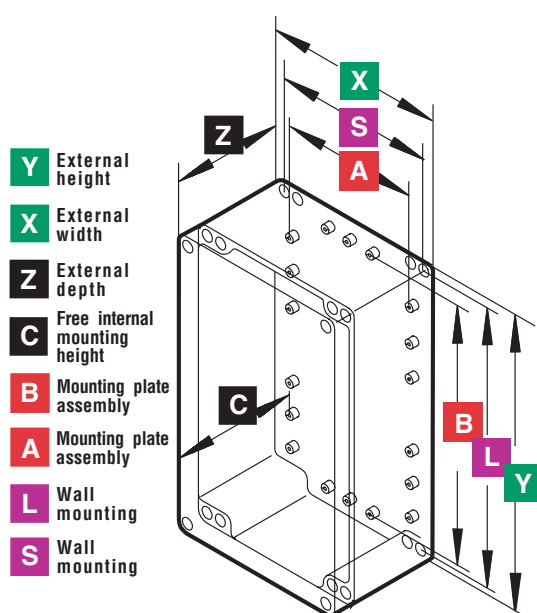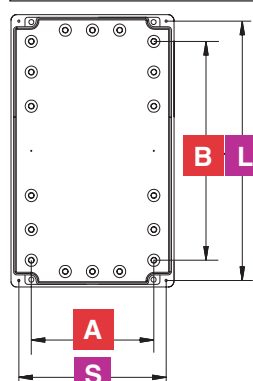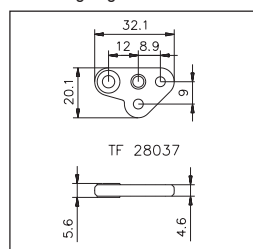TF 28037
fastening lug measures

SYMBOLS AND ABBREVIATIONS

PCT 05 07 05

L Height
 Length
 Width
 Enclosure type

PCT polycarbonate with transparent cover

PC polycarbonate with grey cover

AB ABS plastic


Al Aluminium

P polyester / fibreglass (GRP)

FIBOX EURONORD II PC: IP66 / IP67, IK 08/IK 07 ABS: IP66 / IP67, IK 07	Z x C B x A L x S mm	GREY COVER AND TRANSPARENT COVER	
		ORDER SYMBOL	
162513 Y x X 250 mm 160 mm 	Z / C 125 x 113 B x A 201.5 x 138.5 L x S 238 x 130	PCT 162513 PC 162513 AB 162513	
233009 Y x X 300 mm 230 mm 	Z / C 87 x 75 B x A 255 x 198 L x S 288 x 200	PCT 233009 PC 233009 AB 233009	
233011 Y x X 300 mm 230 mm 	Z / C 110 x 98 B x A 255 x 198 L x S 288 x 200	PCT 233011 PC 233011 AB 233011	

CIRCUIT BOARD BRACKET

Printed circuit boards and mounting plates often need special mounting supports that offer flexibility in positioning the boards across the enclosure body. Mounting supports also raise the board above the enclosure bottom, especially effective when using two sided boards. This circuit board bracket has a standard E1 (IEC 297-3, DIN 41494) Eurocard screw mounting distance of 89 mm (3.5") accepting M2,5 to M4 screws. The bracket can also be used for nonstandard boards by separating the ends of the bracket (a) from the connector bridge (b). If the bracket is not needed, the adapter parts for each individual mounting pod size can be used only for raising the board above the enclosure body level.

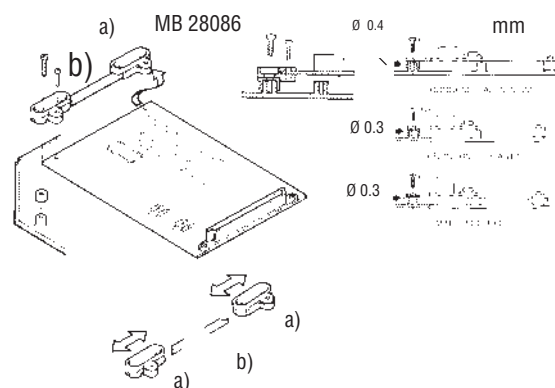


CIRCUIT BOARD BRACKET

ORDER SYMBOL	Standard Mounting Distance	Remarks
MB 28086	89 mm	Adapter for EURONORD, PICCOLO, MINI. Direct mount to EK, SOLID, EKI.

FIBOX EURONORD II

POLYCARBONATE AND ABS ENCLOSURES

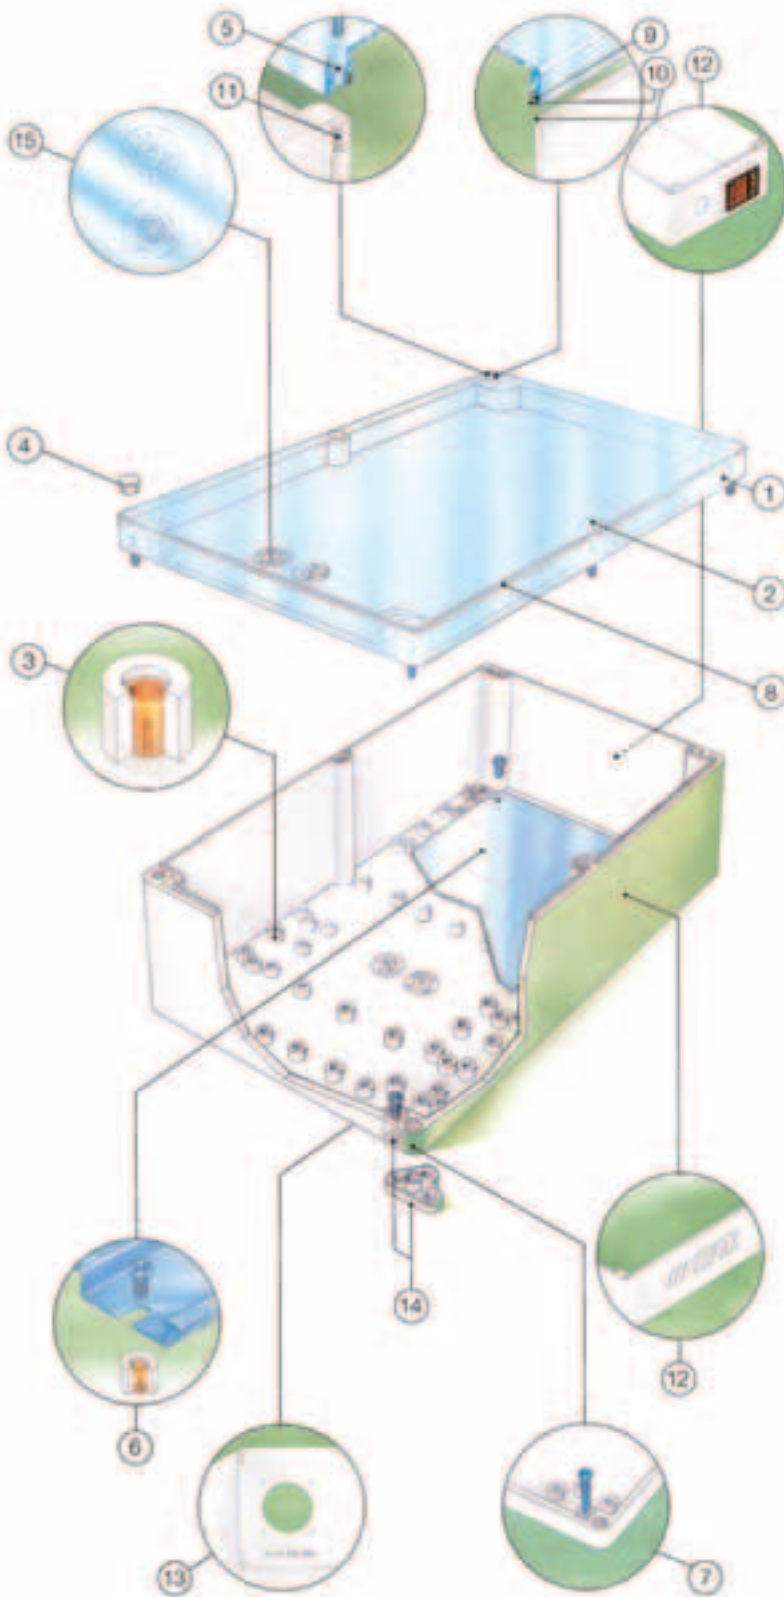

1. Enclosure covers are moulded with state of the art technology. Depending upon size, covers are injection moulded from the edge or the inside surface. The outer surface is free of "gate marks" creating a smooth area for labels, decals or screen printing.
2. Cover screws are designed for automatic assembly using normal tools or PosiDrive Phillips screwdrivers. Slightly ferrite, F1 stainless screws work with magnetised drivers. Screws fully tighten in 4 revolutions.
3. Fibox Euronorm II enclosures feature more mounting points than the competitors' products. F1 style screws are provided for mounting inner panels and Din rails. Enclosures feature low height mounting pods, thus maximising internal usable depth. Brass M3 inserts are also available.
4. Decorative cover plugs create a smooth finished appearance.
5. Cover screws are held captive, but are still removable.
6. Assorted mounting plates and Din rails are available.
7. Enclosures can be wall mounted through the base holes. This reduces both mounting area and possible vandalism. Mounting holes are outside the gasket area maintaining water tight protection.
8. The Euronorm II features a slightly bevelled edge design creating a modern look.
9. Robotically applied, foamed in place PUR gaskets are moulded into the unique designed gasket groove. The tight adhesion and low compression set of PUR gasket material ensures protection ratings of NEMA 4 and IP 66/67.
10. An extension strip structure reinforces the inner gasket groove edge, protecting against side impact.
11. Special injection moulded plastic threads allow the cover screws to fasten quickly, while preventing sticking and corrosion.
12. The enclosure sides have space for mounting switches, sensors, or cable glands. Smooth sides allow decals or screen printing of logos. Fibox can customise enclosures with cut-outs, drilled or machined holes, and knock-out openings to the customers specifications.
13. Customisation of the back and sides of the enclosure can be supplied by Fibox.
14. Optional wall mounting brackets (feet) allow 4 external mounting points for hanging the enclosure, even when the cover is in place.
15. Fibox is an ISO 9001 manufacturer. Each enclosure part (cover and base) bears a code number, indication of manufacturing date and type of plastic, i.e. PC, ABS, etc. These indications are moulded into the part for quality control purposes and for compliance with European recycling regulations.

TECHNICAL INFORMATION FOR EURONORD PC AND ABS

PROPERTY	POLYCARBONATE (PC)	ABS	CONFORMITY TO STANDARDS (UL, CSA, CE, Lloyds, BV, FI)
Ingress Protection (EN 60529)	IP66/IP67	IP66/67	USA Enclosures for Electrical Equipment PC: UL Type 1, 4, 4X, 12 and 13 (UL 50/508) ABS: NEMA 1, 4, 4X, 12 and 13
Impact Resistance (EN 50102)	IK 08/IK 07	IK 07	Canada Industrial Control Equipment Enclosures for Electrical Equipment/ULc
Temperature Range Celsius (short term)	40°...120°C	-40°...80°C	Europe Enclosures for Switch Gear and Control Gear Assemblies EN 50298:1998
Temperature Range Fahrenheit (short term)	40°...250°F	-40°...175°F	
Temperature Range Celsius (continuous)	-40°...80°C	-40°...60°C	Europe Safety of Information Technology Equipment EN 60950
Temperature Range Fahrenheit (continuous)	-40°...175°F	-40°...140°F	
Electrical Insulation	Totally insulated 	Totally insulated 	Australia Enclosures for switch gear and control gear AS 3132-1991
Light Grey Parts Colour	RAL 7035	RAL 7035	
Transparent Clear PC Cover	Industry Grey	Industry Grey	
Cover Screws	Clear Transparent	Clear Transparent	
Gasket	Stainless steel	Stainless steel	
Gasket	PUR	PUR	
Enclosure Flammability Rating	UL94-5V	UL94HB	UL 746 C 5 in. vertical flame test
Glow Wire Test	960°C	650°C	IEC 695-2-1, Self-extinguishing
Non-toxicity	Halogen Free	Halogen Free	
UV resistance	UL 508		
	720 hours in "Weatherometer"		
Chemical Resistance *	Good	Good	






Data subject to change without notice. * Consult separate raw material data for more detailed information

ACCESSORIES FOR EURONORD PC AND ABS

Product	Order symbol	Size mm	
Mounting plate 	TM 0505 TM 0507 TM 0808 TM 0812 TM 0816 TM 1212 TM 1216 TM 1220 TM 1520 TM 1625 TM 2330	26 x 48 26 x 57 56 x 71 71 x 94 71 x 134 96 x 111 111 x 134 111 x 174 141 x 174 151 x 214 221 x 274	
Mounting rail DIN 15 	TRM 0507 TRM 0808 TRM 0812 TRM 0816 TRM 1212	15 x 48 15 x 68 15 x 106 15 x 146 15 x 110	
Mounting rail DIN 35 	TRH 1212 TRH 1216 TRH 1220 TRH 1520 TRH 24 TRH 2330	35 x 110 35 x 146 35 x 186 35 x 170 35 x 226 35 x 285	
Plastic hinges (2 pcs) 	TH A		
Wall fastening lug set 	TF 28037		
Inspection windows 	L02 L04 L06 L08 L10	60 x 77 96 x 77 130 x 77 162 x 77 199 x 77	




Product	Order symbol	Size mm	
Brass insert M3 for PC, PCT and ABS enclosures, set of 4 pcs 	MRS 28084 set	M3	
Mounting screw 	MR 28036EU	4.5 x 8.0	
Sealing pin 	SB 28088		
Decoration plug for PC, PCT and ABS enclosures 	MB 28018		
Water plug 	MB 12189		
Cover screw 	MR 28005EU		
Mounting screw 	MR 28036EU		
Cover screw set, incl. 2 x MR 28005 EU and 2 x MR 28036	MRS 38036		
Cover screw set, incl. 4 x MR 28005 EU and 4 x MR 28036	MRS 38005		

FIBOX EURONORD II

FIBOX EURONORD II ALUMINIUM IP66 / IP67, IK 08	Z x C			FIBOX EURONORD II ALUMINIUM IP66 / IP67, IK 08	Z x C		
	B x A	ORDER SYMBOL			B x A	ORDER SYMBOL	
	L x S mm				L x S mm		
AL 050503 Y x X 50 mm 45 mm 	Z / C 31.5 x 20.5 B x A - L x S 40 x 35	AL 050503		AL 082506 Y x X 252 mm 81 mm 	Z / C 56.5 x 45.5 B x A 231 x 39 L x S 238 x 52	AL 082506	
AL 060605 Y x X 60 mm 66 mm 	Z / C 46 x 35 B x A 46 L x S 46 x 36	AL 060605		AL 121208 Y x X 125 mm 124 mm 	Z / C 81 x 64 B x A 95 x 52 L x S 104,6 x 82	AL 121208	
AL 061005 Y x X 100 mm 66 mm 	Z / C 46 x 35 B x A 45 x 50 L x S 86 x 36	AL 061005		AL 122208 Y x X 222 mm 125 mm 	Z / C 81 x 64 B x A 193 x 52 L x S 202,6 x 82	AL 122208	
AL 061505 Y x X 152 mm 66 mm 	Z / C 46 x 35 B x A 100 x 46 L x S 138 x 36	AL 061505		AL 123608 Y x X 362 mm 125 mm 	Z / C 81 x 64 B x A 333 x 52 L x S 342,6 x 82	AL 123608	
AL 080806 Y x X 82 mm 77 mm 	Z / C 56.5 x 45.5 B x A 56 x 39 L x S 63 x 52	AL 080806		AL 161609 Y x X 163 mm 162 mm 	Z / C 91 x 74 B x A 130 x 76 L x S 140 x 110	AL 161609	
AL 081306 Y x X 127 mm 81 mm 	Z / C 56.5 x 45.5 B x A 50 x 62 L x S 113 x 52	AL 081306		AL 162609 Y x X 263 mm 162 mm 	Z / C 91 x 74 B x A 230 x 76 L x S 240 x 110	AL 162609	
AL 081806 Y x X 177 mm 81 mm 	Z / C 56.5 x 45.5 B x A 100 x 62 L x S 163 x 52	AL 081806		AL 163609 Y x X 360 mm 160 mm 	Z / C 90 x 72 B x A 330 x 76 L x S 340 x 110	AL 163609	

External
height **Y**External
width **X**External
depth **Z**Free internal
mounting height **C**Mounting plate
assembly **B** x **A**Wall
mounting **L** x **S**


FIBOX EURONORD II

FIBOX EURONORD II ALUMINIUM IP66 / IP67, IK 08	Z x C	ORDER SYMBOL		FIBOX EURONORD II ALUMINIUM IP66 / IP67, IK 08	Z x C	ORDER SYMBOL	
	B x A L x S mm				B x A L x S mm		
AL 165609 Y x X 560 mm 160 mm 	Z x C 90 x 72 B x A 530 x 76 L x S 540 x 110	AL 165609		AL 236011 Y x X 600 mm 230 mm 	Z x C 110 x 90 B x A 570 x 144 L x S 580 x 180	AL 236011	
AL 232011 Y x X 230 mm 200 mm 	Z x C 110 x 93 B x A 144 x 170 L x S 180 x 180	AL 232011		AL 314011 Y x X 402 mm 310 mm 	Z x C 110 x 90 B x A 372.5 x 223.5 L x S 382.5 x 261	AL 314011	
AL 232018 Y x X 230 mm 200 mm 	Z x C 180 x 162 B x A 144 x 170 L x S 180 x 180	AL 232018		AL 314018 Y x X 402 mm 310 mm 	Z x C 180 x 162 B x A 372.5 x 223.5 L x S 382.5 x 261	AL 314018	
AL 232811 Y x X 280 mm 230 mm 	Z x C 110 x 93 B x A 250 x 144 L x S 260 x 180	AL 232811		AL 316011 Y x X 600 mm 310 mm 	Z x C 110 x 92 B x A 570 x 223.5 L x S 580 x 261	AL 316011	
AL 233311 Y x X 330 mm 230 mm 	Z x C 110 x 93 B x A 300 x 144 L x S 310 x 180	AL 233311		AL 316018 Y x X 600 mm 310 mm 	Z x C 180 x 162 B x A 570 x 223.5 L x S 580 x 261	AL 316018	
AL 233318 Y x X 330 mm 230 mm 	Z x C 180 x 162 B x A 300 x 144 L x S 310 x 180	AL 233318					
AL 234011 Y x X 401 mm 230 mm 	Z x C 110 x 92 B x A 373 x 144 L x S 381 x 180	AL 234011					

External height **Y** External width **X** External depth **Z** Free internal mounting height **C** Mounting plate assembly **B** x **A** Wall mounting **L** x **S**

FIBOX EURONORD II

ALUMINIUM ENCLOSURES

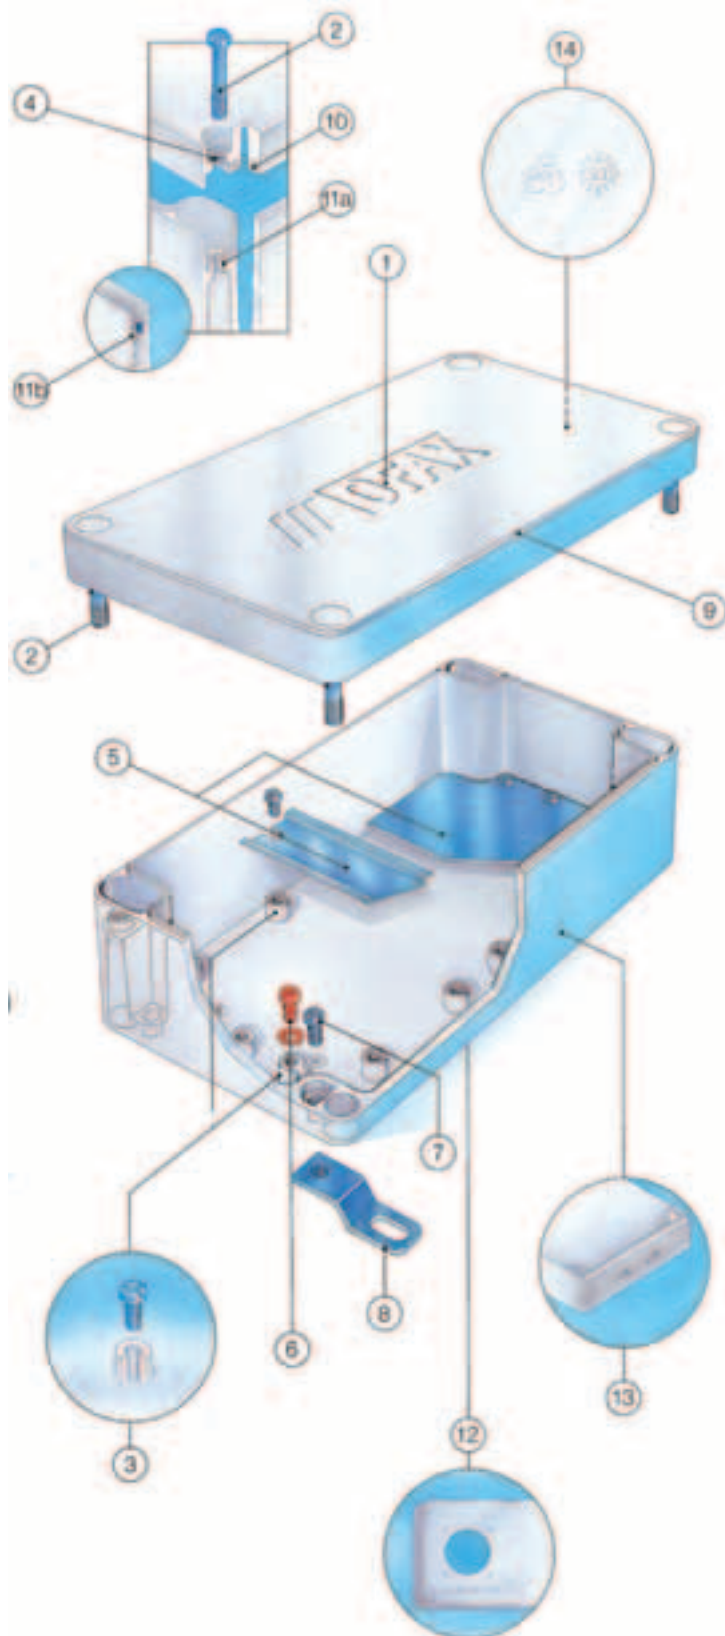






1. Enclosure covers can be custom designed. Modifications include holes, cutouts, flanges, and frames. Even external changes such as cooling ribs (heat sinks) are possible. OEMs receive the enclosure ready for assembly.
2. Cover screws are designed for automatic assembly using normal tools or PosiDrive Phillips screwdrivers. Slightly ferrite, FI stainless screws work with magnetised drivers.
3. This enclosure has more internal mounting points than other enclosures on the market. There are threaded M4 or M6 mounting pods at both interior ends of the bases. Along the interior sides, the enclosure bases have rows of pods ready for M3 Taptite (smaller enclosures) and M5 Taptite (larger enclosures). Alternatively, pods can be machined for M4 or M5 mounting screws. Helicoil inserts are available in English thread sizes.

The large number of mounting pods, especially in the bigger enclosures, creates many alternatives for mounting components. Various sized mounting plates are easily installed. DIN rails can be mounted either vertically or horizontally permitting high density terminal block installation.

Usable internal depth is maximised as Euronorm II has the lowest height mounting pods on the market.

4. A special retainer keeps cover screws captive. No more lost hardware.
5. A variety of mounting plate sizes are available, plus TS35 and TS15 DIN rail cut to size.
6. Proper electrical earthing is ensured with copper plated screws and paint free grounding pods.
7. The enclosures can be mounted through the base. The mounting holes are outside the gasket area; maintaining the water tight seal. Oval shaped mounting holes accommodate mounting centre variations.
8. Optional stainless steel wall mounting plates permit mounting without opening the enclosure.
9. The Euronorm II features a slightly bevelled edge design creating a modern look.
10. Robotically applied, foamed in place PUR gaskets are into the unique designed gasket groove. The tight adhesion and low compression set of PUR gasket material insures protection ratings of NEMA 4 and IP 66/67.
11. Enclosure bases are tapped to receive cover screws, either M4 or M6, depending upon enclosure size. Optional special thread types are available, as are Helicoil special steel thread inserts which prevent cover screws from corroding even in saltwater environments.
12. Customisation of the back and sides of the enclosure can be supplied by Fibox.
13. Larger enclosures have lots of space for mounting instruments, switches, sensors, indicators and connectors. Smooth sides permit easy machining and allow decal and screen printing. Fibox can customise the enclosure with openings, cut-outs, holes and tapped holes. Changes can add unique options, for example, conduit hub openings or cooling fins.
14. Manufactured using unique techniques. These enclosures have straight sides (no draft angle) which means conduit and cable fitting are at right angles, insuring stress free connections. Further, straight sides mean that enclosures can be securely "ganged" together without gaps.

FIBOX EURONORD II

FIBOX EURONORD II POLYESTER (GRP) IP65, IK 08	Z x C	ORDER SYMBOL		FIBOX EURONORD II POLYESTER (GRP) IP65, IK 08	Z x C	ORDER SYMBOL	
	B x A L x S mm				B x A L x S mm		
P 080806 Y x X 80 mm 75 mm 	Z x C 55 x 47 B 59 L x S 68 x 45	P 080806		P 162609 Y x X 260 mm 160 mm 	Z x C 92 x 75 B x A 233 x 76 L x S 240 x 110	P 162609	
P 081106 Y x X 110 mm 75 mm 	Z x C 55 x 47 B 89 L x S 98 x 45	P 081106		P 163609 Y x X 360 mm 160 mm 	Z x C 91 x 74.5 B x A 333 x 76 L x S 340 x 110	P 163609	
P 081606 Y x X 160 mm 75 mm 	Z x C 55 x 47 B 139 L x S 148 x 45	P 081606		P 252612 Y x X 257 mm 251 mm 	Z x C 121 x 105 B x A 227.5 x 100 L x S 236 x 200.5	P 252612	
P 081906 Y x X 190 mm 75 mm 	Z x C 55 x 47 B 169 L x S 178 x 45	P 081906		P 254012 Y x X 400 mm 250 mm 	Z x C 120 x 104.5 B x A 372.5 x 100 L x S 381.5 x 201	P 254012	
P 121209 Y x X 122 mm 120 mm 	Z x C 90 x 75 B x A 95 x 52 L x S 106 x 82	P 121209		P 404012 Y x X 405 mm 400 mm 	Z x C 120 x 105 B x A 373.5 x 250.5 L x S 381.5 x 356	P 404012	
P 122209 Y x X 220 mm 120 mm 	Z x C 90 x 75 B x A 193 x 52 L x S 204 x 82	P 122209					
P 161609 Y x X 160 mm 160 mm 	Z x C 91 x 75 B x A 132 x 76 L x S 140 x 110	P 161609					

External
height **Y**External
width **X**External
depth **Z**Free internal
mounting height **C**Mounting plate
assembly **B** x **A**Wall
mounting **L** x **S**

FIBOX EURONORD II

TECHNICAL INFORMATION FOR EURONORD ALUMINIUM- AND POLYESTER ENCLOSURES

PROPERTY	AlSi Cast ALUMINIUM	CONFORMITY TO STANDARDS (UL, CSA, CE, Lloyds, BV, FI)
Ingress Protection (EN 60529)	IP66/67	USA Enclosures for Electrical Equipment UL Type 1, 4, 4X, 6, 12 and 13 (50/508)
Impact Resistance (EN 50102)	IK 08	Canada Industrial Control Equipment Enclosures for Electrical Equipment/ULc
Temperature Range Celsius (short term)	-50°...140°C	Europe Safety of Information Technology Equipment EN 60950
Temperature Range Fahrenheit (short term)	-60°...285°F	
Temperature Range Celsius (continuous)	-50°...80°C	
Temperature Range Fahrenheit (continuous)	-60°...175°F	
Polyester Powder Paint Colour	RAL 7001	
Cover Screws	Stainless Steel	
Gasket	PUR/Neoprene	
Chemical Resistance *	Good	

PROPERTY	FIBERGLASS	CONFORMITY TO STANDARDS (UL, CSA, CE, Lloyds, BV, FI)
Ingress Protection (EN 60529)	IP65	USA Enclosures for Electrical Equipment NEMA 1, 4, 4X, 6, 12 and 13
Impact Resistance (EN 50102)	IK 08	Canada Industrial Control Equipment Enclosures for Electrical Equipment/ULc
Temperature Range Celsius (short term)	-50°...120°C	Europe Safety of Information Technology Equipment EN 60950
Temperature Range Fahrenheit (short term)	-60°...250°F	
Temperature Range Celsius (continuous)	-40°...80°C	Australia Enclosures for switch gear and control gear AS 3132-1991
Temperature Range Fahrenheit (continuous)	-40°...175°F	
Electrical Insulation	Totally insulated 	UL 746 C 5 in. vertical flame test IEC 695-2-1, Self-extinguishing
Colour	RAL 7001, grey	
Enclosure Flammability Rating	UL94-5V	
Glow Wire test	960°C	
Cover Screws	Stainless Steel	
Gasket	EPDM	
Chemical Resistance *	Good	


Data subject to change without notice. *Consult separate raw material data for more detailed information

ACCESSORIES FOR EURONORD ALUMINIUM ENCLOSURES

Product	Order symbol	Size mm	
Mounting plate 	AM 0808 AM 0813 AM 0818 AM 0825 AM 1212 AM 1222 AM 1236 AM 1616 AM 1626 AM 1636 AM 1656 AM 2320 AM 2328 AM 2333 AM 2340 AM 2360 AM 3140 AM 3160	69 x 64 69 x 114 69 x 164 69 x 240 107 x 110 107 x 207 107 x 347 146 x 146 146 x 244 146 x 346 146 x 545 215 x 184 215 x 264 215 x 315 215 x 385 215 x 586 294 x 387 293 x 585	
Mounting rail DIN 15 	ARM 0610 ARM 0615 ARM 0808 ARM 0813 ARM 0818 ARM 0825	15 x 88 15 x 140 15 x 65 15 x 115 15 x 165 15 x 240	
Mounting rail DIN 35 	ARH 12 ARH 22 ARH 36 ARH 16 ARH 26 ARH 1636 ARH 1656 ARH 2320 ARH 2328 ARH 2333 ARH 40 ARH 60	35 x 105 35 x 203 35 x 343 35 x 140 35 x 240 35 x 340 35 x 540 35 x 180 35 x 260 35 x 310 35 x 383 35 x 580	
Earth screw	MR 28550M	M4 x 6	
Earth screw	MR 28546CU	M4 x 6	
Mounting screw	MR 28548ZN	M4 x 6	
Screw set	MRS 38546		
Ground screw	MR 28547CU	M6 x 8	

Product	Order symbol	Size mm	
Mounting screw	MR 28549ZN		
Screw set	MRS 38547		
Cover screw	MR 10425	M4 x 20	
Cover screw	MR 10635	M6 x 30	
Mounting foot kit	MRS 28540 MRS 28541	11 x 42 15 x 50	
Mounting screw  M3 or M5 	MR 28550 MR 28546CU MR 28548ZN MRS 38546 MR 28547CU MR 28549ZN MRS 38547 MR 75003 MR 75005 MRHC 406 MRHC 609	M4 x 6 M4 x 6 M6 x 8 M6 x 8 M3 M5 M4 M6	
Cover screw	MRS 28544A4 MRS 28545WH	M6 x 30 M6 x 30	

ACCESSORIES FOR EURONORD POLYESTER

Product	Order symbol	Size mm	
Mounting plate 	PM 0808 PM 0811 PM 0816 PM 0819 PM 1616 PM 1626 PM 2526 PM 2540 PM 4040	64 x 69 64 x 99 64 x 149 64 x 179 146 x 146 146 x 244 231 x 240 231 x 383 390 x 385	
Mounting rail DIN 15	PRM 0811 PRM 0816 PRM 0819	15 x 99 15 x 149 15 x 179	
Mounting rail DIN 35	PRH 2526	35 x 238	
Hinge kit 1 pair includes screws	AH A/B PH A		
Mounting lug kit	MRS 28540 MRS 28541	11x42 15x50	

FIBOX

MCE












- MCE CONTROL •
- MCE FEM •
- MCE ISO •



The FIBOX MCE modular component enclosures offer a practical and modern design to automation, control and switch gear applications from IP 55 (MCE FEM and MCE ISO) to IP 65 (MCE CONTROL). In MCE CONTROL and MCE FEM unique features include multiple membrane cable glands (Multi-FEM). In larger (14+) sizes a variety of flange plates is available for the standard size 2 knock-out. All cable entry knock-outs in Fibox MCE are in metric dimensions to reflect modern trends. Application specific wiring can be achieved from any direction, easily, quickly and securely.

MCE CONTROL, MCE FEM, MCE ISO

FIBOX MCE CONTROL









FIBOX MCE CONTROL Polycarbonate: IP 65, IK 08		Including: Multi-FEM (one for 5 and 9, two for 14 and three for 28 and 42), FEM 10-14/25 and/or FEM 14-20 membrane cable glands, two PEN 10mm² bars in plastic support, DIN 35 rail pre-mounted, wall mount cover plugs, module marking stripe and -pocket, mounting instructions.		
L x S mm		ORDER SYMBOL		Endplates
MCE PC 5 Y x X x Z 200 mm x 116 mm x 105 mm 	5 L/S 155/60	MCE PC 5 MF/M		MCE 5 MF 5 
				MCE 5 M 5 
MCE PC 9 Y x X x Z 200 mm x 190 mm x 105 mm 	9 L/S 155/120	MCE PC 9 MF/M		MCE 9 MF 9 
				MCE 9 M 9 
MCE PC 14 Y x X x Z 280 mm x 306 mm x 145 mm 	14 L/S 236/220	MCE PC 14 MF/FL MCE PC 14 MF/M		MCE 14 FL (for sizes 14, 28 and 42) 14-42 
				MCE 14 M (for sizes 14, 28 and 42) 14-42 
MCE PC 28 Y x X x Z 430 mm x 306 mm x 145 mm 	28 L/S 386/220	MCE PC 28 MF/FL MCE PC 28 MF/M		MCE 14 MF (for sizes 14, 28 and 42) 14-42 
MCE PC 42 Y x X x Z 580 mm x 306 mm x 145 mm 	42 L/S 536/220	MCE PC 42 MF/FL MCE PC 42 MF/M		

External height **Y**

External width **X**






External depth **Z**

Wall mounting trough the base **L** x **S**


FIBOX MCE FEM Polystyrene: IP 55, IK 07	L x S mm	Including: Multi-FEM (one for 5 and 9, two for 14 and three for 28 and 42), FEM 10-14/25 and/or FEM 14-20 membrane cable glands, two PEN 10mm² bars in plastic support, DIN 35 rail pre-mounted, wall mount cover plugs, module marking stripe and -pocket, mounting instructions.		
		ORDER SYMBOL		Endplates
MCE FEM 5 Y x X x Z 200 mm x 116 mm x 105 mm 	L/S 155/60	MCE FEM 5 MF/M		MCE 5 MF 
MCE FEM 9 Y x X x Z 200 mm x 190 mm x 105 mm 	L/S 155/120	MCE FEM 9 MF/M		MCE 5 M 
MCE FEM 14 Y x X x Z 280 mm x 306 mm x 145 mm 	L/S 236/220	MCE FEM 14 MF/FL MCE FEM 14 MF/M		MCE 9 MF 
MCE FEM 28 Y x X x Z 430 mm x 306 mm x 145 mm 	L/S 386/220	MCE FEM 28 MF/FL MCE FEM 28 MF/M		MCE 9 M 
MCE FEM 42 Y x X x Z 580 mm x 306 mm x 145 mm 	L/S 536/220	MCE FEM 42 MF/FL MCE FEM 42 MF/M		MCE 14 FL (for sizes 14, 28 and 42) 
				MCE 14 M (for sizes 14, 28 and 42) 
				MCE 14 MF (for sizes 14, 28 and 42) 

External height **Y**External width **X**External depth **Z**Wall mounting trough the base **L** x **S**

FIBOX MCE ISO


FIBOX MCE ISO Polystyrene: IP 55, IK 07	L x S mm	Including: Modular component enclosure with TPE gaskets, mounted DIN 35-rail, wall mount cover plugs and mounting instructions.		
		ORDER SYMBOL		Endplates
MCE ISO 5 Y x X x Z 200 mm x 116 mm x 105 mm 	5 L/S 155/60	MCE ISO 5 P/P		MCE 5 P 5 
MCE ISO 9 Y x X x Z 200 mm x 190 mm x 105 mm 	9 L/S 155/120	MCE ISO 9 P/P		MCE 9 P 9 
MCE ISO 14 Y x X x Z 280 mm x 306 mm x 145 mm 	14 L/S 236/220	MCE ISO 14 P/P		MCE 14 P 14 
MCE ISO 28 Y x X x Z 430 mm x 306 mm x 145 mm 	28 L/S 386/220	MCE ISO 28 P/P		MCE 28 P 28 
MCE ISO 42 Y x X x Z 580 mm x 306 mm x 145 mm 	42 L/S 536/220	MCE ISO 42 P/P		MCE 42 P 42 

SYMBOLS AND ABBREVIATIONS

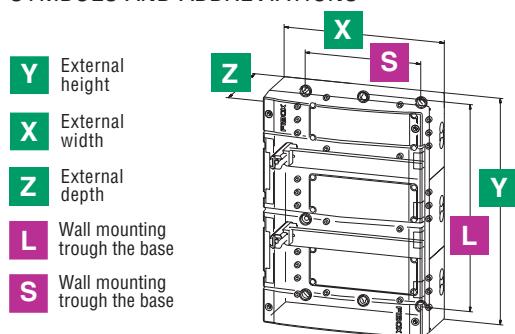


ASSEMBLY HEIGHTS

Dimensions for sizes 5 and 9



Dimensions for sizes 14, 28 and 42



TECHNICAL INFORMATION FOR MCE CONTROL

PROPERTY	POLYCARBONATE (PC)	CONFORMITY TO STANDARDS
Ingress Protection (EN 60529)	IP 65	Europe Enclosures for Switch Gear and Control Gear Assemblies EN 50298:1998
Impact Resistance (EN 50102)	IK 08	Europe Safety of Information Technology Equipment EN 60950
Temperature Range (short term)	Celsius -40°–120°C Fahrenheit -40°–250°F	Australia Enclosures for switch gear and control gear AS 3132-1991
Temperature Range (continuous)	Celsius -40°–80°C Fahrenheit -40°–175°F	
Insulation	Totally insulated ☒	
Light Grey Parts Colour	RAL 7035	
Transparent PC Cover	Industry Grey	
Cover Screws	Smoked Grey	
Gasket	Grey, Polyamide (PA)	
Enclosure Flammability Rating	TPE Thermo Plastic Elastomer UL-94 5V	UL 746 C 5 in. Vertical flame test
Glow Wire Test	960°C	IEC 695-2-1, Self-extinguishing
Non-toxicity	Halogen Free	DIN/VDE 0472, Part 815
UV resistance	UL 508	
Chemical Resistance *	720 hours in "Weatherometer" Good	

TECHNICAL INFORMATION FOR MCE FEM AND MCE ISO

PROPERTY	VALUE
Ingress Protection (EN 60529)	IP 55
Impact Resistance (EN 50102)	IK 07
Temperature Range (short term)	-40°...80°C
Temperature Range (continuous)	-40°...60°C
Electrical Insulation	Totally insulated ☒
Light Industry Grey Parts Colour	RAL 7035
Transparent PC Cover	Smoked Grey
Cover Screws, Polyamide (PA)	Grey
Gasket	TPE
Material Flammability Rating	UL-94HB
Glow Wire Test (IEC 695-2-1)	750°C
Glow Wire Test/Current carrying parts	960°C
Non-toxicity (DIN/VDE 0472, Part 815)	Halogen Free
Chemical Resistance *	Good

Data subject to change without notice. *Consult separate raw material data for more detailed information

FIBOX MCE CONTROL PC / FEM / ISO

MCE PC 28 MF / M	Second endplate M= Metric - knock-outs, FL=Flange knock-out (size 2) First endplate: = Knock-out for Multi-FEM (M50) Max. amount of DIN-modules/enclosure PC=Polycarbonate for outdoor use (CONTROL) Modular Component enclosure
MCE FEM 28 MF / M	Second endplate M= Metric - knock-outs, FL=Flange knock-out First endplate: = Knock-out for Multi-FEM (M50) Max. amount of DIN-modules/enclosure FEM = one end for Multi-FEM cable glands Modular Component enclosure
MCE ISO 28 P / P	Second endplate P= Large metric knock-outs First endplate P= Large metric knock-outs Max. amount of DIN-modules/enclosure ISO = both ends for conduits Modular Component enclosure

WHY POLYCARBONATE (PC)?

Polycarbonate, trade names Lexan, Makrolon etc., is known as high tech engineering thermoplastic with high levels of mechanical, optical, electrical and thermal properties. But why are Fibox Polycarbonate types so well suited for enclosures in power distribution applications?

It can be used outdoors

Polycarbonates FIBOX use are all UV tested for outdoor use, are highly corrosion resistant and make enclosures IP 65 (EN 60529 4:1992) weather resistant. One quality of enclosure for all environments.

It is safe in fire

Polycarbonates FIBOX use are 960 (C glow wire (IEC 695-2-1) and UL 94 V-0 tested. Self-extinguishing, non-igniting with no potentially hazardous halogen additives.

It does not break

Hard knocks and rough handling pose no problems. Polycarbonates that Fibox uses insure that our enclosures meet IK 08 (EN 50102) or better impact resistance.

Interested in more information? Order Fibox "The Future is Plastic" information sheet.

FIBOX


MCE CONTROL

SPACIOUS AND EASY TO WIRE

PEN supports are positioned to allow optimum wiring space inside the enclosure. Their position also makes wiring as easy as possible. DIN rails are mounted away from the base of the enclosure and on units of 14+ modules the position is adjustable. Large knockouts are provided in the base of the enclosure to accommodate the entry of flush wiring.

EVERY WIRING CONFIGURATION MADE POSSIBLE


"MULTI FEM", multi-cable membrane glands, size M50, enable quick and effective entry of 3 x Ø 6-10 mm, 3 x Ø 10-14 mm through one single membrane while maintaining IP65. In sizes for 14 modules and above many gland plate options are available including blind, metric, PG, threaded, NPT and membrane versions. There are cable entries on five sides of every MCE enclosure and all of them are to the metric standard.

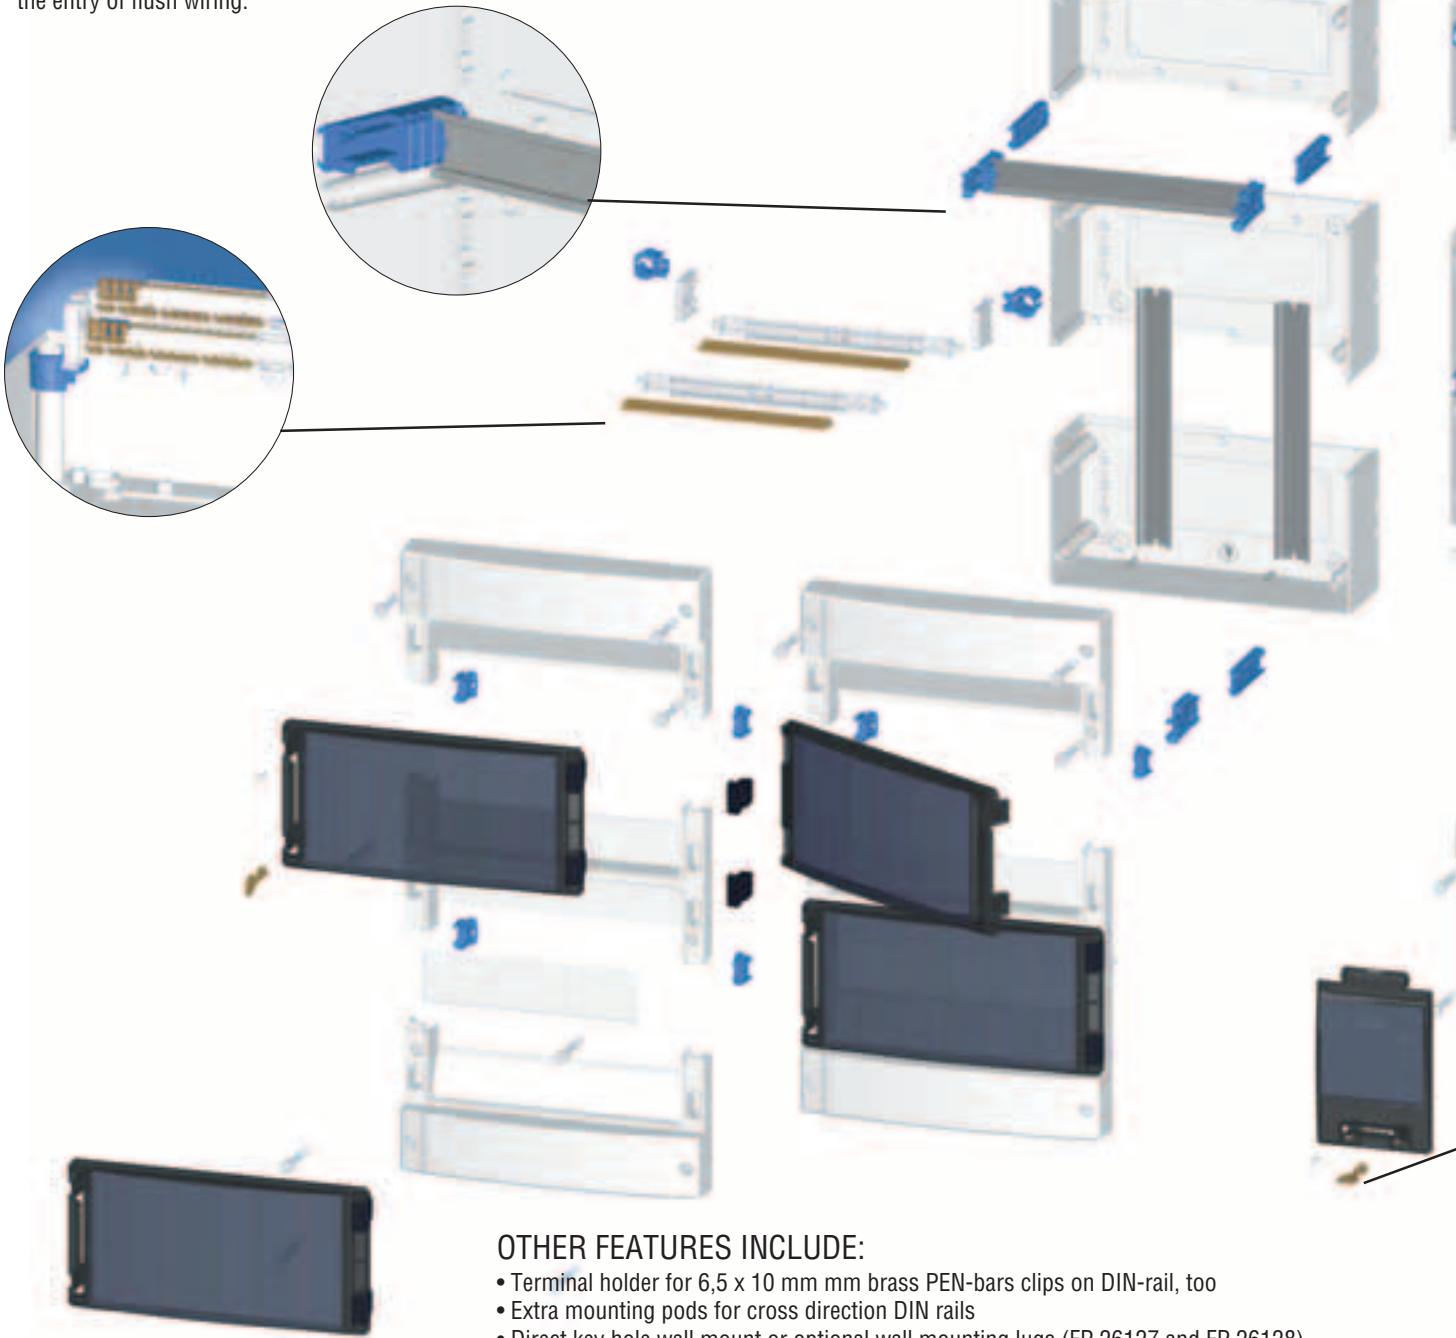

OTHER FEATURES INCLUDE:

- Terminal holder for 6,5 x 10 mm mm brass PEN-bars clips on DIN-rail, too
- Extra mounting pods for cross direction DIN rails
- Direct key hole wall mount or optional wall mounting lugs (FP 26127 and FP 26128)
- Size 2/FL 21 knock-out for standard gland plates
- Front aperture can be covered with plates (mounting screw holes provided)
- Window can be replaced with instrumentation cover (14+ sizes)
- Enclosures can be connected to each other in all four directions due to the smooth sides and M20 knock-outs
- Enclosure can be mounted directly on flush mounted junction boxes via purpose designed knock-outs in the bottom of the enclosure

ACCESSORIES FOR FIBOX MCE CONTROL AND FEM

Product	Order symbol	Size mm	EAN-code
Multi-FEM <i>Multi-FEM membrane cable glands allow entry of several cables through one gland. IP 65.</i> 	MFM 8-12	M50	
Membrane cable glands <i>Easy and fast assembly, security, high protection rating (IP 65) and cable strain relief are standard features.</i> 	FEM 3-5 FEM 5-7 FEM 7-10 FEM 10-14/23 FEM 10-14/25 FEM 14-20 FEM 20-26 FEM 26-35 FEM 30-45	M12 M16 M20 M23/PG16 M25 M32 M40 M50 M60	
Membrane flange plates <i>Time and space saving membrane flange plates are made of light grey EPDM rubber. They offer up to three times the capacity of a traditional cable gland.</i> 	FMB 5 FMC 3 FMC 25 FMC 35	Flange size 2 (EK) size 2 (EK)	
Flange plate (PC) Cover plate (Metric) knockout plate, 4xM12 + 4xM12/M20 + 4xM16/M25 <i>Glass fibre reinforced polycarbonate flange plates are completely halogen free. EPDM-gaskets ensure high IP 67 protection rating. Smooth cover plate provides easy and safe machining.</i>	MB 10546 MB 10857	Flange size 2 (EK) size 2 (EK)	
Knock-out plate (PC) <i>These PG-knock-out plates feature the same material properties, and strength as MB 10546 and MB 10857</i> 	9xPg 11 + 5xPg 9/16 4xPg 21/29 13xPg16	MB 10593 MB 10594 MB 10595	Flange size 2 (EK) size 2 (EK) size 2 (EK)
Key lock set <i>One key lock set includes two keys. No mounting required: simply insert the lock with the key, turn clockwise and remove the key. To unlock just reverse the procedure.</i> 	MR 26065		
Wall fastening lug <i>FIBOX MCE enclosures can be mounted to wall or rails either through the base of the enclosure or with wall fastening lugs. Single lug allows fastening of an enclosure without piercing the base. Double lug can be used for wallmounting of a single enclosure or for conjunction of two enclosures.</i> 	Single FP 26128 Double FP 26127		
PEN bus-bar holder for MCE 5 for MCE 9 for MCE 14-42		PEN H 26135 PEN H 26136 PEN H 26140	
Multiaadapter for PEN-bars		MU 26138	
PEN-bar Earth/neutral terminal busbar	 6x10 mm ² 10x10 mm ² 16x10 mm ² 35x10 mm ²	PEN 6x10 PEN 10x10 PEN 16x10 PEN 35x10	
Marking stripe for MCE 5 Marking stripe pocket for MCE 5 Marking stripe for MCE 9 Marking stripe pocket for MCE 9 Marking stripe for MCE 14+ Marking stripe pocket for MCE 14+		MB 26061 MB 26062 MB 26063 MB 26064 MB 26065 MB 26066	
Cover Stripe		MB 26050	



UNAUTHORISED ACCESS STOPS HERE

Stylish, but impact proof window can be secured easily with a clasp, MR 26065 key lock (optional) or screw. Pad lock set MR 26146 SET for three MCE 14+ windows is also available. Secured windows cover the screws used for the mounting of frame part of the enclosure and thus the components and the wall mountings remain inaccessible. Cover screws and windows can be wire sealed, too.

MODULAR SERVICES FOR YOUR BEST

Fibox introduces surface mounting aid and multitude of earth-neutral solutions for all MCE sizes and a pad locking system for MCE 14+ sizes. All these products affirm the modularity of MCE enclosures and emphasise the characteristics of the range.

FIBOX MCE PE/N/PEN -bar -sets are complete packages, that include Phase Earth and Neutral bars and all necessary holders needed for assembly to FIBOX MCE enclosures. The same parts follow with standard delivery of MCE CONTROL and MCE FEM enclosures.

Note! All FIBOX MCE PE/N/PEN holders can also be mounted straight on DIN-rails. Then they take about one modular width, depending on the type of the wire used.

This feature together with well designed knock-outs on five sides of the MCE-enclosures enables the use of solitary enclosures even only for earthing purposes, whilst components are on neighbouring enclosures. Use of double wall fastening/conjunction lugs FP 26127 is useful on these occasions.

Product	Order symbol	
Ready to fit set includes PEN-bar holder for MCE 5 with two 6x10mm ² brass bars.	MCE 5 PEN SET	
Ready to fit set includes PEN-bar holder for MCE 9 with two 10x10mm ² brass bars.	MCE 9 PEN SET	
Ready to fit set includes PEN-bar holder for MCE 14 with two 16x10mm ² brass bars.	MCE 14 PEN SET	
Ready to fit set includes two PEN-bar holders for MCE 14 with two 16x10mm ² brass bars and one 35x10mm ² brass bar and a multi adapter for easier mounting.	MCE 14 MU PEN SET	
Multi adapter set accepts a variety of PE/N/PEN -bars: brass or copper, profiles of 6,5x10mm (1 position in 4 placements), 5x5mm (2 positions in 3 placements), 2x12mm (12 placements). Naturally the MCE 14+ PE/N/PEN -bar holder fits into multi adapter. It can be mounted on DIN 35 -rail or to internal towers of MCE 14 and larger enclosures. Set includes a pair of tower mounting pieces and two multi adapters. PE/N/PEN -bars need to be acquired separately.	MCE MU PEN SET	
Terminal bus-bar clamp, 25 mm ² .	MS BAR CLAMP	
Terminal bus-bar clamp, 35 mm ² .	MR 26145	

ALUMINUM FRONT PLATE FOR MCE 14+ ENCLOSURES

FP A 26133 broadens the spectrum of control and measurement equipment that can be assembled into MCE 14 and larger enclosures. It is:

- rigid: Use for switches.
- even: ideal for membrane keypads
- flat: good for variety of displays
- light in weight, as all FIBOX MCEs
- easy to tool, as FIBOX MCE in the whole.
- easy to mount with just four screws.

(KN 2.9x9.5, please order separately, if applicable).

SURFACE MOUNTING ON MCE 5 AND MCE 9 ENCLOSURES


Flat surface of the two smallest MCE enclosures allow mounting of displays, membrane keyboards, etc. directly under the window. To open the inner cover for modular components, please use screwdriver and hammer or a knife.

PAD LOCKING SET FOR MCE 14+ ENCLOSURES

Pad locking set **MR 26146 SET**, which provides double locking safety for three MCE 14+ windows. Six 25mm x 25mm pad locks mounted into three holder parts keeps max. 42 modular components protected.


WALL MOUNTING RAIL FOR MCE 14+ ENCLOSURES

Wall mounting rail set **FP AL 26148** contains two rails and mounting instructions. Rail is mounted horizontally to the back of the enclosure with two M5 12-14 mm screws. These holes on the rail are threaded. The wall mounting holes at the end of the rail are of 10 mm diameter. Please acquire the screws separately.

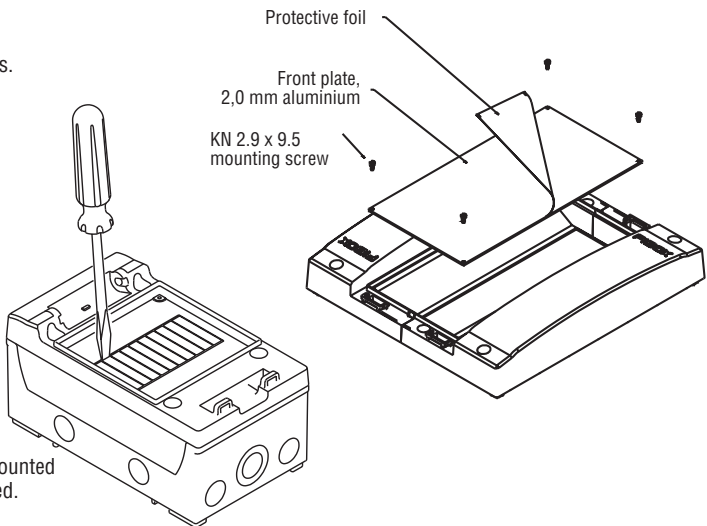

FIBOX CUSTOMISATION SERVICES FOR MCE -ENCLOSURES

More than 30 years of know-how with injection moulded plastic enclosures has taught FIBOX few tricks of the trade. Therefore we are able to provide a comprehensive range of enclosure customising options in affordable price and short lead times. Machining and tooling can be done with experience and expertise. Customised moulding is also available for larger orders in very economical price. Printing or colouring can give your product the needed edge. And we are proud to offer it to you.



FIBOX CUSTOMISATION SERVICES FOR MCE ENCLOSURES.

More than 30 years of know-how in injection moulding plastic enclosures has taught FIBOX a few tricks of the trade. Therefore we are able to provide a comprehensive range of affordable enclosure customizing options with short lead times. Machining is carried out by highly experienced personnel who know their jobs inside out. Economically priced customised moulding is also available on larger orders. Printing and special colours add the finishing touch to your customized product and give you a competitive edge.

CUSTOMISED TOOLING

Our customized tooling service offers you a low cost method of producing "tailor-made" enclosures to your own exact specification. The required investment is often minimal, especially when existing interchangeable tool slides can be utilized. A typical lead time using this option can be as short as 5 to 8 weeks. As an example, the end plates of Fibox MCE enclosures can be easily modified. This means the mount, shape and number of knock-outs can be changed. We can even provide no knock-outs at all.

The flexible modular design of the Fibox MCE range means that to achieve large scale customization it may be only necessary to modify a small number of tools, therefore keeping the expense aspects under control. In addition to physical modifications the colour of the enclosure can be customized by using colour pigmented plastic granules. In the case of a customized mould run the colour change represents only a nominal extra cost.

COLOURED PLASTIC ENCLOSURES

Fibox offers plastic enclosures in various customized RAL colours by using pre-coloured plastic raw material granules. The best result is achieved on non glass reinforced fibre materials. Colouring can be used as an efficient and relatively low cost method of promoting your company's corporate identity. This process becomes economical for batches of more than 500 pieces, then the surcharge is about 50%. For batches of 2000 pieces the surcharge is only about 10%. The additional cost involved when colouring enclosure raw material is incurred in cleaning and preparing moulds both before and after the production run. Painting of an MCE enclosure is not recommended due to the modular nature and design features.

As all Fibox MCE enclosures are constructed from various parts all these parts must be coloured separately. This allows for a variety of colour combinations. For example the cover screws, the enclosure body and the front frame can all be different colours. When designing a customized product it is important to remember that each coloured mould run increases the total enclosure price.




PRINTED ENCLOSURES

Silk screen printing and Tampo printing are recommended methods of adding logos, text or imagery to Fibox enclosures. Both methods can be used on flat surfaces and tampo printing is suitable for curved areas such as the cover. It is also recommended for areas where access is restricted, for example the area underneath the viewing window on Fibox MCE enclosures. Silk screen printing is an economical option for production batches of say 100, and Tampo printing is cost effective when the run is say 1000 pieces. Both methods, silk screen printing and Tampo printing, can accommodate one to three colours to RAL or PMS specifications. A quality end result is assured with both processes.

MACHINED ENCLOSURES

The Fibox machining service offers a peace of mind, value for money solution to your customizing requirement. Years of experience mean we can create the exact specification your drawings demand. Because we know our products and materials intimately we can advise you on the most efficient means of meeting your customizing needs quickly and efficiently. Fibox can machine enclosures to drawing with either metric or imperial dimensions. To attain a satisfactory result time and again we request that correct customizing drawings are provided. Our CAD/CAM system helps both Fibox and your designer to create drawings for CNC machining. Drawings of enclosures are available at www.fibox.com to be either printed out or copied c/w dimensions in PDF and GIF format or in DWG, IGES and DXF for downloading onto your CAD system for further modifications. Several enclosure drawings are also available in 3D format upon request.

Although machining a standard Fibox MCE enclosure is possible, a better result will be achieved if totally smooth end plates are utilized at the outset. These options can be viewed in our range brochure – FIBOX MCE PANEL or by visiting www.fibox.com.





FIBOX[®]

TESTED SYSTEMS



www.fibox.com

FIBOX

SOLID

FIBOX SOLID



PC
ABS
SM
HINGED COVER



Pat.Reg. 392179, 391844

FIBOX SOLID SC II



FIBOX SOLID METRIC KNOCK-OUTS



FIBOX SOLID HINGED COVER
Cover with hinges, more information page 44.



The FIBOX SOLID SC II range, SM range and SOLID Hinged Cover range offer a clear alternative to polyester enclosures. Moulded with impact resistant polycarbonate or ABS plastic, the FIBOX SOLID range is available as a screw cover enclosure or as a hinged cover enclosure.

The enclosures are rated EN 60529 IP66 / IP67.

FIBOX SOLID

FIBOX SOLID PC: IP66 / IP67, IK 08 ABS: IP66 / IP67, IK 08	Z mm	C mm	Including: Enclosure base, 4 cross head cover screws, and mounting screws.				B x A
			ORDER SYMBOL		ORDER SYMBOL		L x S
			Grey cover		Transparent cover		mm
PC 1919 ABS 1919 Y x X 190 mm 190 mm 	130	115	Cover 30 mm PC 1919 13 G ABS 1919 13 G		Cover 30 mm PC 1919 13 T ABS 1919 13 T		B x A 120 x 120
	130	115					
	180	165	Cover 80 mm PC 1919 18 G ABS 1919 18 G		Cover 80 mm PC 1919 18 T ABS 1919 18 T		L x S 164 x 164
	180	165					
PC 2819 ABS 2819 Y x X 280 mm 190 mm 	130	115	Cover 30 mm PC 2819 13 G ABS 2819 13 G		Cover 30 mm PC 2819 13 T ABS 2819 13 T		B x A 210 x 120
	130	115					
	180	165	Cover 80 mm PC 2819 18 G ABS 2819 18 G		Cover 80 mm PC 2819 18 T ABS 2819 18 T		L x S 254 x 164
	180	165					
PC 3819 ABS 3819 Y x X 380 mm 190 mm 	130	115	Cover 30 mm PC 3819 13 G ABS 3819 13 G		Cover 30 mm PC 3819 13 T ABS 3819 13 T		B x A 310 x 120
	130	115					
	180	165	Cover 80 mm PC 3819 18 G ABS 3819 18 G		Cover 80 mm PC 3819 18 T ABS 3819 18 T		L x S 354 x 164
	180	165					
PC 2828 ABS 2828 Y x X 280 mm 280 mm 	130	115	Cover 30 mm PC 2828 13 G ABS 2828 13 G		Cover 30 mm PC 2828 13 T ABS 2828 13 T		B x A 210 x 210
	130	115					
	180	165	Cover 80 mm PC 2828 18 G ABS 2828 18 G		Cover 80 mm PC 2828 18 T ABS 2828 18 T		L x S 254 x 254
	180	165					
PC 3828 ABS 3828 Y x X 380 mm 280 mm 	130	115	Cover 30 mm PC 3828 13 G ABS 3828 13 G		Cover 30 mm PC 3828 13 T ABS 3828 13 T		B x A 310 x 210
	130	115					
	180	165	Cover 80 mm PC 3828 18 G ABS 3828 18 G		Cover 80 mm PC 3828 18 T ABS 3828 18 T		L x S 354 x 254
	180	165					

External height **Y**External width **X**External depth **Z**Free internal mounting height **C**Mounting plate assembly **B** x **A**Wall mounting **L** x **S**

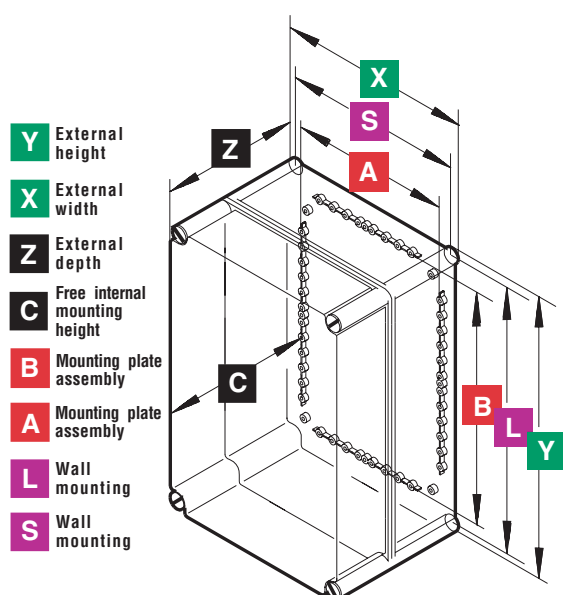

SYMBOLS AND ABBREVIATIONS

PC 19 19 13 T

└ Cover G= Grey
 └ T= Smoked grey

Height

Length

Width

Enclosure type

PC polycarbonate smooth sides

ABS ABS grey, smooth sides

SP polycarbonate with SM knock-outs

FIBOX SOLID
 PC: IP66 / IP67, IK 08
 ABS: IP66 / IP67, IK 08

Z
 mm

C
 mm

Including: Enclosure base, 6 cross head cover screws, and mounting screws.

ORDER SYMBOL

Grey cover

ORDER SYMBOL

Transparent cover

B x **A****L** x **S**

mm

PC 5628
 ABS 5628

Y x **X**

560 mm 280 mm

130
130115
115

Cover 30 mm
 PC 5628 13 G
 ABS 5628 13 G

Cover 30 mm
 PC 5628 13 T
 ABS 5628 13 T

B x A
 489 x 210
 L x S
 534 x 254

PC 5638
 ABS 5638

Y x **X**

560 mm 380 mm

180
180165
165

Cover 30 mm
 PC 5638 18 G
 ABS 5638 18 G

Cover 30 mm
 PC 5638 18 T
 ABS 5638 18 T

B x A
 489 x 310
 L x S
 534 x 354

FIBOX SOLID SM WITH METRIC KNOCK-OUTS

FIBOX SOLID SM PC: IP66 / IP67, IK 08 ABS: IP66 / IP67, IK 08	Z mm	C mm	Including: Enclosure base, 4 slotted cover screws, and mounting screws.				B x A
			ORDER SYMBOL		ORDER SYMBOL		L x S
			Grey cover		Transparent cover		mm
SM 1928 Y x X 280 mm 190 mm 	130 180	115 165	SM 1928 13 G SM 1928 18 G		SM 1928 13 T SM 1928 18 T		B x A 210 x 120 L x S 254 x 164
SM 2819 Y x X 190 mm 280 mm 	130 180	115 165	SM 2819 13 G SM 2819 18 G		SM 2819 13 T SM 2819 18 T		B x A 210 x 120 L x S 254 x 164
SM 2828 Y x X 280 mm 280 mm 	130 180	115 165	SM 2828 13 G SM 2828 18 G		SM 2828 13 T SM 2828 18 T		B x A 210 x 210 L x S 254 x 254
SM 2838 Y x X 380 mm 280 mm 	130 180	115 165	SM 2838 13 G SM 2838 18 G		SM 2838 13 T SM 2838 18 T		B x A 310 x 210 L x S 354 x 254



External height **Y** External width **X** External depth **Z** Free internal mounting height **C** Mounting plate assembly **B** x **A** Wall mounting **L** x **S**




TECHNICAL INFORMATION

PROPERTY	POLYCARBONATE (PC)	ABS	CONFORMITY TO STANDARDS (UL, CSA, CE, Lloyds, BV, FI)
Ingress Protection (EN 60529)	IP66/IP67	IP66/IP67	USA Enclosures for Electrical Equipment PC: UL Type 1, 3, 3S, 4, 4X, 6, 12 and 13 (UL 50/508) ABS: NEMA 1, 4, 4X, 6, 12 and 13
Impact Resistance (EN 50102)	IK 08	IK 08	Canada Industrial Control Equipment Enclosures for Electrical Equipment/ULc
Temperature Range Celsius (short term)	-40°...120°C	-40°...80°C	Europe Enclosures for Switch Gear and Control Gear Assemblies EN 50298:1998
Temperature Range Fahrenheit (short term)	-40°...250°F	-40°...175°F	
Temperature Range Celsius (continuous)	-40°...80°C	-40°...60°C	Europe Safety of Information Technology Equipment EN 60950
Temperature Range Fahrenheit (continuous)	-40°...175°F	-40°...140°F	
Electrical Insulation	Totally insulated 	Totally insulated 	Australia Enclosures for switch gear and control gear AS 3132-1991
Light Grey Parts Colour	RAL 7035	RAL 7035	
Transparent Clear PC Cover	Industry Grey	Industry Grey	
Cover Screws	Clear Transparent	Clear Transparent	
Cover Screws	RAL 7035	RAL 7035	
Gasket	Polyamide (PA)	Polyamide (PA)	
Gasket	PUR/EPDM	PUR/EPDM	
Enclosure Flammability Rating	UL94-5V	UL94HB	UL 746 C 5 in. vertical flame test
Glow Wire Test	960°C	650°C	IEC 695-2-1, Self-extinguishing
Non-toxicity	Halogen Free	Halogen Free	
UV resistance	UL 508		
Chemical Resistance *	720 hours in "Weatherometer"		
	Good	Good	

Data subject to change without notice. *Consult separate raw material data for more detailed information






ACCESSORIES



Product	Order symbol	Size mm	
Mounting plates 	EKHVT EKJVT EKMVT EKOVT EKPVT EKTVT EKUVT	148 x 148 238 x 148 338 x 148 238 x 238 338 x 238 518 x 238 518 x 338	
Mounting rails DIN 35 	EKV 12 EKV 22 EKV 32	35 x 160 35 x 235 35 x 335	
Extension frame, 50 mm 	EKJZR EKMZR EKOZR EKPZR EKTZR EKUZR	280 x 190x50 380 x 190x50 280 x 280x50 380 x 280x50 560 x 280x50 560 x 380x50	
Inspection windows 	L44 II L43 II L24 II L12 II L24 L12 L13 L10 L08 L06 L04 L02 L13 L02-L10	377 x 331 331 x 231 248 x 218 248 x 128 248 x 218 248 x 128 257 x 108 199 x 77 162 x 77 130 x 77 96 x 77 60 x 77	

Product	Order symbol		
Front plates for windows L12 and L24 	B12 10621-45 B24 10620-45		
Cover screws 	HS 10255 (a) CS 10256 (b) DS 10581 (c) SS 10535 (d) SS 10544 (e) HS 10533 (f) HS 10532 (g) MB 10534 (h) SS 10563 (i) HS 10562 (j) DS 10581 (k)	For 30 mm cover Wing head Cross head Triangle head Slotted head, sealable Slotted head, quick-lock* Wing head, quick-lock* Wing head, hinged* Threaded bushing (to be ordered separately with quick-lock screws) For 80 mm cover Slotted head Wing head Triangle head	
Ventilators 	MB 10564 II MB 10631		
Hinges 	MB 10622		
	MB 10547 PA 10547 FA 10547	Drill template, PA Drill template, metal	
	EKZKS 1		

FIBOX SOLID

ACCESSORIES


Product	Order symbol	Size mm	
Spacers	MR 10726 MR 10727 MR 10728 MR 10729	15, M6 (inner) 20, M6 (inner) 30, M6 (inner) 54, M6 (inner)	
	HR 10 HR 15 HR 20 HR 30	10, M6/M6 15, M6/M6 20, M6/M6 30, M6/M6	
	FA 12052 FA 12053	14, M5 (inner) 42, M5 (inner)	
	MB 10686	15/34	
	FX 20 set		
	MB FP88	88	
	MB FP882	88	
Lock	MB10597		
			
Mounting feet	MB 10674		
			
Triangular key	MB 10673 set		
			
Front plates for Solid SM enclosures	FP12-2819 FP12-2828 FP12x2-2828 FP12x2-2838 FP12x3-2838 FP12x3-2856		
			

Product	The unique new FIBOX SOLID hinge is assembled on the cover. The hinged cover can be easily mounted to the enclosure base without drilling holes or other modification. Field replacement of screw covers is easily accomplished without modification. This cover is suitable for the FIBOX EK, SOLID and FEX products. Available in opaque grey (G) or transparent (T) polycarbonate.		
	Order symbol	Size mm	Order symbol
	EKH 30-G-2FSH	190 x 190 x 30	EKH 30-T-2FSH
	EKJ 30-G-FSH19	190 x 280 x 30	EKJ 30-T-FSH19
	EKJ 30-G-2FSH	280 x 190 x 30	EKJ 30-T-2FSH
	EKM 30-G-2FSH	380 x 190 x 30	EKM 30-T-2FSH
	EKO 30-G-2FSH	280 x 280 x 30	EKO 30-T-2FSH
	EKP 30-G-2FSH	380 x 280 x 30	EKP 30-T-2FSH
	EKT 30-G-3FSH	560 x 280 x 30	EKT 30-T-3FSH
	EKU 30-G-3FSH	560 x 380 x 30	EKU 30-T-3FSH
	EKH 80-G-2FSH	190 x 190 x 80	EKH 80-T-2FSH
	EKJ 80-G-2FSH	280 x 190 x 80	EKJ 80-T-2FSH
	EKM 80-G-2FSH	380 x 190 x 80	EKM 80-T-2FSH
	EKO 80-G-2FSH	280 x 280 x 80	EKO 80-T-2FSH
	EKP 80-G-2FSH	380 x 280 x 80	EKP 80-T-2FSH
	ABS 2819 30-G-2FSH	280 x 190 x 30	
	ABS 3819 30-G-2FSH	380 x 190 x 30	
	ABS 2828 30-G-2FSH	280 x 280 x 30	
	ABS 3828 30-G-2FSH	380 x 280 x 30	
	ABS 2819 80-G-2FSH	280 x 190 x 80	
	ABS 3819 80-G-2FSH	380 x 190 x 80	
	ABS 2828 80-G-2FSH	280 x 280 x 80	
	ABS 3828 80-G-2FSH	380 x 280 x 80	

FIBOX SOLID HINGED COVER


FULL OPENING ANGLE

The hinged cover opening exceeds 180 degrees allowing complete access to the interior of the enclosure.



REVERSABLE LEFT / RIGHT OPENING

The the hinged cover may be mounted on the left side or on the right side. Hinging is field reversible and easily accomplished.

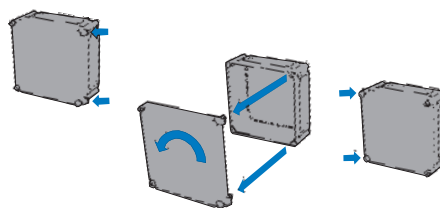

FIBOX SOLID SC II ENCLOSURES

These cabinets, are made from high impact resistant polycarbonate material, and will withstand harsh industrial environments. They have ready mounted hinges and quick lock screws. Protection to IP65 is maintained when fastened. The enclosure base features many internal mounting pods for various assembly requirements. SOLID SC enclosures offer a large number of accessories. Transparent cover options allow visual inspection of equipment installed inside the enclosure.

Approvals: IP65

Order symbol		Size mm	
Grey cover	Transparent cover		
SC 281913 G II	SC 281913 T II	280 x 190 x 130	
SC 281918 G II	SC 281918 T II	280 x 190 x 180	
SC 381913 G II	SC 381913 T II	380 x 190 x 130	
SC 381918 G II	SC 381918 T II	380 x 190 x 180	
SC 282813 G II	SC 282813 T II	280 x 280 x 130	
SC 282818 G II	SC 282818 T II	280 x 280 x 180	
SC 382813 G II	SC 382813 T II	380 x 280 x 130	
SC 382818 G II	SC 382818 T II	380 x 280 x 180	
SC 562813 G II	SC 562813 T II	560 x 280 x 130	
SC 563818 G II	SC 563818 T II	560 x 380 x 180	

FIBOX^{EK}

FOUR EASY STEPS TO BUILD A DISTRIBUTION PANEL THAT WORKS

BASE

FURNISH

CLAD

ROOF



Medium to large size enclosures manufactured using impact resistant polycarbonate.

Available with one or more flange openings. The flange openings allow modular assembly of several enclosures and the addition of various size cable glands and knockout flanges. Select from a large selection of standard flanges or request flanges machined separately to customer specifications. The EK bases feature multiple mounting pods.

A large range of accessories is available.

FIBOX EK

BASE

ENCLOSURE BASES


Impact-resistant, medium to large size polycarbonate enclosure with a high protection rating (IP 67). Pre-pressed flange panels can accept a variety of flange plates from the EK accessory range.

EKHA




EKJB

EKTH




EKUH



ORDER SYMBOL	SIZE mm
EKHA	190x190x100
EKHS	190x190x100
EKJB	280x190x100
EKMB	380x190x100
EKMR	380x190x100
EKOE	280x280x100
EKPE	380x280x100
EKPG	380x280x100
EKPK	380x280x150
EKPL	380x280x150
EKTH	560x280x100
EKUH	560x380x150
EKUM	560x380x150
EKUN	560x380x150
EKWH	760x560x150

THE THIRD LETTER OF THE ORDER SYMBOL INDICATES THE SIZE OF THE ENCLOSURE:
For example the letter J in the order symbol EKJB stands for the size 280x190 mm

- H = 190x190 mm
- J = 280x190 "
- M = 380x190 "
- O = 280x280 "
- P = 380x280 "
- T = 560x280 "
- U = 560x380 "
- W = 760x560 "

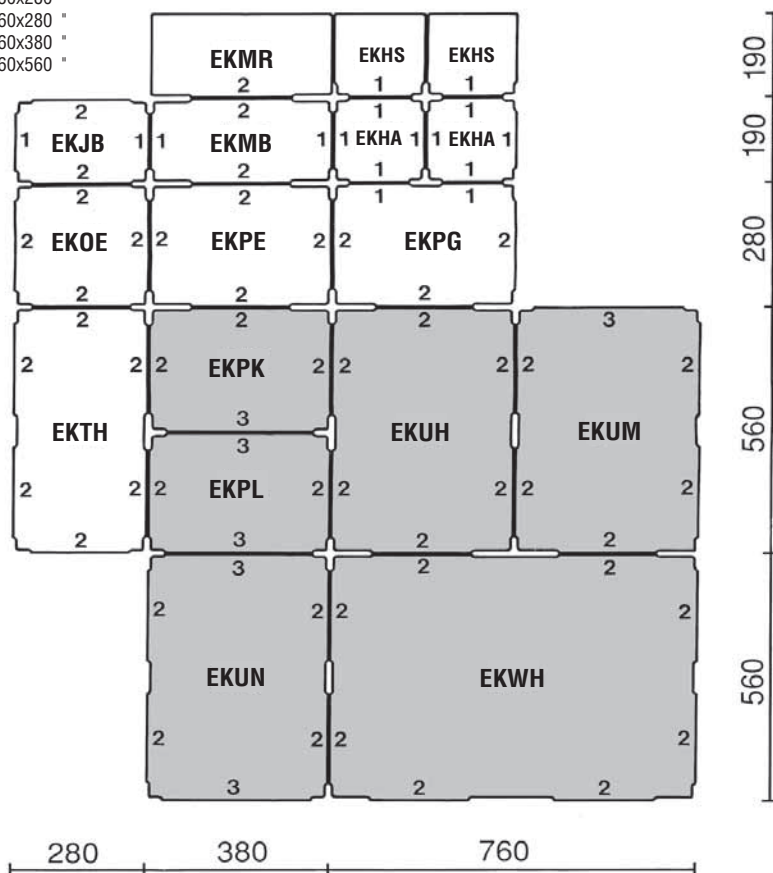

The bases marked with the grey colour have a depth of 150 mm, the others are 100 mm.
The number on the bases indicates the size of the flange plate.

Base = EKHA

Base = EKJB

Base = EKMB

Base = EKOE

Base = EKPE

Base = EKPK

Base = EKTH

Base = EKUH


Base = EKWH

BASE


EXAMPLE OF THE ASSEMBLY OF ONE ENCLOSURE



THE SIZE OF THE WHOLE ENCLOSURE ACCORDING TO THE LETTER:
The enclosure sized (280x190x230) can be assembled as follows:

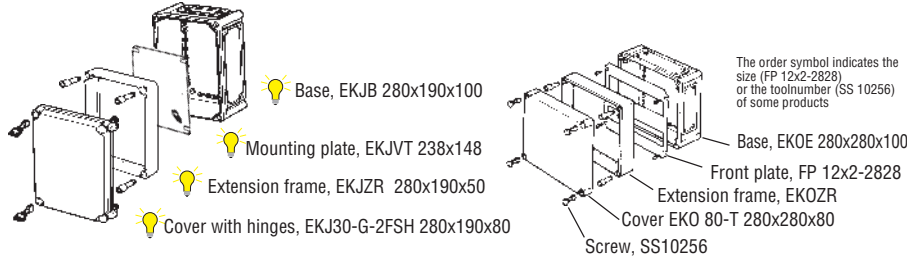

ASSEMBLY ENCLOSURES




Connector set + 4 screws
Connector set + 4 screws
Connector set + 4 screws

Plastic head screw for the assembly of bases with size 1 opening
Plastic head screw for the assembly of bases with size 2 openings

Lock nuts for plastic head screws

ORDER SYMBOL	SIZE
MB 10671	1
MB 10670	2
MB 10672	3
MB 10472	M6x30
MB 10474	M8x30
M6	M6
M8	M8

EXTENSION FRAMES



ORDER SYMBOL	SIZE mm
EKJZR	280x190x50
EKMZR	380x190x50
EKOZR	280x280x50
EKPZR	380x280x50
EKTZR	560x280x50
EKUZR	560x380x50





SUPPORT FLANGES



ORDER SYMBOL	SIZE
Support flange	MB 10025 2
Support flange	MB 10026 1


WALL FASTENING LUG



ORDER SYMBOL	
Wall fastening lug set, 4 pcs incl. screws	MB 10674




FASTENING OF BIG SYSTEMS



Connecting rail, standard length 2000 mm
Stud rail, standard length 2000 mm
Lock for connecting rail

ORDER SYMBOL	
Connecting rail, standard length 2000 mm	EKZKH1
Stud rail, standard length 2000 mm	EKSZY2
Lock for connecting rail	EKZKH1

THE BASE CONNECTORS



Connection bridge and gasket
Connection bridge and gasket



ORDER SYMBOL	SIZE
Connection bridge and gasket	MB 10717 2
Connection bridge and gasket	MB 10718 3

The plate connectors can be used for assembling bases together or flanges to bases.



FURNISH

MOUNTING PLATES



Note!
EK-mounting
plates also for
Solid-enclosure.

Mounting plate, metal
Mounting plate, metal
Mounting plate, metal
Mounting plate, metal
Mounting plate, metal
Mounting plate, metal
Mounting plate, metal

ORDER SYMBOL SIZE mm




EKHVT	148x148
EKJVT	238x148
EKMVT	338x148
EKQVT	238x238
EKPVT	338x238
EKTVT	518x238
EKUVT	518x338

KWh-mounting plate, metal
KWh- mounting plate, plastic
Accessory screws for mounting
the KWh meter

EKPVM2	338x238
EKPVM2P	338x238
M6x16	6x16

DIN RAILS




DIN-rail
DIN-rail
DIN-rail
DIN-rail
Self-cutting mounting screw

ORDER SYMBOL SIZE mm

EKV 12	35x160
EKV 22	35x235
EKV 32	35x335
EKV 50	35x500
MSM PT 5x10	4.8x9.5

DIN RAIL FRAME



DIN frame profile
DIN frame profile
DIN frame profile
DIN frame profile


ORDER SYMBOL SIZE mm

MS PROF 19	87
MS PROF 28	166
MS PROF 38	266
MS PROF 56	444

Screws for DIN-rail (terminal) assembly order MSM PT 5x10

Note!
Openings for
DIN-modules

FX FP FRONT PLATES FX20 SET -CORNER STUDS



Blue 2 mm PC front plate
Blue 2 mm PC front plate
Blue 2 mm PC front plate
Blue 2 mm PC front plate


ORDER SYMBOL SIZE mm

FX FP 8-2819	280x190
FX FP 12-2828	280x280
FX FP 2*12-2838	280x380
FX FP 3*12-2856	280x560

Cover plate (12 mod.)

MB 26050

CORNER STUD FX 2000



Set of corner studs FX 2000
Corner stud FX 2000 (separate)
Front plate screw FX 2000
PE/N brass bar
Screws for mounting PE/N
brass bar

ORDER SYMBOL SIZE mm

FX20 SET	
MB 10791	
MB 10792	
MS BAR 2+18	10x6.5x187
MR 28005EU	40x18

FURNISH

MB FP FRONT PLATES FOR MB 60MM BUS-BAR HOLDES



MB FP 2828



MB FP 3828




MB FP 5628

Blue 2 mm PC front plate
Blue 2 mm PC front plate
Blue 2 mm PC front plate

ORDER SYMBOL	SIZE mm
MB FP 2828	280x280
MB FP 3828	380x280
MB FP 5628	560x280

60 MM BUS-BAR



Bus-bar support set
incl. screws and support


ORDER SYMBOL

MB 60MM


For assembling to middle of the enclosure use screws KN4.8x13

RATED CURRENT	250 A	400 A
Bus-bar sizes	L1, L2, L3	20 x 5 mm
	PE/N	15 x 5 mm

SOLID FRAME COVERS



SF PC2828-SG-12-1



MB 10686


ORDER SYMBOL	SIZE mm
Solid Frame covers	
With opening 1x12 mod.	SF PC2828-SG-12-1 280x280x54
With opening 2x12 mod.	SF PC2828-SG-12-2 280x280x54

DIN-rail EKV 22 35x235


Note!
SOLIDFRAME cover fits to
EKOE and SOLID 2828 bases

Extension for DIN rail/mbc MB 10686 15/34

SPACERS



M6 spacers, self-cutting for corners of the base MR 10726 15
M6 spacers, self-cutting for corners of the base MR 10727 20
M6 spacers, self-cutting for corners of the base MR 10728 30
M6 spacers, self-cutting for corners of the base MR 10729 54




M6/M6 extension for MR spacer HR 10 10
M6/M6 extension for MR spacer HR 15 15
M6/M6 extension for MR spacer HR 20 20
M6/M6 extension for MR spacer HR 30 30




M5 spacers, self-cutting for middle mounting pods FA 12052 42
FA 12053 14

FP FRONT PLATES FOR FB88 AND FP882 SPACERS

MB FP88



MB FP882



FP 12-2819



FP 12X2-2828

ORDER SYMBOL	SIZE mm
Distance spacer for front plates, 1set, 2 pcs	MB FP88 88
Distance spacer for front plates, 1set, 2 pcs	MB FP882 88
FP front plate with DIN-openings	FP12-2819 280x190
FP front plate with DIN-openings	FP12-2828 280x280
FP front plate with DIN-openings	FP12x2-2828 280x280

FP front plate with DIN-openings FP12x2-2838 280x380
FP front plate with DIN-openings FP12x3-2838 280x380
FP front plate with DIN-openings FP12x3-2856 280x560

N/PE-terminal bracket, incl. 2 pcs of MR 26100 terminals (16-holes) MB 26069SET

Terminal bus-bar clamp, 25 mm² MS BAR CLAMP
Terminal bus-bar clamp, 35 mm² MR 26145



GLAD

PLATES

ORDER SYMBOL SIZE

MB 10546

MB 10215



Cover plate
Cover plate
Cover plate

MB 10215 1
MB 10546 2
MB 10324 3

MB 10537



Cable gland plates, threads 4xPG 13,5
Cable gland plates, threads 4xPG 16
Cable gland plates, threads 3xPG 21
Cable gland plates, threads 1xPG 29
Cable gland plates, threads 4xM20*1.5

MB 10151 1
MB 10149 1
MB 10214 1
MB 10537 1
MB 10892 1

MB 10014-10019
MB 10149-10214

Cable gland plates, threads 12xPG 16
Cable gland plates, threads 12xPG 13,5
Cable gland plates, threads 6xPG 16+4xPG21
Cable gland plates, threads 4xPG 16+3xPG29
Cable gland plates, threads 4xPG 16+2xPG36
Cable gland plates, threads 12xM20*1.5

MB 10014 2
MB 10015 2
MB 10016 2
MB 10017 2
MB 10019 2
MB 10891 2

MB 10593-10596



Knock-out plates 9xPG 11+5xPG9/16
Knock-out plates 4xPG 21/29
Knock-out plates 13xPG16

MB 10593 2
MB 10594 2
MB 10595 2

MK 10438



METRIC!

Knock-out plates 4xPG 11/21+7xPG16

MB 10596 2

Knock-out plates 4x 1/2" + 2x 3/4" + 1x 3/4" / 1"

MB 10856 2

Knock-out plates 4xM12+4xM12 / M20 + 4xM16/M25

MB 10857 2

Knock-out plates 8xM20+5xM25 / M16

MB 10889 2

Knock-out plates 2xM32 / M20 + 2xM40/M25

MB 10890 2

MK 10441



Flange gasket 1

MK 10437 1

Flange gasket 2

MK 10438 2

Flange gasket 3

MK 10439 3

Flange gasket 1, for smooth side

MK 10440 1

Flange gasket 2, for smooth side

MK 10441 2

1 2 3



Connector set + 4 screws

MB 10671 1

Connector set + 4 screws

MB 10670 2

Connector set + 4 screws

MB 10672 3

The plate connectors can be used
to assemble flanges and bases

1 2 3



Plastic screw, lock nut, flange gasket

EKZA 7 1

Plastic screw, lock nut, flange gasket

EKZA 8 2

Plastic screw, lock nut, flange gasket

EKZA 9 3

1 2 3



Plastic head screw

Plastic head screw for size 1 flange

MB 10345 M6x25

Plastic head screw for size 2 flange

MB 10346 M8x25

Plastic head screw for size 3

MB 10347 M10x30

Lock nut for plastic head screws

M6 M6

Lock nut for plastic head screws

M8 M8

Lock nut for plastic head screws

M10 M10

MEMBRANE FLANGE PLATE

ORDER SYMBOL SIZE

Membrane flange plate, IP 65

FMB 5 1

1x7-10+2x10-14+2x15-30

FMC 3 2

2x24-54+1x30-60

FMC 25 2

4x5-7+4x8-12+12x10-14+4x14-20+1x20-26

FMC 35 2

2x5-7+6x6-10+8x7-12+16x10-14+2x12-18+1x17-32

FMB 5 assembly: order MB 10671 connector set

FMC 3, -25, -35 : "fast" connectors incl. delivery





PLATE EXTENSION

ORDER SYMBOL SIZE

MB 10391



Height of the extension 25 mm

MB 10391 2

Mounting with four MB 10392

MB 10392

M8x50 plastic head screw

WATER PLUG VENTILATOR

ORDER SYMBOL

MB 12189



MB 10631



Water plug

MB 12189

Pressure stabilizer, M12x1,5

MB 10894

Ventilation device

MB 10631

Ventilation device, gasgated, incl. screws

MB 10564 II

Grille/filter holder for MB 10564 II. Optional

MB 10858 II

Holder for 40 x 40 mm fan, incl. screws

MB 10859 II


MB 10564 II



MB 10858 II




MB 10859 II



GLAD

CABLE ENTRY BOXES



ORDER SYMBOL


Including: base, cover, cover screws, 1 blind plug, 1 pull-off, hose clamp with screws, membrane cable gland, and plate connector set. MB 2260

Accessory set Including: membrane cable gland, pull-off, and hose clamp with screws. MB 2260A



Use plastic head screws for assembly

CABLE ENTRY



HIBOX 16

DSHIBOX 26



EPA 2160



EPA 2260



MK 10426



MK 10428

Cable entry, 1 cable (incl. rubber gasket)
Cable entry, 2 cables (incl. rubber gasket)

Cable entry (1 cable)
Cable entry (2 cables)
Cable entry (1 cable)
Cable entry (2 cables)

Rubber gasket for cable entry EPA 1130-1230
Rubber gasket for cable entry EPA 2160-2260

ORDER SYMBOL FLANGE SIZE

HIBOX 16
DSHIBOX 26

EPA 1130
EPA 1230
EPA 2160
EPA 2260

MK 10426
MK 10428

SIZE MM
10-31
28-60



CABLE GLANDS

METRIC!



Metric Cable gland, PA

PA=cable glands in polyamide
Grey RAL 7035
Temperature range
-40° (-+100°)
New metric dimensions EN 60423!



Metric Hexagonal lock nut PA

B=lock nuts for cable gland, polyamide

Membrane cable glands

EPDM
IP 65 (EN 60529)
Wall thickness (C) 1,5 -5 mm



Multifem


ORDER SYMBOL	FOR CABLE mm	METRIC SIZE	CLEARANCE HOLE Ø mm
GPA M12	3-6	M12x1,5	12.5
GPA M16	5-10	M16x1,5	16.5
GPA M20	8-13	M20x1,5	20.5
GPA M25	11-17	M25x1,5	25.5
GPA M32	15-21	M32x1,5	32.5
GPA M40	19-28	M40x1,5	40.5
GPA M50	27-35	M50x1,5	50.5
GPA M63	32-42	M63x1,5	60.5

GPA M12-B	M12x1,5
GPA M16-B	M16x1,5
GPA M20-B	M20x1,5
GPA M25-B	M25x1,5
GPA M32-B	M32x1,5
GPA M40-B	M40x1,5
GPA M50-B	M50x1,5
GPA M63-B	M63x1,5

FEM 3-5	3-5	M12	12.5
FEM 5-7	5-7	M16	16.5
FEM 7-10	7-10	M20	20.5
FEM 10-14/23	10-14	M23/PG16	23.5
FEM 10-14/25	10-14	M25	25.5
FEM 14-20	14-20	M32	32.5
FEM 20-26	20-26	M40	40.5
FEM 26-35	26-35	M50	50.5
FEM 30-45	30-45	M60	60.5

ORDER SYMBOL	FOR CABLE mm	CLEARANCE HOLE, PG
FET 5-7	5-7	PG 9
FET 7-10	7-10	PG 11
FET 8-14	8-14	PG 16
FET 14-20	14-20	PG 21
FET 20-26	20-26	PG 29
FET 26-35	26-35	PG 36

Membrane cable glands
Flame resistance UL 96-V2
Grey RAL 7035
Temperature range
-50°C-+70°C
Fet 5-7 for cables 5-7 ø
Fet 7-10 for cables 7-10 ø etc.

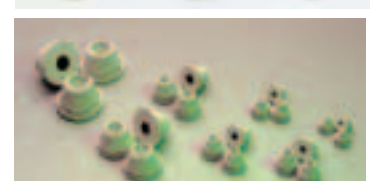

ROOF

COVERS



Cover = EKH 30 T (G)



Cover = EKJ 30 T (G)



Cover = EKM 30 T (G)



Cover = EKO 30 G (T)



Cover = EKP 30 T (G)



Cover = EKP 30 T (G)




Cover = EKT 30 G (T)




Cover = EKT 30 T (G)



Cover = EKW 100 G



Eight sizes of base and cover.
Three depths for cover 30, 80, 100 mm.
Note! (EKW only with grey colour)
Note! Order cover screws against the cover height.



EK-covers (PC)
G=grey cover RAL 7035
T=transparent cover
Height 30 mm.

EK-covers (PC)
G=grey cover RAL 7035
T=transparent cover
Height 80 mm.


More space with extension frames

ORDER SYMBOL	SIZE mm
EKH 30-T	190x190x30
EKH 30-G	190x190x30
EKJ 30-T	280x190x30
EKJ 30-G	280x190x30
EKM 30-T	380x190x30
EKM 30-G	380x190x30
EKO 30-T	280x280x30
EKO 30-G	280x280x30
EKP 30-T	380x280x30
EKP 30-G	380x280x30
EKT 30-T	560x280x30
EKT 30-G	560x280x30
EKU 30-T	560x380x30
EKU 30-G	560x380x30

EKH 80-T	190x190x80
EKH 80-G	190x190x80
EKJ 80-T	280x190x80
EKJ 80-G	280x190x80
EKM 80-T	380x190x80
EKM 80-G	380x190x80
EKO 80-T	280x280x80
EKO 80-G	280x280x80
EKP 80-T	380x280x80
EKP 80-G	380x280x80
EKW 100-G	760x560x100

HINGED COVER

FIBOX COVERS WITH READY ASSEMBLED FSH HINGES




Low cover 30 mm.
G=grey cover RAL 7035
T=transparent cover



Incl. cover and 2 pcs or 3 pcs HS-wing head (2FSH/3FSH) screws.

High cover 80 mm.
G=grey cover RAL 7035
T=transparent cover




ORDER SYMBOL	SIZE mm
EKH 30-G-2FSH	190x190x30
EKH 30-T-2FSH	190x190x30
EKJ 30-G-FSH19	190x280x30
EKJ 30-T-FSH19	190x280x30
EKJ 30-G-2FSH	280x190x30
EKJ 30-T-2FSH	280x190x30
EKM 30-G-2FSH	380x190x30
EKM 30-T-2FSH	380x190x30
EKO 30-G-2FSH	280x280x30
EKO 30-T-2FSH	280x280x30
EKP 30-G-2FSH	380x280x30
EKP 30-T-2FSH	380x280x30
EKT 30-G-3FSH	560x280x30
EKT 30-T-3FSH	560x280x30
EKU 30-G-3FSH	560x380x30
EKU 30-T-3FSH	560x380x30

EKH 80-G-2FSH	190x190x80
EKH 80-T-2FSH	190x190x80
EKJ 80-G-2FSH	280x190x80
EKJ 80-T-2FSH	280x190x80
EKM 80-G-2FSH	380x190x80
EKM 80-T-2FSH	380x190x80
EKO 80-G-2FSH	280x280x80
EKO 80-T-2FSH	280x280x80
EKP 80-G-2FSH	380x280x80
EKP 80-T-2FSH	380x280x80

HINGES, BLIND PLUG

ORDER SYMBOL	SIZE mm
MB 10622	30/80
MB 10547	30/80
PA 10547	
MB 10523	






PC hinge set, 1 pair, incl. screws and drill template
PA hinge set, 1 pair, incl. screws
Template for MB 10547 in plastic
Blind plug for cover corner on hinged side when cover screws are not used

ROOF

COVERS SCREWS


	ORDER SYMBOL	FOR COVERS
 ——— Wing head screw	HS 10255	30
 ——— Slotted head screw, sealable	SS 10535	30
 ——— Triangle head screw	DS 10581	30/80/100
 ——— Cross head screw	CS 10256	30/100
 ——— Slotted head screw, quick-lock, *)	SS 10544	30/100
 ——— Wing head screw, quick-lock, *)	HS 10533	30
 ——— Quick-locking wing head screw, hinged, *)	HS 10532	30
 ——— *) Threaded bushing	MB 10534	
 ——— *) Threaded bushing (needed for quick-locking screws)		
 ——— Cross head screw	SS 10563	80
 ——— Wing head screw	HS 10562	80
 ——— Noryl slotted head screw (good chemical resistance)	SS 10256N	30
 ——— Noryl wing head screw (good chemical resistance)	HS 10255N	30
Set of four cross head screws	SS 10256-4	30/100
Set of six cross head screws	SS 10256-6	30/100
Set of four cross head screws	SS 10563-4	80

SOLID FRAME

	ORDER SYMBOL	SIZE mm
 Cover 28/28-O	Frame, with opening	Cover 28/28-O 280x280
 Front plate aluminium	FP 28/28	
 Cover 28/28-D	Frame, no opening	Cover 28/28-D 280x280
	Key lock set	MR 26065




Solid Frames also fit EKOE and SOLID 2828 beses.

KEY-LOCK SET

	ORDER SYMBOL
 Key-lock set incl., lock and 2 keys for 30 mm covers	MB 10597


INSPECTION WINDOWS

The order symbol indicates the amount of the DIN modules for example L08=8 modules.

	ORDER SYMBOL	SIZE mm
 L24 II	Windows, IP 65	L12 II 248x128
 L12 II	Windows, IP 65	L24 II 248x128
 L24	Windows, IP 65	L12 248x128
 L12	Windows, IP 65	L24 248x128
	Windows, IP 65	L13 257x108
	Windows, IP 54	L10 199x77
	Windows, IP 54	L08 162x77
	Windows, IP 54	L06 130x77
	Windows, IP 54	L04 96x77
	Windows, IP 54	L02 60x77
 B 24 10620-45	Front plates for L 12 windows	B12 10621-45
 B 12 10621-45	Front plates for L 24 windows	B24 10620-45
 L44 II	Large size windows, IP 65,	L44 II 377x331
 L43 II	for enclosure EKW 100-G	L43 II 331x277



L 12 clear



L 12 II transparent smoked grey



L 13 clear




SOLID FRAME application



L 24 clear




L 44 II transparent smoked grey




L 43 II transparent smoked grey

DIMENSIONAL DRAWINGS



FLANGE OPENINGS								
Plate size	Dimensions							
	A	B	C	D	E	F	G	M
1	48	138	33	7	121	30	120	31
2	86	217	63	9,5	195	62	193	52
3	127	332	101	11,5	306	80	292	71



COVER PLATES								
Order symbol	Plate size	Dimensions						
		A	B	C	D	E	F	G
MB 10215	1	49	140,5	10	7	30	120	5
MB 10546	2	85	217	10	9,5	62	193	5
MB 10324	3	127	332	15	11,5	80	292	8

TECHNICAL INFORMATION

PROPERTY	POLYCARBONATE (PC)	CONFORMITY TO STANDARDS
Ingress Protection (EN 60529)	IP66/IP67	USA Enclosures for Electrical Equipment PC: UL Type 1, 3, 3S, 4, 4X, 6, 6P and 12 (UL 50/508)
Impact Resistance (EN 50102)	IK 08	Canada Industrial Control Equipment Enclosures for Electrical Equipment/ULc
Temperature Range Celsius (short term)	-40° ... 120°C	Europe Enclosures for Switch Gear and Control Gear Assemblies EN 50298:1998
Temperature Range Fahrenheit (short term)	-40° ... 250°F	
Temperature Range Celsius (continuous)	-40° ... 80°C	Europe Safety of Information Technology Equipment EN 60950
Temperature Range Fahrenheit (continuous)	-40° ... 175°F	
Electrical Insulation	Totally insulated	Australia Enclosures for switch gear and control gear AS 3132-1991
Light Grey Parts Colour	RAL 7035	DNV PC: DNV Rules for Classification of Ships and Mobile Offshore Units
Transparent Clear PC Cover	Clear Transparent	GL PC: GL Regulations for the Performance of Type Test, Part 1
Cover Screws	RAL 7035	
Cover Screws	Polyamide (PA)	LR Marine offshore and industrial installations
Gasket	PUR	BV BV Rules
Enclosure Flammability Rating	UL94-5V	UL 746 C 5 in. vertical flame test
Glow Wire Test	960°C	IEC 695-2-1, Self-extinguishing
Non-toxicity	Halogen Free	DIN/VDE 0472, Part 815
UV resistance	UL 508	CE, FI -mark
Chemical Resistance *	720 hours in "Weatherometer" Good	


Data subject to change without notice. * Consult separate raw material data for more detailed information

NEW!

EK enclosure sets

Some most popular EK sizes are now available as complete enclosures with just one order symbol.

Sets include base, cover and cover screws. Naturally same wide SOLID/EK accessory range allows you to customise these "easy-to-order" sets to your needs.



EKTH 130 T

ORDER SYMBOL	SIZE mm	
EKHA 130 G	190x190x130	
EKJB 130 G	280x190x130	
EKMB 130 G	380x190x130	
EKOE 130 G	280x280x130	
EKPE 130 G	380x280x130	
EKTH 130 G	560x280x130	
EKUH 180 G	560x380x180	
EKWH 250 G	760x560x250	
EKHA 130 T	190x190x130	
EKJB 130 T	280x190x130	
EKMB 130 T	380x190x130	
EKOE 130 T	280x280x130	
EKPE 130 T	380x280x130	
EKTH 130 T	560x280x130	
EKUH 180 T	560x380x180	

FIBOX


CAB QUICK



FIBOX CAB HINGED DOOR WITH KEY LOCK OR LATCH



FIBOX SPACE LINK

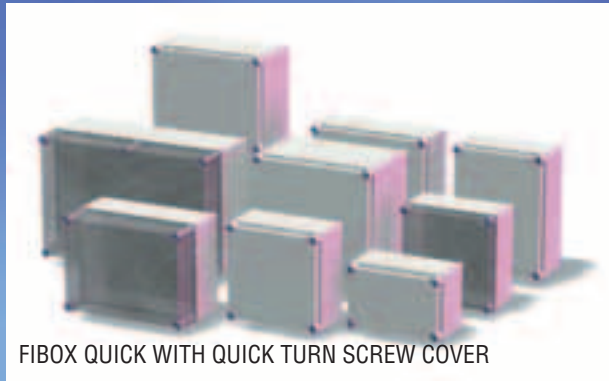

FIBOX QUICK WITH QUICK TURN SCREW COVER

FIBOX CAB PC/ABS wall mounting cabinets are manufactured using high impact resistant polycarbonate or ABS material, withstanding harsh, hostile industrial environments. The FIBOX QUICK lock system allows easy access to the enclosure, while still ensuring tight sealing. The enclosure is rated EN 60529 IP66/IP67. The cabinet base features numerous internal mounting pods, allowing ease in component assembly and installation. FIBOX CAB PC/ABS (hinged one), FIBOX QUICK PC/ABS (screw cover). Transparent "smoked grey" cover options allows easy viewing of installed control equipment and indicators.

FIBOX CAB PC/ABS

CAB ENCLOSURE WITH KEY LOCKS PC: IP 65, IK 08 ABS: IP 65, IK 08	Z mm	C mm	Including: Cabinet base, door with EPDM gasket, 3 mm double bit lock(s) with key, hinges, mounting plate screws, and corner plugs.				B x A
			ORDER SYMBOL		ORDER SYMBOL		L x S mm
			Grey door 3 mm double bit key		Smoked transparent cover 3 mm double bit key		
CAB PC/ABS 302018 G3B CAB PC/ABS 302018 T3B Y x X 300 mm 200 mm 	180 180	168 168	CAB PC 302018 G3B CAB ABS 302018 G3B		CAB PC 302018 T3B CAB ABS 302018 T3B		B x A 260 x 160 L x S 272 x 172
CAB PC/ABS 303018 G3B CAB PC/ABS 303018 T3B Y x X 300 mm 300 mm 	180 180	168 168	CAB PC 303018 G3B CAB ABS 303018 G3B		CAB PC 303018 T3B CAB ABS 303018 T3B		B x A 260 x 260 L x S 272 x 272
CAB PC/ABS 403018 G3B CAB PC/ABS 403018 T3B Y x X 400 mm 300 mm 	180 180	167 167	CAB PC 403018 G3B CAB ABS 403018 G3B		CAB PC 403018 T3B CAB ABS 403018 T3B		B x A 260 x 360 L x S 372 x 272
CAB PC/ABS 504020 G3B CAB PC/ABS 504020 T3B Y x X 500 mm 400 mm 	200 200	185 185	CAB PC 504020 G3B CAB ABS 504020 G3B		CAB PC 504020 T3B CAB ABS 504020 T3B		B x A 360 x 460 L x S 472 x 372
CAB PC/ABS 604022 G3B CAB PC/ABS 604022 T3B Y x X 600 mm 400 mm 	220 220	207 207	CAB PC 604022 G3B CAB ABS 604022 G3B		CAB PC 604022 T3B CAB ABS 604022 T3B		B x A 360 x 560 L x S 572 x 372

External height **Y**External width **X**External depth **Z**Free internal mounting height **C**Mounting plate assembly **B** x **A**Wall mounting **L** x **S**

T= smoked transparent cover G= grey cover

CAB ENCLOSURE WITH LATCHES PC: IP 65, IK 08 ABS: IP 65, IK 08	Z mm	C mm	Including: Cabinet base, door with EPDM gasket, hinges, latches, mounting plate screws, and corner plugs.				B x A	
			ORDER SYMBOL			ORDER SYMBOL		L x S
			Grey door Hinges on short sides	Smoked transparent cover Hinges on long side		mm		
CAB PC/ABS 203018 CAB PC/ABS 302018 Y x X 300 mm 200 mm 	180 180 180 180	168 168 168 168	CAB PC 203018 G CAB PC 203018 T CAB ABS 203018 G CAB ABS 203018 T		CAB PC 302018 G CAB PC 302018 T CAB ABS 302018 G CAB ABS 302018 T		B x A 260 x 160 L x S 272 x 172	
CAB PC/ABS 303018 Y x X 300 mm 300 mm 	180 180 180 180	168 168 168 168	CAB PC 303018 G CAB PC 303018 T CAB ABS 303018 G CAB ABS 303018 T				B x A 260 x 260 L x S 272 X 272	
CAB PC/ABS 304018 CAB PC/ABS 403018 Y x X 400 mm 300 mm 	180 180 180 180	167 167 167 167	CAB PC 304018 G CAB PC 304018 T CAB ABS 304018 G CAB ABS 304018 T		CAB PC 403018 G CAB PC 403018 T CAB ABS 403018 G CAB ABS 403018 T		B x A 260 x 360 L x S 372 x 272	
CAB PC/ABS 405020 CAB PC/ABS 504020 Y x X 500 mm 400 mm 	200 200 200 200	185 185 185 185	CAB PC 405020 G CAB PC 405020 T CAB ABS 405020 G CAB ABS 405020 T		CAB PC 504020 G CAB PC 504020 T CAB ABS 504020 G CAB ABS 504020 T		B x A 360 x 460 L x S 472 x 372	
CAB PC/ABS 604022 Y x X 600 mm 400 mm 	220 220 220 220	207 207 207 207			CAB PC 604022 G CAB PC 604022 T CAB ABS 604022 G CAB ABS 604022 T		B x A 560 x 360 L x S 572 x 372	


External height **Y** External width **X** External depth **Z** Free internal mounting height **C** Mounting plate assembly **B** x **A** Wall mounting **L** x **S**

T= smoked transparent cover G= grey cover

FIBOX CAB PC/ABS

SYMBOLS AND ABBREVIATIONS

FIBOX CAB AND FIBOX QUICK							
CAB	PC	Q	30	20	18	G	3B
							3 bit keylock
							Door G = Grey T = Smoked grey transparent
							Total depth of the Cabinet in cm
							Total width of the Cabinet in cm
							Total height of the Cabinet in cm
							HINGES ARE ON THIS SIDE
							Quick cover screws, NO HINGES
							Material of the Cabinet base PC (Polycarbonate) or ABS
							Enclosure range CAB/QUICK

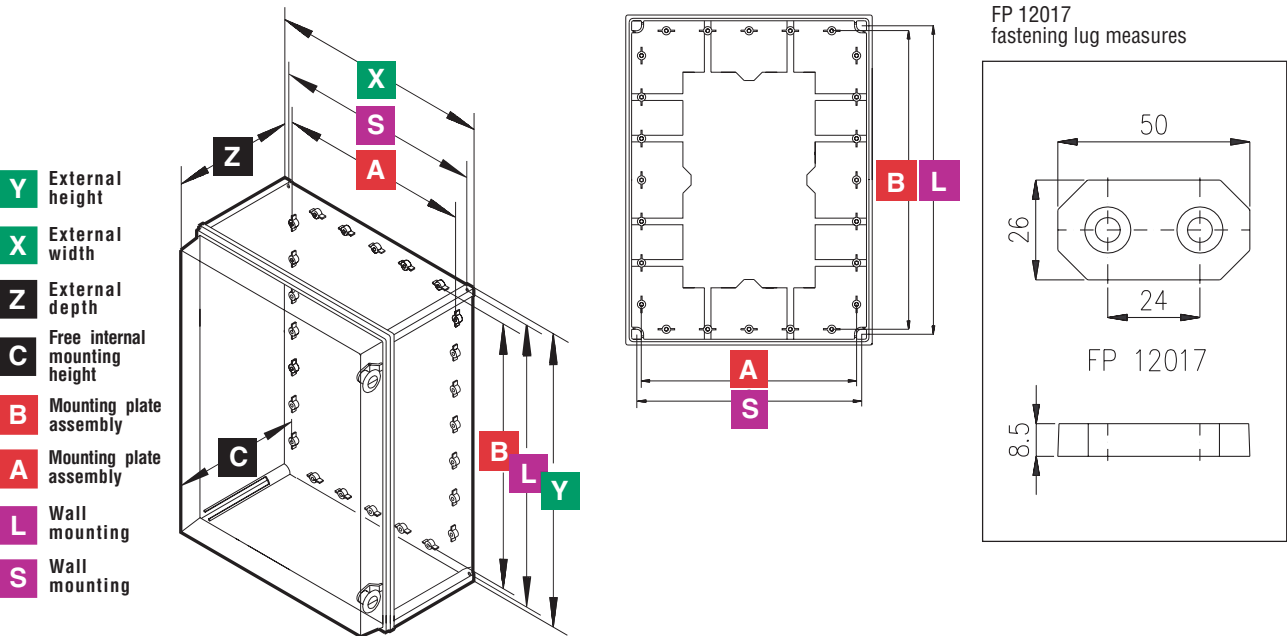

TECHNICAL INFORMATION FOR CAB ENCLOSURES

PROPERTY	POLYCARBONATE (PC)	ABS	CONFORMITY TO STANDARDS (UL, CSA, CE, Lloyds, BV, FI)
Ingress Protection (EN 60529)	IP65	IP65	USA Enclosures for Electrical Equipment PC: UL Type 1, 4, 4X, 12 and 13 (UL 50/508) ABS: NEMA 1, 4, 4X, 12 and 13
Impact Resistance (EN 50102)	IK 08	IK 08	Canada Industrial Control Equipment Enclosures for Electrical Equipment/ULc
Temperature Range Celsius (short term)	-40°...120°C	-40°...80°C	Europe Enclosures for Switch Gear and Control Gear Assemblies EN 50298:1998
Temperature Range Fahrenheit (short term)	-40°...250°F	-40°...175°F	
Temperature Range Celsius (continuous)	-40°...80°C	-40°...60°C	Europe Safety of Information Technology Equipment EN 60950
Temperature Range Fahrenheit (continuous)	-40°...175°F	-40°...140°F	
Electrical Insulation	Totally insulated ☒	Totally insulated ☒	Australia Enclosures for switch gear and control gear AS 3132-1991
Light Grey Parts Colour	RAL 7035	RAL 7035	
Transparent Clear PC Cover	Industry Grey	Industry Grey	
Hinges and Latches (PC)	Smoked Grey	Smoked Grey	
Gasket	RAL 7035	RAL 7035	
Enclosure Flammability Rating	PUR/EPDM	PUR/EPDM	
Glow Wire Test	UL94-5V	UL94HB	UL 746 C 5 in. vertical flame test
Non-toxicity	960°C	650°C	IEC 695-2-1, Self-extinguishing
UV resistance	Halogen Free	Halogen Free	
Chemical Resistance *	UL 508		
	720 hours in "Weatherometer"		
	Good	Good	

Data subject to change without notice. *Consult separate raw material data for more detailed information

POLYCARBONATE AND ABS CABINETS WITH KEY LOCKS OR WITH LATCHES

POLYCARBONATE AND ABS

CAB PC / ABS enclosures feature innovative design and unique latch and locking options. Optional smoked transparent covers provide excellent visibility plus UV protection for internal components.

HINGED INNER PANEL (SWING DOOR)


For instrumentation mounting, aluminium inner panels can be hinged right or left. Panels swing a full 90 degrees permitting total access to components mounted inside the cabinet.

ADJUSTABLE DEPTH

Unique brackets allow inner panels to be mounted at different depths. Panels can be mounted either as hinged or fixed.

SWING DOOR

Pat.Reg. 400865



WALL FASTENING FEET
Wall mounting is achieved directly through the enclosure or by using optional wall mounting feet for hanging the enclosure.

MOUNTING FRAMES




PADLOCKABLE LATCH

Enclosures are available hinged either on the long or short side. Quick release latches feature a built-in provision for padlocking.

KEY LOCK

CAB enclosures are available with a 1/4 turn DIN lock supplied with a standard 3mm double bit plastic key.

FIBOX QUICK

FIBOX QUICK PC AND ABS ENCLOSURE PC and ABS: IP 66/IP 67, IK 08	Z mm	C mm	Including: Enclosure base, cover, screws 4x CS12137, and mounting screws.				B x A
			ORDER SYMBOL		ORDER SYMBOL		L x S
			Grey cover		Smoked transparent cover		mm
CAB PCQ 23 CAB ABSQ 23 Y x X 300 mm x 200 mm 	170 170	158 158	CAB PCQ 302017 G CAB ABSQ 302017 G		CAB PCQ 302017 T CAB ABSQ 302017 T		B x A 260 x 160 L x S 272 x 172
CAB PCQ 33 CAB ABSQ 33 Y x X 300 mm x 300 mm 	170 170	158 158	CAB PCQ 303017 G CAB ABSQ 303017 G		CAB PCQ 303017 T CAB ABSQ 303017 T		B x A 260 x 260 L x S 272 x 272
CAB PCQ 43 CAB ABSQ 43 Y x X 400 mm x 300 mm 	170 170 230 230	158 158 218 218	CAB PCQ 403017 G CAB ABSQ 403017 G CAB PCQ 403023 G CAB ABSQ 403023 G		CAB PCQ 403017 T CAB ABSQ 403017 T CAB PCQ 403023 T CAB ABSQ 403023 T		B x A 360 x 260 L x S 372 x 272
CAB PCQ 44 CAB ABSQ 44 Y x X 400 mm x 400 mm 	170 170 +100	158 158 +100	CAB PCQ 404017 G CAB ABSQ 404017 G EKI EXT 44 Extension frame for multi-times additional 100 mm		CAB PCQ 404017 T CAB ABSQ 404017 T EKI EXT 44		B x A 360 x 360 L x S 372 x 372
CAB PCQ 63 Y x X 600 mm x 300 mm 	170	158	CAB PCQ 603017 G		CAB PCQ 603017 T		B x A 560 x 260 L x S 572 x 272
CAB PCQ 64 CAB ABSQ 64 Y x X 600 mm x 400 mm 	210 210 270 270	198 198 258 258	CAB PCQ 604021 G CAB ABSQ 604021 G CAB PCQ 604027 G CAB ABSQ 604027 G		CAB PCQ 604021 T CAB ABSQ 604021 T CAB PCQ 604027 T CAB ABSQ 604027 T		B x A 560 x 360 L x S 572 x 372

External height **Y**

External width **X**

External depth **Z**

Free internal mounting height **C**

Mounting plate assembly **B** x **A**

Wall mounting **L** x **S**

FIBOX QUICK – QUICK TURN COVER SCREW

HINGED INNER PANEL (SWING DOOR)

For instrumentation mounting, aluminium and insulated plastic inner panels can be hinged right or left. Panels swing a full 90 degrees permitting total access to components mounted inside the cabinet.

ADJUSTABLE DEPTH

Unique brackets allow panels to be mounted at different depths. Panels can be mounted either as hinged or fixed.

NEW DESIGN WITH STYLE

- Increased wall thickness adds strength and rigidity
- Smoked grey transparent cover provides excellent component visibility
- More flexibility in component mounting with large number of mounting pods
- Lower weight when compared with fibreglass or metal
- Smooth surfaces for nomenclature, decals and overlays

QUICK LOCK SCREWS

Quarter turn screws have optional head designs.

**SWING
DOOR**

EASY COMPONENT MOUNTING

Internal mounting options include metal mounting plates, plastic front plates, DIN rail assemblies and variable depth spacers.

ACCESSORIES TO CUSTOMISE YOUR APPLICATION

- Quick turn cover screws feature alternative screw heads: slotted, wing, blind and Phillips.
- Unique corner brackets permit variable depth mounting of front plates, DIN rail frames and mounting plates
- Corner hinge brackets permit inner swing panel to open 90 degrees.
- Wall mounting may be done directly through the rear of an enclosure. Sealing plugs maintain the NEMA rating. Alternatively, optional wall mounting feet may be added using the brass mounting inserts on the rear of the enclosure.
- Inspection windows provide access to components, yet maintain IP ratings.

SPACE AND MORE SPACE

Unique corner pod design leaves maximum mounting space without limiting accessories.

Moulded in place, perimeter gasket allows full enclosure base opening (no door return to reduce opening.)

Depth increase with enclosure size. Two optional 100mm high covers increase overall usable depth.

**SWING
DOOR**

Pat.Reg. 400865

FIBOX SPACE LINK

FIBOX SPACE LINK PC: IP 65	Z mm	C mm	Please order separately: Enclosure base, cover and screws QUICK SET. (see page 60), for EKI 63 and EKI 64, 2 x QUICK SET.				B x A
			ORDER SYMBOL		ORDER SYMBOL		L x S
			Grey cover		Smoked transparent cover		mm
EKI 23 Y x X 200 mm x 300 mm 	170	158	Base: EKI 23-2 EKI 23-4 Cover: EKI 23/40G		Base: EKI 23-2 EKI 23-4 Cover: EKI 23/40T		B x A 260 x 160 L x S 272 x 172
EKI 33 Y x X 300 mm x 300 mm 	170	158	Base: EKI 33-2 EKI 33-4 Cover: EKI 33/40G		Base: EKI 33-2 EKI 33-4 Cover: EKI 33/40T		B x A 260 x 260 L x S 272 x 272
EKI 43 Y x X 400 mm x 300 mm 	170 230	158 218	Base: EKI 43-5A EKI 43-4 Cover: EKI 43/40G EKI 43/100G		Base: EKI 43-5A EKI 43-4 Cover: EKI 43/40T EKI 43/100T		B x A 360 x 260 L x S 372 x 272
EKI 44 Y x X 400 mm x 400 mm 	170 +100	158 +100	Base: EKI 44-4 Cover: EKI 44/40G EKI EXT 44 Extension frame adds 100 mm depth, use many. See page 64.		Base: 44-4 Cover: EKI 44/40T EKI EXT 44		B x A 360 x 360 L x S 372 x 372
EKI 63 Y x X 600 mm x 300 mm 	170	158	Base: EKI 63-6 Cover: EKI 63/40G		Base: EKI 63-6 Cover: EKI 63/40T		B x A 560 x 260 L x S 572 x 272
EKI 64 Y x X 600 mm x 400 mm 	210 270	198 258	Base: EKI 64H - 4EPA EKI 64H - 6 Cover: EKI 64/40G EKI 64/100G		Base: EKI 64H - 4EPA EKI 64H - 6 Cover: EKI 64/40T EKI 64/100T		B x A 560 x 360 L x S 572 x 372

FIBOX SPACE LINK - LARGE FLANGE OPENINGS FOR EASY ASSEMBLY

COMPREHENSIVE ASSEMBLY SYSTEM


- New quick-link system plus a more rugged flange opening design making it easier to connect enclosure assemblies together.
- Flange support system works with popular bus bar systems (ABB, Wohner, Weber, etc.) designed for 5 x 20 and 10 x 30 mm copper bars.
- New DIN rail frames ease DIN module mounting and feature front plate corner brackets.
- Inspection windows with standard DIN 17.5/45 mm openings. New sizes include 377 x 331 mm and 331 x 277 mm.

EXTENSION FRAMES

Available in 400 x 400 mm and when stacked create additional depth in 100mm increments., for example, 170mm, 270mm, 370mm, etc.


QUICK-LINK SYSTEM

Assembly of the enclosures faster than ever.



MB 12287F3 set

60 MM BUS-BAR SYSTEM



ACCESSORIES TO CUSTOMIZE YOUR APPLICATION

- Quick turn cover screws feature alternative screw heads: slotted, wing, blind and Phillips.
- Unique corner brackets permit variable depth mounting of front plates, DIN rail frames and mounting plates
- Corner hinge brackets permit inner swing panel to open 90 degrees.
- Wall mounting may be done directly through rear of enclosure. Sealing plugs maintain the NEMA rating. Alternatively, optional wall mounting feet may be added using the brass mounting inserts on the rear of the enclosure.
- Inspection windows provide access to components, while maintaining NEMA ratings.
- Hinges, spacers, ventilators, etc.
- Flange plates with knockouts or blank.
- Variety of cable glands, strain relief and conduit fittings.



Pat.Reg. 400865

MOUNTING RAILS AND PLATES

Internal mounting options include metal mounting panels, blue polycarbonate front plates, DIN rail assemblies with variable depth spacers.

SNAP-IN SYSTEM


Fastest way to assemble the flanges.





FIBOX SPACE LINK

SYMBOLS AND ABBREVIATIONS

- Y** External height
- X** External width
- Z** External depth
- C** Free internal mounting height
- B** Mounting plate assembly
- A** Mounting plate assembly
- L** Wall mounting
- S** Wall mounting

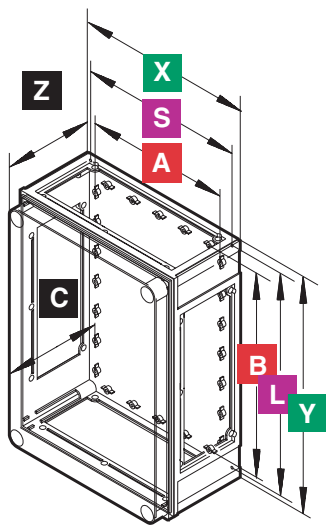

FP 12017
fastening lug measures

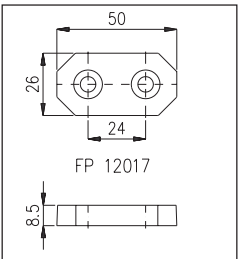

QUICK SET

Screw set for Space Link and Quick includes:

- 4 x CS 12137 cover screws head, blue
- 4 x MSM PT 5x10 mounting plate screw
- 4 x SP 12087 internal corner plug, red


(4 x) CS 12137

(4 x) MSM PT 5x10

(4 x) SP 12087

Please order one QUICK SET for each SPACE LINK enclosure except 2 for EKI 63 and EKI 64.




ASSEMBLY OF SPACE LINK ENCLOSURES

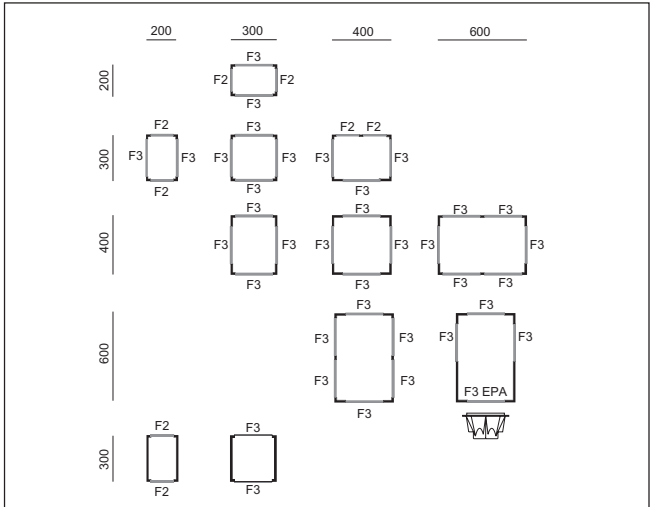

POLYCARBONATE FLANGES

Ordering symbol	Size	Openings
F3/12014	F3	no opening
F3/12022	F3	12xPg16/9 + 7xPg16
F3/12088	F3	4xPg36/29 + 4xPg16
F3/12028	F3	4xPg21 + 9xPg16 = for plate size 2 in EK range
F3/12187	F3	6 x M20/M25, 4 x M25/M32
F3/12023	F3	C-opening (SFS)
F3/EPA	F3/EPA	C-opening (SFS) incl. MB 12288 plate + 2xFA 12114
F2/12015	F2	no opening
F2/12042	F2	6xPg16/9 + 5xPg16
F2/12041	F2	4xPg16 + 3xPg21
F2/12089	F2	4xPg 16+3xPg 29
F2/12069	F2	2xPg 36+1xPg 16

EXTENSION FRAME
In size 400 x 400 mm
allow unlimited depth
170mm,
270mm,
370mm
470 mm etc...

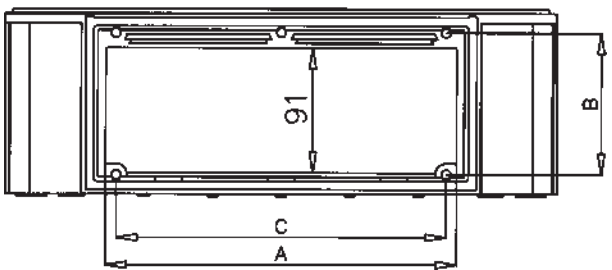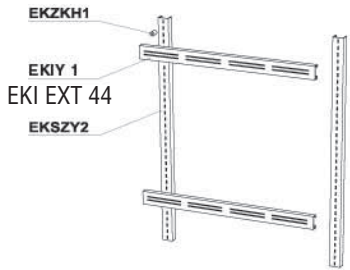

**DIMENSIONAL DRAWINGS
OF THE FIBOX EKI FLANGE
OPENINGS F2 AND F3**

TYPE	A	B	C
F2	155	102	140
F3	255	102	240

TECHNICAL INFORMATION FOR SPACE LINK ENCLOSURES

PROPERTY	POLYCARBONATE (PC)	CONFORMITY TO STANDARDS
Ingress Protection (EN 60529)	IP65	USA Enclosures for Electrical Equipment PC: UL Type 1, 3R (UL 50/508) NEMA 1, 4, 4X, 12 and 13
Impact Resistance (EN 50102)	IK 08	Canada Industrial Control Equipment Enclosures for Electrical Equipment/ULc
Temperature Range Celsius (short term)	-40°...120°C	Europe Enclosures for Switch Gear and Control Gear Assemblies EN 50298:1998
Temperature Range Fahrenheit (short term)	-40°...250°F	
Temperature Range Celsius (continuous)	-40°...80°C	Europe Safety of Information Technology Equipment EN 60950
Temperature Range Fahrenheit (continuous)	-40°...175°F	
Electrical Insulation	Totally insulated 	Australia Enclosures for switch gear and control gear AS 3132-1991
Light Grey Parts Color	RAL 7035	
Transparent Clear PC Cover	Industry Grey	
Screws Head CS (PC)	Smoked Grey	
Gasket	RAL 5023 Blue	
Enclosure Flammability Rating	PUR/EPDM	
Glow Wire Test	UL94-5V	UL 746 C 5 in. vertical flame test
Non-toxicity	960°C	IEC 695-2-1, Self-extinguishing
UV resistance	Halogen Free	DIN/VDE 0472, Part 815
Chemical Resistance *	UL 508	
	720 hours in "Weatherometer"	
	Good	

TECHNICAL INFORMATION FOR QUICK ENCLOSURES



PROPERTY	POLYCARBONATE (PC)	ABS	CONFORMITY TO STANDARDS
Ingress Protection (EN 60529)	IP 66/IP67	IP 66/IP67	USA Enclosures for Electrical Equipment PC: UL Type 1, 3R (UL 50/508) NEMA 1, 4, 4X, 12 and 13
Impact Resistance (EN 50102)	IK 08	IK 08	Canada Industrial Control Equipment Enclosures for Electrical Equipment/ULc
Temperature Range Celsius (short term)	-40°...120°C	-40°...80°C	Europe Enclosures for Switch Gear and Control Gear Assemblies EN 50298:1998
Temperature Range Fahrenheit (short term)	-40°...250°F	-40°...175°F	
Temperature Range Celsius (continuous)	-40°...80°C	-40°...60°C	Europe Safety of Information Technology Equipment EN 60950
Temperature Range Fahrenheit (continuous)	-40°...175°F	-40°...140°F	
Electrical Insulation	Totally insulated 	Totally insulated 	Australia Enclosures for switch gear and control gear AS 3132-1991
Light Grey Parts Color	RAL 7035	RAL 7035	
Transparent Clear PC Cover	Industry Grey	Industry Grey	
Screws Head CS (PC)	Smoked Grey	Smoked Grey	
Gasket	RAL 5023 Blue	RAL 5023 Blue	
Enclosure Flammability Rating	PUR/EPDM	PUR/EPDM	
Glow Wire Test	UL94-5V	UL94HB	UL 746 C 5 in. vertical flame test
Non-toxicity	960°C	650°C	IEC 695-2-1, Self-extinguishing
UV resistance	Halogen Free	Halogen Free	DIN/VDE 0472, Part 815
Chemical Resistance *	UL 508		
	720 hours in "Weatherometer"		
	Good	Good	

Data subject to change without notice. * Consult separate raw material data for more detailed information

ACCESSORIES FOR CAB -, QUICK AND SPACE LINK ENCLOSURES

Product	Order symbol	Size mm	
Swing door/ front plates (aluminium)	FP A 23 FP A 33 FP A 43 FP A 44 FP A 54 FP A 63 FP A 64	168x268 268x268 368x268 368x368 468x368 568x268 568x368	
Front plates 	FP 12-23 FP 12-33 FP 12x2-33 FP 12x2-43 FP 12x2-43 FP* FP 12x3-43 FP 18x2-54 FP 12x3-63 FP 18x3-64	178 x 278 278 x 278 278 x 278 378 x 278 378 x 278 378 x 278 478 x 378 578 x 378 578 x 378	
Front plates, black (ABS) 	FP 23 FP 33 FP 43 FP 44 FP 54 FP 63 FP 64	268 x 176 276 x 268 376 x 268 376 x 368 476 x 368 576 x 268 576 x 368	

*) Use with
FP 12190

Product	Order symbol	Size mm	
*) Swing door kit for front plates and door 	MB 12225 MB 12225 AL *)		*) Use with FP A front plates
DIN rail frame Incl. A pair of metal profile bar and moun- ting screws and front plate holders 	DRF 23 DRF 33 DRF 43/44 DRF 54 DRF 63/64	170 270 370 470 570	
DIN-rails/Banks DIN 35 	EKIV 17 EKIV 27 EKIV 37 EKIV 47	166 266 366 466	
Mounting plates (Zinc plates metal) 	EKIV 23 EKIV 33 EKIV 43 EKIV 44 EKIV 54 EKIV 63 EKIV 64	170 x 270 270 x 270 370 x 270 370 x 370 470 x 370 570 x 270 570 x 370	

ACCESSORIES FOR CAB - AND QUICK ENCLOSURES

Product	Order symbol	Size mm	
Inspection windows			
 L44 II	L44 II	377 x 331	
 L43 II	L43 II	331 x 277	
 L24 II	L24 II	248 x 218	
 L12 II	L12 II	248 x 128	
 L24	L24	248 x 218	
 L12	L12	248 x 128	
 L13	L13	257 x 108	
 L10	L10	199 x 77	
 L08	L08	162 x 77	
 L06	L06	130 x 77	
 L04	L04	96 x 77	
 L02-L10	L02	60 x 77	
Front plates for windows L12 and L24	B12 10621-45 B24 10620-45	12 modules 24 modules 1 module = 17,5 mm	
Cover screws heads			
 Blue	CS 12137		
 Grey	SS 12136		
 Grey	HS 12112		
 Grey	BS 12138		
Hinge set <i>Only to CAB</i>	MB CH SET		
Latch set <i>Only to CAB</i>	MB CL SET		
Hinge set <i>Only to QUICK</i>	PAT 12040		
Wall fastening lug  Set of four, incl screws M6x10	FP 12017		
Corner plug 	SP 12087		
Key 	MB 12235		
DIN rail support	FP 12190		
Spacers	FA 12053 FA 12052 MB 10686 set		
Mounting screws	MSM PT 5x10		
Ventilation device	MB 10564 II MB 10631		
Water plug	MB 12189		
Pole mount set 	PM 60 PM 120		

Product	Order symbol	
Bush-bar support flange	BBSF	
Support flanges 	F2/12291 F3/12290	
PE bus-bar, DIN-rail clip-on, blue	MS BAR 7 B	
N bus-bar, DIN-rail clip-on, green/yellow	MS BAR 7 GY	
Terminal support, DIN-rail clip-on Mounting screw for MS TS. Order separately.	MS TS KN 2.9x9.5	
PE/N terminal bus-bar 25+ 10 mm ²	MS BAR 2+18	
PE/N terminal bus-bar 35+ 10 mm ²	MS BAR 3+24	
PE/N terminal bus-bar 10 mm ²	MS BAR 96	
Terminal bus-bar clamp, 25 mm ²	MS BAR CLAMP	
Terminal bus-bar clamp, 35 mm ²	MR 26145	

Cable entry direct mount to flange opening

Product	Order symbol	Size mm	
For F3-size flange open.	F3/12101	2 x 30-60 mm cables	
For F2-size flange open.	F2/12102	1x 30-60 mm cables	
Connect. kit	MB F3F2	For F2/12101 and F3/12101	
Cable gasket	MK 10428	28-60 mm cables	

Cable entry with cable gasket for gland plate F3/EPA

Product	Order symbol	Size mm	
Cable entry with cable gasket	HIBOX 16	1 x 37-62 mm cables	
Cable entry with two cable gasket	DSHIBOX 26	2 x 37-62 mm cables	
Cable entry kit	F3/EPA	Connecting HIBOX/DSHIBOX to EKI bases	


Cable entry for gland plate F3/EPA

Product	Order symbol	Size mm	
Cable entry Cable entry	EPA 2160 EPA 2260	1 x 28-60 mm 2 x 28-60 mm	
Connector set	MB 10670	Size 2 flange opening	
Gland plate gasket	MK 10438	Size 2 flange opening	
Cable gasket 	MK 10428	28-60 mm cables	


FIBOX

CARDMASTER

FIBOX CARDMASTER

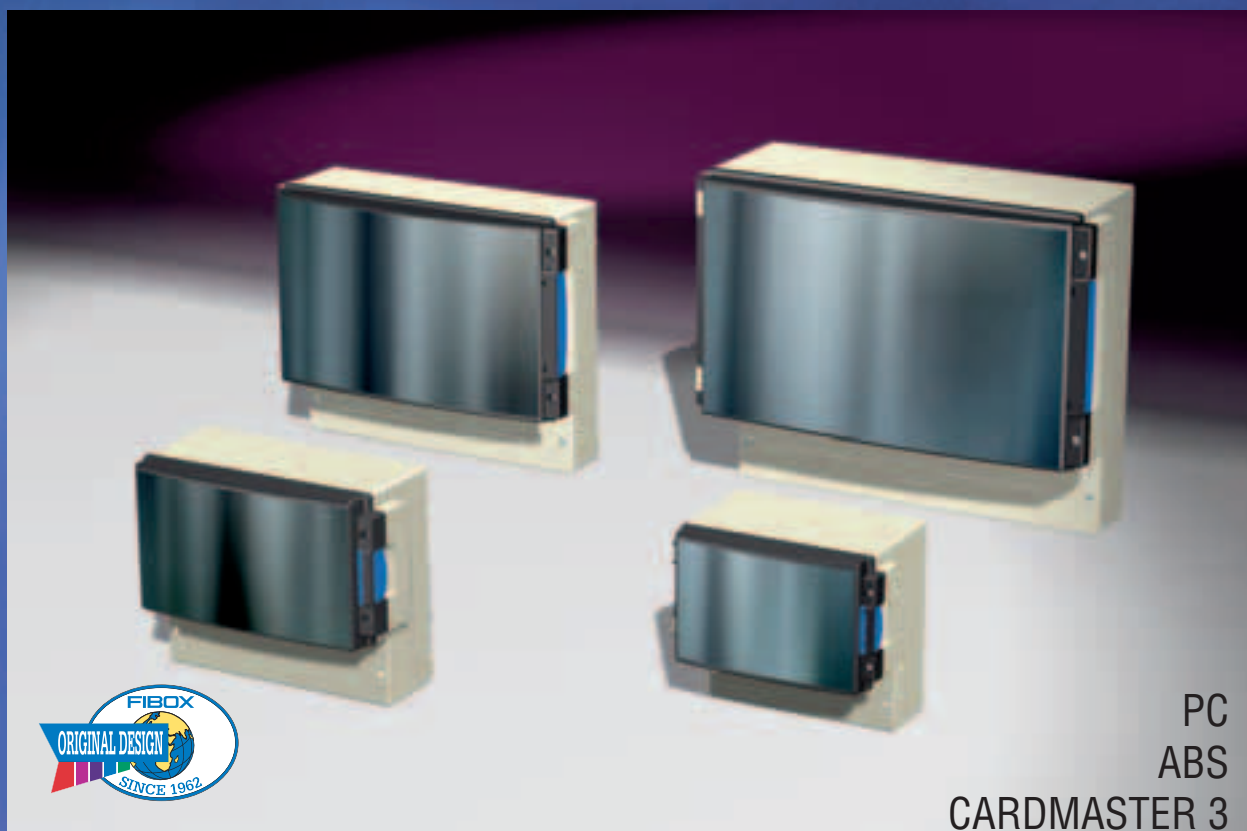

CARDMASTER 3

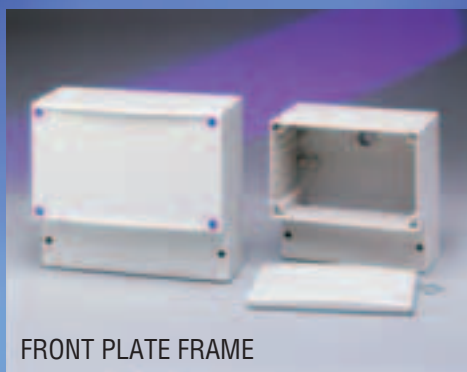

FRONT PLATE FRAME

A new generation of FIBOX CARDMASTER enclosures, featuring improved design and colours, is available in polycarbonate and ABS. Designed for use with modular components, the FIBOX CARDMASTER 3 range is ideal for packaging instrumentation, measurement, monitoring and process control equipment.

The enclosure has built in PCB card guides and a separate terminal wiring compartment.

Hinged transparent covers have quick release latches.

All sizes available in either impact resistant polycarbonate or ABS.

New accessory front plate frame also available.

FIBOX CARDMASTER 3


Features

Ecology also in design
more mounting pods and no brass inserts for better recycling


50 % bigger opening
between two compartments

More usable mounting space
in all corners for better utilisation of PCB's

Instrumentation compartment
Smoked grey transparent cover with textured sides

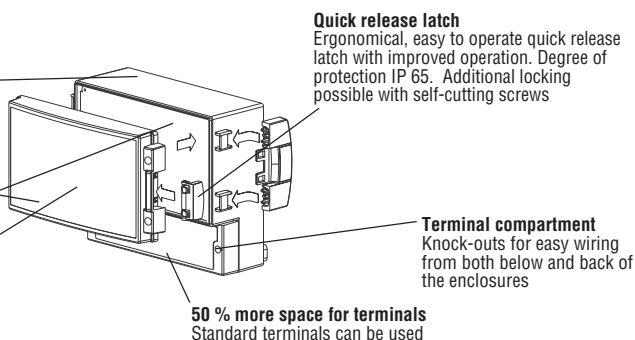

Three wall mounting alternatives



For 17/16 and 21/18 3

CARDMASTER 3 PC AND ABS ENCLOSURE PC: IP 65, IK08/IK07 ABS: IP 65, IK07	 Z mm	 C mm	Including: Enclosure base, transparent cover, termination compartment cover, polyamide hinges, locking devices, and 8 mounting screws		Including: Enclosure base, terminal compartment cover, and 8 mounting screws. (A transparent cover and hinges are not included.)		 B X  A	
			ORDER SYMBOL		ORDER SYMBOL			 L X  S mm
			Transparent cover, hinged base		No main cover, smooth side base			
17/16-LC3 17/16-L3  Y X  X 166 mm 160 mm   	80	58			PC 17/16-LC3		See www.Fibox.com for dimensional drawings.	
	80	58			ABS 17/16-LC3			
	104	58			PC 17/16-LFC3			
	106	84	PC 17/16-L3					
17/16-C3 17/16-3  Y X  X 166 mm 160 mm   	105	86			PC 17/16-C3		See www.Fibox.com for dimensional drawings.	
	105	86			ABS 17/16-C3			
	119,5	86,7			PC 17/16-FC3			
	134	113	PC 17/16-3					
	134	113	ABS 17/16-3					
21/18-C3 21/18-3  Y X  X 213 mm 185 mm   	87	71			PC 21/18-C3		See www.Fibox.com for dimensional drawings.	
	87	71			ABS 21/18-C3			
	102	71			PC 21/18-FC3			
	118	97	PC 21/18-3					
28/28-0 II 28/28-D II  Y X  X 280 mm 280 mm    	153	150	PC 28/28-0 II				See www.Fibox.com for dimensional drawings.	
	153	150	ABS 28/28-0 II					
	154	84			PC 28/28-D II			
	154	84			ABS 28/28-D II			
			Remarks: Size 28/28-0 II including: Enclosure base, (PC with knock-outs), open smoked transparent cover (SOLID FRAME), cover screws, 4 mounting screws, and 4 mounting screws for mounting plate.		Remarks: Size 28/28-D II including: Enclosure base, (PC with knock-outs), closed smoked transparent cover (SOLID FRAME), cover screws, 4 mounting screws, and 4 mounting screws for mounting plate.			

External height Y

External width X

External depth Z

Free internal mounting height C

Mounting plate assembly B X A

Wall mounting L X S

REMOVING
PRODUCT

FIBOX CARDMASTER 3

SYMBOLS AND ABBREVIATIONS

Y External height

X External width

Z External depth


C Free internal mounting height

B Mounting plate assembly


A Mounting plate assembly

L Wall mounting

S Wall mounting




Y






C **Z**

FP 10674
fastening lug measures

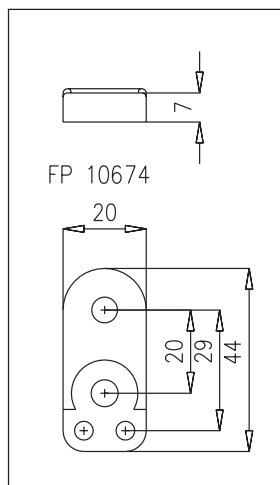

CARDMASTER 3

PC	17/16-LFC3
ABS	17/16-3
Type	
L=low base	
C3=without main cover and hinge lugs	
3=with hinged cover	
FC3=with screw mounted plastic cover	
Width /length	
Enclosure material	
PC	Polycarbonate
ABS	ABS-plastic

CARDMASTER PC AND ABS ENCLOSURE PC: IP 65, IK08/IK07 ABS: IP 65, IK07	Z mm	C mm	Including: Enclosure base, transparent cover, termination compartment cover, polyamide hinges, locking devices, and 6 mounting screws		Including: Enclosure base, termination compartment cover, front plate, and 6 mounting screws		B X A L X S mm
			ORDER SYMBOL		ORDER SYMBOL		
21/18-1  Y X X 185 mm 213 mm Remarks: USA: Incl. FP 21/18 and PC with 3 x 0.85" knock-outs.	113	91	PC 21/18-3 USA				See www.Fibox.com for dimensional drawings.
30/25-3 30/25-C3  Y X X 256 mm 296 mm Remarks: USA: Incl. FP 30/25 and PC with 5 x 0.85" knock-outs.	123	103	PC 30/25-3				See www.Fibox.com for dimensional drawings.
	123	103	ABS 30/25-3				
	123	103	PC 30/25-3 USA				
36/31-3 36/31-C3  Y X X 316 mm 363 mm Remarks: USA: Incl. FP 36/31 and PC with 2 x 0.85" and 2 x 1.09" knock-outs.	92	68			PC 30/25-C3		See www.Fibox.com for dimensional drawings.
	92	68			ABS 30/25-C3		
	162	139	PC 36/31-3				
	162	139	ABS 36/31-3				
	162	139	PC 36/31-3 USA				
	130	105			PC 36/31-C3		See www.Fibox.com for dimensional drawings.
	130	105			ABS 36/31-C3		

FIBOX CARDMASTER

TECHNICAL INFORMATION FOR CARDMASTER 3

PROPERTY	POLYCARBONATE (PC)	ABS	CONFORMITY TO STANDARDS (UL, CSA, CE, Lloyds, BV, FI)
Ingress Protection (EN 60529)	IP65	IP65	USA Enclosures for Electrical Equipment PC: UL Type 1 and 12K (UL 50/508) PC/ABS: NEMA 1, 4, 4X, 6, 12 and 13
Impact Resistance (EN 50102)	IK 08/IK 07	IK 07	Canada Industrial Control Equipment Enclosures for Electrical Equipment/ULc
Temperature Range Celsius (short term)	-40°...120°C	-40°...80°C	Europe Enclosures for Switch Gear and Control Gear Assemblies EN 50298:1998
Temperature Range Fahrenheit (short term)	-40°...250°F	-40°...175°F	
Temperature Range Celsius (continuous)	-40°...80°C	-40°...60°C	Europe Safety of Information Technology Equipment EN 60950
Temperature Range Fahrenheit (continuous)	-40°...175°F	-40°...140°F	
Electrical Insulation	Totally insulated 	Totally insulated 	Australia Enclosures for switch gear and control gear AS 3132-1991
Light Grey Parts Colour	RAL 7035	RAL 7035	
Transparent Clear PC Cover	Industry Grey	Industry Grey	
Latches (PA)	Smoked Grey	Smoked Grey	
Gasket	RAL 5023 Blue	RAL 5023 Blue	
Enclosure Flammability Rating	PUR/EPDM	PUR/EPDM	
Glow Wire Test	UL94-5V	UL94HB	UL 746 C 5 in. vertical flame test
Non-toxicity	960°C	650°C	IEC 695-2-1, Self-extinguishing
UV resistance	Halogen Free	Halogen Free	
Chemical Resistance *	UL 508 720 hours in "Weatherometer"		
	Good	Good	

Data subject to change without notice. *Consult separate raw material data for more detailed information

ACCESSORIES

Product/size	Order symbol	Size mm	
Front plate	FP 17/16 FP 21/18 FP 28/28 FP 30/25 FP 36/31	160 x 100 207 x 119 254 x 254 290 x 190 351 x 225	
Back panels	MP 17/16 MP 21/18 MP 30/25 MP 36/31	136 x 133 200 x 142 282 x 215 345 x 258	
Cover	CM 17/16-3T CM 21/18-3T CM 30/25-3T CM 36/31-3T	166 x 106 x 29 213 x 125 x 30 296 x 196 x 36 363 x 271 x 36	
Wall mounting lug 17/16-21/18	FP 10674		

Product/size	Order symbol	Size mm	
Set of hinges & latches 	SET 17/16-21/18-3 SET 30/25-3 SET 36/31-3		
DIN-rail support	MB 20064 SET		
Frame front plate, closed IP 65 	FC PC 17/16 FC PC 21/18	160 x 100 203 x 115	


FIBOX^{EX}

FIBOX EX

FIBOX ALX
ENCLOSURES

ATEX

Directive (94/8/EC)

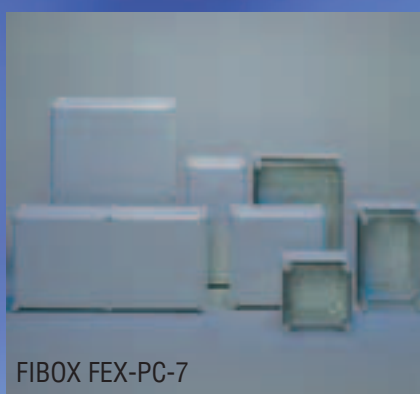

FIBOX FEX-PC-7



FIBOX PEX

Fibox EX enclosures are made for use in hazardous areas. They are designed, tested and manufactured to international standards. The certificates are issued by the manufacturer under licence from a test authority.

All certified products are labelled clearly in compliance with the certification.

An enclosure with Component Certification will achieve the specified degree of safety in use when selected, assembled and installed correctly. The Component Certification establishes the acceptability of the empty enclosure for use as a component part of equipment which is certified by a Certificate of Conformity. Only equipment with a Certificate of Conformity should be installed in hazardous areas.

FIBOX ALX

FIBOX ALX ALUMINIUM ENCLOSURE At least IP 54, IK 08			Including: Enclosure base, cover, cover screws, mounting screws, earth screws and earth terminal.					
Y mm	X mm	ORDER SYMBOL		Z mm	C mm		ACCESSORIES	
		Grey cover						
 FIBOX ALX aluminium enclosures for housing terminal blocks, electronic devices and other industrial components. These enclosures are made from high quality, non corrosive aluminium.  ATEX VTT 03 ATEX Q 002 VTT 03 ATEX 044U (II 2 G, EEx e II) VTT 03 ATEX 137U (II 3 D) Supplement 1 to VTT 03 ATEX 044U and VTT 03 ATEX 137U	50	45	ALX 050503	32	20		Order symbol	Size mm
	60	66	ALX 060605	46	35		Mounting plate	
	100	66	ALX 061005	46	35		AM 0808	69 x 64
	152	65	ALX 061505	46	35		AM 0813	69 x 114
	82	77	ALX 080806	57	45		AM 0818	69 x 164
	127	81	ALX 081306	57	45		AM 0825	69 x 240
	177	81	ALX 081806	57	45		AM 1212	107 x 110
	252	81	ALX 082506	57	45		AM 1222	107 x 207
	125	124	ALX 121208	81	64		AM 1236	107 x 347
	222	125	ALX 122208	81	64		AM 1616	146 x 146
	362	125	ALX 123608	81	74		AM 1626	146 x 244
	163	162	ALX 161609	91	74		AM 1636	146 x 346
	263	162	ALX 162609	91	74		AM 1656	146 x 545
							AM 2320	215 x 184
							AM 2328	215 x 264
							AM 2333	215 x 315
							AM 2340	215 x 385
							AM 2360	215 x 586
							AM 3140	294 x 387
							AM 3160	293 x 585
							Mounting rail DIN 15	
							ARM 0610	15 x 88
							ARM 0615	15 x 140
						ARM 0808	15 x 65	
						ARM 0813	15 x 115	
						ARM 0818	15 x 165	
						ARM 0825	15 x 240	
						Mounting rail DIN 35		
						ARH 12	35 x 105	
						ARH 22	35 x 203	
						ARH 36	35 x 343	
						ARH 16	35 x 140	
						ARH 26	35 x 240	
						ARH 1636	35 x 340	
						ARH 1656	35 x 540	
						ARH 2320	35 x 180	
						ARH 2328	35 x 260	
						ARH 2333	35 x 310	
						ARH 40	35 x 383	
						ARH 60	35 x 580	
						Wall mounting lugs		
						MRS 28540		
						MRS 28541		
							More accessories and dimensions; see page 28.	

TECHNICAL INFORMATION

More accessories and dimensions;
see page 28.


TECHNICAL INFORMATION

PROPERTY	AlSi CAST ALUMINIUM	CONFORMITY TO STANDARDS
Ingress Protection (EN 60529)	At least IP 54 IP66/IP67	USA Enclosures for Electrical Equipment NEMA 1, 4, 4X, 6 12 and 13 (50/508)
Impact Resistance (EN 50014)	7J	Europe Electrical apparatus for potentially explosive atmospheres EN 50014: 1997 + A1.....A5, General requirements EN 50019: 1997 + A1.....A5, Increased safety "e"
ALX 050503 to ALX 082506		
Temperature Range Celsius (short term)	-50°...140°C	
Temperature Range Fahrenheit (short term)	-60°...285°F	
Temperature Range Celsius (continuous)	-10°...80°C	
Temperature Range Fahrenheit (continuous)	14°...175°F	
Gasket	Silicone	
ALX 121208 to ALX 162609		
Temperature Range Celsius (short term)	-50°...140°C	
Temperature Range Fahrenheit (short term)	-60°...285°F	
Temperature Range Celsius (continuous)	-25°...80°C	
Temperature Range Fahrenheit (continuous)	-13°...175°F	
Gasket	PUR	
Polyester Powder Paint Colour	RAL 7001 grey	
Cover Screws	Stainless Steel	
Chemical Resistance *	Good	

Data subject to change without notice. *Consult separate raw material data for more detailed information.

Also bigger Ex sizes available.

External height **Y** External width **X** External depth **Z** Free internal mounting height **C**

FIBOX FEX-PC-7 POLYCARBONATE ENCLOSURE At least IP 54	Y mm	X mm	Including: Enclosure base, cover, cover screws, and mounting screws.			Z x C mm
			ORDER SYMBOL		ORDER SYMBOL	
			Grey cover	EAN-code	Transparent cover	
 The FEX-PC-7 range is suitable for enclosing terminals and other equipment in harsh environmental conditions such as petrochemical sites or off-shore platforms.  CERTIFICATES: - VTT 03 ATEX Q 002 - VTT 03 ATEX 043U (II 2 G, EEx e II) - VTT 03 ATEX 136U (II 3 D) - FIMKO: IP67 to IEC529 - Germanischer Lloyd	190	190	FEX 1919 13 G		FEX 1919 13 T	130 x 115
	190	190	FEX 1919 18 G		FEX 1919 18 T	180 x 165
	280	190	FEX 2819 13 G		FEX 2819 13 T	130 x 115
	280	190	FEX 2819 18 G		FEX 2819 18 T	180 x 165
	380	190	FEX 3819 13 G		FEX 3819 13 T	130 x 115
	380	190	FEX 3819 18 G		FEX 3819 18 T	180 x 165
	280	280	FEX 2828 13 G		FEX 2828 13 T	130 x 115
	280	280	FEX 2828 18 G		FEX 2828 18 T	180 x 165
	380	280	FEX 3828 13 G		FEX 3828 13 T	130 x 115
	380	280	FEX 3828 18 G		FEX 3828 18 T	180 x 165
	560	280	FEX 5628 13 G		FEX 5628 13 T	130 x 115
	560	380	FEX 5638 18 G		FEX 5638 18 T	180 x 165
	Accessories, see pages 43-44.					

TECHNICAL INFORMATION

PROPERTY	POLYCARBONATE (PC)	CONFORMITY TO STANDARDS
Ingress Protectionat (EN 60529)	At least IP 54 IP66/IP67	Europe Electrical apparatus for potentially explosive atmospheres EN 50014: 1977 + A1....A5, General requirements EN 50019: 1997 + A1....A5, Increased safety "e"
Impact Resistance (EN 50014)	4J	
Temperature Range Celsius (short term)	-40°...120°C	
Temperature Range Fahrenheit (short term)	-40°...250°F	
Temperature Range Celsius (continuous)	-10°...80°C	
Temperature Range Fahrenheit (continuous)	14°...175°F	
Electrical Insulation	Totally insulated 	
Light Grey Parts Colour	RAL 7035	
Industry Grey		
Transparent Clear PC Cover	Clear Transparent	
Cover Screws	RAL 7035	
Cover Screws	Polyamide (PA)	
Gasket	Silicone	
Enclosure Flammability Rating	UL94-5V	UL 746 C 5 in. vertical flame test
Glow Wire Test	960°C	IEC 695-2-1, Self-extinguishing
Non-toxicity	Halogen Free	
UV resistance	UL 508, 720 hours in "Weatherometer"	
Chemical Resistance *	Good	

Data subject to change without notice. * Consult separate raw material data for more detailed information

External height **Y** External width **X** External depth **Z** Free internal mounting height **C**

FIBOX PEX POLYESTER ENCLOSURE At least IP 54				Including: Enclosure base, cover, cover screws, and mounting screws.					
X mm	Y mm	ORDER SYMBOL		Z mm	C mm		ACCESSORIES		
		Grey cover							
 The FIBOX PEX product family is suitable for enclosing terminals and other electrical equipment in the most demanding environments such as mining or chemical industries.  CERTIFICATES: - PTB: EEx e II	75	80	PEX 080806	55	47		Order symbol	Size mm	
	75	110	PEX 081106	55	47		Mounting plate	64 x 69 64 x 99 64 x 149 64 x 179 146 x 146 146 x 244 231 x 240 231 x 383 390 x 385	
	75	160	PEX 081606	55	47				
	75	190	PEX 081906	55	47				
	120	122	PEX 121209	90	75				
	120	220	PEX 122209	90	75				
	160	160	PEX 161609	90	75		Mounting rail DIN 15	15 x 99 15 x 149 15 x 179	
	160	260	PEX 162609	90	75				
	160	360	PEX 163609	90	75				
	250	255	PEX 252612	120	105		Mounting rail DIN 35	35 x 238	
	250	400	PEX 254012	120	105				
	405	400	PEX 404012	120	105		Hinge kit 1 pair includes screws AH A/B PH A		
							Mounting foot kit MRS 28540 MRS 28541	11x42 15x50	
	More accessories and dimensions; see page 28.								

PROPERTY	POLYESTER	CONFORMITY TO STANDARDS
----------	-----------	-------------------------

PROPERTY	POLYESTER	CONFORMITY TO STANDARDS
Ingress Protection (EN 60529)	IP 65	USA Enclosures for Electrical Equipment
Impact Resistance (EN 50014)	At least IP 54 7J	NEMA 1, 4, 4X, 6 12 and 13 UL 746 C 5 in. vertical flame test IEC 695-2-1, Self-extinguishing
Temperature Range Celsius (short term)	-40°...120°C	
Temperature Range Fahrenheit (short term)	-40°...250°F	
Temperature Range Celsius (continuous)	-10°...80°C	
Temperature Range Fahrenheit (continuous)	14°...175°F	
Electrical Insulation	Totally insulation ☐	
Enclosure Flammability Rating	UL94-5V	UL 746 C 5 in. vertical flame test
Glow Wire Test	960°C	IEC 695-2-1, Self-extinguishing
Cover screws	Stainless Steel	
Gasket	EPDM	
Chemical Resistance *	Good	

Data subject to change without notice. *Consult separate raw material data for more detailed information

External height **Y** External width **X** External depth **Z** Free internal mounting height **C**

EX CERTIFICATION OF ENCLOSURES

Fibox EX enclosures are made for use in hazardous areas. They are designed, tested and manufactured to international standards. The certificates are issued by the manufacturer under licence from a test authority. All certified products are labelled clearly in compliance with the certification.

An enclosure with Component Certification will achieve the specified degree of safety in use when selected, assembled and installed correctly. The Component Certification establishes the acceptability of the empty enclosure for use as a component part of equipment which is certified by a Certificate of Conformity. Only equipment with a Certificate of Conformity should be installed in hazardous areas.

Hazardous areas are referred to as they are classified under CENELEC European Norms:

Zone 0 = Zone in which an explosive gas/air mixture is continuously present or present for long periods.

Zone 1 = Zone in which an explosive gas/air mixture is likely to occur in normal operation.

Zone 2 = Zone in which an explosive gas/air mixture is not likely to occur in normal operation and if arises, will only last for a short period.

EXPLANATION OF CERTIFICATE SYMBOLS

The following tables can be used as practical quick guides. For more detailed information please contact your local Fibox representative.

The different EX protection types specified are:

Protection type	Symbol	Test Standard
Increased safety	e	EN 50019
Non-sparking	n	-
Flameproof	d	EN 50018
Intrinsically safe	i	EN 50020
Special protection	s	-
Encapsulation	m	EN 50028
Oil immersion	o	EN 50015
Pressurisation	p	EN 50016
Sand or powder filled	q	EN 50017

Classification of gas groups to IEC standards:

Gas Group	Representative Gas
I	Methane
II A	Propane
II B	Ethylene
II C	Acetylene and Hydrogen

Temperature classification to EN standards of the maximum surface temperature allowed for any part of an apparatus:


Temperature Class	Max. Surface Temperature
T1	450 °C
T2	300 °C
T3	200 °C
T4	135 °C
T5	100 °C
T6	85 °C

These temperature classifications are applicable only to mounted enclosures which have a Certificate of Conformity.

CIRCUIT BOARD BRACKET


Printed circuit boards and mounting plates often need special mounting supports that offer flexibility in positioning the boards across the enclosure body. Mounting supports also raise the board above the enclosure bottom, especially effective when using two sided boards. This circuit board bracket has a standard E1 (IEC 297-3, DIN 41494) Eurocard screw mounting distance of 89 mm (3.5") accepting M2,5 to M4 screws. The bracket can also be used for nonstandard boards by separating the ends of the bracket (a) from the connector bridge (b). If the bracket is not needed, the adapter parts for each individual mounting pod size can be used only for raising the board above the enclosure base level.


CIRCUIT BOARD BRACKET			
ORDER SYMBOL	Standard Mounting Distance		Remarks
	mm	inches	
MB 28086	89	3.5	Adapter for EURONORD, PICCOLO, MINI. Direct mount to EK, SOLID, EKI, ALX, PC-7, PEX.

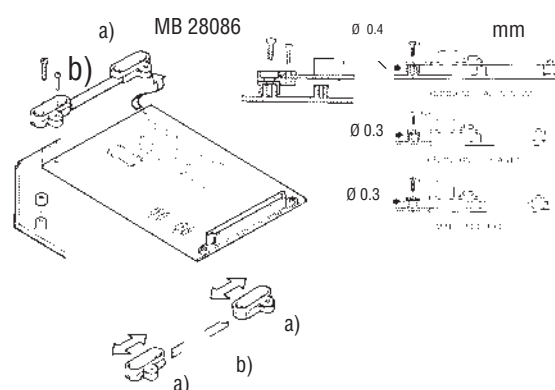

CUSTOMISATION


Enclosures can be machined, painted, screen printed and preassembled to meet your customisation requirements. Fibox's service center offers complete CNC machining, hinge mounting, screen printing, assembly and much more. Our wide selection of enclosures and accessories can be customised to create a unique enclosure meeting your application requirements.



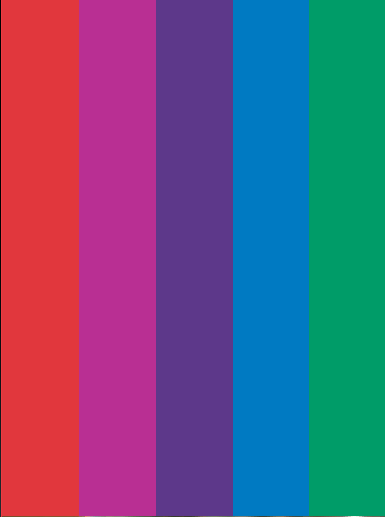

FIBOX[®]

CONTRACT MANUFACTURING




www.fibox.com

FIBOX

WINDOWS









Simple to mount.
Self-extinguishing,
impact resistant polycarbonate.








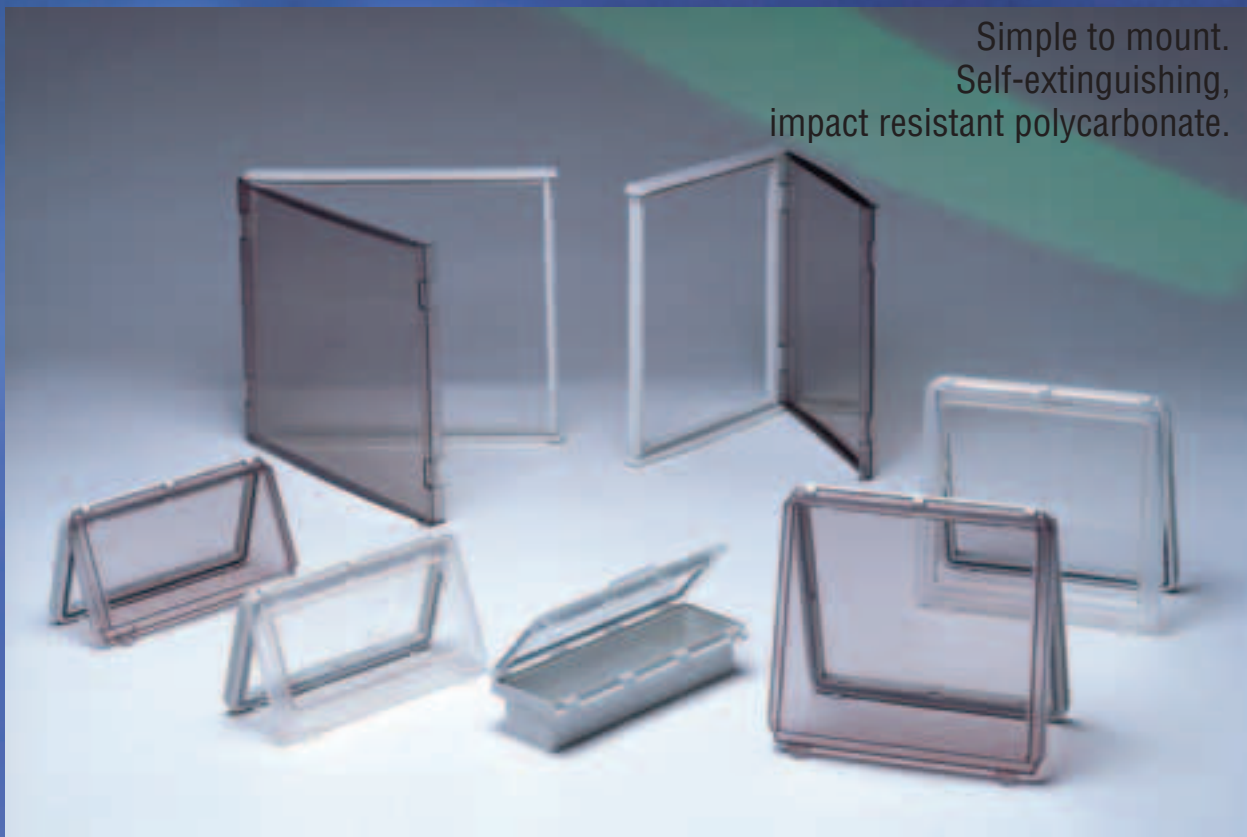




FIBOX SOLID FRAME



FIBOX Inspection Windows permit both viewing and access to IP rating and controls which are surface mounted on plastic or metal enclosures. While providing access, when cover closed, these inspection windows maintain enclosure environmental ratings up to IP 65. Four new second generation windows L12 II, L24 II, L43 II and L44 II, feature transparent smoked grey polycarbonate with textured sides and stylish design.

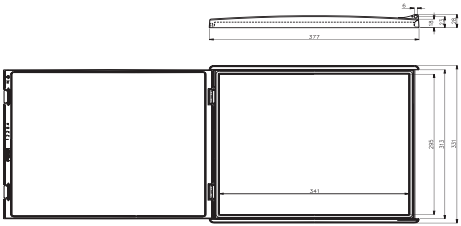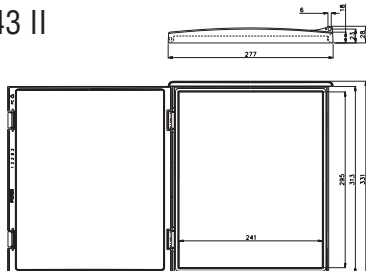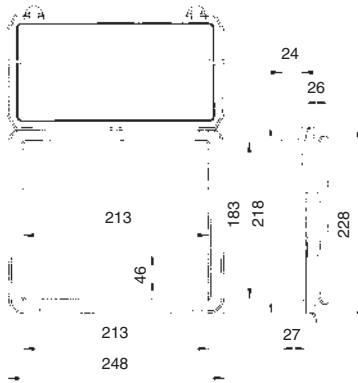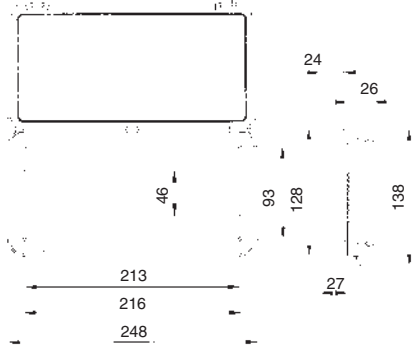FIBOX INSPECTION WINDOWS	Remarks	IP	Size mm	ORDER SYMBOL	
L44 II 	For 36 modules (1 module = 17,5 mm)  Smoked transparent cover	65	377 x 331	L44 II	
L43 II 	For 26 modules  Smoked transparent cover	65	331 x 277	L43 II	
L24 II 	For 24 modules High cover  Smoked transparent cover	65	248 x 218	L24 II	
L12 II Pat.Reg. 383990 	For 12 modules High cover  Smoked transparent cover	65	248 x 128	L12 II	
FRONT PLATES FOR WINDOWS L12, L 24, L12 II and L24 II 	12 modules 2 x 12 modules	65		B12 10621-45 B24 10620-45	

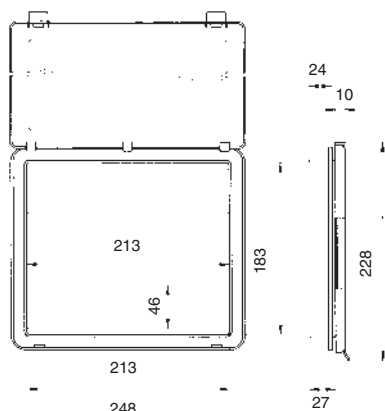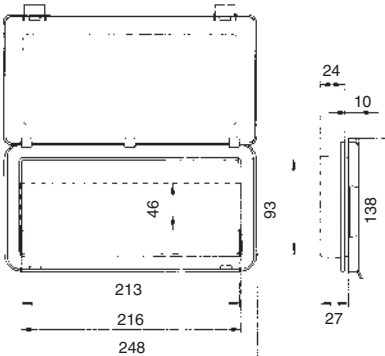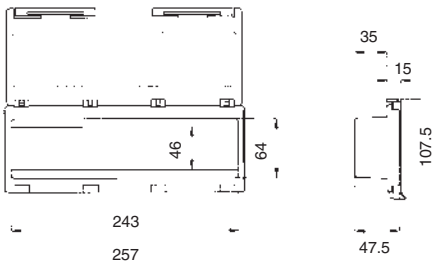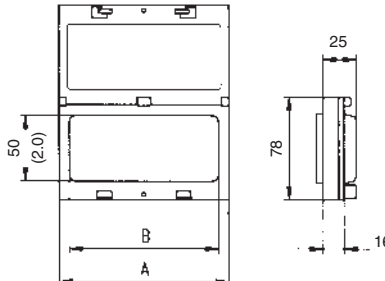FIBOX INSPECTION WINDOWS	Remarks	IP	Size mm	ORDER SYMBOL																																			
L24 	For 24 modules Low clear cover 	65	248 x 218	L24																																			
L12 	For 12 modules Low clear cover 	65	248 x 128	L12																																			
L13 	For 13 modules Clear cover 	65	257 x 108	L13																																			
L02-L10 <table><thead><tr><th rowspan="2">TYPE</th><th colspan="2">A</th><th colspan="2">B</th></tr><tr><th>mm</th><th>in.</th><th>mm</th><th>in.</th></tr></thead><tbody><tr><td>L02</td><td>59</td><td>2.3</td><td>44</td><td>1.7</td></tr><tr><td>L04</td><td>94.5</td><td>3.7</td><td>78</td><td>3.1</td></tr><tr><td>L06</td><td>129.5</td><td>5.1</td><td>114</td><td>4.5</td></tr><tr><td>L08</td><td>163</td><td>6.4</td><td>146</td><td>5.7</td></tr><tr><td>L10</td><td>200</td><td>7.9</td><td>183</td><td>7.2</td></tr></tbody></table>	TYPE	A		B		mm	in.	mm	in.	L02	59	2.3	44	1.7	L04	94.5	3.7	78	3.1	L06	129.5	5.1	114	4.5	L08	163	6.4	146	5.7	L10	200	7.9	183	7.2	For 10 modules For 8 modules For 6 modules For 4 modules For 2 modules Clear cover 	54 54 54 54 54	199 x 77 162 x 77 130 x 77 96 x 77 60 x 77	L10 L08 L06 L04 L02	
TYPE		A		B																																			
	mm	in.	mm	in.																																			
L02	59	2.3	44	1.7																																			
L04	94.5	3.7	78	3.1																																			
L06	129.5	5.1	114	4.5																																			
L08	163	6.4	146	5.7																																			
L10	200	7.9	183	7.2																																			

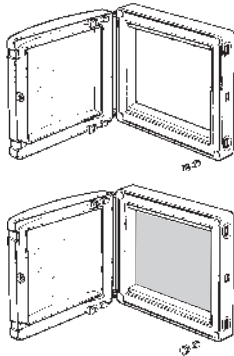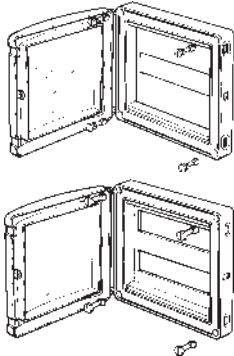FIBOX SOLID FRAMES	Remarks	Size mm	ORDER SYMBOL	
	Frame, with opening Smoked transparent cover	280 x 280	Cover 28/28-0	
	Frame, no opening Smoked transparent cover	280 x 280	Cover 28/28-D	
	Frame with one DIN opening Smoked transparent cover	280 x 280 x 54	SF PC2828-SG-12-1	
	Frame with two DIN openings Smoked transparent cover	280 x 280 x 54	SF PC2828-SG-12-2	

Data subject to change without notice.

FEATURES YOU'VE NEVER SEEN BEFORE

Ingress protection: IP 54-IP 65


Temperature range: - 40°C – +120°C


- Chemical resistance to concentrated mineral acids, organic acid, oxidants, deducing agents, neutral /acid salt solutions, grease & oil
- Resistance to U.V. radiation
- Self-extinguishing to UL94
- Non-hygroscopic

Data subject to change without notice.

CUSTOMISATION

Enclosures can be machined, painted, screen printed and preassembled to meet your customisation requirements. Fibox's service centre offers complete CNC machining, hinge mounting, screen printing, assembly and much more. Our wide selection of enclosures and accessories can be customised to create a unique enclosure meeting your application requirements.



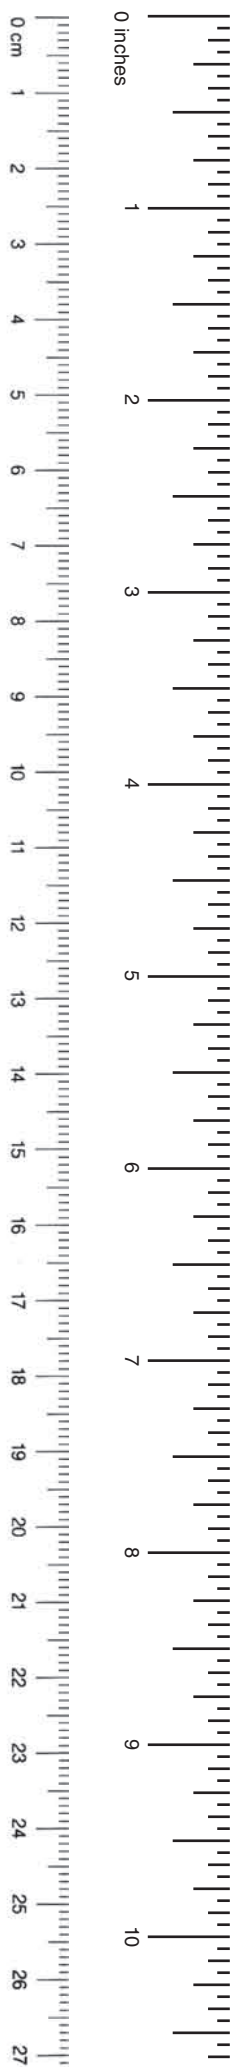



www.fibox.com

Production

Fibox Oy Ab
Jorvaksenniitty, P.O. Box 16
FIN-02421 JORVAS, Finland
Tél. +358 9 2955 31 - Fax +358 9 2955 3200
E-mail : info@fibox.fi, sales@fibox.fi

Fibox Ltd. Korea
1381-2, Juan-Dong, Nam-Gu
Incheon, Post No 402-853
Republic of Korea
Tél. +82 32 81 46 742 - Fax +82 32 81 46 077
E-mail : fibox@kornet.net

Customer service

FIBOX Ltd.
3 Primrose Hill Industrial Park
Orde Wingate Way, Stockton on Tees
Cleveland TS19 0BJ, England
Tél. +44 1642 6044 00 - Fax +44 1642 6046 00
E-mail : sales@fibox.co.uk

Fibox Oy Ab
Jorvaksenniitty, P O Box 16
FIN-02421 JORVAS, Finland
Tél. +358 9 2955 351 - Fax +358 9 2955 3500
E-mail : info@fibox.fi, sales@fibox.fi

Fibox Inc.
810 Cromwell Park Drive
Suite R, Glen Burnie
MD 21061, USA
Tél. +1 410 760 9696 - Fax +1 410 760 8686
Call toll-free
USA 1 888 342 6987 / 1888 FIBOX US
E-mail : sales@fiboxusa.com

FIBOX FRANCE Sarl
28 rue Paul Henri Spaak
Parc de l'Esplanade
F-77400 Saint Thibault Des Vignes
Tél. +33-1-60 21 17 17 - Fax +33-1-60 21 17 18
E-mail : service.client@fibox.fr

FIBOX GmbH - FSC Germany
Möllberger strasse 18
D-32602 Vlotho, Germany
Tél. +49 5733 87 160 - Fax +49 5733 87 1610
E-mail : info@fibox.de

FIBOX GmbH - Switzerland
Industrieareal Jenny
CH-8866 Ziegelbrücke
Tél. +41 55 617 2080 - Fax +41 55 617 2089
E-mail : info@fibox.ch

Fibox Ltd. Korea
1381-2, Juan-Dong, Nam-Gu
Incheon, Post No 402-853
Republic of Korea
Tél. +82 32 81 46 742 - Fax +82 32 81 46 077
E-mail : fibox@kornet.net

Fibox Shanghai Ltd.
2A, 2. etage, Block No. 55-56, 461 Hongcao Road
Shanghai 200233, China
Tél. +86 216 495 9922 - Fax +86 216 495 9667
E-mail : fibox@kornet.net

FIBOX Sp. z o.o.
ul. Dzieciola 19
04-988 Warsaw, Poland
Tél. +48 22 872 9498 - Fax +48 22 872 9698
E-mail : info@fibox.pl